

MITSUBISHI (AV COMMON) M5218AL/P/FP

DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)

DESCRIPTION

The M5218 are semiconductor integrated circuits designed for a low noise preamplifier in audio equipment and a general-purpose operational amplifier in other electronic equipment. Two low noise operational amplifier circuits displaying internal phase-compensated high gain and low distortion are contained in an 8-pin SIP, DIP or FP for application over a wide range as a general-purpose dual amplifier in general electronic equipment.

The devices have virtually the same characteristics as the 4557, 4558, 4559 and 741 operational amplifiers.

The units can also be used as a single power supply type and amplifier in portable equipment. It is also suitable as a headphone amplifier because of its high load current.

FEATURES

- High gain, low distortion
..... $G_{VO}=110\text{dB}$, $T_{HE}=0.0015\%$ (typ.)
- High slew rate, high f_T
..... $SR=3.0\text{V}/\mu\text{s}$, $f_T=7\text{MHz}$ (typ.)
- Low noise ($R_S=1\text{k}\Omega$) FLAT $V_{NI}=2\mu\text{Vrms}$ (typ.)
RIAA $V_{NI}=1\mu\text{Vrms}$ (typ.)
- Operation with low supply voltage
..... $V_{CC}\geq 4\text{V}(\pm 2\text{V})$
- High load current, high power dissipation
..... $I_{LP}=\pm 50\text{mA}$, $P_d=800\text{mW}$ (SIP)
 $P_d=625\text{mW}$ (DIP), $P_d=440\text{mW}$ (FP)


APPLICATION

General-purpose amplifier in stereo equipment, tape decks, and radio stereo cassette recorders; active filters, servo amplifiers, operational circuits in other general electronic equipment.


RECOMMENDED OPERATING CONDITIONS

- Supply voltage range $\pm 2 \sim \pm 16\text{V}$
- Rated supply voltage $\pm 15\text{V}$

PIN CONFIGURATION (TOP VIEW)

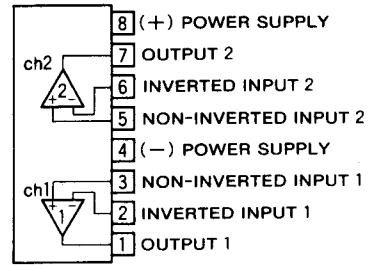


Outline 8P5 (AL)

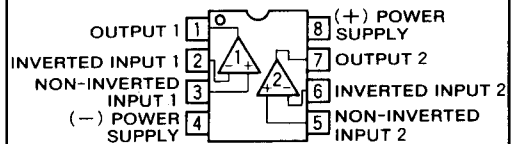

Outline 8P4 (AP)
8P2S-A (AFP)

BLOCK DIAGRAM

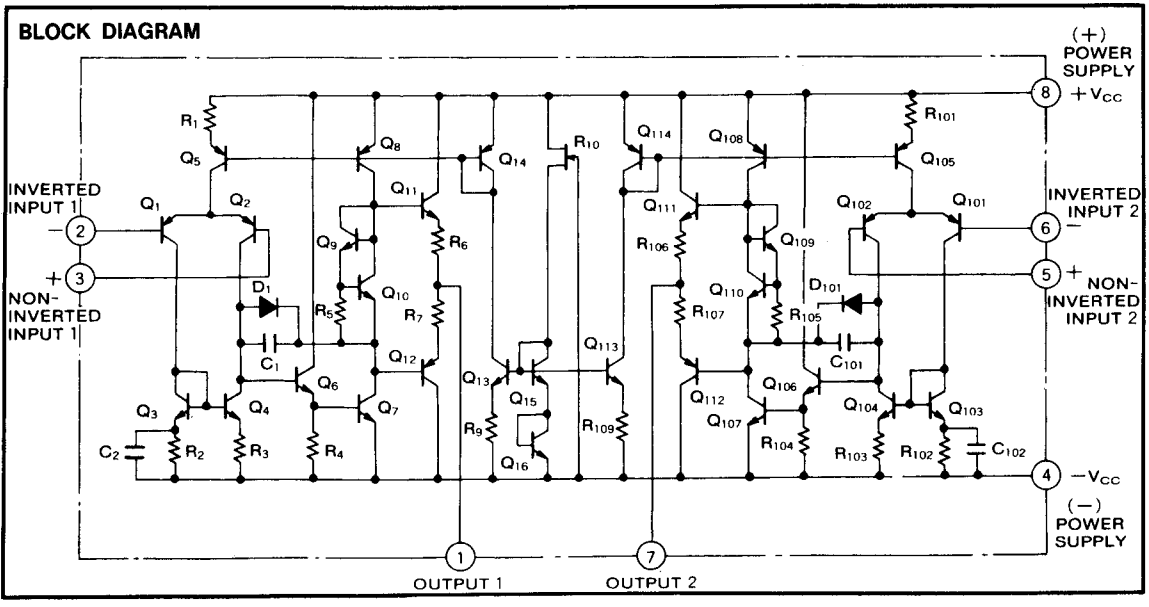

DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$, unless otherwise noted)


| Symbol | Parameter | Conditions | Ratings | Unit |
|------------|----------------------------|-----------------------------|---------------------------|-------|
| V_{CC} | Supply voltage | | ± 18 | V |
| I_{LP} | Load current | | ± 50 | mA |
| V_{id} | Differential input voltage | | ± 30 | V |
| V_{ic} | Common input voltage | | ± 15 | V |
| P_d | Power dissipation | | 800(SIP)/625(DIP)/440(FP) | mW |
| K_θ | Thermal dirating | $T_a \geq 25^\circ\text{C}$ | 8(SIP)/6.25(DIP)/4.4(FP) | mW/°C |
| T_{opr} | Ambient temperature | | $-20 \sim +75$ | °C |
| T_{stg} | Storage temperature | | $-55 \sim +125$ | °C |

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$, $V_{CC}=\pm 15\text{V}$)


| Symbol | Parameter | Test conditions | Limits | | | Unit |
|----------|------------------------------|---|----------|----------|------|------------------|
| | | | Min. | Typ. | Max. | |
| I_{CC} | Circuit current | $V_{in}=0$ | | 3.0 | 6.0 | mA |
| V_{IO} | Input offset voltage | $R_S \leq 10\text{k}\Omega$ | | 0.5 | 6.0 | mV |
| I_{IO} | Input offset current | | | 5 | 200 | nA |
| I_{IB} | Input bias current | | | | 500 | nA |
| R_{in} | Input resistance | | 0.3 | 5 | | MΩ |
| G_{VO} | Open loop voltage gain | $R_L \geq 2\text{k}\Omega, V_o = \pm 10\text{V}$ | 86 | 110 | | dB |
| V_{OM} | Maximum output voltage | $R_L \geq 10\text{k}\Omega$ | ± 12 | ± 14 | | V |
| | | $R_L \geq 2\text{k}\Omega$ | ± 10 | ± 13 | | |
| V_{CM} | Common input voltage range | | ± 12 | ± 14 | | V |
| CMRR | Common mode rejection ratio | $R_S \leq 10\text{k}\Omega$ | 70 | 90 | | dB |
| SVRR | Sypply voltage | $R_S \leq 10\text{k}\Omega$ | | 30 | 150 | $\mu\text{V/V}$ |
| P_d | Power dissipation | | | 90 | 180 | mW |
| SR | Slew rate | $G_v=0\text{dB}, R_L=2\text{k}\Omega$ | | 3.0 | | V/ μs |
| f_T | Gain bandwidth product | | | 7 | | MHz |
| V_{NI} | input referred noise voltage | $R_S=1\text{k}\Omega, \text{BW}:10\text{Hz}\sim 30\text{kHz}$ | | 2.0 | | μVrms |

TYPICAL CHARACTERISTICS

TERMAL DERATING (MAXIMUM RATING)

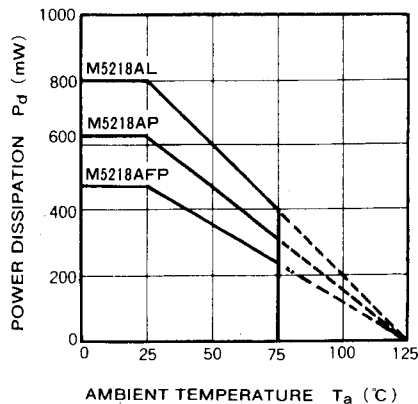


VOLTAGE GAIN VS. FREQUENCY RESPONSE

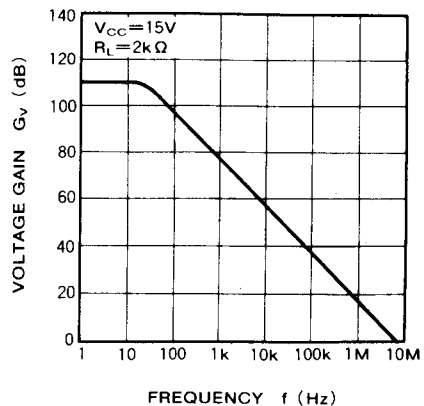


DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)


CIRCUIT CURRENT VS. SUPPLY VOLTAGE

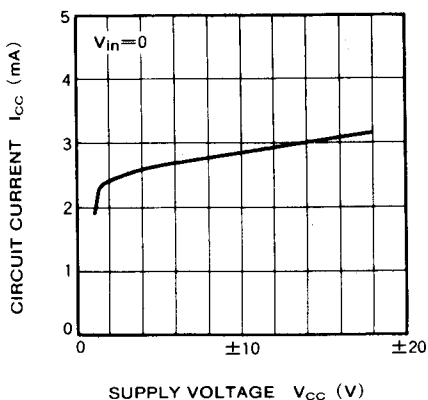


CIRCUIT CURRENT VS. AMBIENT TEMPERATURE

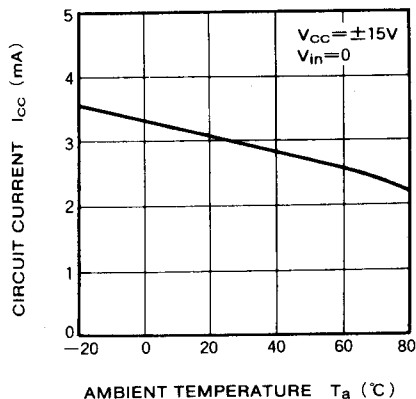


INPUT OFFSET VOLTAGE VS. AMBIENT TEMPERATURE

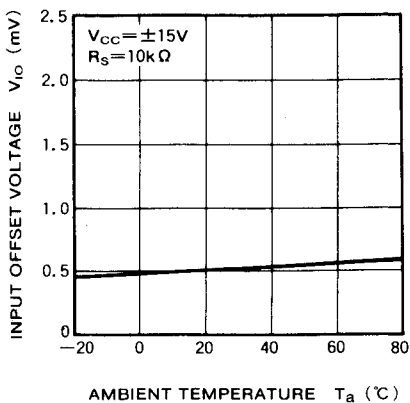


OUTPUT VOLTAGE / LOAD CURRENT PEAK VS. LOAD RESISTANCE

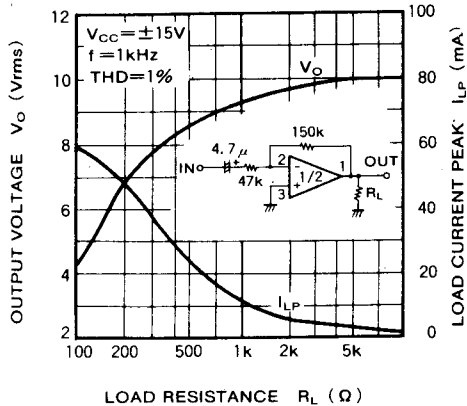

MAXIMUM OUTPUT VOLTAGE VS. SUPPLY VOLTAGE

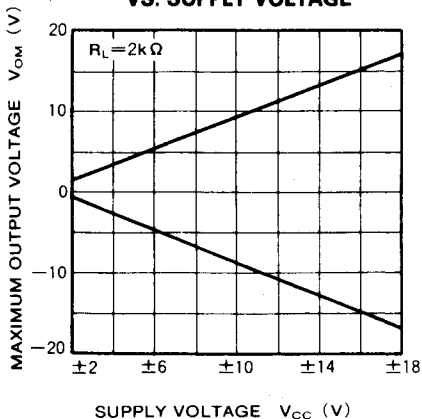


MAXIMUM OUTPUT VOLTAGE VS. FREQUENCY RESPONSE

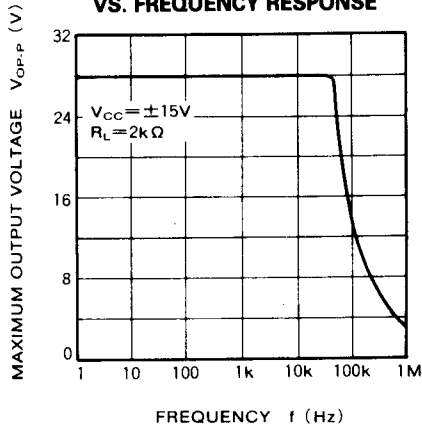

DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)

APPLICATION EXAMPLES


(1) Stereo Equalizer amplifier circuit

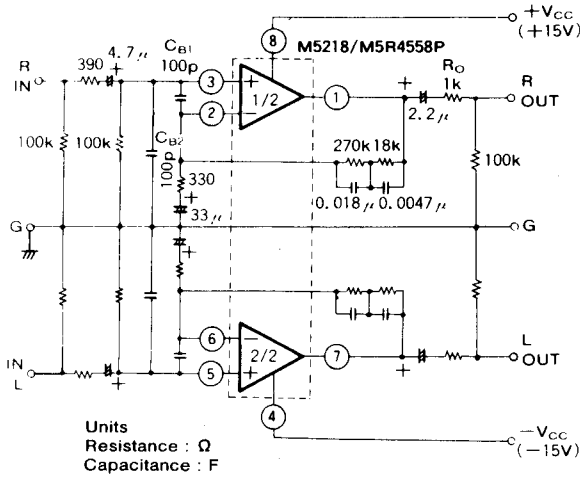


Left channel circuit constants are identical to those of right channel.
 C_{B1} , C_{B2} : Capacitors for buzz prevention, use if required.
 R_O : Resistor used to prevent parasitic oscillation for capacitive loads and current limiting with shorted and other abnormal load conditions.

TYPICAL CHARACTERISTICS ($V_{CC} = \pm 15V$, RIAA)


- $G_V = 35.6dB$ ($f = 1kHz$)
- $V_{NI} = 1 \mu V_{rms}$ ($R_S = 1k\Omega$, $BW = 20Hz \sim 30kHz$)
- Signal-to-noise = 72.5dB (IHF-A network, shorted input, 2.5mVrms input sensitivity)
- THD = 0.0015% ($f = 1kHz$, $V_O = 3V_{rms}$)

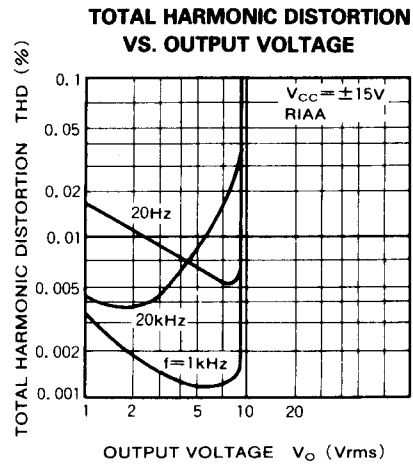

OUTPUT NOISE VOLTAGE VS. SIGNAL SOURCE RESISTANCE

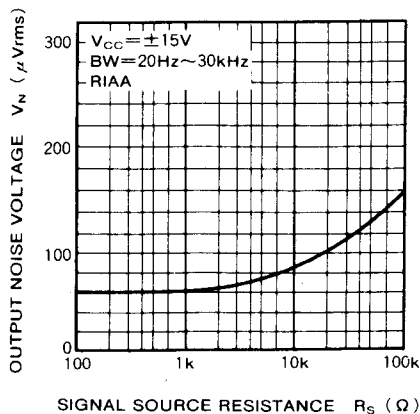

SIGNAL-TO-NOISE RATIO VS. SIGNAL SOURCE RESISTANCE

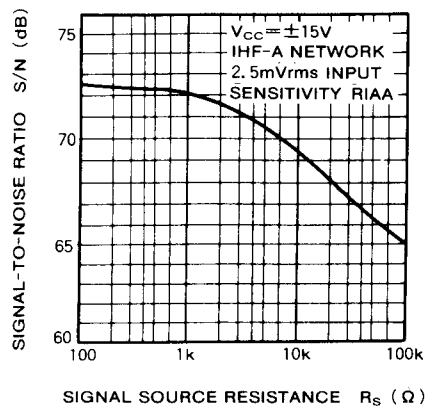


DUAL LOW-NOISE OPERATIONAL AMPLIFIERS (DUAL POWER SUPPLY TYPE)


(2) High S / N stereo DC ICL equalizer

TYPICAL CHARACTERISTICS ($V_{CC} = \pm 15V$, RIAA)

- Signal-to-noise = 72.5dB (IHF-A network, shorted input, 2.5mVrms input sensitivity)
- $V_{NI} = 0.77 \mu V_{rms}$ ($R_S = 5.1k\Omega$, BW = 5Hz ~ 100kHz)
- $G_V = 35.6dB$ ($f = 1kHz$)

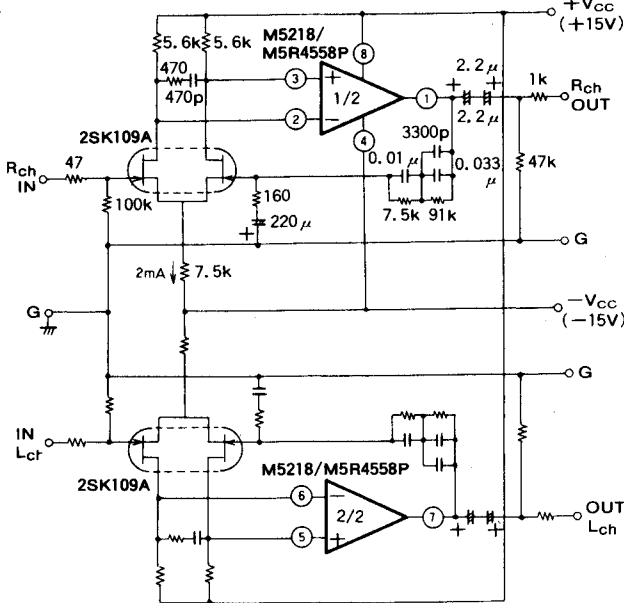

TOTAL HARMONIC DISTORTION VS. OUTPUT VOLTAGE

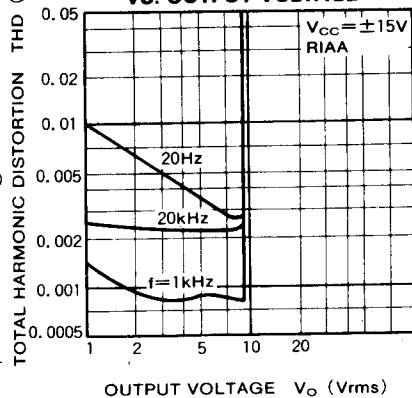


Left channel circuit constants are identical to those of right channel.


Units Resistance : Ω
Capacitance : F

(3) Headphone amplifier

TOTAL HARMONIC DISTORTION VS. OUTPUT VOLTAGE

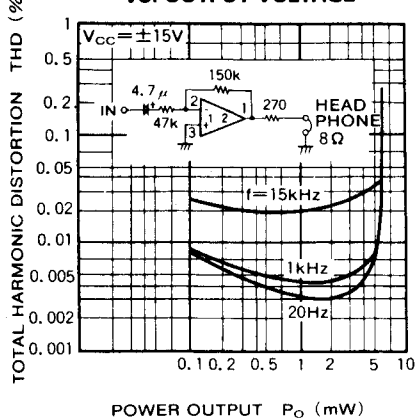





(Output resistance R_O is made the parameter) POWER OUTPUT / POWER DISSIPATION VS. SUPPLY VOLTAGE

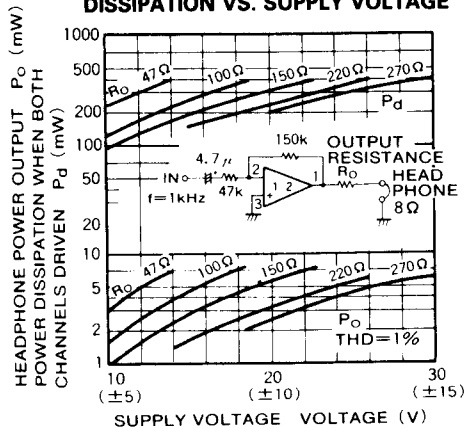


8P2S-A

Plastic 8pin 225mil SOP

| | | | |
|-------------------|------------|-----------|---------------|
| EIAJ Package Code | JEDEC Code | Weight(g) | Lead Material |
| SOP8-P-225-1.27 | - | 0.07 | Cu Alloy |

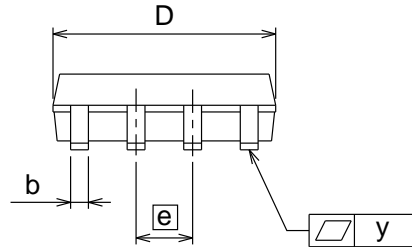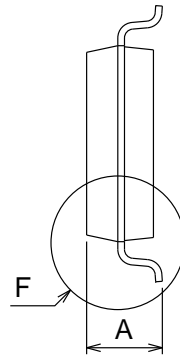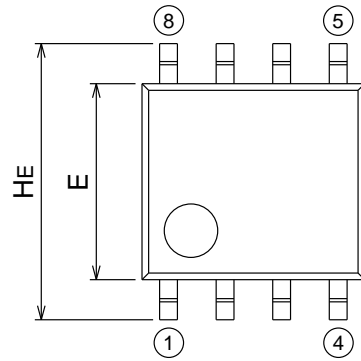

Detail F

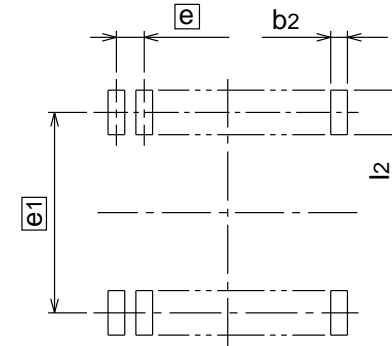

Recommended Mount Pad

| Symbol | Dimension in Millimeters | | |
|--------|--------------------------|------|-----|
| | Min | Nom | Max |
| A | - | - | 1.9 |
| A1 | 0.05 | - | - |
| A2 | - | 1.5 | - |
| b | 0.35 | 0.4 | 0.5 |
| c | 0.13 | 0.15 | 0.2 |
| D | 4.8 | 5.0 | 5.2 |
| E | 4.2 | 4.4 | 4.6 |
| e | - | 1.27 | - |
| HE | 5.9 | 6.2 | 6.5 |
| L | 0.2 | 0.4 | 0.6 |
| L1 | - | 0.9 | - |
| y | - | - | 0.1 |
| theta | 0° | - | 10° |
| b2 | - | 0.76 | - |
| e1 | - | 5.72 | - |
| l2 | 1.27 | - | - |