




No. 754A



3023

LA4460,4461

Monolithic Linear Integrated Circuit
12W AF POWER AMPLIFIER
FOR CAR RADIO OR CAR STEREO


Features

- . High gain of 51dB typ. and high power output of 12W typ.
- . Possible to delete output and bootstrap capacitors, this encourages cost and space reductions due to external parts reduction.
- . Reduced external components (8 pieces recommended, 6 pieces minimum).
- . Almost no shock noises heard during power on or off operation.
- . Soft tonal quality in saturated power output.
- . Low distortion over low to high ranges of the audio frequencies.
- . Low residual noises ($R_g=0$).
- . Good operation conditions because of SEP (single ended pins) package having been employed to LA4460.
- . All pin terminal layouts of the LA4461 are reversed for easy stereo PC board pattern arrangement.
- . Two ground terminals for pre-amplifier and power amplifier are provided for easy PC board pattern arrangement and for stabilizing distortion characteristics depending on signal source impedance.
- . Voltage gain is fixed at 51dB, however, lowering the gain is possible by adding a resistor.
- . IC is not damaged, if it is connected reversely.
- . Audio muting functions (AC mute & DC mute) are equipped.
- . Several protection circuits are installed, including.
 - a. Thermal runaway protection circuit.
 - b. Over voltage & surge voltage protection circuit.
 - c. Load short-circuit current limiting protection circuit.
 - d. Output pins DC short-circuit protection circuit.
 (grounding protection between OUT & GND, and speaker protection provided.)

Maximum Ratings at $T_a=25^\circ\text{C}$

			unit
Maximum Supply Voltage	V_{CCmax1}	quiescent(30sec)	25 V
	V_{CCmax2}	with signal	18 V
Supply Current	I_{l0peak}	Instantaneous value duty $\leq$ 5%, pulse width $\leq$ 1ms flow-in only	4.5 A
Output Current	I_7, I_{9peak}	Instantaneous value duty $\leq$ 5%, pulse width $\leq$ 1ms	4.5 A
Surge Supply Voltage	V_{surge}	$t \leq 0.2\text{sec}$	50 V
Allowable Power Dissipation	P_{dmax}	$T_c=75^\circ\text{C}$, See P_{dmax} - T_a graph.	25 W
Package Thermal Resistance	θ_{j-c}		3 $^\circ\text{C/W}$

Case Outline 3024
(unit:mm)

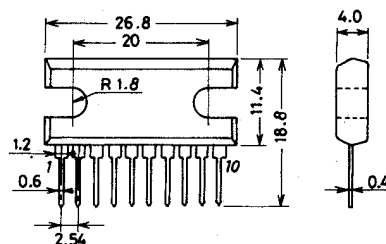

These specifications are subject to change without notice.

TOKYO SANYO ELECTRIC CO., LTD. SEMICONDUCTOR DIVISION
15-13, 6-CHOME, SOTOKANDA, CHIYODA-KU, TOKYO, 101 JAPAN

Operating Temperature

 T_{opg}

-20 to +75 °C

Storage Temperature

 T_{stg}

-40 to +150 °C

Recommended Operation Condition at $T_a=25^\circ\text{C}$

Recommended Supply Voltage

 V_{CC}

13.2 V



Load Resistance

 R_L

4 to 8 ohm


Operation Characteristics at $T_a=25^\circ\text{C}$, $V_{CC}=13.2\text{V}$, $R_L=4\text{ohm}$, $f=1\text{kHz}$, $R_g=600\text{ohm}$, with 100 x100x1.5mm³ Al heat sink at specified test circuit.

			min	typ	max	unit
Quiescent Current	I_{CCO}			65	120	mA
Voltage Gain	VG	closed loop, at specified recommended circuit.	49	51	53	dB
Output Power	P_O	THD=10%	10	12		W
Total Harmonic Distortion	THD	$P_O=1\text{W}$		0.1	1.0	%
Input Resistance	r_i		21	30		kohm
Output Noise Voltage	V_{NO1}	$R_g=0$, $f=20\text{Hz}$ to 20kHz Band Pass Filter		0.4	1.0	mV
	V_{NO2}	$R_g=10\text{kohm}$, $f=20\text{Hz}$ to 20kHz , Band Pass Filter		0.6	2.0	mV
Output Offset Voltage	V_{off}		-300		+300	mV
Muting Suppression (AC)	A_{TT}	$V_O=0\text{dBm}$, $V_M=9\text{V}$		38		dB

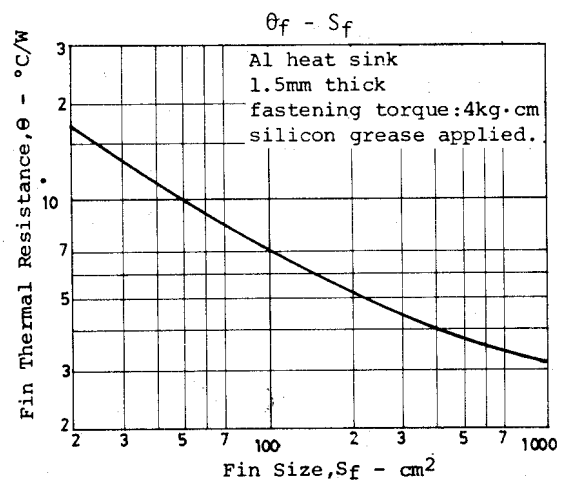
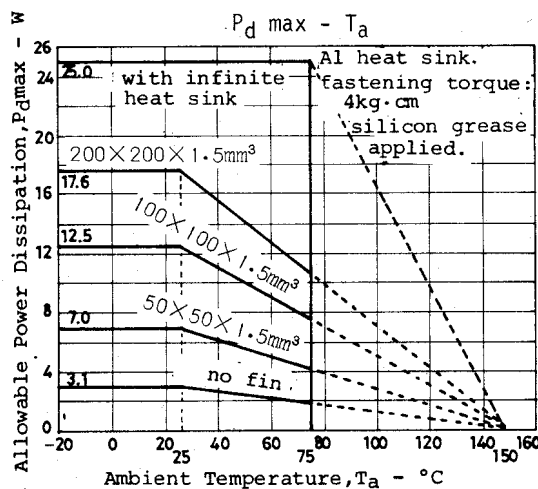
(Note) : For DC muting, $A_{TT}=\infty$ 

Equivalent Circuit and Block Diagram


Pin numbers with () show LA4461.

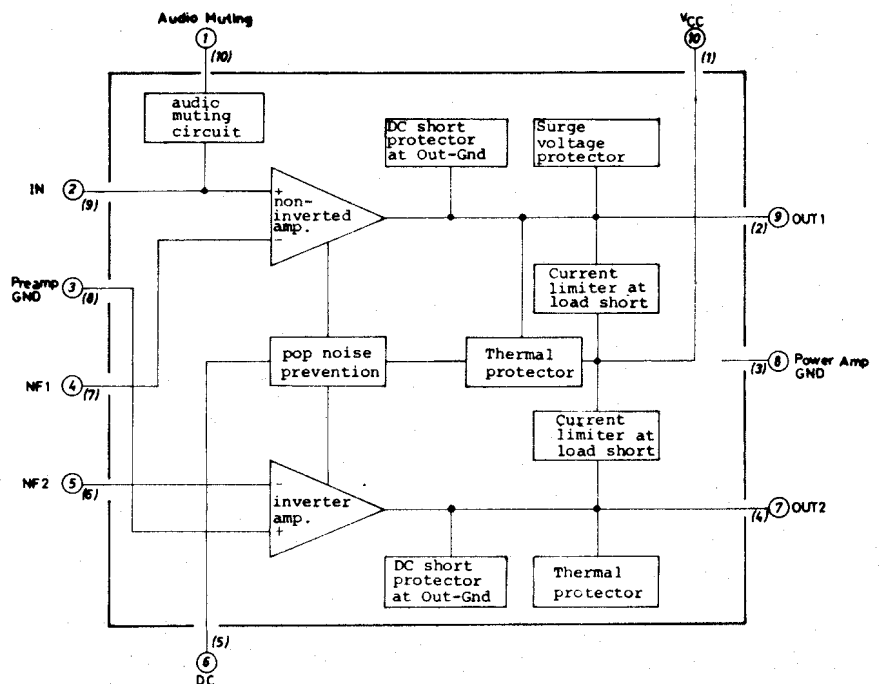

Application 1 : Recommended Circuit

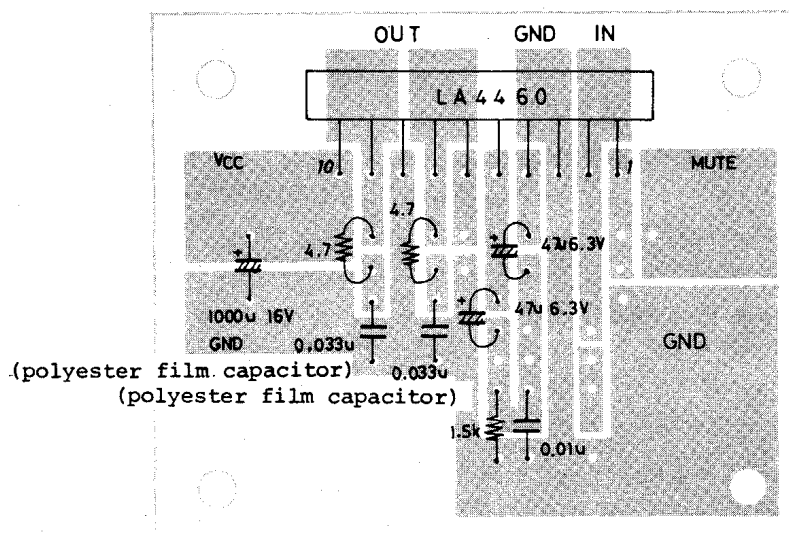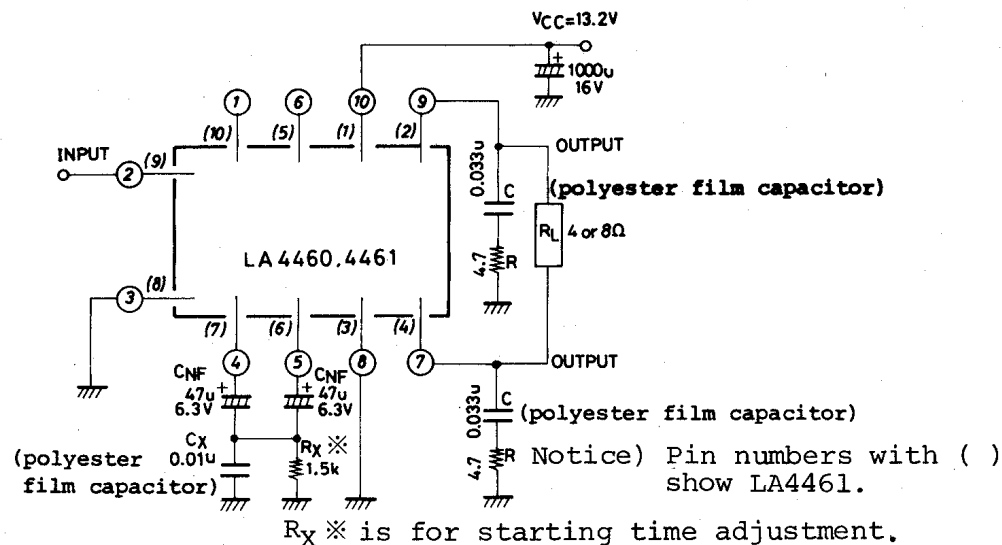

LA4460 An Example of Printed Pattern, (40x50mm²,bottom view)





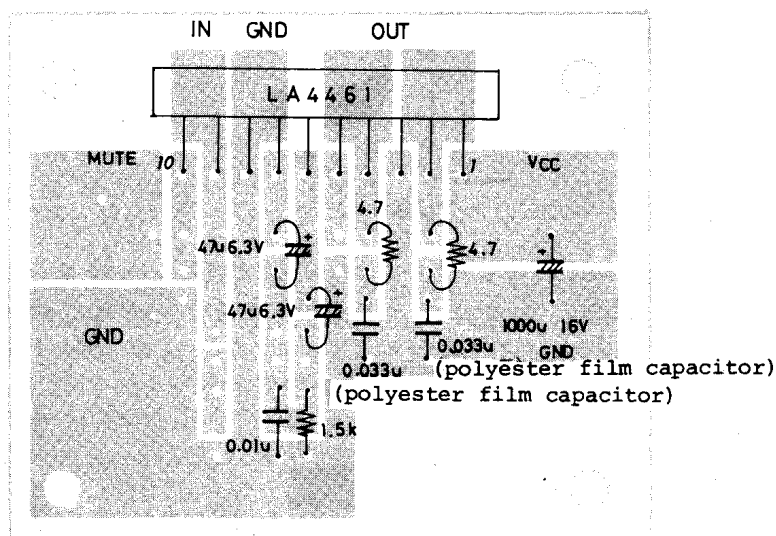


LA4461 An Example of Printed Pattern, (40x50mm²,bottom view)


3. Pin Voltage (unit:V)

LA4460	1	2	3	4	5	6	7	8	9	10
LA4461	10	9	8	7	6	5	4	3	2	1
Function	AC Audio Muting	IN PUT	Pre GND	NON INV NF	INV NF	DC Audio Muting	INV OUT	Power GND	NON INV OUT	V _{CC}
Quiescent Pin Voltage	0	0.06	0	2.8	2.8	5.6	6.6	0	6.6	13.2


Much data on general characteristics are given for the application example #1, but these data can be applied to the application example #2 because of no characteristic changed. However, the data on "Shock noises at power turned on", "Starting time t_s " and "DC muting" are shown for only the application example #1. For the same characteristics to be applied to the application example #2, refer to 1-C on page 4.

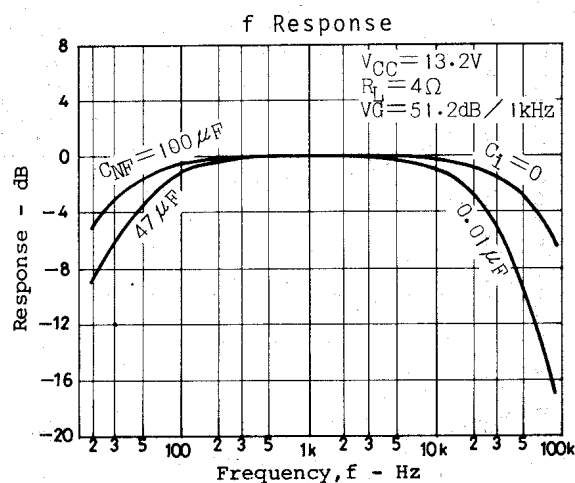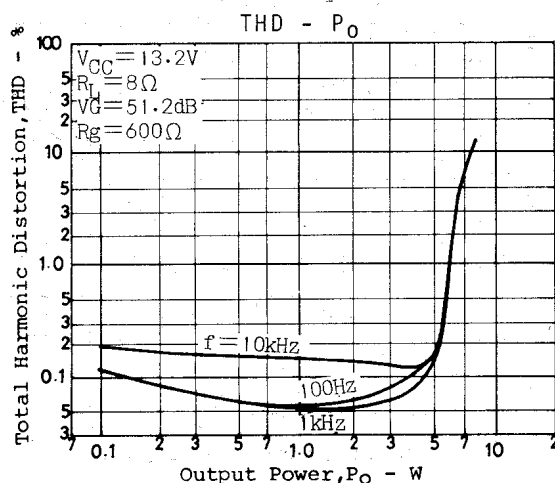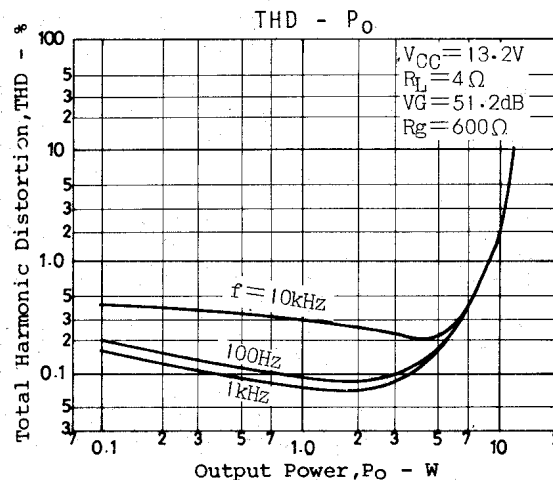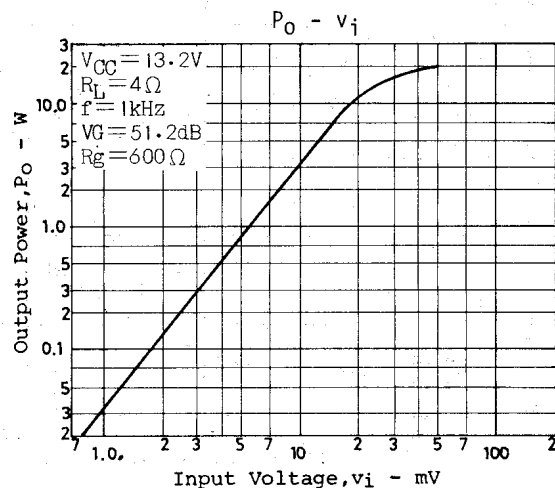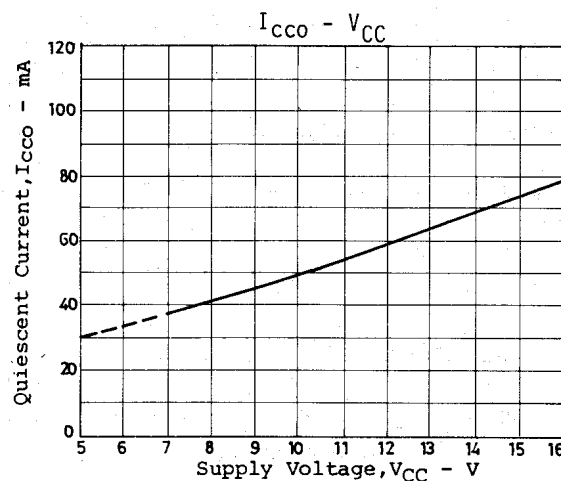

Application 3

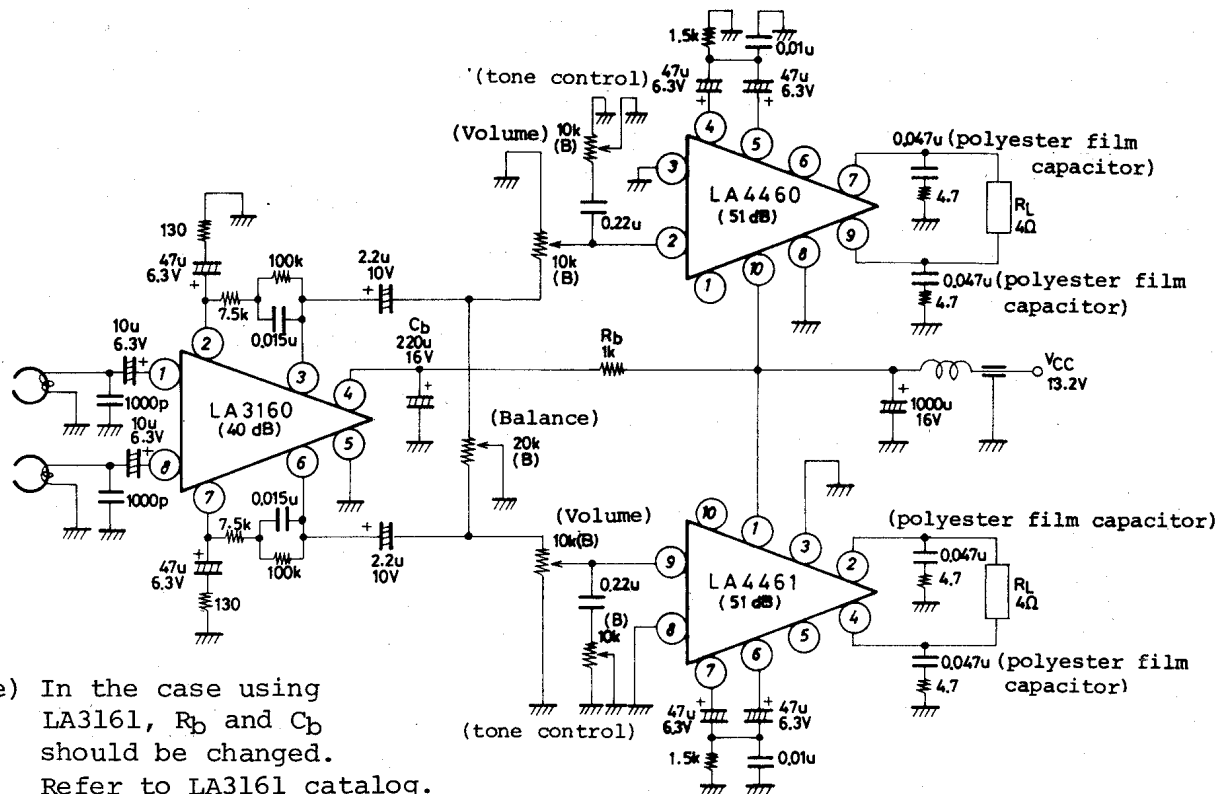


Notice) In the case using
LA3161, R_b and C_b
should be changed.
Refer to LA3161 catalog.

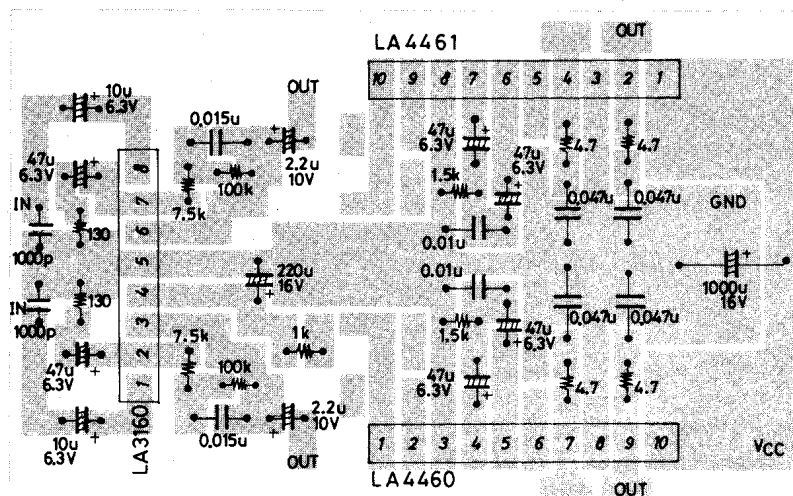

An Example of Printed Pattern, (42x65mm², bottom view)

Example of oscillaiton compensation where through line capacitors are used at the output terminals.

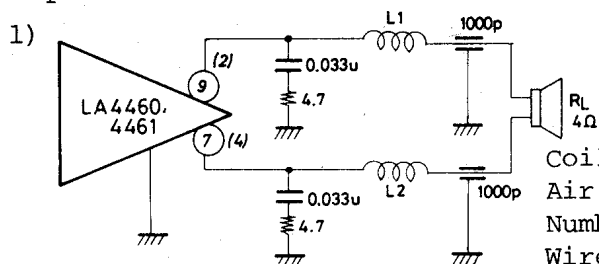

Coil Used :
Air core Innerdiameter : 8 ϕ
Number of turns : 6 turns
Wire size : UEW 1.5 Winding method :
 solenoid (0.3uH)

Connect each coil, L_1 and L_2 , in series with each output terminal, where $L_1=L_2$.