


### Features

- Epitaxial Planar Die Construction
- Built-In Biasing Resistors
- Also Available in Lead Free Version


### Mechanical Data

- Case: SOT-363, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please see Ordering Information, Note 4, on Page 3
- Terminal Connections: See Diagram
- Marking: Date Code and Marking Code (See Diagrams & Page 3)
- Weight: 0.006 grams (approx.)
- Ordering Information (See Page 3)

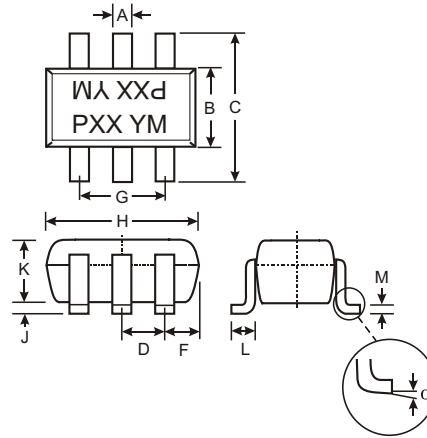

SOT-363		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J	—	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
$\alpha$	0°	8°
All Dimensions in mm		

P/N	R1	R2	MARKING
DDA124EU	22K $\Omega$	22K $\Omega$	P17
DDA144EU	47K $\Omega$	47K $\Omega$	P20
DDA114YU	10K $\Omega$	47K $\Omega$	P14
DDA123JU	2.2K $\Omega$	47K $\Omega$	P06
DDA114EU	10K $\Omega$	10K $\Omega$	P13
DDA143TU	4.7K $\Omega$	-	P07
DDA114TU	10K $\Omega$	-	P12

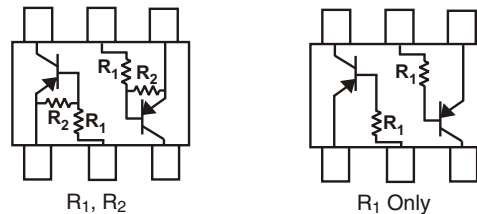

SCHEMATIC DIAGRAM

### Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage, (3) to (1)	V <sub>CC</sub>	50	V
Input Voltage, (2) to (1)	V <sub>IN</sub>	DDA124EU: +10 to -40 DDA144EU: +10 to -40 DDA114YU: +6 to -40 DDA123JU: +5 to -12 DDA114EU: +10 to -40 DDA143TU: +5 V <sub>max</sub> DDA114TU: +5 V <sub>max</sub>	V
Output Current	I <sub>O</sub>	DDA124EU: -30 DDA144EU: -30 DDA114YU: -70 DDA123JU: -100 DDA114EU: -50 DDA143TU: -100 DDA114TU: -100	mA
Output Current	I <sub>C</sub> (Max)	All: -100	mA
Power Dissipation (Total)	P <sub>d</sub>	200	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R <sub>θJA</sub>	625	°C/W
Operating and Storage and Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-55 to +150	°C

- Note:
1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
  2. 150mW per element must not be exceeded.

**Electrical Characteristics** @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic (DDA143TU & DDA114TU only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV <sub>CBO</sub>	-50	—	—	V	I <sub>C</sub> = -50μA
Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	-50	—	—	V	I <sub>C</sub> = -1mA
Emitter-Base Breakdown Voltage	BV <sub>EBO</sub>	-5	—	—	V	I <sub>E</sub> = -50μA
Collector Cutoff Current	I <sub>CBO</sub>	—	—	-0.5	μA	V <sub>CB</sub> = -50V
Emitter Cutoff Current	I <sub>EBO</sub>	—	—	-0.5	μA	V <sub>EB</sub> = -4V
Collector-Emitter Saturation Voltage	V <sub>CE(sat)</sub>	—	—	-0.3	V	I <sub>C</sub> /I <sub>B</sub> = -2.5mA / -0.25mA DDA143TU I <sub>C</sub> /I <sub>B</sub> = -1mA / -0.1mA DDA114TU
DC Current Transfer Ratio	h <sub>FE</sub>	100	250	600	—	I <sub>C</sub> = -1mA, V <sub>CE</sub> = -5V
Input Resistor (R <sub>1</sub> ) Tolerance	ΔR <sub>1</sub>	-30	—	+30	%	—
Gain-Bandwidth Product*	f <sub>T</sub>	—	250	—	MHz	V <sub>CE</sub> = -10V, I <sub>E</sub> = 5mA, f = 100MHz

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU	V <sub>I(off)</sub>	-0.5 -0.5 -0.3 -0.5 -0.5	-1.1 -1.1 — — -1.1	—	V	V <sub>CC</sub> = -5V, I <sub>O</sub> = -100μA
	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU	V <sub>I(on)</sub>	—	-1.9 -1.9 — — -1.9	-3.0 -3.0 -1.4 -1.1 -3.0		
Output Voltage	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU	V <sub>O(on)</sub>	—	-0.1	-0.3	V	I <sub>O</sub> /I <sub>I</sub> = -10mA / -0.5mA I <sub>O</sub> /I <sub>I</sub> = -10mA / -0.5mA I <sub>O</sub> /I <sub>I</sub> = -5mA / -0.25mA I <sub>O</sub> /I <sub>I</sub> = -5mA / -0.25mA I <sub>O</sub> /I <sub>I</sub> = -10mA / -0.5mA
Input Current	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU	I <sub>I</sub>	—	—	-0.36 -0.18 -0.88 -3.6 -0.88	mA	V <sub>I</sub> = -5V
Output Current		I <sub>O(off)</sub>	—	—	-0.5	μA	V <sub>CC</sub> = -50V, V <sub>I</sub> = -0V
DC Current Gain	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU	G <sub>I</sub>	56 68 68 80 30	—	—	—	V <sub>O</sub> = -5V, I <sub>O</sub> = -5mA V <sub>O</sub> = -5V, I <sub>O</sub> = -5mA V <sub>O</sub> = -5V, I <sub>O</sub> = -10mA V <sub>O</sub> = -5V, I <sub>O</sub> = -10mA V <sub>O</sub> = -5V, I <sub>O</sub> = -5mA
Input Resistor (R <sub>1</sub> ) Tolerance		ΔR <sub>1</sub>	-30	—	+30	%	—
Resistance Ratio Tolerance		R <sub>2</sub> /R <sub>1</sub>	-20	—	+20	%	—
Gain-Bandwidth Product*		f <sub>T</sub>	—	250	—	MHz	V <sub>CE</sub> = -10V, I <sub>E</sub> = -5mA, f = 100MHz


\* Transistor - For Reference Only

**Ordering Information** (Note 3)

Device	Packaging	Shipping
DDA124EU-7	SOT-363	3000/Tape & Reel
DDA144EU-7	SOT-363	3000/Tape & Reel
DDA114YU-7	SOT-363	3000/Tape & Reel
DDA123JU-7	SOT-363	3000/Tape & Reel
DDA114EU-7	SOT-363	3000/Tape & Reel
DDA143TU-7	SOT-363	3000/Tape & Reel
DDA114TU-7	SOT-363	3000/Tape & Reel

- Notes: 3. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.  
 4. For Lead Free version (with Lead Free terminal finish) part number, please add "-F" suffix to part number above.  
 Example: DDA114TU-7-F.

**Marking Information**



PXX = Product Type Marking Code  
 See Sheet 1 Diagrams  
 YM = Date Code Marking  
 Y = Year ex: N = 2002  
 M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009
Code	N	P	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

**TYPICAL CURVES - DDA123JU**  
**ONE SECTION**

**NEW PRODUCT**

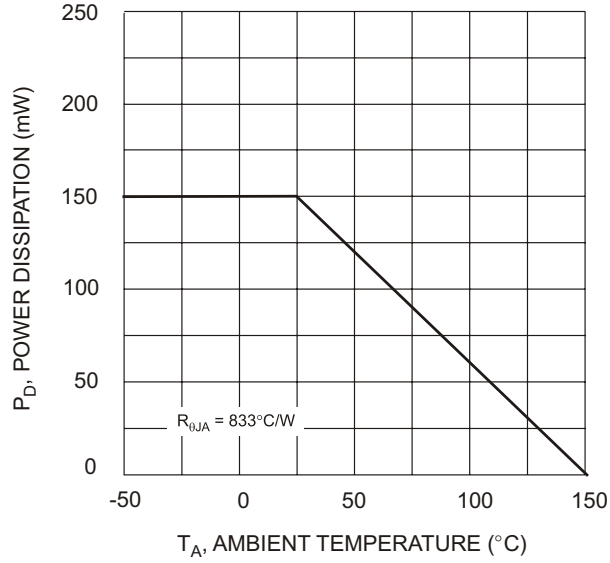


Fig. 1 Derating Curve

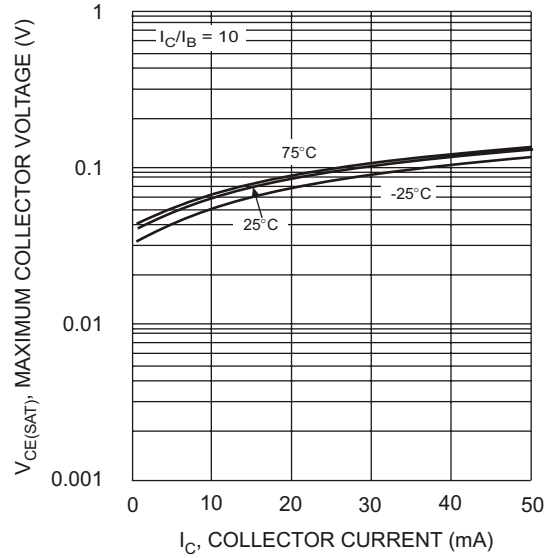


Fig. 2  $V_{CE(SAT)}$  vs.  $I_C$

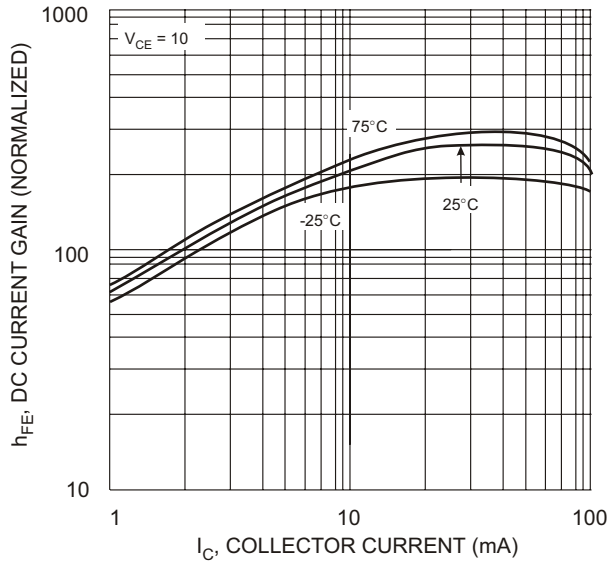


Fig. 3 DC Current Gain

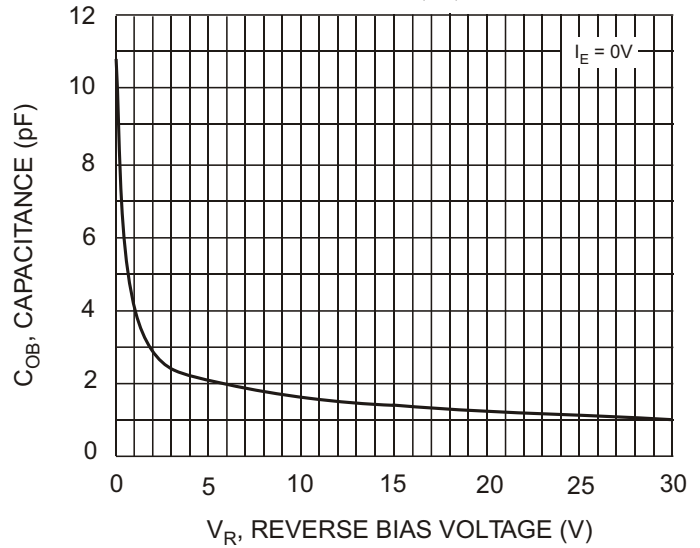


Fig. 4 Output Capacitance

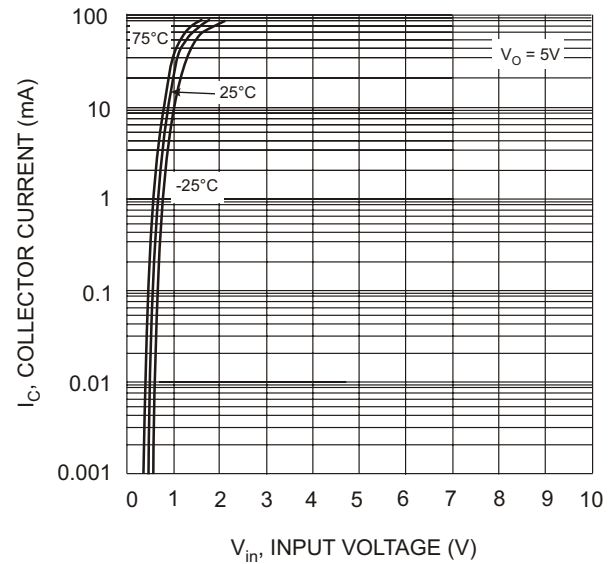


Fig. 5 Collector Current Vs. Input Voltage

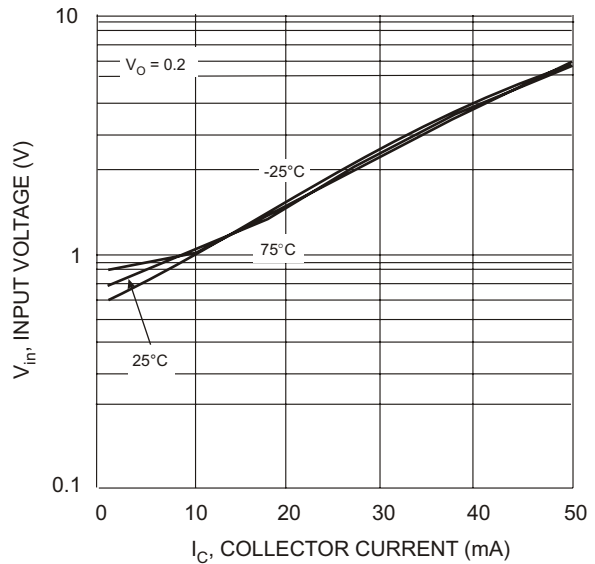


Fig. 6 Input Voltage vs. Collector Current

**TYPICAL CURVES - DDA114TU**  
**ONE SECTION**

**NEW PRODUCT**

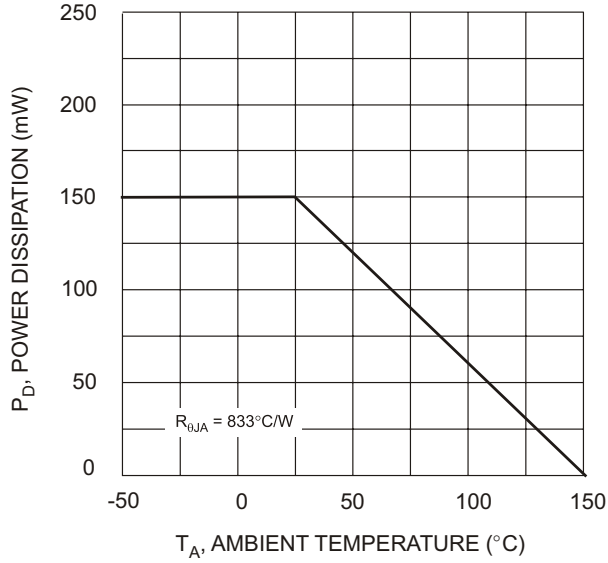


Fig. 1 Derating Curve

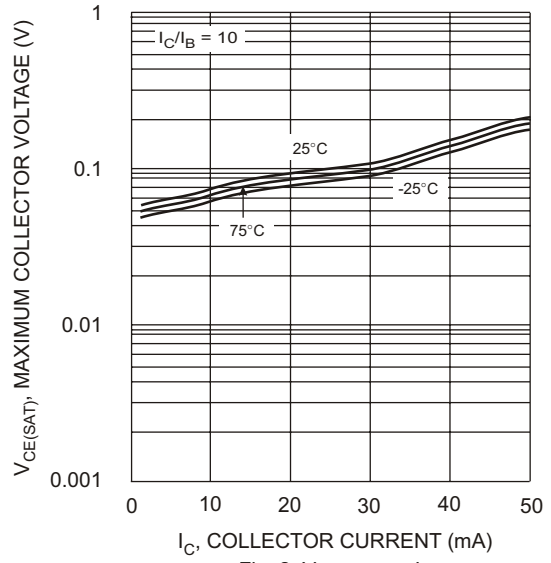


Fig. 2  $V_{CE(SAT)}$  vs.  $I_C$

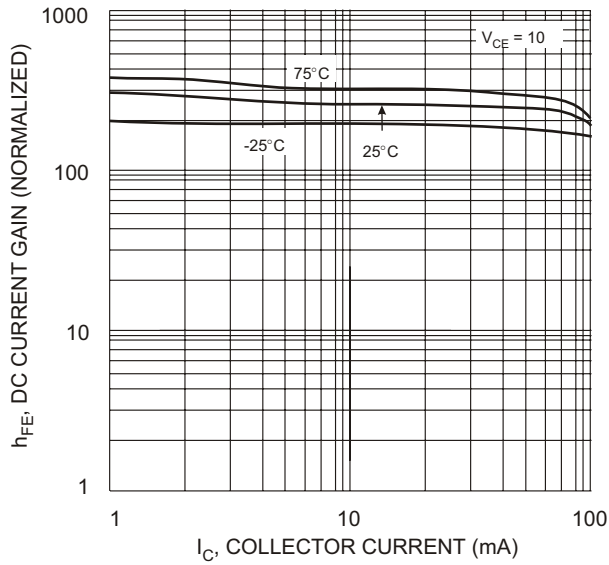


Fig. 3 DC Current Gain

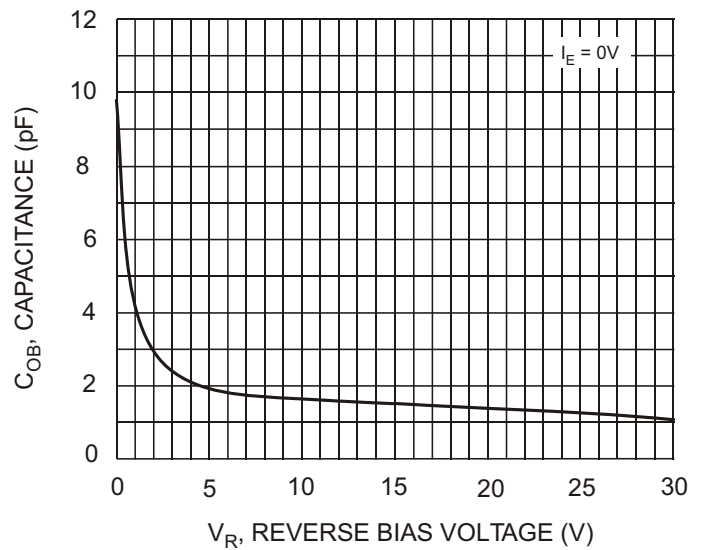


Fig. 4 Output Capacitance

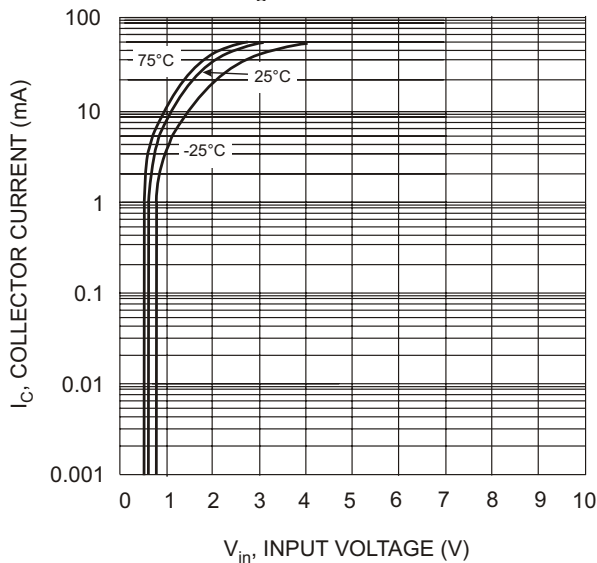


Fig. 5 Collector Current Vs. Input Voltage

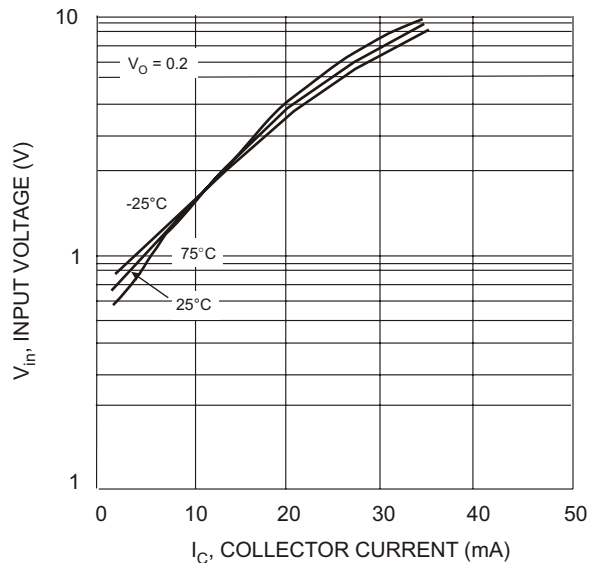


Fig. 6 Input Voltage vs. Collector Current