

AN8060, AN8060S

Low Drop Type Negative Output ($-4V$) Regulator with Reset Pin

■ Overview


The AN8060 and the AN8060S are the low drop type regulators having the function of resetting output voltage. With a comparator to sense reduced voltage building it is suitable for batteries operation.

■ Features


- With reset function : bias current at resetting $-5\mu A$
- Small input-output voltage difference : $I_O=30mA$, $0.2V$
- Low Supply Voltage sensing comparator built-in

■ Pin Descriptions

Pin No.	Symbol	Pin name
1	GND	GND
2	V_I	Input voltage
3	V_O	Output voltage
4	C_{ADJ}	Low supply voltage sensing adj.
5	RSENSE	Low supply voltage sensing output
6	RESET	Reset pin
7	D_{IC}	Diode pin (Cathode)
8	D_{IA}	Diode pin (Anode)

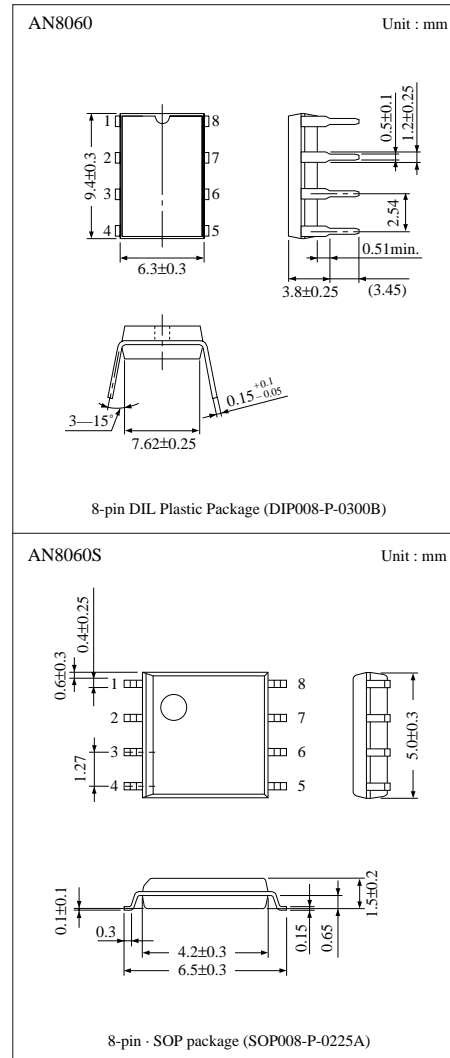

■ Block Diagram

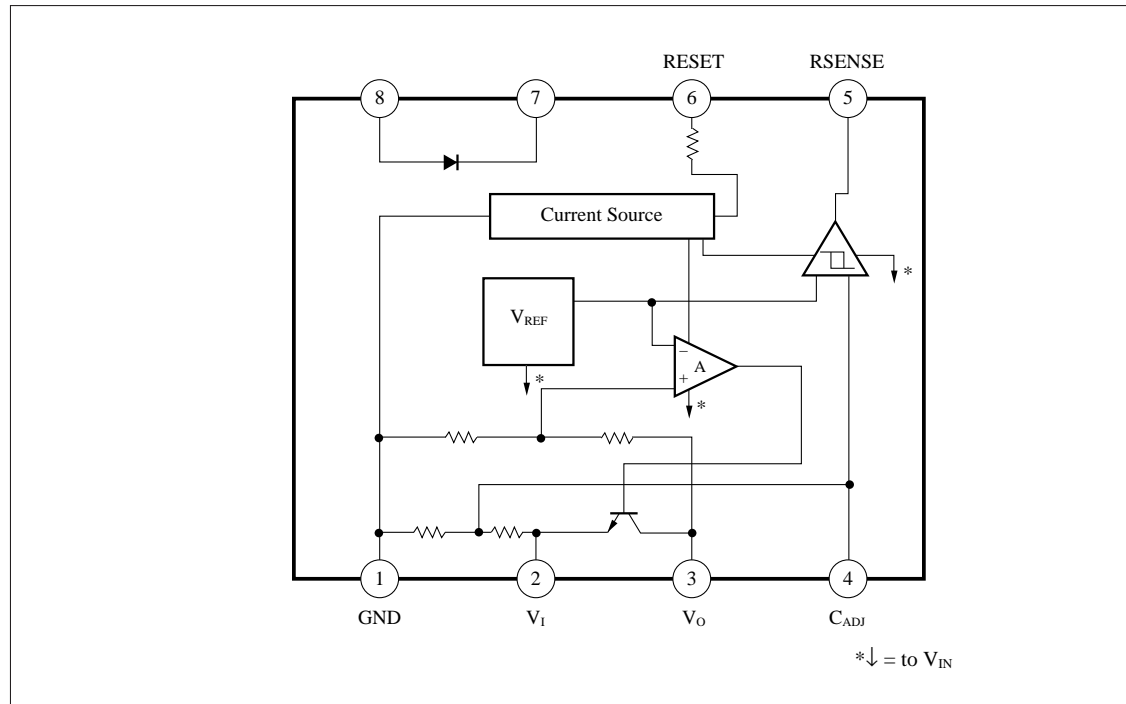

■ Absolute Maximum Ratings ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Rating	Unit
Supply voltage	V_{CC}	-12 to +0.3	V
Supply current	I_{CC}	—	mA
Power dissipation	P_D	AN8060	500
		AN8060S	361
Operating ambient temperature	T_{opr}	-20 to +75	$^{\circ}\text{C}$
Storage temperature	T_{sig}	AN8060	-55 to +150
		AN8060S	-55 to +125

■ Electrical Characteristics ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Condition	min	typ	max	Unit
Bias current at reset	I_{RB}	$V_{RESET}=0\text{V}$, $V_i=-6\text{V}$	—	—	5	μA
Bias current at no load	I_{UB}	$V_i=-6\text{V}$	—	2.5	6	mA
Output voltage	V_o	$V_i=-6\text{V}$, $I_o=10\text{mA}$	-4.08	-3.92	-3.76	V
Output voltage tolerance	V_T	$V_i=-4.4$ to -8V , $I_o=1$ to 30mA	-4.06	—	-3.66	V
Stable input voltage	V_{IS}	$V_i=-4.4$ to -7.4V , $I_o=10\text{mA}$	—	3.6	60	mV
Stable lock voltage	V_{LS}	$V_i=-6\text{V}$, $I_o=1$ to 30mA	—	8	60	mV
Input/Output voltage difference	V_{IOS}	$V_i=-3.8\text{V}$, $I_o=30\text{mA}$	—	0.1	0.2	V
Reset pin input current (H)	I_{RICH}	$V_i=-6\text{V}$, $V_{RESET}=0\text{V}$	-1	—	—	μA
Reset pin input current (L)	I_{RICL}	$V_i=-6\text{V}$, $V_{RESET}=-6\text{V}$	-200	—	—	μA
Low supply voltage sending level	V_{RDL}	$I_o=10\text{mA}$	-4.55	-4.3	-4.05	V
Output voltage at reset	V_{RO}	$V_{RESET}=0\text{V}$, $V_i=-6\text{V}$	-0.1	—	—	V
Comparator output current	I_{CO}	$V_i=-4\text{V}$, $V_{RSENSE}=-3.6\text{V}$	1	—	—	mA

■ Characteristics Curve

