




General Description

Silicon VDMOS and LDMOS transistors designed specifically for broadband RF applications. Suitable for Military Radios, Cellular and Paging Amplifier Base Stations, Broadcast FM/AM, MRI, Laser Driver and others.

"Polyfet"TM process features low feedback and output capacitances resulting in high F_t transistors with high input impedance and high efficiency.



SILICON GATE ENHANCEMENT MODE

RF POWER LDMOS TRANSISTOR

25.0 Watts Single Ended

Package Style AC

HIGH EFFICIENCY, LINEAR
HIGH GAIN, LOW NOISE

ABSOLUTE MAXIMUM RATINGS ($T = 25^{\circ}\text{C}$)

Total Device Dissipation	Junction to Case Thermal Resistance	Maximum Junction Temperature	Storage Temperature	DC Drain Current	Drain to Gate Voltage	Drain to Source Voltage	Gate to Source Voltage
120 Watts	1.30°C/W	200°C	-65°C to 150°C	7.0 A	36V	36V	20 V

RF CHARACTERISTICS (25.0 WATTS OUTPUT)


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Gps	Common Source Power Gain	8			dB	$I_{dq} = 0.20\text{ A}$, $V_{ds} = 12.5\text{ V}$, $F = 500\text{ MHz}$
η	Drain Efficiency		65		%	$I_{dq} = 0.20\text{ A}$, $V_{ds} = 12.5\text{ V}$, $F = 500\text{ MHz}$
VSWR	Load Mismatch Tolerance			20:1	Relative	$I_{dq} = 0.20\text{ A}$, $V_{ds} = 12.5\text{ V}$, $F = 500\text{ MHz}$

ELECTRICAL CHARACTERISTICS (EACH SIDE)


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Bvdss	Drain Breakdown Voltage	36			V	$I_{ds} = 0.25\text{ mA}$, $V_{gs} = 0\text{ V}$
Idss	Zero Bias Drain Current			1.0	mA	$V_{ds} = 12.5\text{ V}$, $V_{gs} = 0\text{ V}$
Igss	Gate Leakage Current			1	μA	$V_{ds} = 0\text{ V}$, $V_{gs} = 30\text{ V}$
Vgs	Gate Bias for Drain Current	1		7	V	$I_{ds} = 0.30\text{ A}$, $V_{gs} = V_{ds}$
gM	Forward Transconductance		2.7		Mho	$V_{ds} = 10\text{ V}$, $V_{gs} = 5\text{ V}$
Rdson	Saturation Resistance		0.28		Ohm	$V_{gs} = 20\text{ V}$, $I_{ds} = 8.00\text{ A}$
Idsat	Saturation Current		17.00		Amp	$V_{gs} = 20\text{ V}$, $V_{ds} = 10\text{ V}$
Ciss	Common Source Input Capacitance		80.0		pF	$V_{ds} = 12.5\text{ V}$, $V_{gs} = 0\text{ V}$, $F = 1\text{ MHz}$
Crss	Common Source Feedback Capacitance		5.0		pF	$V_{ds} = 12.5\text{ V}$, $V_{gs} = 0\text{ V}$, $F = 1\text{ MHz}$
Coss	Common Source Output Capacitance		60.0		pF	$V_{ds} = 12.5\text{ V}$, $V_{gs} = 0\text{ V}$, $F = 1\text{ MHz}$

LC421


POUT VS PIN GRAPH

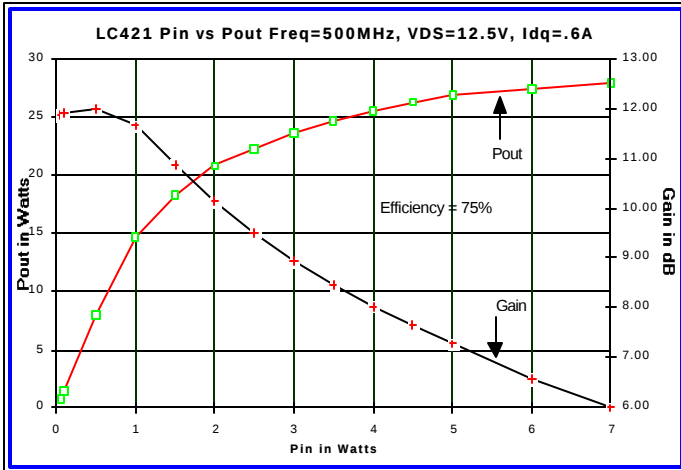


CAPACITANCE VS VOLTAGE

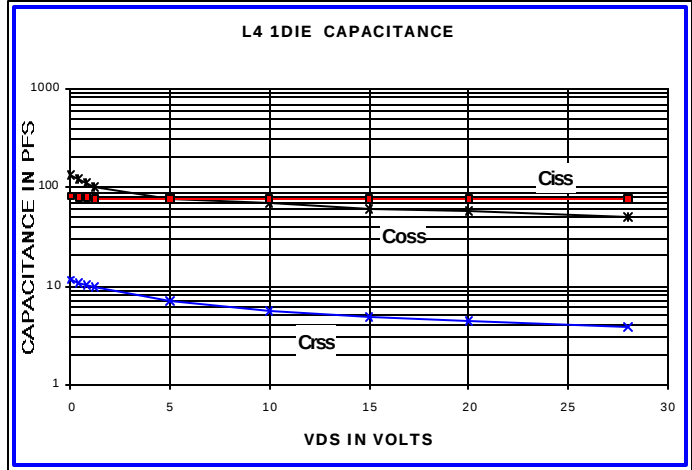


IV CURVE

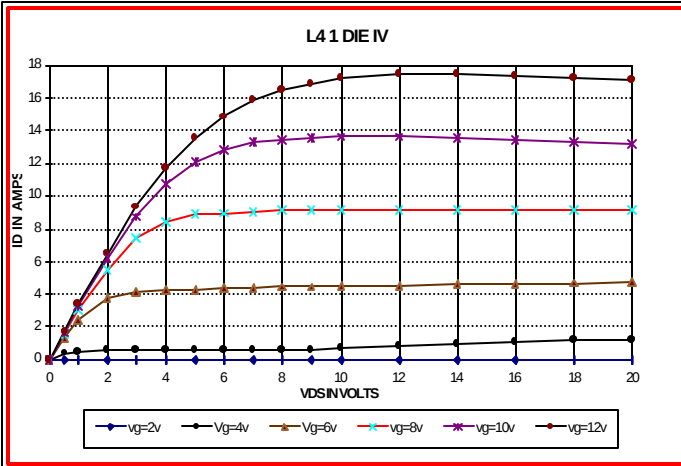


ID & GM VS VGS

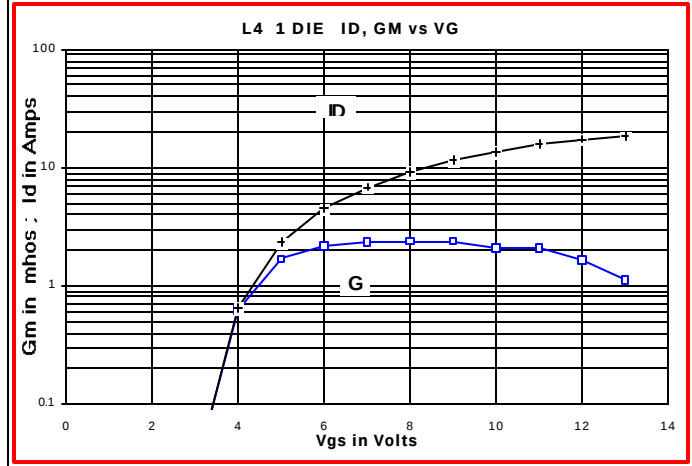

S11 & S22 SMITH CHART

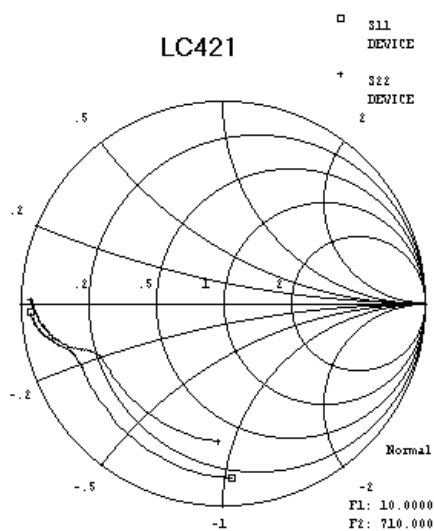

PACKAGE DIMENSIONS IN INCHES

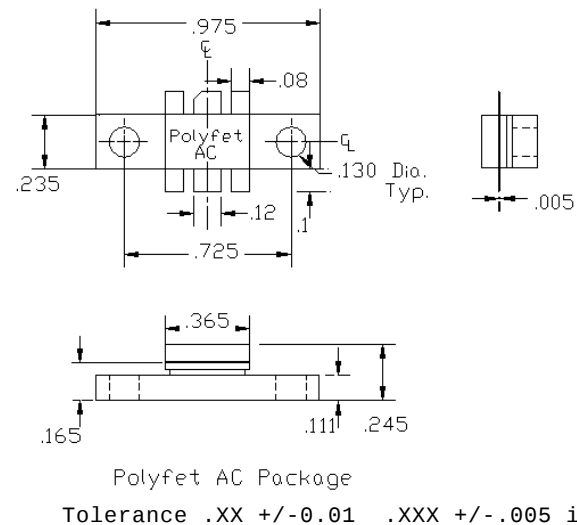

POLYFET RF DEVICES

REVISION 03/08/2001

1110 Avenida Acaso, Camarillo, Ca 93012 Tel:(805) 484-4210 FAX: (805) 484-3393 EMAIL:Sales@polyfet.com URL:www.polyfet.com