




Single-Phase Bridge Rectifier

Reverse Voltage 50 and 1000 V
Forward Current 8.0 A

Case Style KBU

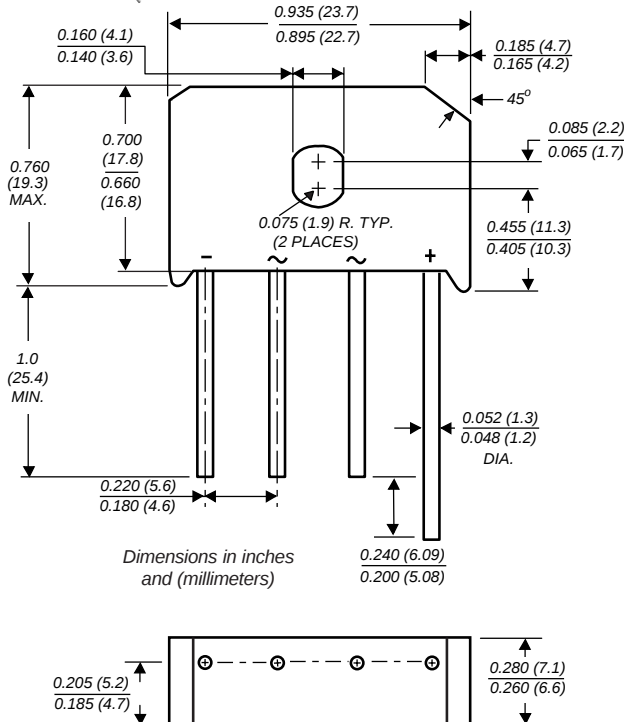

Features

- Plastic material used carries Underwriters Laboratory Flammability Classification 94V-0
- This series is UL listed under the Recognized Component Index, file number E54214
- High case dielectric strength of 1500 VRMS
- Ideal for printed circuit boards
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375 (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: Molded plastic body**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026**Mounting Position:** Any (Note 1)**Mounting Torque:** 5 in. -lb. max.**Weight:** 0.3 oz., 8.0 g**Packaging codes/options:**
1/250 EA. per Bulk Tray StackMaximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	KBU 8A	KBU 8B	KBU 8D	KBU 8G	KBU 8J	KBU 8K	KBU 8M	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at $T_C=100^\circ\text{C}$ ⁽¹⁾ ⁽³⁾ $T_A=45^\circ\text{C}$ ⁽²⁾	$I_{F(AV)}$	8.0 6.0							A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method) $T_J=150^\circ\text{C}$	I_{FSM}	300							A
Typical thermal resistance per leg ⁽²⁾ ⁽³⁾	$R_{\theta JA}$ $R_{\theta JC}$	18 3.0							°C/W
Operating junction and storage temperature range	T_J, T_{STG}	-50 to +150							°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.


Maximum instantaneous forward drop per leg at 8.0 A	V_F	1.0	V
Maximum DC reverse current at rated DC blocking voltage per leg $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	10 1.0	μA mA

Notes:


- (1) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw
- (2) Units mounted in free air, no heatsink, P.C.B. at 0.375" (9.5mm) lead length with 0.5 x 0.5" (12 x 12mm) copper pads
- (3) Units mounted on a 3.0 x 3.0" x 0.11" thick (7.5 x 7.5 x 0.3cm) Al. Plate heatsink

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 – Derating Curve
Output Rectified Current**

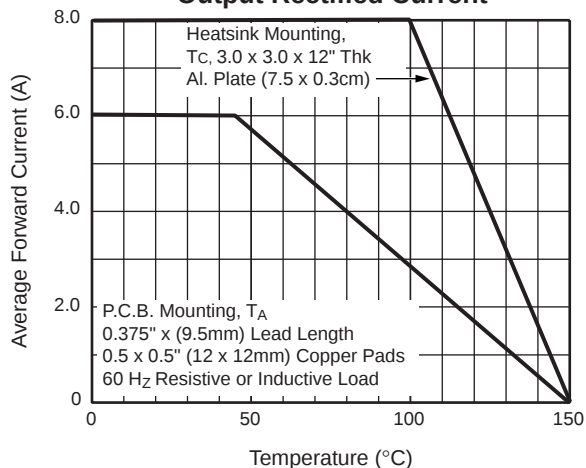


**Fig. 2 – Maximum Non-Repetitive Peak
Forward Surge Current**

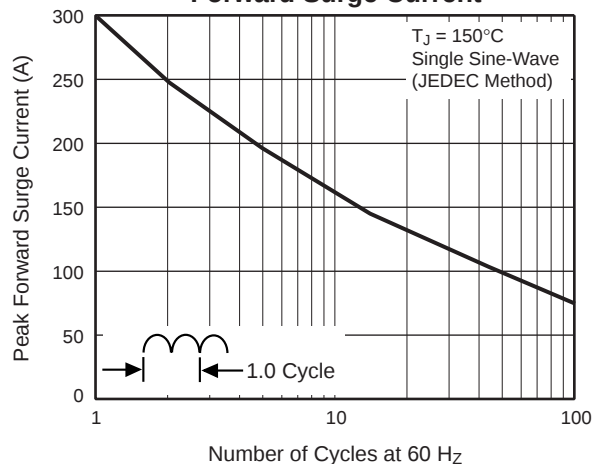

**Fig. 3 – Typical Instantaneous
Forward Characteristics Per Leg**

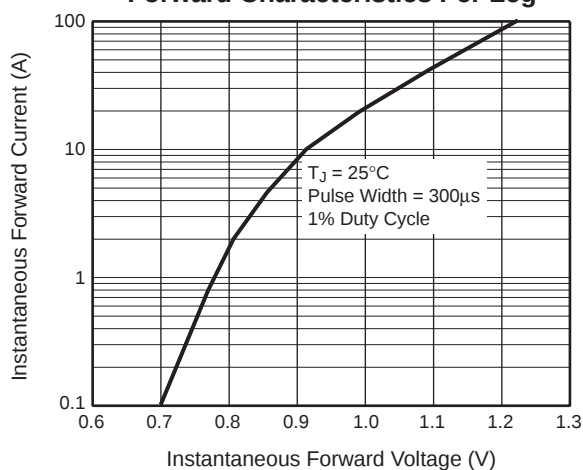

**Fig. 4 – Typical Reverse Leakage
Characteristics Per Leg**

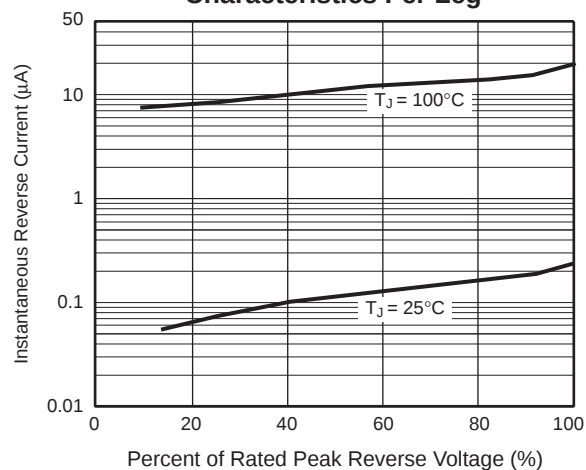

**Fig. 5 – Typical Junction
Capacitance Per Leg**

