



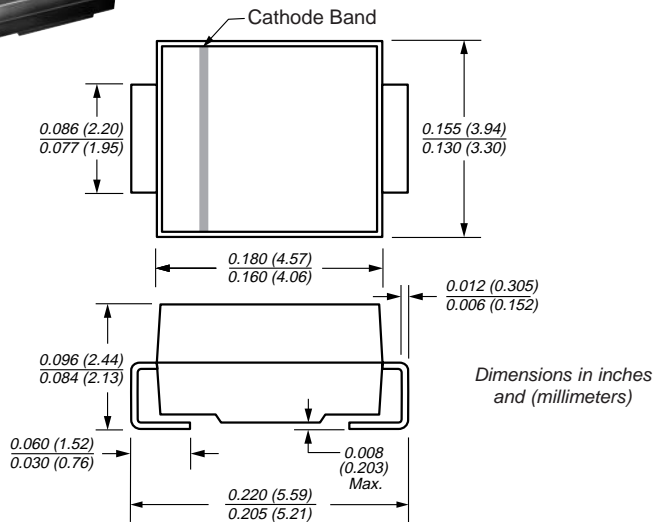

Ultrafast Plastic Rectifier

DO-214AA (SMB)
Reverse Voltage 200V
Forward Current 1.0A
Reverse Recovery Time 25ns


Mounting Pad Layout

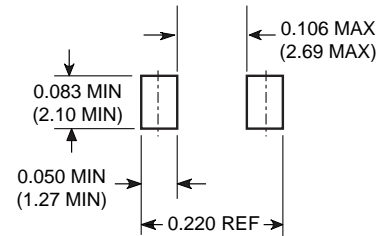

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultrafast recovery time for high efficiency
- For surface mount applications • Glass passivated junction
- High temperature soldering guaranteed: 250°C/10 seconds on terminals

Mechanical Data

- Case:** JEDEC DO-214AA molded plastic body
- Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity:** Color band denotes cathode end
- Weight:** 0.003 oz., 0.093 g
- Packaging Codes/Options:**
 5/3.2K per 13" reel (12mm tape)
 2/750 EA per 7" reel (12mm tape)

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Device Marking Codes		MD	
Maximum repetitive peak reverse voltage	V _{RRM}	200	V
Working peak reverse voltage	V _{RWM}	200	V
Maximum DC blocking voltage	V _{DC}	200	V
Maximum average forward rectified current at T _L = 155°C (See figure 1) T _L = 145°C	I _{F(AV)}	1.0 2.0	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	40	A
Typical thermal resistance junction to ambient	R _{θJL}	13	°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +175°C	°C

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Maximum instantaneous forward voltage ⁽¹⁾	at I _F = 1.0A, T _J = 25°C at I _F = 1.0A, T _J = 150°C	V _F	0.875 0.71	V
Maximum instantaneous reverse current at rated DC blocking voltage ⁽¹⁾	T _J = 25°C T _J = 150°C	I _R	2.0 50	μA
Maximum reverse recovery time at I _F =0.5A, I _R =1.0A, I _{rr} =0.25A		t _{rr}	25	ns
Maximum reverse recovery time at I _F = 1.0A, di/dt = 50A/μs, V _R = 30V, I _{rr} = 10% I _{RM}		t _{rr}	35	ns
Maximum forward recovery time at I _F = 1.0A, di/dt = 100A/μs, recovery to 1.0V		t _{fr}	25	ns

Note: (1) Pulse test: t_p = 300μs, duty cycle ≤ 2%

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Fig. 1 – Forward Current Derating Curve

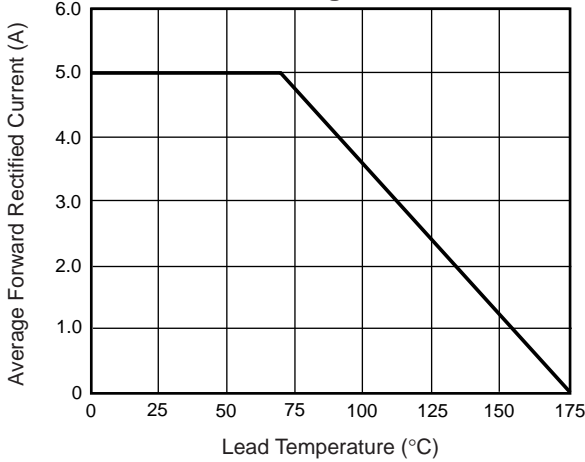


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

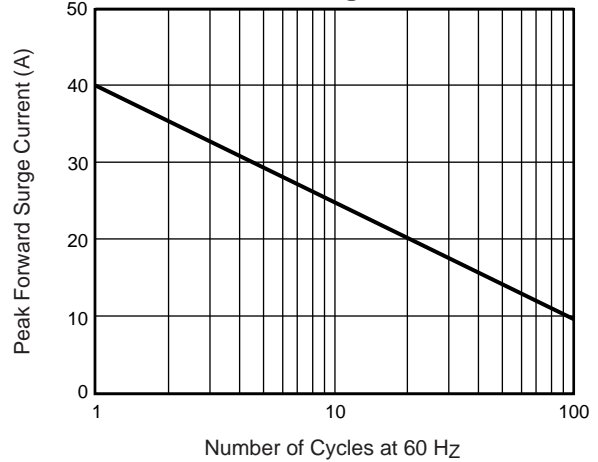


Fig. 3 – Typical Instantaneous Forward Characteristics

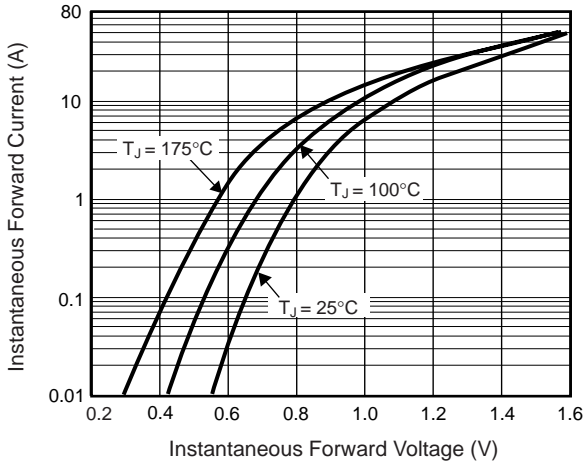


Fig. 4 – Typical Reverse Leakage Characteristics

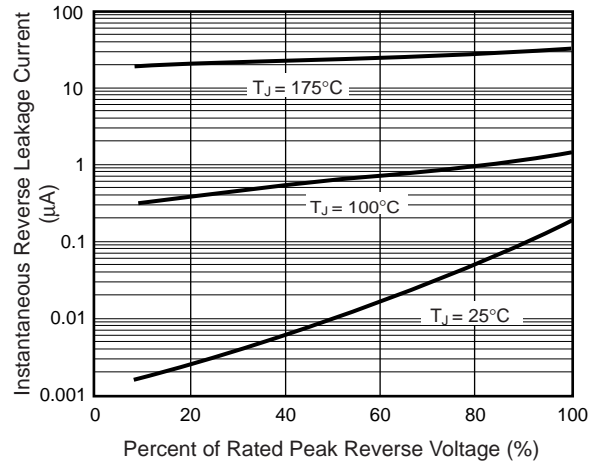


Fig. 5 – Typical Junction Capacitance

