

P-Channel 108-V (G-S) MOSFET

CHARACTERISTICS


- P-Channel Vertical DMOS
- Macro Model (Subcircuit Model)
- Level 3 MOS
- Apply for both Linear and Switching Application
- Accurate over the -55 to 125°C Temperature Range
- Model the Gate Charge, Transient, and Diode Reverse Recovery Characteristics

DESCRIPTION

The attached spice model describes the typical electrical characteristics of the p-channel vertical DMOS. The subcircuit model schematic is extracted and optimized over the -55 to 125°C temperature ranges under the pulsed 0-to-5V gate drive. The saturated output impedance is best fit at the gate bias near the threshold voltage.

A novel gate-to-drain feedback capacitance network is used to model the gate charge characteristics while avoiding convergence difficulties of the switched C_{gd} model. All model parameter values are optimized to provide a best fit to the measured electrical data and are not intended as an exact physical interpretation of the device.

SUBCIRCUIT MODEL SCHEMATIC

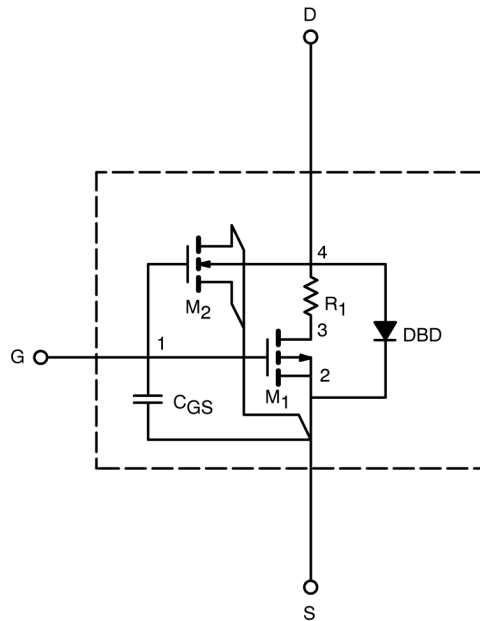

This document is intended as a SPICE modeling guideline and does not constitute a commercial product data sheet. Designers should refer to the appropriate data sheet of the same number for guaranteed specification limits.

SPICE Device Model Si6467DQ

Vishay Siliconix



SPECIFICATIONS ($T_J = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)115







Parameter	Symbol	Test Conditions	Typical	Unit
Static				
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250 \mu\text{A}$	0.64	V
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \geq -5 \text{ V}, V_{GS} = -4.5 \text{ V}$	274	A
Drain-Source On-State Resistance ^a	$r_{DS(on)}$	$V_{GS} = -4.5 \text{ V}, I_D = -8.0 \text{ A}$	0.009	Ω
		$V_{GS} = -2.5 \text{ V}, I_D = -7.0 \text{ A}$	0.015	
		$V_{GS} = -1.8 \text{ V}, I_D = -5.8 \text{ A}$	0.024	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -5 \text{ V}, I_D = -8.0 \text{ A}$	28	S
Diode Forward Voltage ^a	V_{SD}	$I_S = -1.5 \text{ A}, V_{GS} = 0 \text{ V}$	0.80	V
Dynamic^b				
Total Gate Charge	Q_g	$V_{DS} = -6 \text{ V}, V_{GS} = -4.5 \text{ V}, I_D = -8.0 \text{ A}$	47	nC
Gate-Source Charge	Q_{gs}		9	
Gate-Drain Charge	Q_{gd}		6.5	
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -6 \text{ V}, R_L = 6 \Omega$ $I_D \cong -1 \text{ A}, V_{GEN} = -4.5 \text{ V}, R_G = 6 \Omega$	66	ns
Rise Time	t_r		44	
Turn-Off Delay Time	$t_{d(off)}$		212	
Fall Time	t_f		32	
Source-Drain Reverse Recovery Time	t_{rr}	$I_F = -1.5 \text{ A}, di/dt = 100 \text{ A}/\mu\text{s}$	71	

Notes

- a. Pulse test; pulse width $\leq 300 \mu\text{s}$, duty cycle $\leq 2\%$.
- b. Guaranteed by design, not subject to production testing.



COMPARISON OF MODEL WITH MEASURED DATA ($T_J=25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

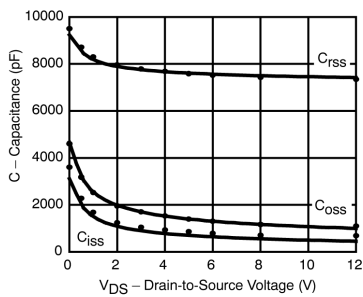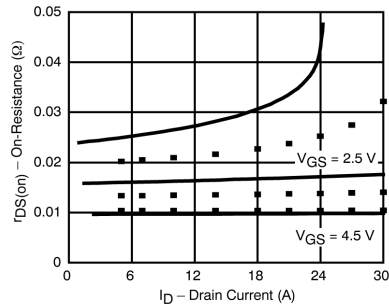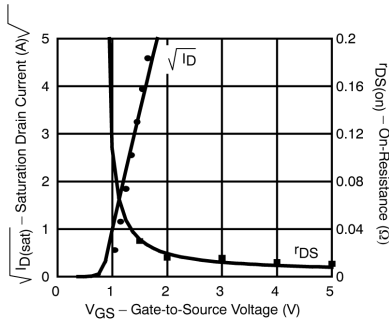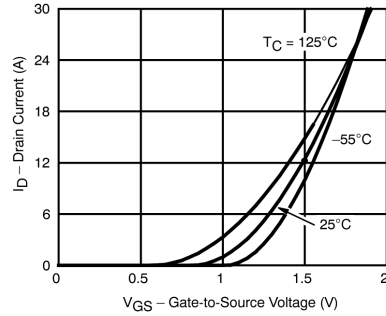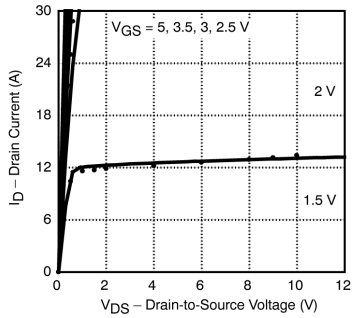

Note: Dots and squares represent measured data.