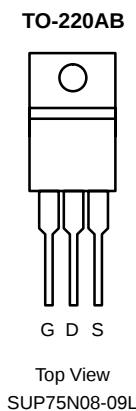




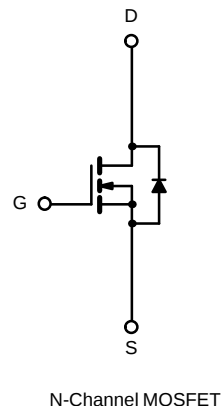

N-Channel 75-V (D-S), 175°C MOSFET

PRODUCT SUMMARY		
$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ (Ω)	I_D (A)
75	0.009 @ $V_{GS} = 10$ V	$\pm 75^a$
	0.011 @ $V_{GS} = 4.5$ V	

175°C Rated
Maximum Junction Temperature
TrenchFET®
Power MOSFETs



DRAIN connected to TAB



ABSOLUTE MAXIMUM RATINGS (T _C = 25°C UNLESS OTHERWISE NOTED)				
Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V _{DS}	75	V
Gate-Source Voltage		V _{GS}	± 20	
Continuous Drain Current (T _J = 175°C)	T _C = 25°C	I _D	± 75 ^a	A
	T _C = 125°C		± 66	
Pulsed Drain Current		I _{DM}	± 240	
Avalanche Current		I _{AR}	± 75	
Repetitive Avalanche Energy ^b	L = 0.1 mH	E _{AR}	280	mJ
Maximum Power Dissipation ^b	T _C = 25°C (TO-220AB and TO-263)	P _D	250 ^c	W
	T _A = 25°C (TO-263) ^d		3.7	
Operating Junction and Storage Temperature Range		T _J , T _{stg}	−55 to 175	°C

THERMAL RESISTANCE RATINGS				
Parameter		Symbol	Limit	Unit
Junction-to-Ambient	PCB Mount (TO-263) ^d	R _{thJA}	40	°C/W
	Free Air (TO-220AB)		62.5	
Junction-to-Case		R _{thJC}	0.6	

Notes

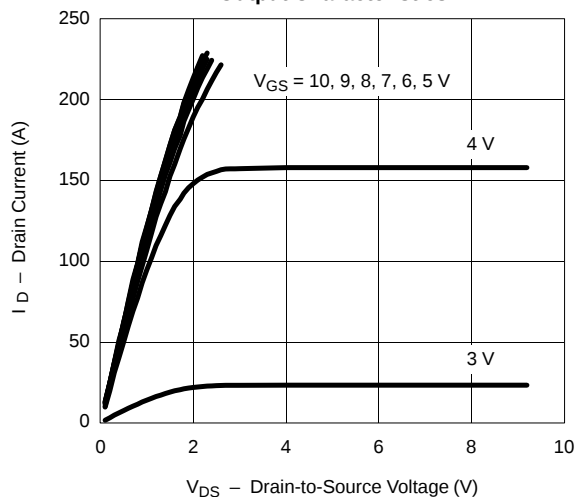
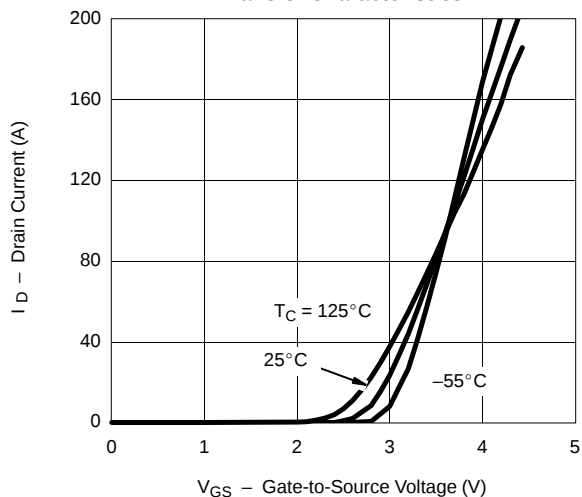
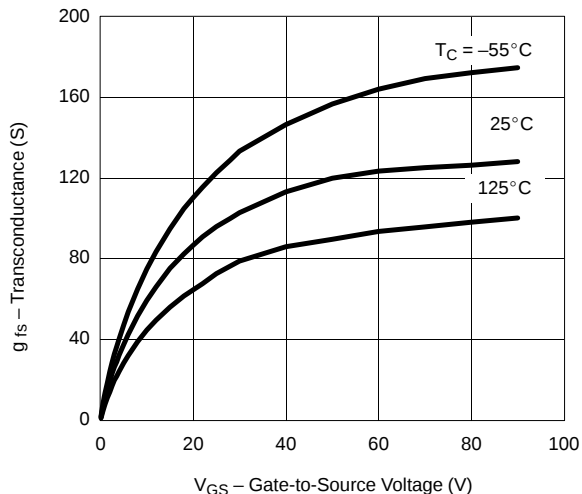
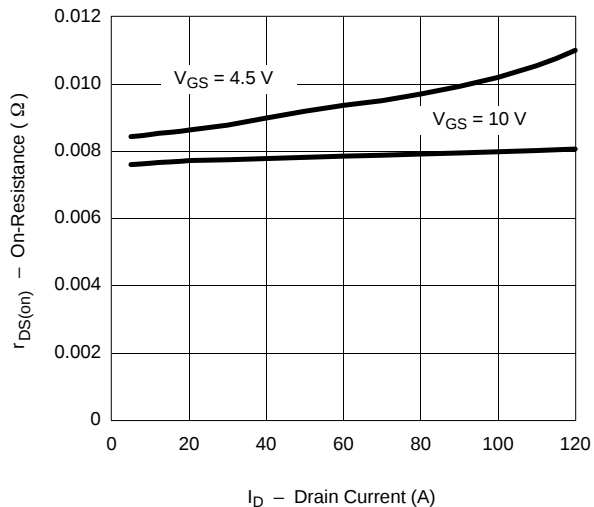
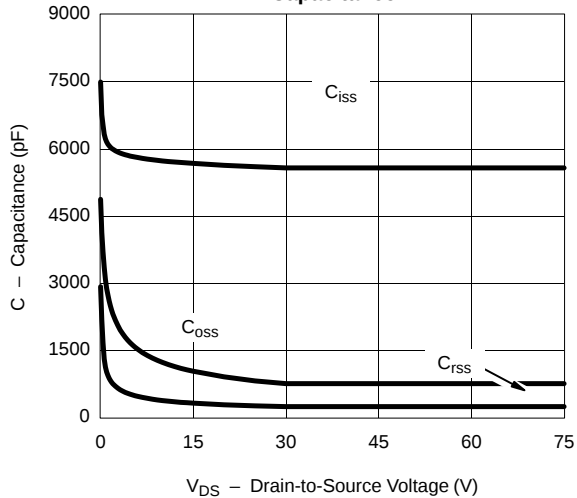
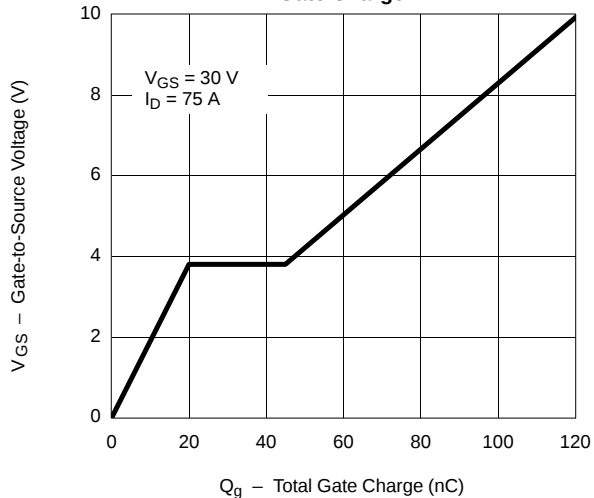
- Package limited.
- Duty cycle $\leq 1\%$.
- See SOA curve for voltage derating.
- When mounted on 1" square PCB (FR-4 material).

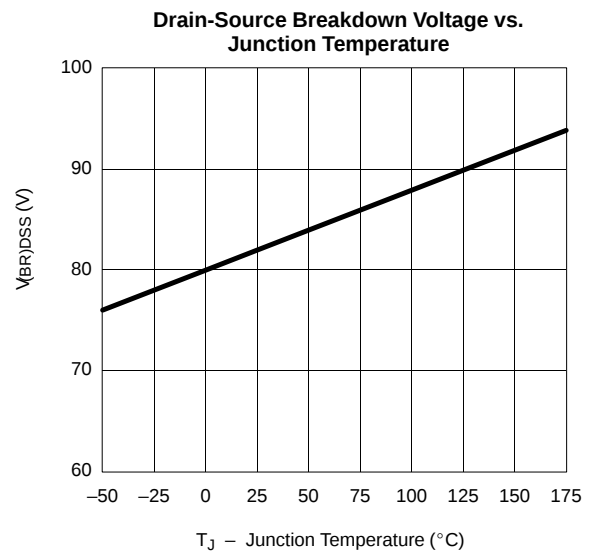
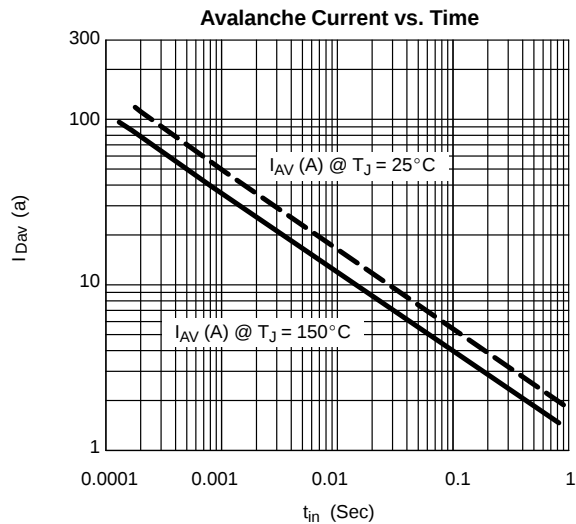
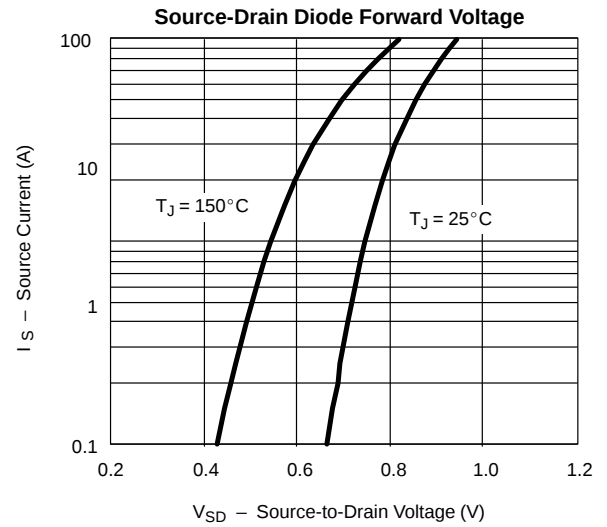
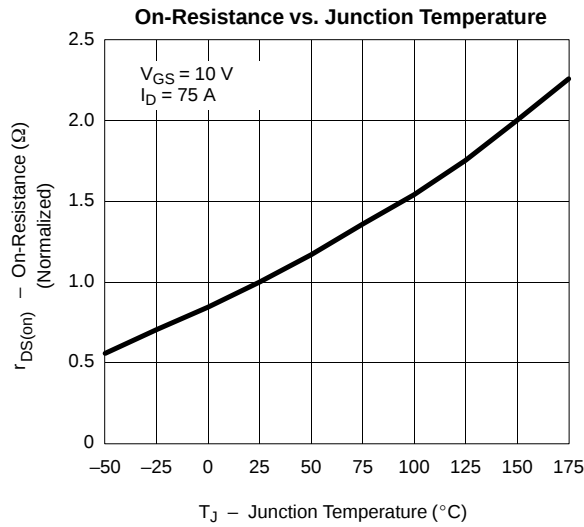


SPECIFICATIONS (T _J =25° C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{DS} = 0 V, I _D = 250 μA	75			V
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	1		3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 60 V, V _{GS} = 0 V			1	μA
		V _{DS} = 60 V, V _{GS} = 0 V, T _J = 125°C			50	
		V _{DS} = 60 V, V _{GS} = 0 V, T _J = 175°C			250	
On-State Drain Current ^a	I _{D(on)}	V _{DS} ≥ 5 V, V _{GS} = 10 V	120			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = 10 V, I _D = 30 A		0.0076	0.009	Ω
		V _{GS} = 4.5 V, I _D = 20 A			0.011	
		V _{GS} = 10 V, I _D = 30 A, T _J = 125°C			0.016	
		V _{GS} = 10 V, I _D = 30 A, T _J = 175°C			0.021	
Forward Transconductance ^a	g _{fs}	V _{DS} = 15 V, I _D = 30 A	30			S
Dynamic ^b						
Input Capacitance	C _{iss}	V _{GS} = 0 V, V _{DS} = 25 V, f = 1 MHz		5600		pF
Output Capacitance	C _{oss}			820		
Reverse Transfer Capacitance	C _{rss}			275		
Total Gate Charge ^c	Q _g	V _{DS} = 30 V, V _{GS} = 10 V, I _D = 75 A		121	150	nC
Gate-Source Charge ^c	Q _{gs}			20		
Gate-Drain Charge ^c	Q _{gd}			25		
Turn-On Delay Time ^c	t _{d(on)}	V _{DD} = 30 V, R _L = 0.47 Ω I _D ≅ 75 A, V _{GEN} = 10 V, R _G = 2.5 Ω		11	20	ns
Rise Time ^c	t _r			10	20	
Turn-Off Delay Time ^c	t _{d(off)}			107	200	
Fall Time ^c	t _f			22	40	
Source-Drain Diode Ratings and Characteristics (T _C = 25° C) ^b						
Continuous Current	I _S				75	A
Pulsed Current	I _{SM}				240	
Forward Voltage ^a	V _{SD}	I _F = 75 A, V _{GS} = 0 V		1.0	1.3	V
Reverse Recovery Time	t _{rr}	I _F = 75 A, di/dt = 100 A/μs		80	120	ns
Peak Reverse Recovery Current	I _{RM(REC)}			4	9	A
Reverse Recovery Charge	Q _{rr}			0.32	0.54	μC

Notes

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
b. Guaranteed by design, not subject to production testing.
c. Independent of operating temperature.

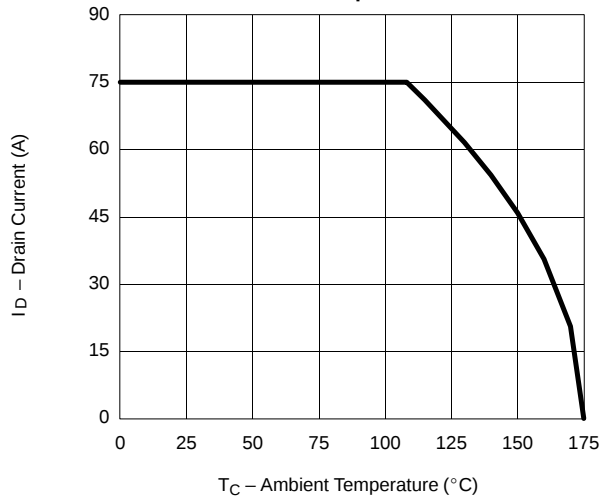
**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)****Output Characteristics****Transfer Characteristics****Transconductance****On-Resistance vs. Drain Current****Capacitance****Gate Charge**

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


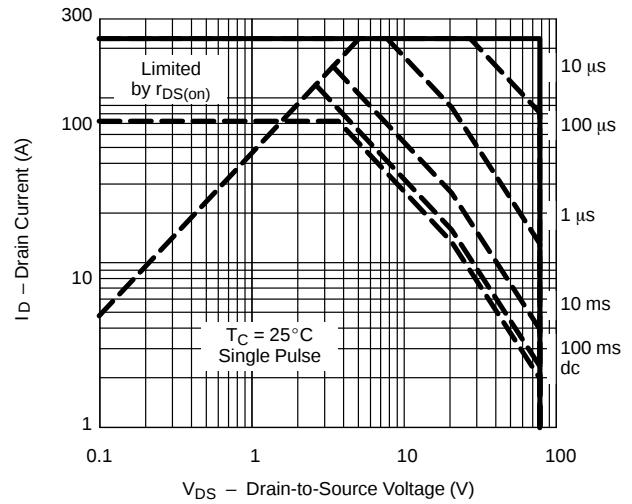


THERMAL RATINGS

Maximum Drain Current vs.
Case Temperature



Safe Operating Area



Normalized Thermal Transient Impedance, Junction-to-Case

