


Ultrafast Plastic Rectifier

Reverse Voltage 400 to 600V
Forward Current 1.5A

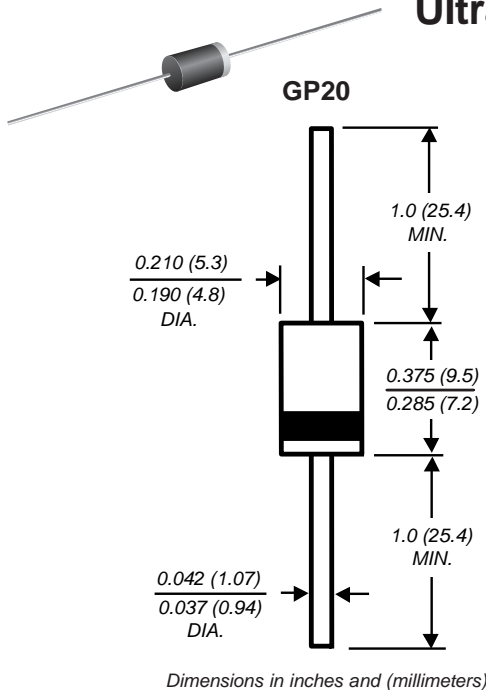

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Glass passivated chip junction
- Superfast recovery time for high efficiency
- High forward surge current capability
- Low leakage current
- Low power loss
- High temperature soldering guaranteed: 260°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: Plastic molded body over passivated chip
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.03 oz., 0.8 g

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	SUF15G	SUF15J	Units
Maximum repetitive peak reverse voltage	V _{RRM}	400	600	V
Maximum RMS voltage	V _{RMS}	280	420	V
Maximum DC blocking voltage	V _{DC}	400	600	V
Maximum average forward rectified current, 0.375" (9.5mm) lead length at T _A = 50°C	I _{F(AV)}	1.5		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) at T _A = 50°C	I _{FSM}	50		A
Typical thermal resistance ⁽¹⁾	R _{θJA} R _{θJL}	65 20		°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150		°C

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	SUF15G	SUF15J	Units
Maximum instantaneous forward voltage at 1.5A ⁽²⁾	V _F	1.80		V
Maximum peak reverse current at rated peak reverse voltage T _A = 25°C T _A = 100°C	I _R	10 100		μA
Maximum reverse recovery time at I _F = 0.5A, I _R = 1.0A, I _{rr} = 0.25A	t _{rr}	35		ns
Typical junction capacitance at 4.0V, 1MHz	C _J	35		pF

Notes:

- (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted
(2) Pulse test: 300μs pulse width, 1% duty cycle

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Maximum Forward Current Derating Curve

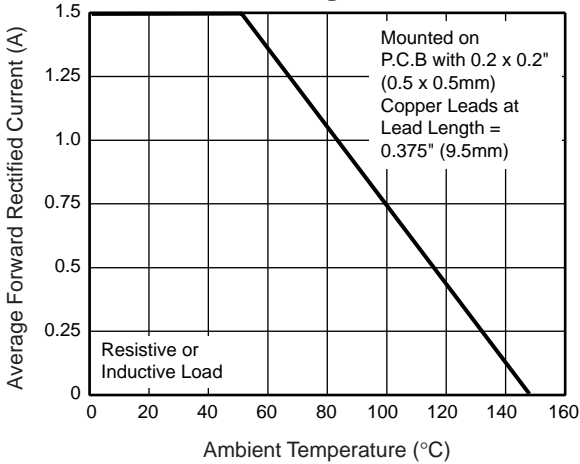


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

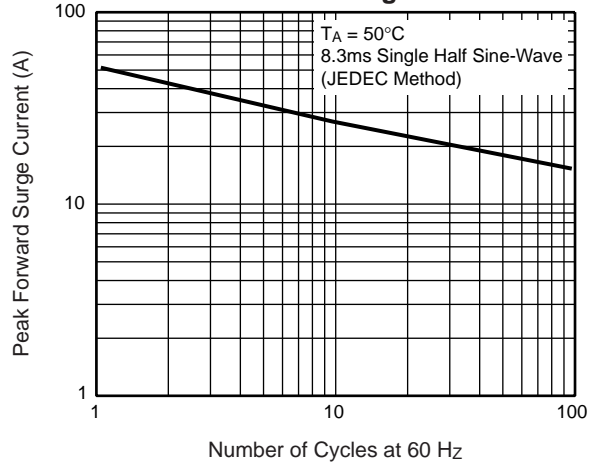


Fig. 3 – Typical Instantaneous Forward Characteristics

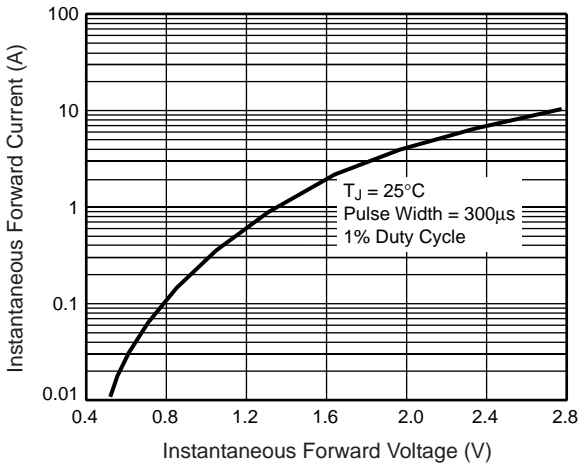


Fig. 4 – Typical Reverse Leakage Characteristics

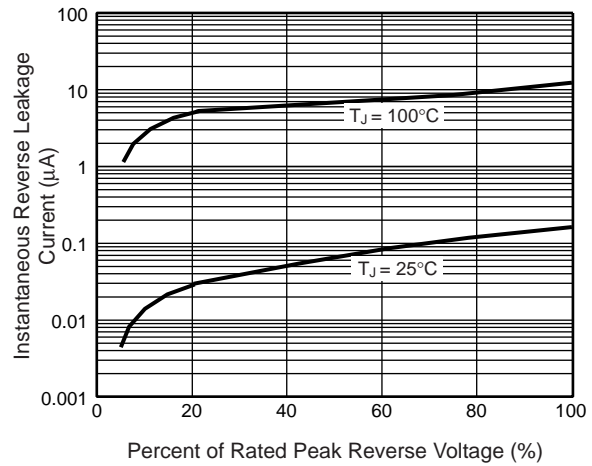


Fig. 5 – Typical Junction Capacitance

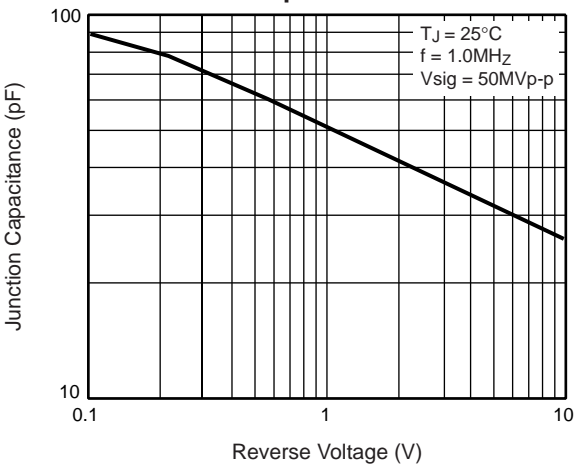


Fig. 6 – Typical Transient Thermal Impedance

