

## Features

- 130 MHz 3 dB bandwidth ( $A_V = +2$ )
- 180 MHz 3 dB bandwidth ( $A_V = +1$ )
- 0.01% differential gain,  $R_L = 500\Omega$
- $0.01^\circ$  differential phase,  $R_L = 500\Omega$
- Low supply current, 8.5 mA
- Wide supply range,  $\pm 2V$  to  $\pm 15V$
- 80 mA output current (peak)
- Low cost
- 1500 V/ $\mu s$  slew rate
- Input common mode range to within 1.5V of supplies
- 35 ns settling time to 0.1%

## Applications

- Video amplifiers
- Cable drivers
- RGB amplifiers
- Test equipment amplifiers
- Current to voltage converter

## Ordering Information

| Part No. | Temp. Range                    | Package     | Outline # |
|----------|--------------------------------|-------------|-----------|
| EL2160CN | $-40^\circ C$ to $+85^\circ C$ | 8-Pin P-DIP | MDP0031   |
| EL2160CS | $-40^\circ C$ to $+85^\circ C$ | 8-Pin SOIC  | MDP0027   |

## General Description


The EL2160C is a current feedback operational amplifier with  $-3$  dB bandwidth of 130 MHz at a gain of  $+2$ . Built using the Elantec proprietary monolithic complementary bipolar process, this amplifier uses current mode feedback to achieve more bandwidth at a given gain than a conventional voltage feedback operational amplifier.

The EL2160C is designed to drive a double terminated  $75\Omega$  coax cable to video levels. Differential gain and phase are excellent when driving both loads of  $500\Omega$  ( $<0.01\% / <0.01^\circ$ ) and double terminated  $75\Omega$  cables ( $0.025\% / 0.1^\circ$ ).

The amplifier can operate on any supply voltage from 4V ( $\pm 2V$ ) to 33V ( $\pm 16.5V$ ), yet consume only 8.5 mA at any supply voltage. Using industry standard pinouts, the EL2160C is available in 8-pin P-DIP and 8-pin SO packages. For dual and quad applications, please see the EL2260C/EL2460C datasheet.

Elantec's facilities comply with MIL-I-45208A and offer applicable quality specifications. See the Elantec document, QRA-2: *Elantec's Military Processing—Monolithic Products*.

## Connection Diagram



2060-1

Note: All information contained in this data sheet has been carefully checked and is believed to be accurate as of the date of publication; however, this data sheet cannot be a "controlled document". Current revisions, if any, to these specifications are maintained at the factory and are available upon your request. We recommend checking the revision level before finalization of your design documentation.

# EL2160C

## 130 MHz Current Feedback Amplifier

### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ )

|                                     |                                            |                                |                                             |
|-------------------------------------|--------------------------------------------|--------------------------------|---------------------------------------------|
| Voltage between $V_S^+$ and $V_S^-$ | +33V                                       | Operating Junction Temperature | 150°C                                       |
| Voltage between +IN and -IN         | $\pm 6\text{V}$                            | Plastic Packages               |                                             |
| Current into +IN or -IN             | 10 mA                                      | Output Current                 | $\pm 50\text{ mA}$                          |
| Internal Power Dissipation          | See Curves                                 | Storage Temperature Range      | $-65^\circ\text{C}$ to $+150^\circ\text{C}$ |
| Operating Ambient Temperature Range | $-40^\circ\text{C}$ to $+85^\circ\text{C}$ |                                |                                             |

#### Important Note:

All parameters having Min/Max specifications are guaranteed. The Test Level column indicates the specific device testing actually performed during production and Quality inspection. Elantec performs most electrical tests using modern high-speed automatic test equipment, specifically the LTX77 Series system. Unless otherwise noted, all tests are pulsed tests, therefore  $T_J = T_C = T_A$ .

| Test Level | Test Procedure                                                                                                                                          |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| I          | 100% production tested and QA sample tested per QA test plan QCX0002.                                                                                   |
| II         | 100% production tested at $T_A = 25^\circ\text{C}$ and QA sample tested at $T_A = 25^\circ\text{C}$ , $T_{MAX}$ and $T_{MIN}$ per QA test plan QCX0002. |
| III        | QA sample tested per QA test plan QCX0002.                                                                                                              |
| IV         | Parameter is guaranteed (but not tested) by Design and Characterization Data.                                                                           |
| V          | Parameter is typical value at $T_A = 25^\circ\text{C}$ for information purposes only.                                                                   |

### Open Loop DC Electrical Characteristics

$V_S = \pm 15\text{V}$ ,  $R_L = 150\Omega$ ,  $T_A = 25^\circ\text{C}$  unless otherwise specified

| Parameter    | Description                                     | Conditions                               | Temp               | Limits |     |     | Test Level | Units                        |
|--------------|-------------------------------------------------|------------------------------------------|--------------------|--------|-----|-----|------------|------------------------------|
|              |                                                 |                                          |                    | Min    | Typ | Max | EL2160C    |                              |
| $V_{OS}$     | Input Offset Voltage                            | $V_S = \pm 5\text{V}$ , $\pm 15\text{V}$ | $25^\circ\text{C}$ |        | 2   | 10  | I          | mV                           |
| $TC\ V_{OS}$ | Average Offset Voltage Drift (Note 1)           |                                          | Full               |        | 10  |     | V          | $\mu\text{V}/^\circ\text{C}$ |
| $+I_{IN}$    | + Input Current                                 | $V_S = \pm 5\text{V}$ , $\pm 15\text{V}$ | $25^\circ\text{C}$ |        | 0.5 | 5   | I          | $\mu\text{A}$                |
| $-I_{IN}$    | - Input Current                                 | $V_S = \pm 5\text{V}$ , $\pm 15\text{V}$ | $25^\circ\text{C}$ |        | 5   | 25  | I          | $\mu\text{A}$                |
| CMRR         | Common Mode Rejection Ratio (Note 2)            | $V_S = \pm 5\text{V}$ , $\pm 15\text{V}$ | $25^\circ\text{C}$ | 50     | 55  |     | II         | dB                           |
| -ICMR        | - Input Current Common Mode Rejection (Note 2)  | $V_S = \pm 5\text{V}$ , $\pm 15\text{V}$ | $25^\circ\text{C}$ |        | 0.2 | 5   | I          | $\mu\text{A}/\text{V}$       |
| PSRR         | Power Supply Rejection Ratio (Note 3)           |                                          | $25^\circ\text{C}$ | 75     | 95  |     | II         | dB                           |
| -IPSR        | - Input Current Power Supply Rejection (Note 3) |                                          | $25^\circ\text{C}$ |        | 0.2 | 5   | I          | $\mu\text{A}/\text{V}$       |

# ***EL2160C***

## ***130 MHz Current Feedback Amplifier***

### **Open Loop DC Electrical Characteristics — Contd.**

$V_S = \pm 15V$ ,  $R_L = 150\Omega$ ,  $T_A = 25^\circ C$  unless otherwise specified

| Parameter | Description                              | Conditions                             | Temp         | Limits    |            |      | Test Level | Units     |
|-----------|------------------------------------------|----------------------------------------|--------------|-----------|------------|------|------------|-----------|
|           |                                          |                                        |              | Min       | Typ        | Max  | EL2160C    |           |
| $R_{OL}$  | Transimpedance<br>(Note 4)               | $V_S = \pm 15V$<br>$R_L = 400\Omega$   | $25^\circ C$ | 500       | 2000       |      | I          | $k\Omega$ |
|           |                                          | $V_S = \pm 5V$<br>$R_L = 150\Omega$    | $25^\circ C$ | 500       | 1800       |      | I          | $k\Omega$ |
| $+R_{IN}$ | + Input Resistance                       |                                        | $25^\circ C$ | 1.5       | 3.0        |      | II         | $M\Omega$ |
| $+C_{IN}$ | + Input Capacitance                      |                                        | $25^\circ C$ |           | 2.5        |      | V          | pF        |
| CMIR      | Common Mode Input Range                  | $V_S = \pm 15V$                        | $25^\circ C$ |           | $\pm 13.5$ |      | V          | V         |
|           |                                          | $V_S = \pm 5V$                         | $25^\circ C$ |           | $\pm 3.5$  |      | V          | V         |
| $V_O$     | Output Voltage Swing                     | $R_L = 400\Omega$ ,<br>$V_S = \pm 15V$ | $25^\circ C$ | $\pm 12$  | $\pm 13.5$ |      | I          | V         |
|           |                                          | $R_L = 150\Omega$ ,<br>$V_S = \pm 15V$ | $25^\circ C$ |           | $\pm 12$   |      | V          | V         |
|           |                                          | $R_L = 150\Omega$ ,<br>$V_S = \pm 5V$  | $25^\circ C$ | $\pm 3.0$ | $\pm 3.7$  |      | I          | V         |
| $I_{SC}$  | Output Short Circuit<br>Current (Note 5) | $V_S = \pm 5V$ ,<br>$V_S = \pm 15V$    | $25^\circ C$ | 60        | 100        | 150  | I          | mA        |
| $I_S$     | Supply Current                           | $V_S = \pm 15V$                        | $25^\circ C$ |           | 8.5        | 12.0 | I          | mA        |
|           |                                          | $V_S = \pm 5V$                         | $25^\circ C$ |           | 6.4        | 9.5  | I          | mA        |

# EL2160C

## 130 MHz Current Feedback Amplifier

### Closed Loop AC Electrical Characteristics

$V_S = \pm 15V$ ,  $A_V = +2$ ,  $R_F = 560\Omega$ ,  $R_L = 150\Omega$ ,  $T_A = 25^\circ C$  unless otherwise noted

| Parameter     | Description                        | Conditions                                                | Limits |       |     | Test Level | Units      |
|---------------|------------------------------------|-----------------------------------------------------------|--------|-------|-----|------------|------------|
|               |                                    |                                                           | Min    | Typ   | Max | EL2160C    |            |
| BW            | – 3 dB Bandwidth<br>(Note 8)       | $V_S = \pm 15V$ , $A_V = +2$                              |        | 130   |     | V          | MHz        |
|               |                                    | $V_S = \pm 15V$ , $A_V = +1$                              |        | 180   |     | V          | MHz        |
|               |                                    | $V_S = \pm 5V$ , $A_V = +2$                               |        | 100   |     | V          | MHz        |
|               |                                    | $V_S = \pm 5V$ , $A_V = +1$                               |        | 110   |     | V          | MHz        |
| SR            | Slew Rate<br>(Notes 6, 8)          | $R_L = 400\Omega$                                         | 1000   | 1500  |     | IV         | V/ $\mu s$ |
|               |                                    | $R_F = 1K\Omega$ , $R_G = 110\Omega$<br>$R_L = 400\Omega$ |        | 1500  |     | V          | V/ $\mu s$ |
| $t_r$ , $t_f$ | Rise Time,<br>Fall Time, (Note 8)  | $V_{OUT} = \pm 500mV$                                     |        | 2.7   |     | V          | ns         |
| $t_{pd}$      | Propagation Delay<br>(Note 8)      |                                                           |        | 3.2   |     | V          | ns         |
| OS            | Overshoot (Note 8)                 | $V_{OUT} = \pm 500 mV$                                    |        | 0     |     | V          | %          |
| $t_s$         | 0.1% Settling Time<br>(Note 8)     | $V_{OUT} = \pm 10V$<br>$A_V = -1$ , $R_L = 1K$            |        | 35    |     | V          | ns         |
| dG            | Differential Gain<br>(Notes 7, 8)  | $R_L = 150\Omega$                                         |        | 0.025 |     | V          | %          |
|               |                                    | $R_L = 500\Omega$                                         |        | 0.006 |     | V          | %          |
| dP            | Differential Phase<br>(Notes 7, 8) | $R_L = 150\Omega$                                         |        | 0.1   |     | V          | deg (°)    |
|               |                                    | $R_L = 500\Omega$                                         |        | 0.005 |     | V          | deg (°)    |

Note 1: Measured from  $T_{MIN}$  to  $T_{MAX}$ .

Note 2:  $V_{CM} = \pm 10V$  for  $V_S = \pm 15V$  and  $T_A = 25^\circ C$

$V_{CM} = \pm 3V$  for  $V_S = \pm 5V$  and  $T_A = 25^\circ C$

Note 3: The supplies are moved from  $\pm 2.5V$  to  $\pm 15V$ .

Note 4:  $V_{OUT} = \pm 7V$  for  $V_S = \pm 15V$ , and  $V_{OUT} = \pm 2V$  for  $V_S = \pm 5V$ .

Note 5: A heat sink is required to keep junction temperature below absolute maximum when an output is shorted.

Note 6: Slew Rate is with  $V_{OUT}$  from  $+10V$  to  $-10V$  and measured at the 25% and 75% points.










Note 7: DC offset from  $-0.714V$  through  $+0.714V$ , AC amplitude 286 mV<sub>p-p</sub>,  $f = 3.58 MHz$ .

Note 8: All AC tests are performed on a “warmed up” part, except for Slew Rate, which is pulse tested.

# EL2160C

## 130 MHz Current Feedback Amplifier

### Typical Performance Curves

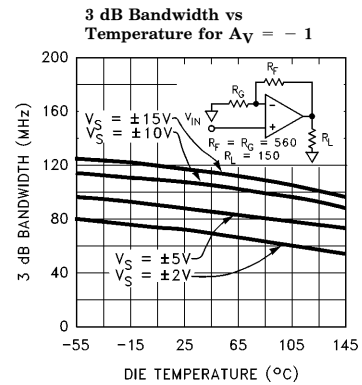
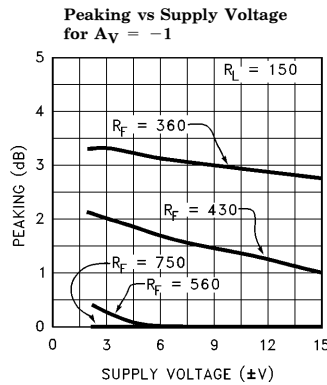
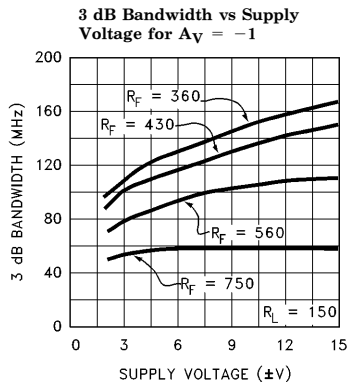
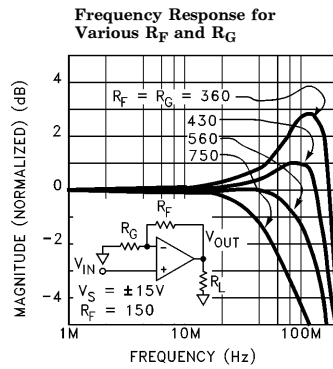
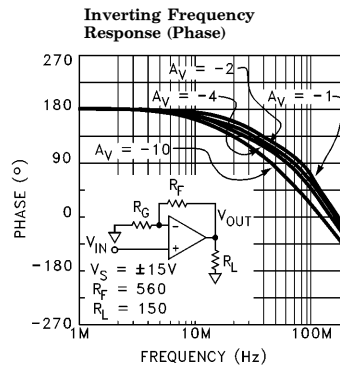
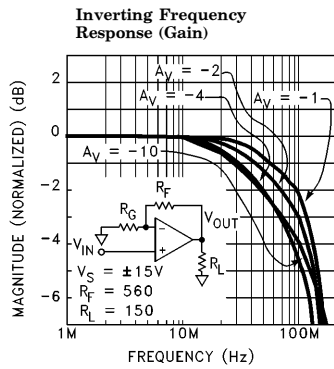
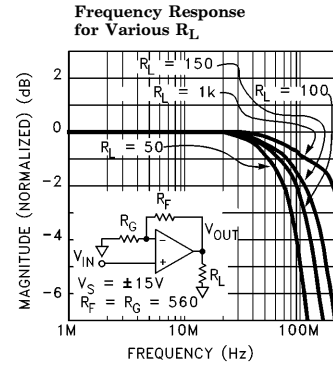
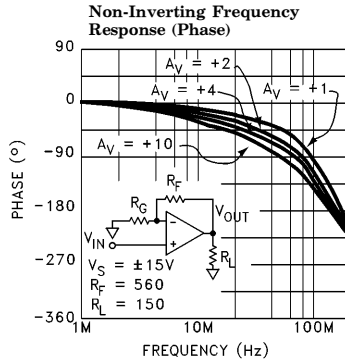
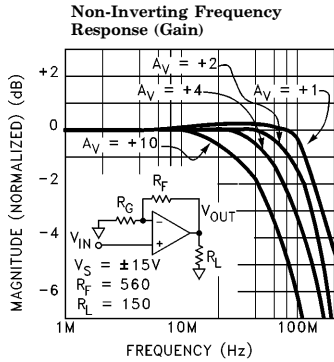


2060-2

# EL2160C

## 130 MHz Current Feedback Amplifier

### Typical Performance Curves — Contd.

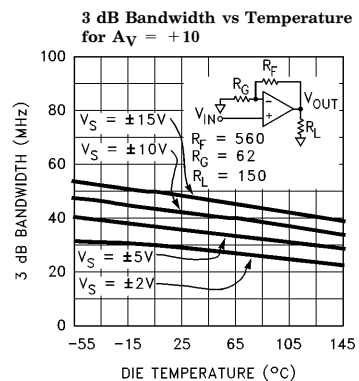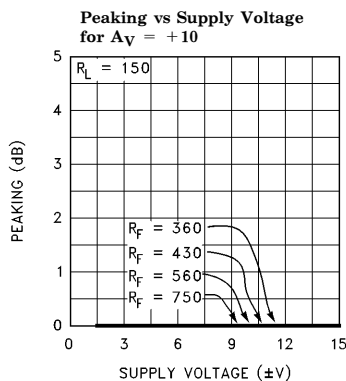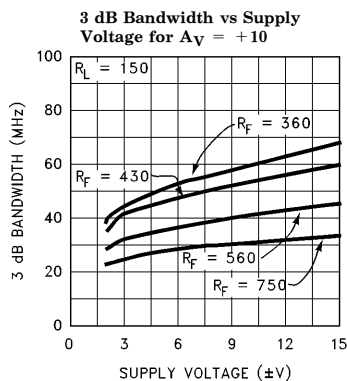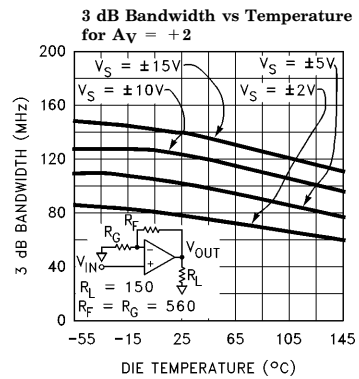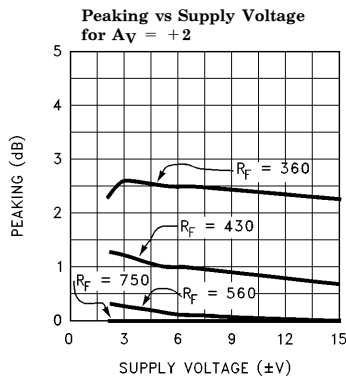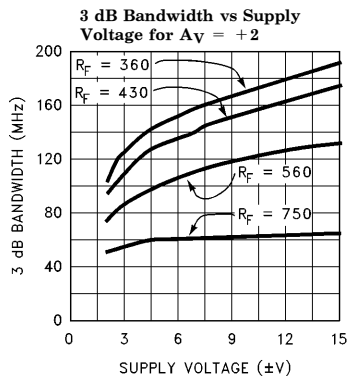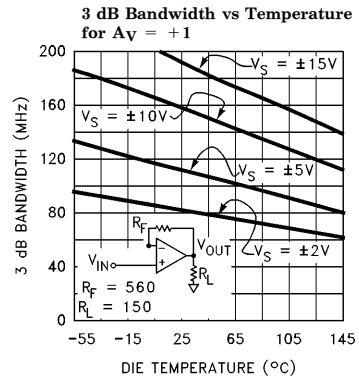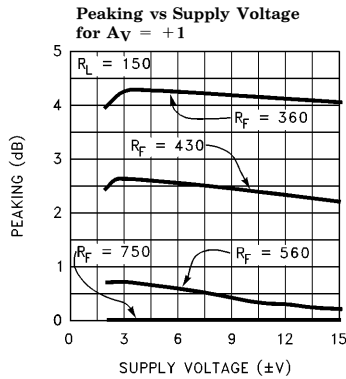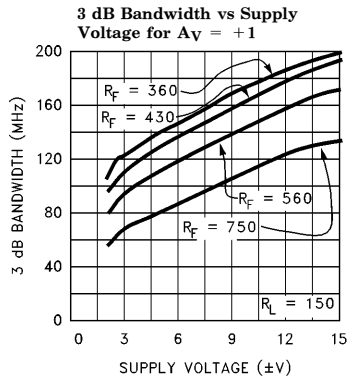


2060-3

# EL2160C

## 130 MHz Current Feedback Amplifier

### Typical Performance Curves — Contd.









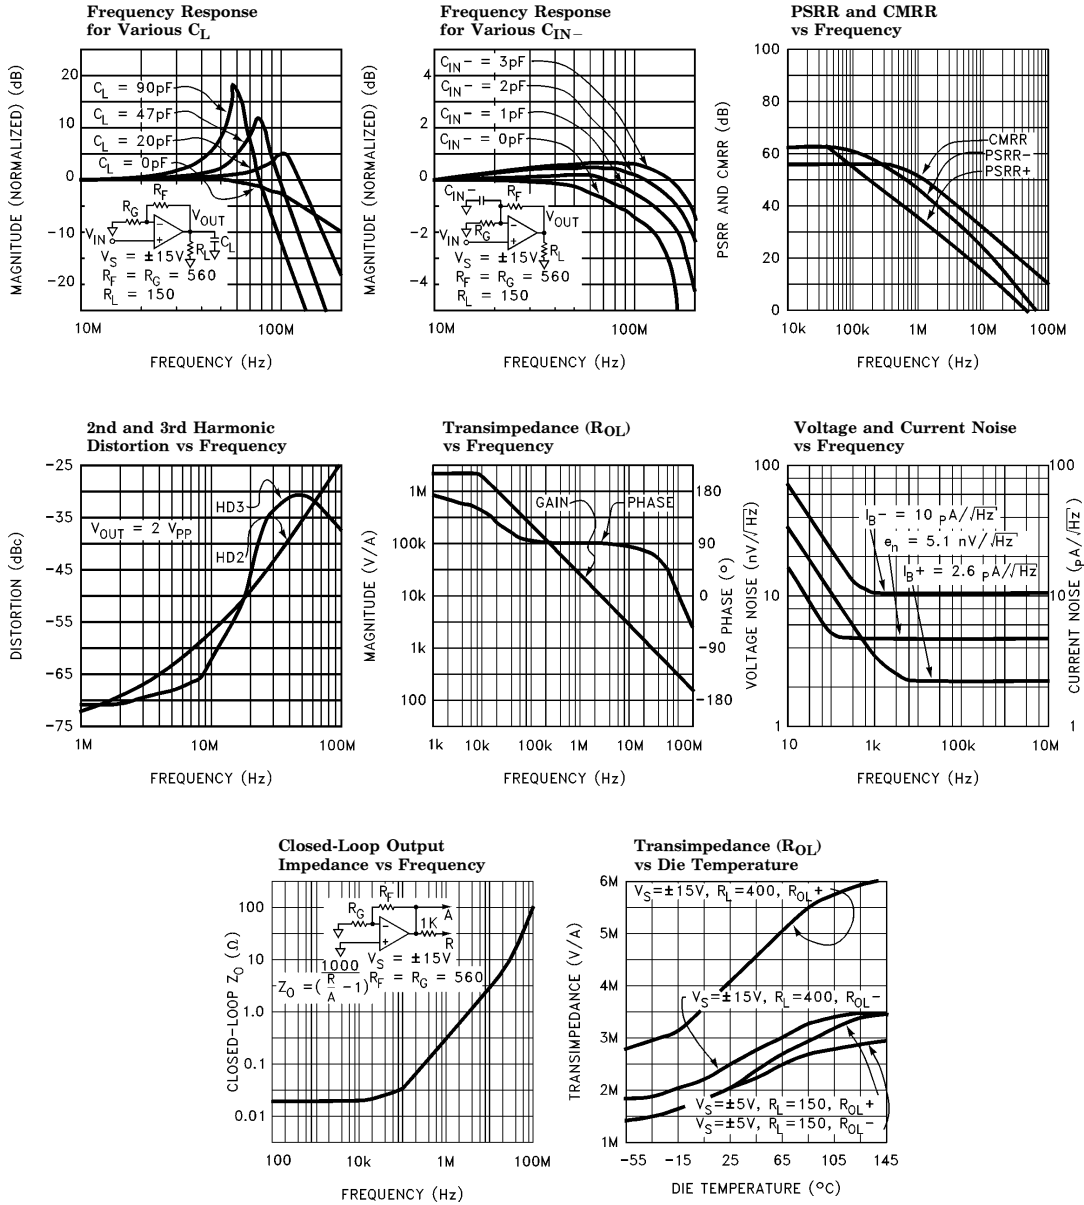


2060-4

# EL2160C

## 130 MHz Current Feedback Amplifier

### Typical Performance Curves — Contd.

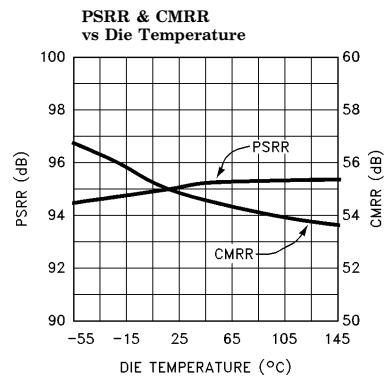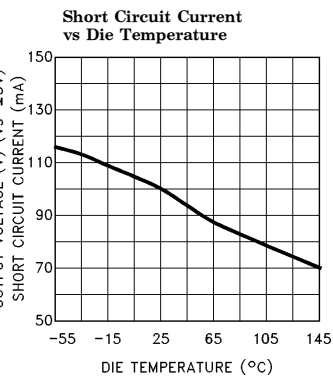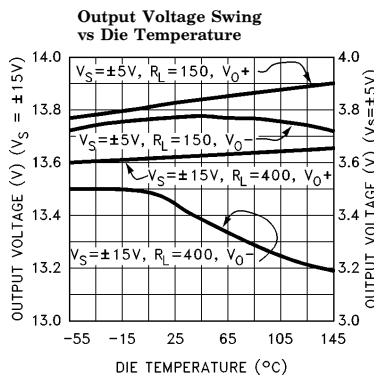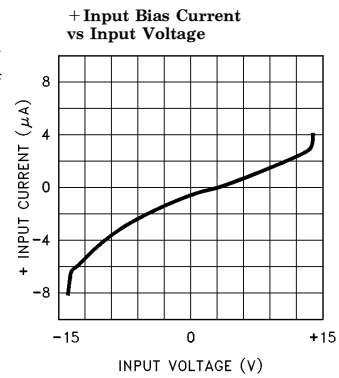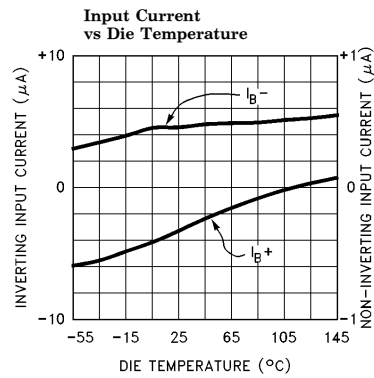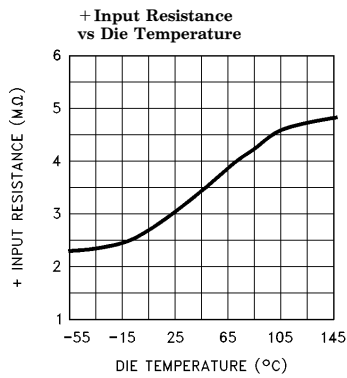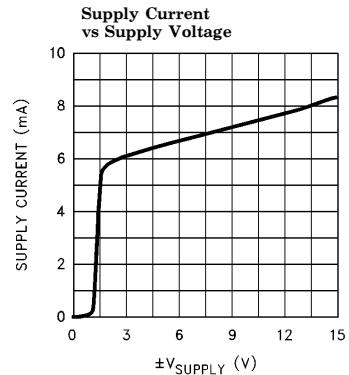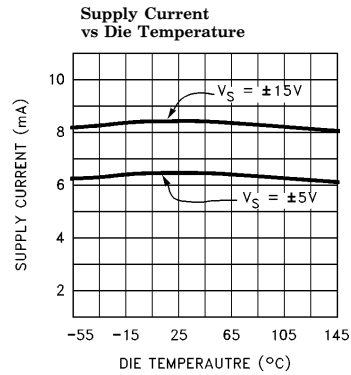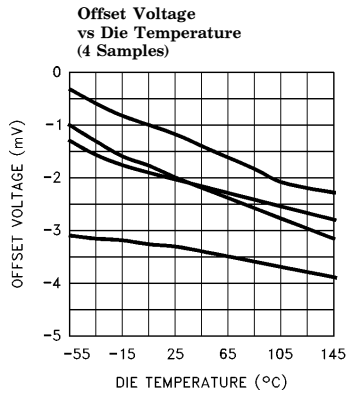










2060-5



# EL2160C

## 130 MHz Current Feedback Amplifier

### Typical Performance Curves — Contd.

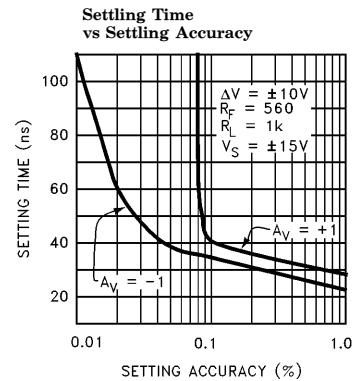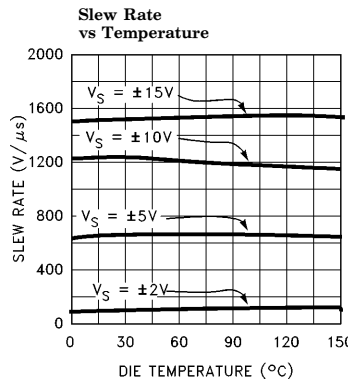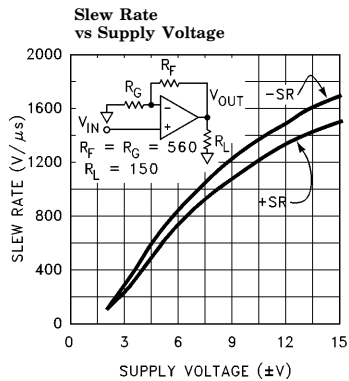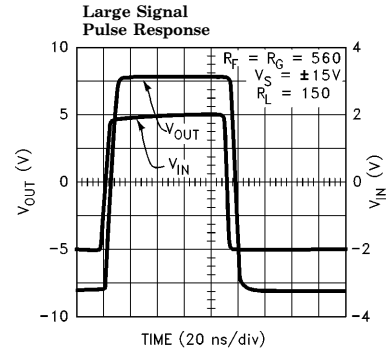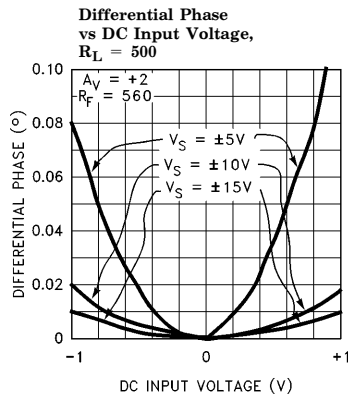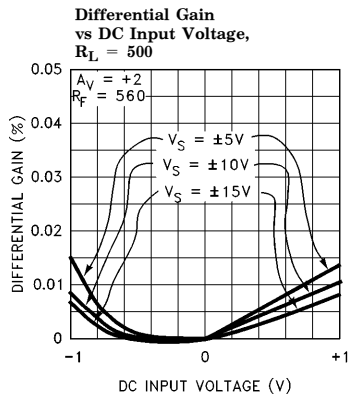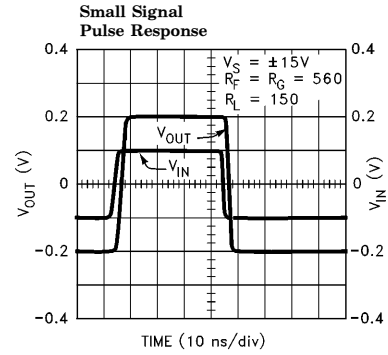
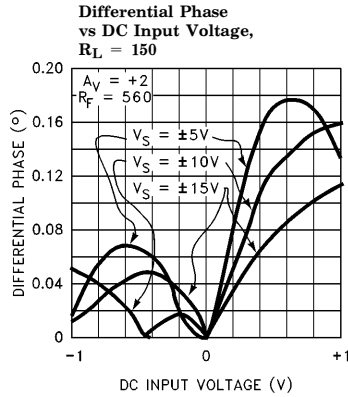
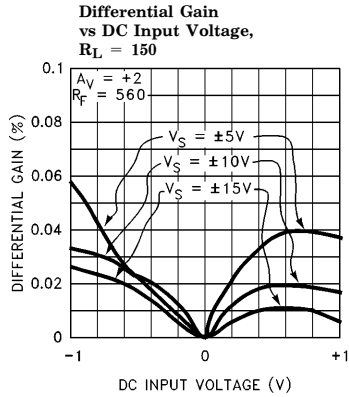


2060-6

# EL2160C


## 130 MHz Current Feedback Amplifier

### Typical Performance Curves — Contd.

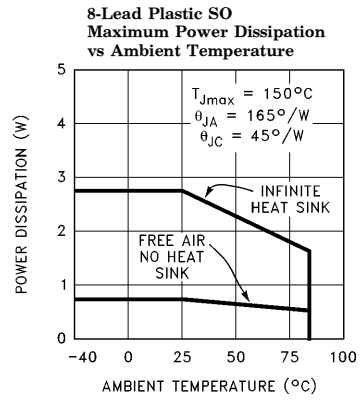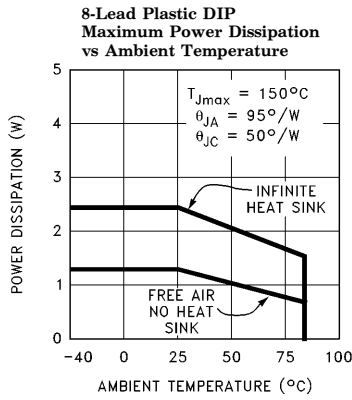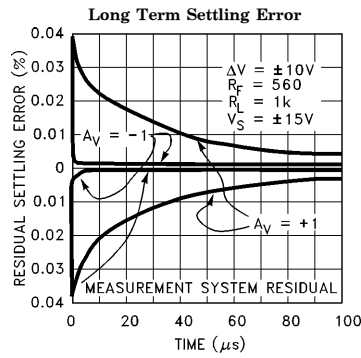

2060-7

### Burn-In Circuit

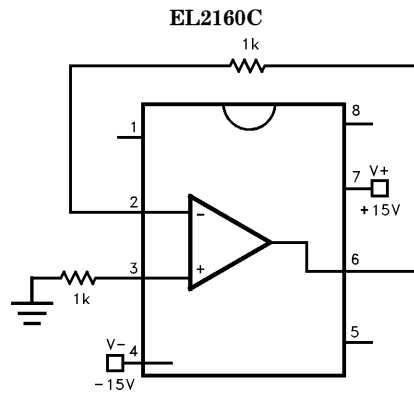


2060-8

# EL2160C


## 130 MHz Current Feedback Amplifier

### Differential Gain and Phase Test Circuit

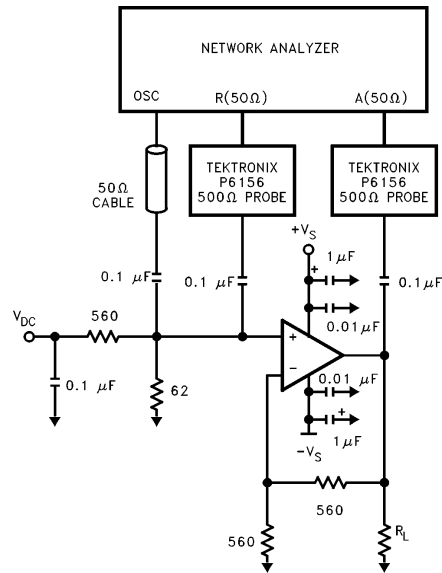

2060-9

### Simplified Schematic (One Amplifier)

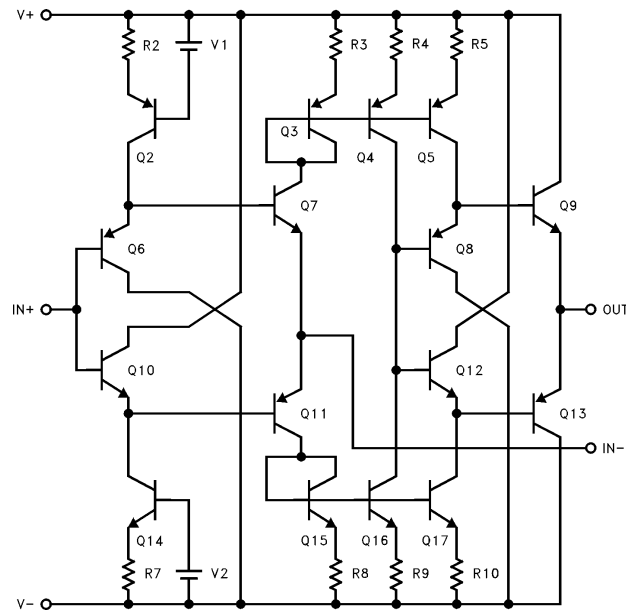

# **EL2160C**

## **130 MHz Current Feedback Amplifier**

### **Applications Information**

#### **Product Description**

The EL2160C is a current mode feedback amplifier that offers wide bandwidth and good video specifications at a moderately low supply current. It is built using Elantec's proprietary complimentary bipolar process and is offered in industry standard pin-outs. Due to the current feedback architecture, the EL2160C closed-loop 3 dB bandwidth is dependent on the value of the feedback resistor. First the desired bandwidth is selected by choosing the feedback resistor,  $R_F$ , and then the gain is set by picking the gain resistor,  $R_G$ . The curves at the beginning of the Typical Performance Curves section show the effect of varying both  $R_F$  and  $R_G$ . The 3 dB bandwidth is somewhat dependent on the power supply voltage. As the supply voltage is decreased, internal junction capacitances increase, causing a reduction in closed loop bandwidth. To compensate for this, smaller values of feedback resistor can be used at lower supply voltages.

#### **Power Supply Bypassing and Printed Circuit Board Layout**

As with any high frequency device, good printed circuit board layout is necessary for optimum performance. Ground plane construction is highly recommended. Lead lengths should be as short as possible, below  $\frac{1}{4}$ ". The power supply pins must be well bypassed to reduce the risk of oscillation. A 1.0  $\mu$ F tantalum capacitor in parallel with a 0.01  $\mu$ F ceramic capacitor is adequate for each supply pin.

For good AC performance, parasitic capacitances should be kept to a minimum, especially at the inverting input (see Capacitance at the Inverting Input section). This implies keeping the ground plane away from this pin. Carbon resistors are acceptable, while use of wire-wound resistors should not be used because of their parasitic inductance. Similarly, capacitors should be low inductance for best performance. Use of sockets, particularly for the SO package, should be avoided. Sockets add parasitic inductance and capacitance which will result in peaking and overshoot.

#### **Capacitance at the Inverting Input**

Due to the topology of the current feedback amplifier, stray capacitance at the inverting input will affect the AC and transient performance of the EL2160C when operating in the non-inverting configuration. The characteristic curve of gain vs. frequency with variations of  $C_{IN-}$  emphasizes this effect. The curve illustrates how the bandwidth can be extended to beyond 200 MHz with some additional peaking with an additional 2 pF of capacitance at the  $V_{IN-}$  pin for the case of  $A_V = +2$ . Higher values of capacitance will be required to obtain similar effects at higher gains.

In the inverting gain mode, added capacitance at the inverting input has little effect since this point is at a virtual ground and stray capacitance is therefore not "seen" by the amplifier.

#### **Feedback Resistor Values**

The EL2160C has been designed and specified with  $R_F = 560\Omega$  for  $A_V = +2$ . This value of feedback resistor yields extremely flat frequency response with little to no peaking out to 130 MHz. As is the case with all current feedback amplifiers, wider bandwidth, at the expense of slight peaking, can be obtained by reducing the value of the feedback resistor. Inversely, larger values of feedback resistor will cause rolloff to occur at a lower frequency. By reducing  $R_F$  to 430 $\Omega$ , bandwidth can be extended to 170 MHz with under 1 dB of peaking. Further reduction of  $R_F$  to 360 $\Omega$  increases the bandwidth to 195 MHz with about 2.5 dB of peaking. See the curves in the Typical Performance Curves section which show 3 dB bandwidth and peaking vs. frequency for various feedback resistors and various supply voltages.

#### **Bandwidth vs Temperature**

Whereas many amplifier's supply current and consequently 3 dB bandwidth drop off at high temperature, the EL2160C was designed to have little supply current variations with temperature. An immediate benefit from this is that the 3 dB bandwidth does not drop off drastically with temperature. With  $V_S = \pm 15V$  and  $A_V = +2$ , the bandwidth only varies from 150 MHz to 110 MHz over the entire die junction temperature range of  $0^\circ C < T < 150^\circ C$ .


# **EL2160C**

## **130 MHz Current Feedback Amplifier**

### **Applications Information — Contd.**

#### **Supply Voltage Range**

The EL2160C has been designed to operate with supply voltages from  $\pm 2\text{V}$  to  $\pm 15\text{V}$ . Optimum bandwidth, slew rate, and video characteristics are obtained at higher supply voltages. However, at  $\pm 2\text{V}$  supplies, the 3 dB bandwidth at  $A_V = +2$  is a respectable 70 MHz. The following figure is an oscilloscope plot of the EL2160C at  $\pm 2\text{V}$  supplies,  $A_V = +2$ ,  $R_F = R_G = 560\Omega$ , driving a load of  $150\Omega$ , showing a clean  $\pm 600\text{ mV}$  signal at the output.



2060-11

If a single supply is desired, values from  $+4\text{V}$  to  $+30\text{V}$  can be used as long as the input common mode range is not exceeded. When using a single supply, be sure to either 1) DC bias the inputs at an appropriate common mode voltage and AC couple the signal, or 2) ensure the driving signal is within the common mode range of the EL2160C.

#### **Settling Characteristics**

The EL2160C offers superb settling characteristics to 0.1%, typically in the 35 ns to 40 ns range. There are no aberrations created from the input stage which often cause longer settling times in other current feedback amplifiers. The EL2160C is not slew rate limited, therefore any size step up to  $\pm 10\text{V}$  gives approximately the same settling time.

As can be seen from the Long Term Settling Error curve, for  $A_V = +1$ , there is approximately a 0.035% residual which tails away to 0.01% in

about 40  $\mu\text{s}$ . This is a thermal settling error caused by a power dissipation differential (before and after the voltage step). For  $A_V = -1$ , due to the inverting mode configuration, this tail does not appear since the input stage does not experience the large voltage change as in the non-inverting mode. With  $A_V = -1$ , 0.01% settling time is slightly greater than 100 ns.

#### **Power Dissipation**

The EL2160C amplifier combines both high speed and large output current drive capability at a moderate supply current in very small packages. It is possible to exceed the maximum junction temperature allowed under certain supply voltage, temperature, and loading conditions. To ensure that the EL2160C remains within its absolute maximum ratings, the following discussion will help to avoid exceeding the maximum junction temperature.

The maximum power dissipation allowed in a package is determined by its thermal resistance and the amount of temperature rise according to

$$P_{\text{DMAX}} = \frac{T_{\text{JMAX}} - T_{\text{AMAX}}}{\theta_{\text{JA}}}$$

The maximum power dissipation actually produced by an IC is the total quiescent supply current times the total power supply voltage plus the power in the IC due to the load, or

$$P_{\text{DMAX}} = 2 * V_S * I_S + (V_S - V_{\text{OUT}}) * \frac{V_{\text{OUT}}}{R_L}$$

where  $I_S$  is the supply current. (To be more accurate, the quiescent supply current flowing in the output driver transistor should be subtracted from the first term because, under loading and due to the class AB nature of the output stage, the output driver current is now included in the second term.)

In general, an amplifier's AC performance degrades at higher operating temperature and lower supply current. Unlike some amplifiers, the EL2160C maintains almost constant supply

# EL2160C

## 130 MHz Current Feedback Amplifier



### Applications Information — Contd.

current over temperature so that AC performance is not degraded as much over the entire operating temperature range. Of course, this increase in performance doesn't come for free. Since the current has increased, supply voltages must be limited so that maximum power ratings are not exceeded.

The EL2160C consumes typically 8.5 mA and maximum 11.0 mA. The worst case power in an IC occurs when the output voltage is at half supply, if it can go that far, or its maximum values if it cannot reach half supply. If we set the two  $P_{D\text{MAX}}$  equations equal to each other, and solve for  $V_S$ , we can get a family of curves for various loads and output voltages according to:

$$V_S = \frac{R_L * (T_{J\text{MAX}} - T_{A\text{MAX}})}{\theta_{JA}} + (V_{\text{OUT}})^2}{(2 * I_S * R_L) + V_{\text{OUT}}}$$

The following curves show supply voltage ( $\pm V_S$ ) vs  $R_{\text{LOAD}}$  for various output voltage swings for the 2 different packages. The curves assume worst case conditions of  $T_A = +85^\circ\text{C}$  and  $I_S = 11 \text{ mA}$ .

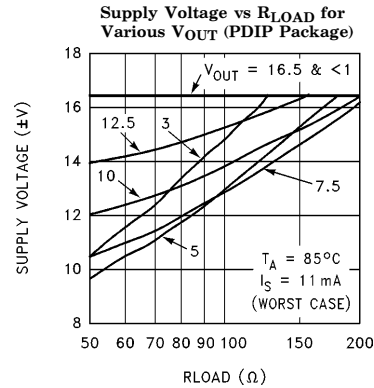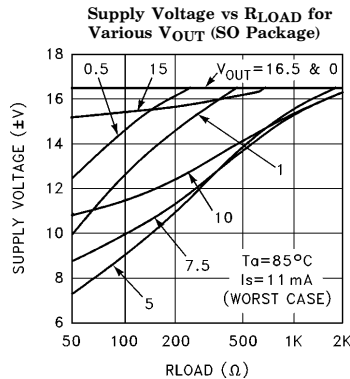

The curves do not include heat removal or forcing air, or the simple fact that the package will probably be attached to a circuit board, which can also provide some form of heat removal. Larger temperature and voltage ranges are possible with heat removal and forcing air past the part.

### Current Limit

The EL2160C has an internal current limit that protects the circuit in the event of the output being shorted to ground. This limit is set at 100 mA nominally and reduces with junction temperature. At a junction temperature of  $150^\circ\text{C}$ , the current limits at about 65 mA. If the output is shorted to ground, the power dissipation could be well over 1W. Heat removal is required in order for the EL2160C to survive an indefinite short.

### Driving Cables and Capacitive Loads

When used as a cable driver, double termination is always recommended for reflection-free performance. For those applications, the back termination series resistor will decouple the EL2160C from the capacitive cable and allow extensive capacitive drive. However, other applications may have high capacitive loads without termination resistors. In these applications, an additional small value ( $5\Omega$ – $50\Omega$ ) resistor in series with the output will eliminate most peaking. The gain resistor,  $R_G$ , can be chosen to make up for the gain loss created by this additional series resistor at the output.

TAB WIDE


UTD is 2.6in

TTD is 6.5in

# EL2160C

## 130 MHz Current Feedback Amplifier

### EL2160C Macromodel — Contd.

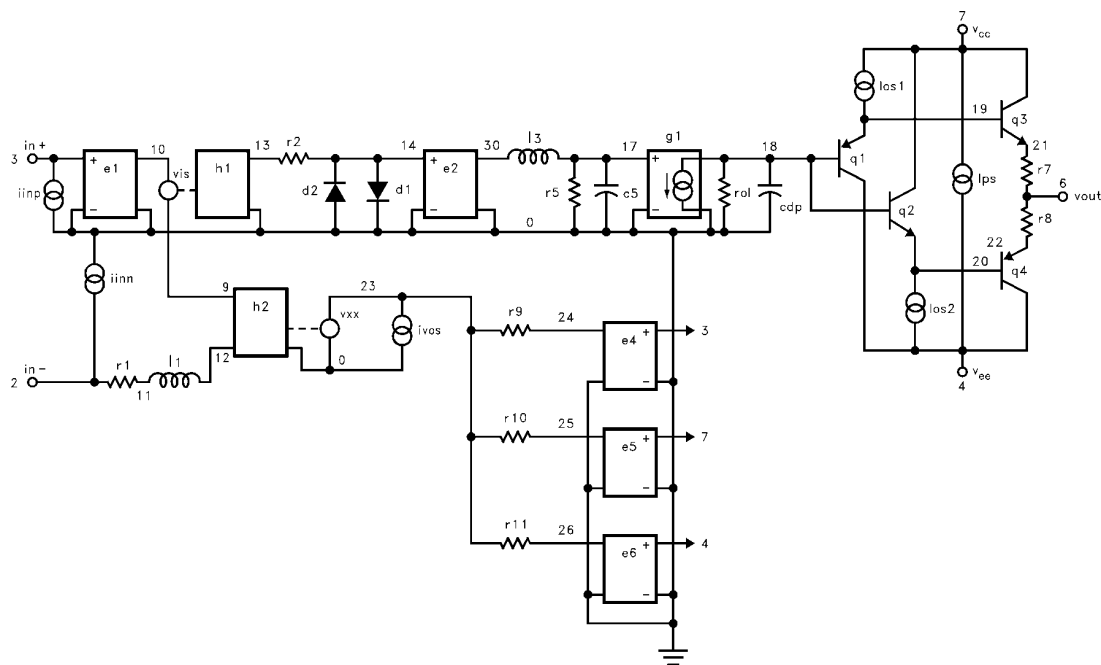

2060-14

#### General Disclaimer

Specifications contained in this data sheet are in effect as of the publication date shown. Elantec, Inc. reserves the right to make changes in the circuitry or specifications contained herein at any time without notice. Elantec, Inc. assumes no responsibility for the use of any circuits described herein and makes no representations that they are free from patent infringement.

**élan****tec**  
HIGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

**Elantec, Inc.**  
1996 Tarob Court  
Milpitas, CA 95035  
Telephone: (408) 945-1323  
(800) 333-6314  
Fax: (408) 945-9305  
European Office: 44-71-482-4596

#### WARNING — Life Support Policy

Elantec, Inc. products are not authorized for and should not be used within Life Support Systems without the specific written consent of Elantec, Inc. Life Support systems are equipment intended to support or sustain life and whose failure to perform when properly used in accordance with instructions provided can be reasonably expected to result in significant personal injury or death. Users contemplating application of Elantec, Inc. products in Life Support Systems are requested to contact Elantec, Inc. factory headquarters to establish suitable terms & conditions for these applications. Elantec, Inc.'s warranty is limited to replacement of defective components and does not cover injury to persons or property or other consequential damages.