

The RF MOSFET Line

RF Power Field-Effect Transistor


N-Channel Enhancement-Mode Lateral MOSFET

Designed for broadband commercial and industrial applications at frequencies from 800 MHz to 1.0 GHz. The high gain and broadband performance of this device makes it ideal for large-signal, common source amplifier applications in 28 volt base station equipment.

- Guaranteed Performance @ 960 MHz, 28 Volts
Output Power — 120 Watts (PEP)
Power Gain — 11 dB
Efficiency — 30%
Intermodulation Distortion — -28 dBc
- Excellent Thermal Stability
- 100% Tested for Load Mismatch Stress at all Phase Angles with 5:1 VSWR @ 28 Vdc, 960 MHz, 120 Watts CW

MRF186

**120 W, 1.0 GHz, 28 V
LATERAL N-CHANNEL
BROADBAND
RF POWER MOSFET**



CASE 375B-02, STYLE 2

MAXIMUM RATINGS (2)

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	65	Vdc
Drain-Gate Voltage ($R_{GS} = 1 \text{ M}\Omega$)	V_{DGR}	65	Vdc
Gate-Source Voltage	V_{GS}	± 20	Vdc
Drain Current — Continuous	I_D	14	Adc
Total Device Dissipation @ $T_C = 70^\circ\text{C}$ Derate above 70°C	P_D	162.5 1.25	Watts W/ $^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to +150	$^\circ\text{C}$
Operating Junction Temperature	T_J	200	$^\circ\text{C}$

THERMAL CHARACTERISTICS (2)

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.8	$^\circ\text{C}/\text{W}$


NOTE — **CAUTION** — MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.



ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS (1)					
Drain–Source Breakdown Voltage ($V_{GS} = 0\text{ Vdc}$, $I_D = 50\text{ }\mu\text{Adc}$)	$V_{(BR)DSS}$	65	—	—	Vdc
Zero Gate Voltage Drain Current ($V_{DS} = 28\text{ Vdc}$, $V_{GS} = 0$)	I_{DSS}	—	—	1	μAdc
Gate–Source Leakage Current ($V_{GS} = 20\text{ Vdc}$, $V_{DS} = 0$)	I_{GSS}	—	—	1	μAdc
ON CHARACTERISTICS (1)					
Gate Quiescent Voltage ($V_{DS} = 26\text{ Vdc}$, $I_D = 300\text{ }\mu\text{Adc}$ Per Side)	$V_{GS(th)}$	2.5	3	4	Vdc
Gate Quiescent Voltage ($V_{DS} = 26\text{ Vdc}$, $I_D = 300\text{ mAdc}$ Per Side)	$V_{GS(Q)}$	3.3	4.2	5	Vdc
Delta Gate Threshold Voltage (Side to Side) ($V_{DS} = 28\text{ V}$, $I_D = 300\text{ mA}$ Per Side)	$\Delta V_{GS(Q)}$	—	—	0.3	Vdc
Drain–Source On–Voltage ($V_{GS} = 10\text{ Vdc}$, $I_D = 3\text{ Adc}$ Per Side)	$V_{DS(on)}$	—	0.58	0.7	Vdc
Forward Transconductance ($V_{DS} = 10\text{ Vdc}$, $I_D = 3\text{ Adc}$ Per Side)	g_{fs}	2.4	2.8	—	S
DYNAMIC CHARACTERISTICS (1)					
Input Capacitance (Per Side) ($V_{DS} = 28\text{ Vdc}$, $V_{GS} = 0$, $f = 1\text{ MHz}$)	C_{iss}	—	177	—	pF
Output Capacitance (Per Side) ($V_{DS} = 28\text{ Vdc}$, $V_{GS} = 0$, $f = 1\text{ MHz}$)	C_{oss}	—	45	—	pF
Reverse Transfer Capacitance (Per Side) ($V_{DS} = 28\text{ Vdc}$, $V_{GS} = 0$, $f = 1\text{ MHz}$)	C_{rss}	—	3.4	—	pF
FUNCTIONAL CHARACTERISTICS (In Motorola Test Fixture) (2)					
Two–Tone Common Source Amplifier Power Gain ($V_{DD} = 28\text{ Vdc}$, $P_{out} = 120\text{ W PEP}$, $I_{DQ} = 2 \times 400\text{ mA}$, $f_1 = 960.0\text{ MHz}$, $f_2 = 960.1\text{ MHz}$)	G_{ps}	11	12.2	—	dB
Two–Tone Drain Efficiency ($V_{DD} = 28\text{ Vdc}$, $P_{out} = 120\text{ W PEP}$, $I_{DQ} = 2 \times 400\text{ mA}$, $f_1 = 960.0\text{ MHz}$, $f_2 = 960.1\text{ MHz}$)	η	30	35	—	%
3rd Order Intermodulation Distortion ($V_{DD} = 28\text{ Vdc}$, $P_{out} = 120\text{ W PEP}$, $I_{DQ} = 2 \times 400\text{ mA}$, $f_1 = 960.0\text{ MHz}$, $f_2 = 960.1\text{ MHz}$)	IMD	—	–32	–28	dBc
Input Return Loss ($V_{DD} = 28\text{ Vdc}$, $P_{out} = 120\text{ W PEP}$, $I_{DQ} = 2 \times 400\text{ mA}$, $f_1 = 960.0\text{ MHz}$, $f_2 = 960.1\text{ MHz}$)	IRL	9	16	—	dB
Two–Tone Common Source Amplifier Power Gain ($V_{DD} = 28\text{ Vdc}$, $P_{out} = 120\text{ W PEP}$, $I_{DQ} = 2 \times 400\text{ mA}$, $f_1 = 945.0\text{ MHz}$, $f_2 = 945.1\text{ MHz}$)	G_{ps}	—	12	—	dB
Two–Tone Drain Efficiency ($V_{DD} = 28\text{ Vdc}$, $P_{out} = 120\text{ W PEP}$, $I_{DQ} = 2 \times 400\text{ mA}$, $f_1 = 945.0\text{ MHz}$, $f_2 = 945.1\text{ MHz}$)	η	—	33	—	%
3rd Order Intermodulation Distortion ($V_{DD} = 28\text{ Vdc}$, $P_{out} = 120\text{ W PEP}$, $I_{DQ} = 2 \times 400\text{ mA}$, $f_1 = 945.0\text{ MHz}$, $f_2 = 945.1\text{ MHz}$)	IMD	—	–32	—	dBc
Input Return Loss ($V_{DD} = 28\text{ Vdc}$, $P_{out} = 120\text{ W PEP}$, $I_{DQ} = 2 \times 400\text{ mA}$, $f_1 = 945.0\text{ MHz}$, $f_2 = 945.1\text{ MHz}$)	IRL	—	16	—	dB
Output Mismatch Stress ($V_{DD} = 28\text{ Vdc}$, $P_{out} = 120\text{ W CW}$, $I_{DQ} = 2 \times 400\text{ mA}$, $f = 960\text{ MHz}$, $V_{SWR} = 5:1$, All Phase Angles at Frequency of Tests)	Ψ	No Degradation In Output Power Before and After Test			

- (1) Each side of device measured separately.
 (2) Device measured in push–pull configuration.

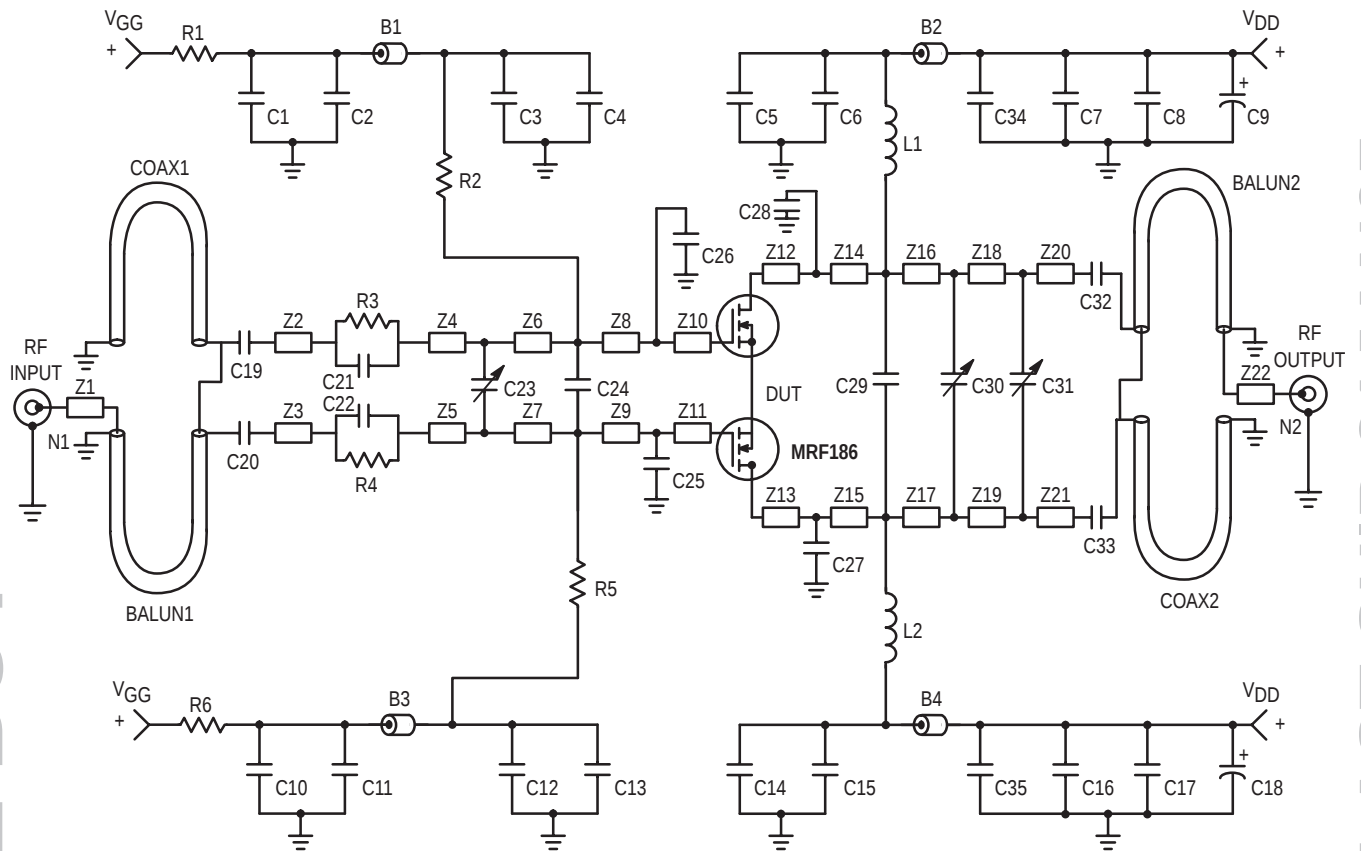

B1 – B4	Fair Rite Products Short Ferrite Bead, 2743021446
C1, C7, C8, C10, C16, C17	10 μ F, 50 V, Tantalum
C2, C11, C34, C35	0.1 μ F, Chip Capacitor
C3, C6, C12, C15	330 pF, Chip Capacitor
C4, C5, C13, C14, C19, C20, C32, C33	47 pF, Chip Capacitor
C9, C18	250 μ F, 50 V, Electrolytic Capacitor
C21, C22	12 pF, Chip Capacitor
C23, C30	0.6 – 4.5 pF, Variable Capacitor, Johanson Gigatrim
C24, C25, C26	5.1 pF, Chip Capacitor
C27, C28	3.9 pF, Chip Capacitor

C31	0.8 – 8.0 pF, Variable Capacitor, Johanson Gigatrim
L1, L2	3 Turns, #20 AWG, IDIA 0.126", 24.7 nH
N1, N2	Type N Connectors
R1, R6	1 k Ω , 1/4 W, Carbon Resistor
R2, R5	1.2 k Ω , 0.1 W, Chip Resistor
R3, R4	75 Ω , 0.1 W, Chip Resistor
Z1 – Z22	Microstrip (See Component Placement)
Balun1, Balun2, Coax1, Coax2	2.20" 50 Ω , 0.086" OD Semi-Rigid Coax Board
Board	1/32" Glass Teflon [®] , $\epsilon_r = 2.55$

Figure 1. 930 – 960 MHz Test Circuit Schematic

TYPICAL CHARACTERISTICS

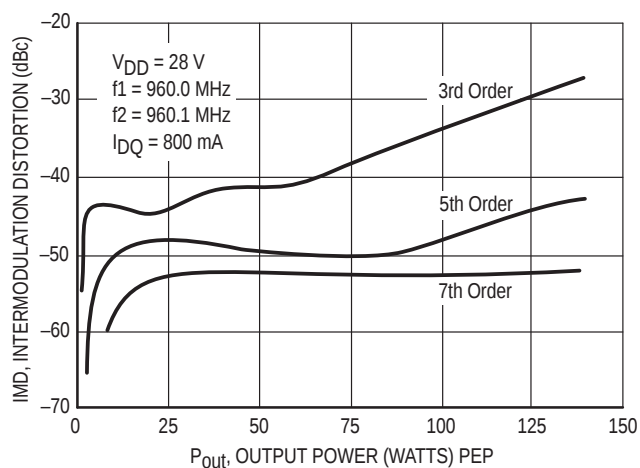


Figure 2. Intermodulation Distortion Products versus Output Power

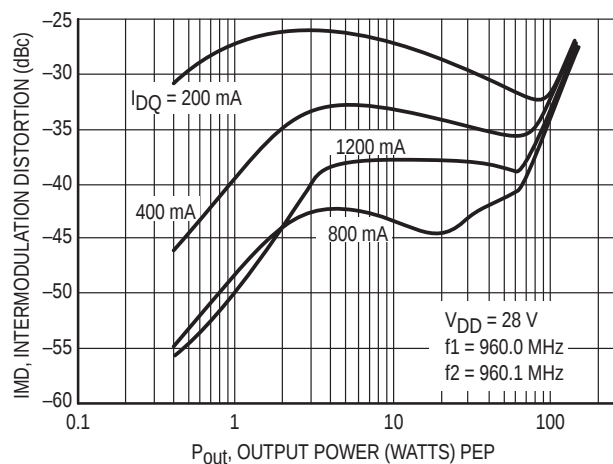


Figure 3. Intermodulation Distortion versus Output Power

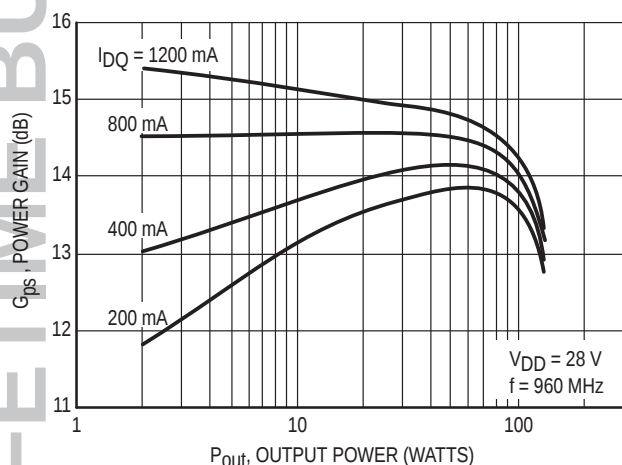


Figure 4. Power Gain versus Output Power

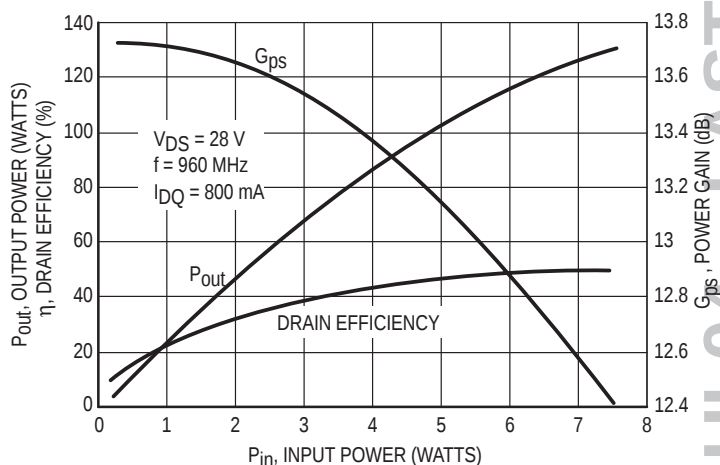


Figure 5. Output Power versus Input Power

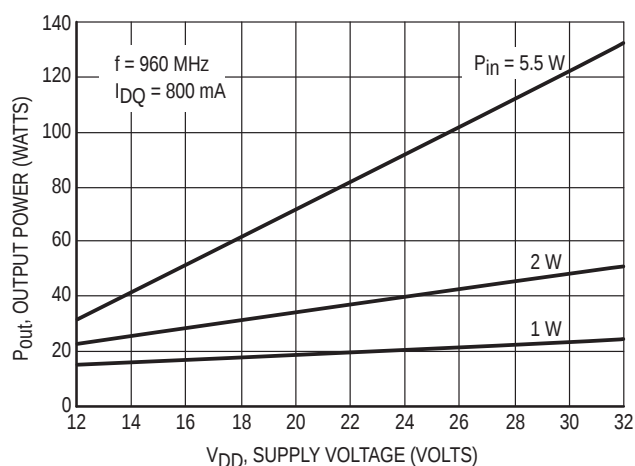


Figure 6. Output Power versus Supply Voltage

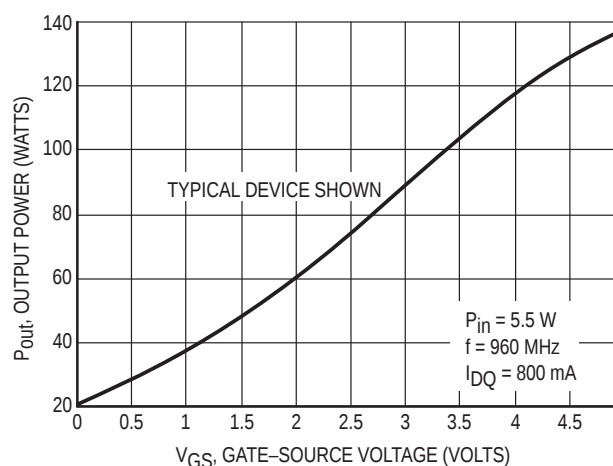


Figure 7. Output Power versus Gate Voltage

TYPICAL CHARACTERISTICS

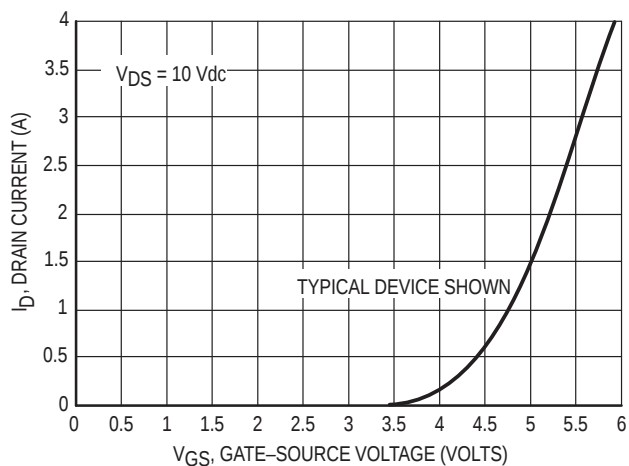


Figure 8. Drain Current versus Gate Voltage

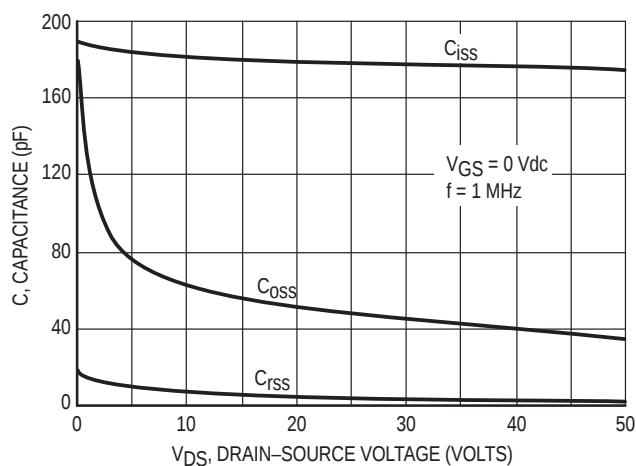


Figure 9. Capacitance versus Voltage

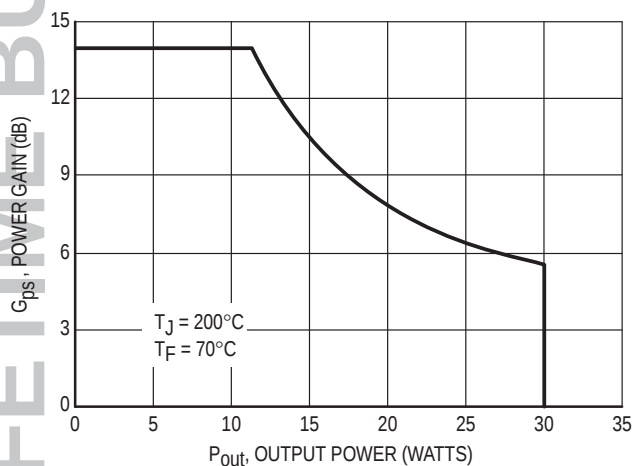


Figure 10. DC Safe Operating Area


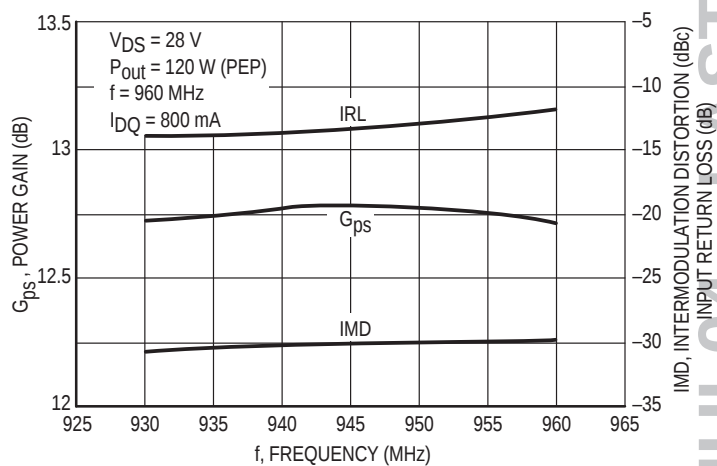


Figure 11. Broadband Circuit Performance

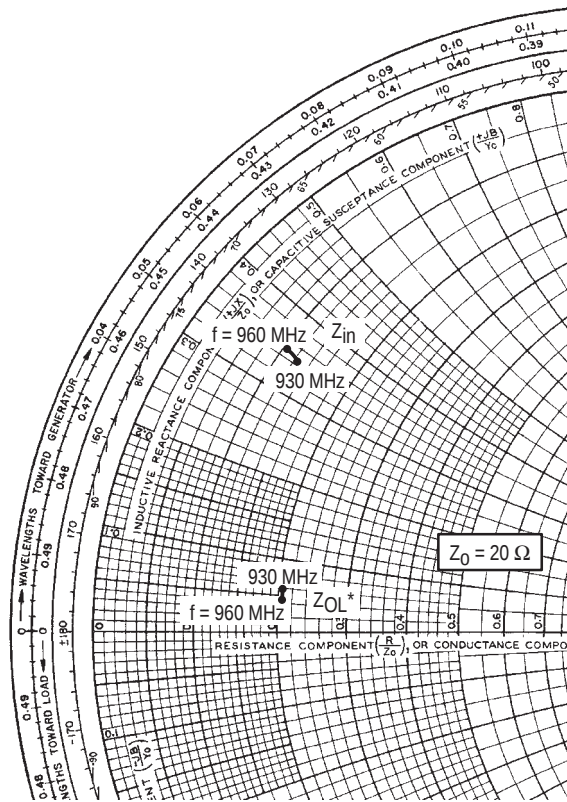

$V_{CC} = 28\text{ V}$, $I_{DQ} = 2 \times 400\text{ mA}$, $P_{out} = 120\text{ Watts (PEP)}$

f MHz	Z_{in} Ω	Z_{OL}^* Ω
930	$2.5 + j6.9$	$4.3 + j1.2$
945	$2.5 + j7.0$	$4.3 + j1.0$
960	$2.2 + j7.1$	$4.3 + j0.9$

Z_{in} = Complex conjugate of source impedance.

Z_{OL}^* = Conjugate of the optimum load impedance at a given output power, voltage, IMD, bias current, efficiency and frequency.

Note: Z_{OL}^* was chosen based on tradeoffs between gain, output power, drain efficiency and intermodulation performance. Impedances shown represent a single channel (1/2 of MRF186) impedance measurement.

Figure 12. Series Equivalent Input and Output Impedance


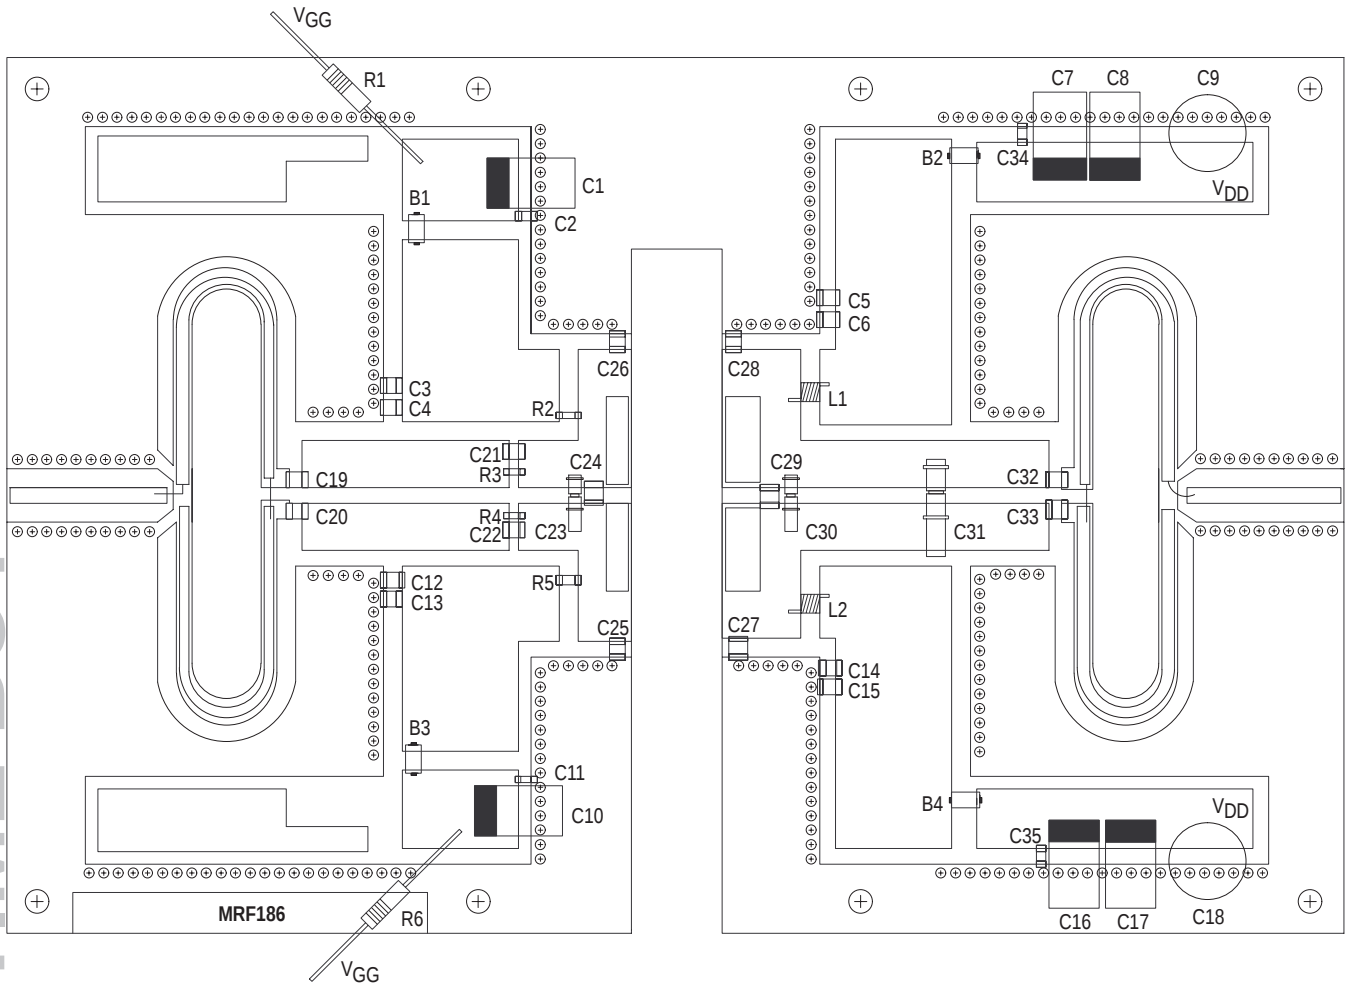



Figure 13. Component Placement Diagram of 930 – 960 MHz Broadband Test Fixture

PACKAGE DIMENSIONS

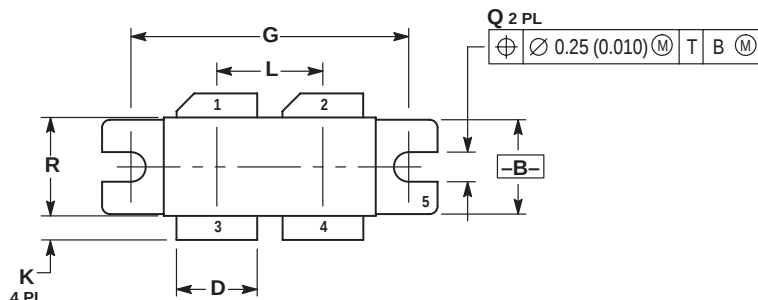

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.330	1.350	33.79	34.29
B	0.375	0.395	9.52	10.03
C	0.180	0.210	4.57	5.33
D	0.320	0.340	8.13	8.64
E	0.060	0.070	1.52	1.77
F	0.004	0.006	0.11	0.15
G	1.100 BSC		27.94 BSC	
H	0.093	0.108	2.36	2.74
K	0.085	0.115	2.16	2.92
L	0.425 BSC		10.80 BSC	
N	0.845	0.875	21.46	22.23
Q	0.118	0.130	3.00	3.30
R	0.390	0.410	9.91	10.41

STYLE 2:
 PIN 1. DRAIN
 2. DRAIN
 3. GATE
 4. GATE
 5. SOURCE

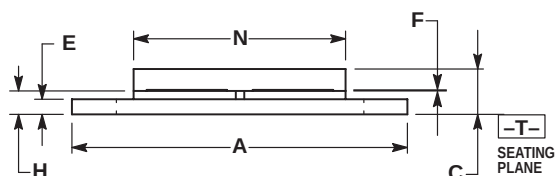

CASE 375B-02
 ISSUE A

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
 P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPD, Strategic Planning Office, 141,
 4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan. 81-3-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609
 Motorola Fax Back System – US & Canada ONLY 1-800-774-1848
 – http://sps.motorola.com/mfax/

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
 2, Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.
 852-26668334

HOME PAGE: <http://motorola.com/sps/>

