

## LM3460-1.2, -1.5

### Precision Controller for GTLp and GTL Bus Termination

#### General Description

The LM3460 is a monolithic integrated circuit designed for precision control of GTLplus and GTL Bus termination. This controller is available in a tiny SOT23-5 package, and includes an internally compensated op amp, a bandgap reference, an NPN output transistor, and voltage setting resistors.

A trimmed precision bandgap voltage reference utilizes temperature drift curvature correction for excellent voltage stability over the operating temperature range. The precision output control enables the termination voltage to maintain tight regulation, despite fast switching requirements on the bus.

The LM3460 controller is designed to be used with a high current ( $> 7A$ ) NPN pass transistor to provide the high current needed for the bus termination. The wide bandwidth of the feedback loop provides excellent transient response, and greatly reduces the output capacitance required, thus reducing cost and board space requirements.


#### Features

- Precision output (1%)
- Output voltage can be adjusted
- Extremely fast transient response in GTLp and GTL bus termination
- Tiny SOT23-5 package
- Output voltage capability for GTL or GTLp
- Low temperature coefficient

#### Applications

- GTL bus termination (1.2V output @ 7A)
- GTLp bus termination (1.5V output @ 7A)
- Adjustable high-current linear regulator

#### Connection Diagram and Package Information

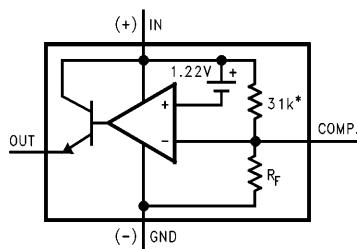

TL/H/12603-1


\*This resistor is not used on the LM3460-1.2.

**LM3460 Functional Diagram**

#### 5-Lead Small Outline Package (M5)

Actual size

TL/H/12603-2



TL/H/12603-3

#### Top View

\*No internal connection, but should be soldered to PC board for best heat transfer.

See NS Package Number MA05A

#### Ordering Information

| Voltage | Order Number  | Package Marking | Supplied As                          |
|---------|---------------|-----------------|--------------------------------------|
| 1.5     | LM3460M5-1.5  | D06A            | 250 Unit Increments on Tape and Reel |
| 1.5     | LM3460M5X-1.5 | D06A            | 3k Unit Increments on Tape and Reel  |
| 1.2     | LM3460M5-1.2  | D09A            | 250 Unit Increments on Tape and Reel |
| 1.2     | LM3460M5X-1.2 | D09A            | 3k Unit Increments on Tape and Reel  |

**MARKING CODE:** The first letter "D" identifies the part as a Driver, and the next two numbers define the voltage for the part. The fourth letter indicates the grade, with "A" designating the prime grade of product.

**AVAILABILITY:** The SOT23-5 package is only available in quantity of 250 on tape and reel (designated by the letters "M5" in the part number), or in quantity of 3000 on tape and reel (indicated by the letters "M5X" in the part number).

# Typical Applications

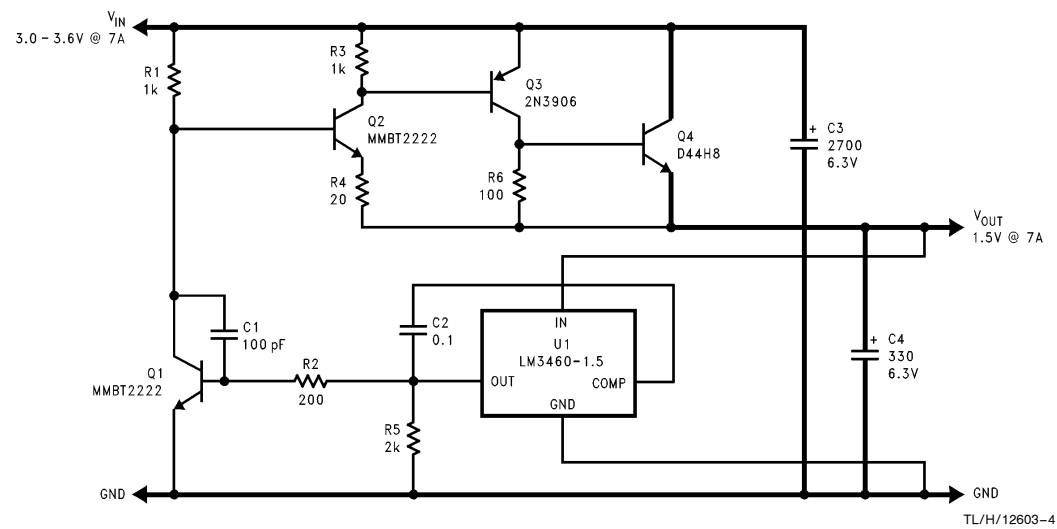


FIGURE 1. 1.5V Typical Application (See Application Information Section)

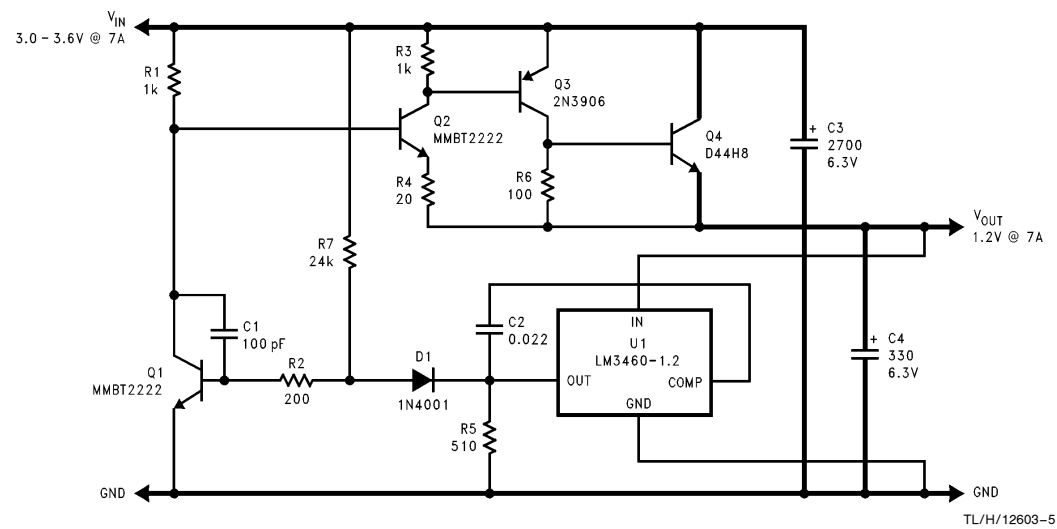


FIGURE 2. 1.2V Typical Application (See Application Information Section)

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                                                         |                 |
|---------------------------------------------------------|-----------------|
| Input Voltage ( $V_{IN}$ )                              | 20V             |
| Output Current                                          | 20 mA           |
| Junction Temperature                                    | 150°C           |
| Storage Temperature                                     | −65°C to +150°C |
| Lead Temperature                                        |                 |
| Vapor Phase (60 sec.)                                   | +215°C          |
| Infrared (15 sec.)                                      | +220°C          |
| Power Dissipation ( $T_A = 25^\circ\text{C}$ ) (Note 2) | 300 mW          |

## ESD Susceptibility (Note 3)

Human Body Model 1500V

See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for methods on soldering surface-mount devices.

## Operating Ratings (Notes 1 and 2)

|                           |                                                   |
|---------------------------|---------------------------------------------------|
| Ambient Temperature Range | $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$ |
| Output Current            | 1 mA                                              |

## LM3460-1.5

**Electrical Characteristics** Specifications with standard type face are for  $T_J = 25^\circ\text{C}$ , and those with **boldface type** apply over **full Operating Temperature Range**. Unless otherwise specified,  $(+)I_N = V_{REG}$ ,  $V_{OUT} = 200\text{ mV}$

| Symbol    | Parameter                                             | Conditions                                                                         | Typical (Note 4) | LM3460-1.5 Limit (Note 5)                  | Units                                |
|-----------|-------------------------------------------------------|------------------------------------------------------------------------------------|------------------|--------------------------------------------|--------------------------------------|
| $V_{REG}$ | Regulated Voltage                                     | $I_{OUT} = 1\text{ mA}$                                                            | 1.5              | 1.515/ <b>1.530</b><br>1.485/ <b>1.470</b> | V (max)<br>V (min)                   |
|           | Regulated Voltage Tolerance                           | $I_{OUT} = 1\text{ mA}$                                                            |                  | $\pm 1 / \pm 2$                            | % (max)                              |
| $I_q$     | Quiescent Current                                     | $I_{OUT} = 1\text{ mA}$                                                            | 85               | 125/ <b>150</b>                            | $\mu\text{A}$ (max)                  |
| $G_m$     | Transconductance<br>$\Delta I_{OUT} / \Delta V_{REG}$ | $20\text{ }\mu\text{A} \leq I_{OUT} \leq 1\text{ mA}$<br>$V_{OUT} = 500\text{ mV}$ | 3.3              | 1/ <b>0.5</b>                              | mA/mV (min)                          |
| $V_{SAT}$ | Output Saturation Voltage (Note 6)                    | $V_{IN} = V_{REG} + 100\text{ mV}$<br>$I_{OUT} = 1\text{ mA}$                      | 0.8              | 0.95                                       | V (max)                              |
| $I_L$     | Output Leakage Current                                | $V_{IN} = V_{REG} - 100\text{ mV}$<br>$V_{OUT} = 0\text{ V}$                       | 0.1              | 0.5/ <b>1.0</b>                            | $\mu\text{A}$ (max)                  |
| $R_F$     | Internal Feedback Resistor (See Functional Diagram)   |                                                                                    | 7.1              | 8.9<br>5.3                                 | k $\Omega$ (max)<br>k $\Omega$ (min) |
| $E_n$     | Output Noise Voltage                                  | $I_{OUT} = 1\text{ mA}$ , $10\text{ Hz} \leq f \leq 10\text{ kHz}$                 | 50               |                                            | $\mu\text{V}$ (rms)                  |

## LM3460-1.2

**Electrical Characteristics** Specifications with standard type face are for  $T_J = 25^\circ\text{C}$ , and those with **boldface type** apply over **full Operating Temperature Range**. Unless otherwise specified,  $(+)I_{IN} = V_{REG}$ ,  $V_{OUT} = 200\text{ mV}$

| Symbol    | Parameter                                              | Conditions                                                                         | Typical<br>(Note 4) | LM3460-1.2<br>Limit (Note 5)               | Units                                            |
|-----------|--------------------------------------------------------|------------------------------------------------------------------------------------|---------------------|--------------------------------------------|--------------------------------------------------|
| $V_{REG}$ | Regulated Voltage                                      | $I_{OUT} = 1\text{ mA}$                                                            | 1.220               | 1.232/ <b>1.244</b><br>1.208/ <b>1.196</b> | V (max)<br>V (min)                               |
|           | Regulated Voltage Tolerance                            | $I_{OUT} = 1\text{ mA}$                                                            |                     | $\pm 1 / \pm \mathbf{2}$                   | % (max)                                          |
| $I_q$     | Quiescent Current                                      | $I_{OUT} = 1\text{ mA}$                                                            | 85                  | 125/ <b>150</b>                            | $\mu\text{A}$ (max)                              |
| $G_m$     | Transconductance<br>$\Delta I_{OUT} / \Delta V_{REG}$  | $20\text{ }\mu\text{A} \leq I_{OUT} \leq 1\text{ mA}$<br>$V_{OUT} = 200\text{ mV}$ | 3.3                 | 1/ <b>0.5</b>                              | $\text{mA/mV}$ (min)                             |
| $V_{SAT}$ | Output Saturation Voltage<br>(Note 6)                  | $V_{IN} = V_{REG} + 100\text{ mV}$<br>$I_{OUT} = 1\text{ mA}$                      | 0.8                 | 0.95                                       | V (max)                                          |
| $I_L$     | Output Leakage Current                                 | $V_{IN} = V_{REG} - 100\text{ mV}$<br>$V_{OUT} = 0\text{ V}$                       | 0.1                 | 0.5/ <b>1.0</b>                            | $\mu\text{A}$ (max)                              |
| $R_F$     | Internal Feedback Resistor<br>(See Functional Diagram) |                                                                                    | 10                  | 12.5<br>7.5                                | $\text{k}\Omega$ (max)<br>$\text{k}\Omega$ (min) |
| $E_n$     | Output Noise Voltage                                   | $I_{OUT} = 1\text{ mA}$ , $10\text{ Hz} \leq f \leq 10\text{ kHz}$                 | 50                  |                                            | $\mu\text{V}$ (rms)                              |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.

**Note 2:** The maximum power dissipation must be derated at elevated temperatures and is dictated by  $T_{Jmax}$  (maximum junction temperature),  $\theta_{JA}$  (junction to ambient thermal resistance), and  $T_A$  (ambient temperature). The maximum allowable power dissipation at any temperature is  $(P_{Dmax} = (T_{Jmax} - T_A)/\theta_{JA})$  or the number given in the Absolute Maximum Ratings, whichever is lower. The typical thermal resistance ( $\theta_{JA}$ ) when soldered to a printed circuit board is approximately  $330^\circ\text{C/W}$ .

**Note 3:** The human body model is a  $100\text{ pF}$  capacitor discharged through a  $1.5\text{ k}\Omega$  resistor into each pin.

**Note 4:** Typical numbers are at  $25^\circ\text{C}$  and represent the most likely parametric norm.

**Note 5:** Limits are 100% production tested at  $25^\circ\text{C}$ . Limits over the operating temperature range are guaranteed through correlation using Statistical Quality Control (SQC) methods. The limits are used to calculate National's Average Outgoing Quality Level (AOQL).

**Note 6:**  $V_{SAT} = V_{REG} - V_{OUT}$ , when the voltage at the IN pin is forced  $100\text{ mV}$  above the nominal regulating voltage ( $V_{REG}$ ).

The LM3460 is a shunt regulator designed for use as a precision control element in a feedback loop. The regulated output voltage is sensed between the IN pin and GROUND pin of the LM3460.


This current is used to cut off the drive to the external pass transistor, which provides the negative feedback to force the output voltage to be the same value as  $V_{REG}$ .

If the voltage on the IN pin is forced above the  $V_{REG}$  voltage, the maximum voltage applied to the IN pin should not exceed 20V. In addition, an external resistor may be required on the OUT pin to limit the maximum current to 20 mA.

The inverting input of the error amplifier is brought out to simplify closed-loop compensation. Typically, compensation is provided by a single capacitor connected from the COMPENSATION pin to the OUT pin of the LM3460.

If excessive ringing on the output waveform is observed, this usually indicates marginal stability resulting from insufficient phase margin.

The test circuit shown in *Figure 3* can be used to measure various LM3460 parameters. Test conditions are set by forcing the appropriate voltage at the  $V_{OUT}$  Set test point and selecting the appropriate  $R_L$  or  $I_{OUT}$  as specified in the Electrical Characteristics section. Use a DVM at the “measure” test points to read the data.

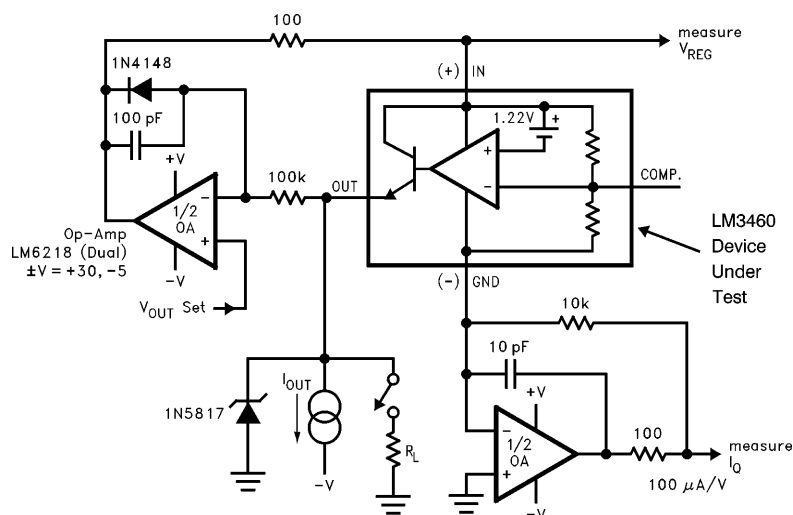


### FIGURE 3. Test Circuit

TL/H/12603-9

V<sub>OUT</sub> Set Note: 0V to 500 mV for LM3460-1.5  
0V to 200 mV for LM3460-1.2

## Setting the Output Voltage

If a regulated output voltage is desired which is not available as a standard voltage, the output voltage may be adjusted by using an external resistive divider (see Figure 4):



TL/H/12603-10

$$V_{OUT} = 1.22 + \left( \frac{1.22}{R_A} \right) R_B$$

$$R_B = \frac{(V_{OUT} - 1.22) R_A}{1.22}$$

FOR BEST RESULTS: SELECT  $R_A < 500\Omega$ .

**FIGURE 4. Setting the Output Voltage**

The simplest way to calculate the resistor values is to assume a value for  $R_A$  and then solve the equation shown for  $R_B$ .

To assure best output voltage accuracy, the value selected for  $R_A$  should be  $< 500\Omega$ , and 1% tolerance resistors should be used.

As the ohmic value of  $R_A$  is increased, the internal resistive divider inside the LM3460 will cause the output voltage to deviate from the value predicted by the formula shown.

## App Circuit Technical Information

Figure 1 and Figure 2 (shown on page 2 of this document) highlight two applications of the LM3460. This section provides details of circuit function.

### 1.5V/7A TYPICAL APPLICATION

Figure 1 shows the schematic of a wide-bandwidth linear regulator which provides a regulated 1.5V output at up to 7A of load current from a 3V–3.6V input.

The pass element of the regulator (which supplies the load current) is made up of a three-transistor complimentary Darlington composed of Q2, Q3, and Q4. The bias current flowing through R1 will drive the pass element ON, until such time as Q1 pulls down and takes the drive away from the base of Q2.

The circuit regulates the output to 1.5V using the LM3460 precision controller, which sources current from its output whenever the voltage at the IN pin reaches 1.5V.

When the LM3460 sources current from its output, it turns on Q1 (stealing the base drive for Q2) which reduces the current from the 1.5V regulated output. In this way, a negative feedback loop is established which locks the output at 1.5V.

C1 and C2 are used for compensation, and should be ceramic capacitors.

C4 is required for regulator stability, and both C3 and C4 affect transient response. Circuit performance should be carefully evaluated if substitutions are made for these two components.


### PERFORMANCE DATA

All data taken at 20°C ambient:

**LOAD/LINE REGULATION:** The output voltage changed  $< 0.1$  mV as the load was increased from 0–7A, and the input voltage was varied from 3.0V–3.6V.

**DROPOUT VOLTAGE:** The dropout voltage (which is defined as the minimum input-output voltage differential required to maintain a regulated output) was measured at 7A and found to be 1.4V. This means that a minimum input voltage of 2.9V is required to keep the 1.5V output in regulation.

**TRANSIENT RESPONSE:** Transient response was tested using a 0.2Ω power resistor connected to the output using a mechanical contact to provide a 0–7A load current step. When the load was applied, the change in output voltage was seen to be  $< 5$  mV with a total recovery time of about 30 μs (see Figure 5).

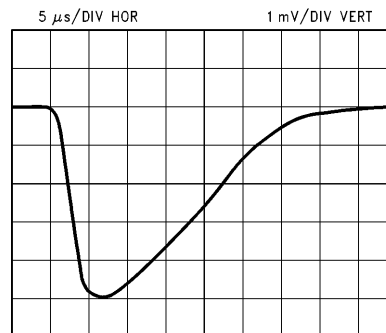

TL/H/12603-11

**FIGURE 5. Output Transient Response**

## App Circuit Technical Information (Continued)


### HEATSINKING/COMPONENT SELECTION

**HEATSINKING:** As with *any* linear regulator, the power dissipated in the pass transistor (Q4) is approximately:

$$P = (V_{IN} - V_{OUT}) \times I_{LOAD}$$

Q4 must be provided with adequate heatsinking so that the junction temperature never exceeds 150°C.

Figure 6 shows the maximum allowable values of thermal resistance (from heatsink-to-ambient) that must be provided for various values of load current.

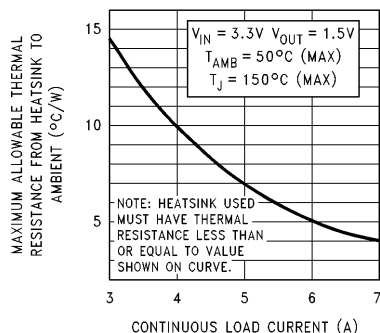

**FIGURE 6. Q4 Heatsink Requirements for Circuit Shown in Figure 1**

These values are calculated assuming a maximum ambient temperature of 50°C, 3.3V input, and a TO-220 power transistor mounted using thermal grease and a mica insulator.

A given thermal resistance can be obtained by using different combinations of heatsink and airflow (refer to heatsink manufacturers data sheets).

The design tradeoff here is that heatsinks which are smaller, lighter, and cheaper require more airflow to get the desired value of thermal resistance.

**TRANSIENT RESPONSE:** If the regulator is to respond quickly to changes in load current demand, the input and output capacitors must be selected carefully.

The output capacitor C4 is most critical, as it must supply current to the load in the time it takes the regulator loop to sense the output voltage change and turn on the pass transistor. A Sanyo Oscon type (or equivalent) will give the best performance here.

The input capacitor C3 is also important, as it provides an energy reservoir from which the regulator sources current to force the output back up to the nominal value. A good, low ESR electrolytic such as a Panasonic HFQ type is a good choice for C3.

**LAYOUT TIPS:** In order to optimize performance, parasitic inductance due to connecting traces must be minimized. All paths shown as heavy lines on the schematic must be made by traces which are as wide and short as possible (component placement should be optimized for minimum lead length).

**POWER TRANSISTOR AND DRIVER:** The power transistor used at Q4 must have very good current gain at 7A, and wide bandwidth (high  $f_T$ ) for this circuit to work as specified. The D44H8 is an excellent choice for cost and performance.

The current gain of Q4 dictates the power dissipation in its driver (Q3) which must supply the base current to Q4. If the gain of Q4 is lowered, Q3 must source more current into its base (and the power dissipation in Q3 goes up proportionally).

The D44H8 has a guaranteed minimum gain of 40 @ 4A, with typical gain much higher. Assuming the gain of Q4 is about 30% lower at 7A, it will still be > 28. Therefore, to support 7A of load current, Q3 must supply 250 mA to the base of Q4 (worst case).

The power dissipation in Q3 (assuming 3.3V input) will never exceed approximately 250 mW, which is easily handled by the 2N3906 in a TO-92 case (which has a thermal resistance of about 180 °C/W), but could be a problem for a very small surface mount device.

If substitutions are made for Q3 or Q4, careful attention must be paid to the current gain as well as the  $f_T$ .

**TRANSISTOR BANDWIDTH:** Fast transient response requires that the regulator be able to respond quickly to any change in output voltage (which will occur if the current drawn by the load suddenly changes).

All of the transistors specified in the schematic are very wide-band devices (have high  $f_T$  values) which is necessary for fast response. If substitutions are made for any of the transistors, this specification must be considered.

### 1.2V/7A TYPICAL APPLICATION

The 1.2V @ 7A design shown in Figure 2 is very similar in function to the design shown in Figure 1. Most of the circuit descriptions previously detailed for that circuit apply unchanged to Figure 2, and will not be repeated.


Detailed information will be presented in the areas which differ between the two circuits.

### HEATSINKING

The 1.2V design needs a little more heatsinking because the lower output voltage means more power dissipation in Q4 at any value of load current.

Figure 7 shows the maximum allowable values of thermal resistance (from heatsink-to-ambient) that must be provided for various values of load current.

## App Circuit Technical Information (Continued)

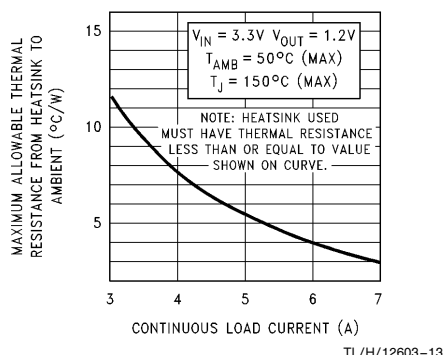

**FIGURE 7. Q4 Heatsink Requirements for Circuit Shown in Figure 2**

### Q1 DRIVE CIRCUITRY

In the circuit shown in *Figure 1*, the output of U1 drives the base of Q1 with current when the voltage at  $V_{OUT}$  reaches the regulation point. As Q1 turns ON, it steals drive from Q2 which holds the loop in regulation.

The circuit of *Figure 2* uses a different drive configuration for Q1, required because of the lower voltage across U1.

With only 1.2V across U1, the OUT pin of the LM3460 can not swing up high enough in voltage to turn on the  $V_{BE}$  of Q1.

In the circuit of *Figure 2*, drive for Q1 is provided by R7, *but only when U1 sources current*. The operation of the drive scheme is as follows:

If the voltage at  $V_{OUT}$  is below 1.2V, no current flows from the OUT pin of U1. Q1 is held OFF as the current flowing down through R7 goes through D1 and R5 to ground.

**IMPORTANT:** Diode D1 is a 1N4001 because its  $V_F$  must be much less than the  $V_{BE}$  of Q1 (a signal diode like 1N4148 will not work here).

When U1 is not sourcing current, the voltage at the OUT pin (and the cathode of D1) will be held at about 50 mV by the R7/D1/R5 divider. The current flowing to ground through these components is about 110  $\mu$ A.

Because D1 is a 1A power diode, the  $V_F$  across D1 at this small value of current will be much less than the  $V_{BE}$  needed to turn ON Q1 (so Q1 is held off by D1).


When U1 begins to source current (to cut off the pass transistor and regulate  $V_{OUT}$ ) it forces the voltage at the cathode of D1 to rise.

This action causes the current that was flowing through D1 to flow into the base of Q1, turning it ON and taking drive away from the base of Q2.

This action provides the negative feedback required to regulate  $V_{OUT}$  and allows the LM3460 to operate with only 1.2V of total supply voltage across the device.



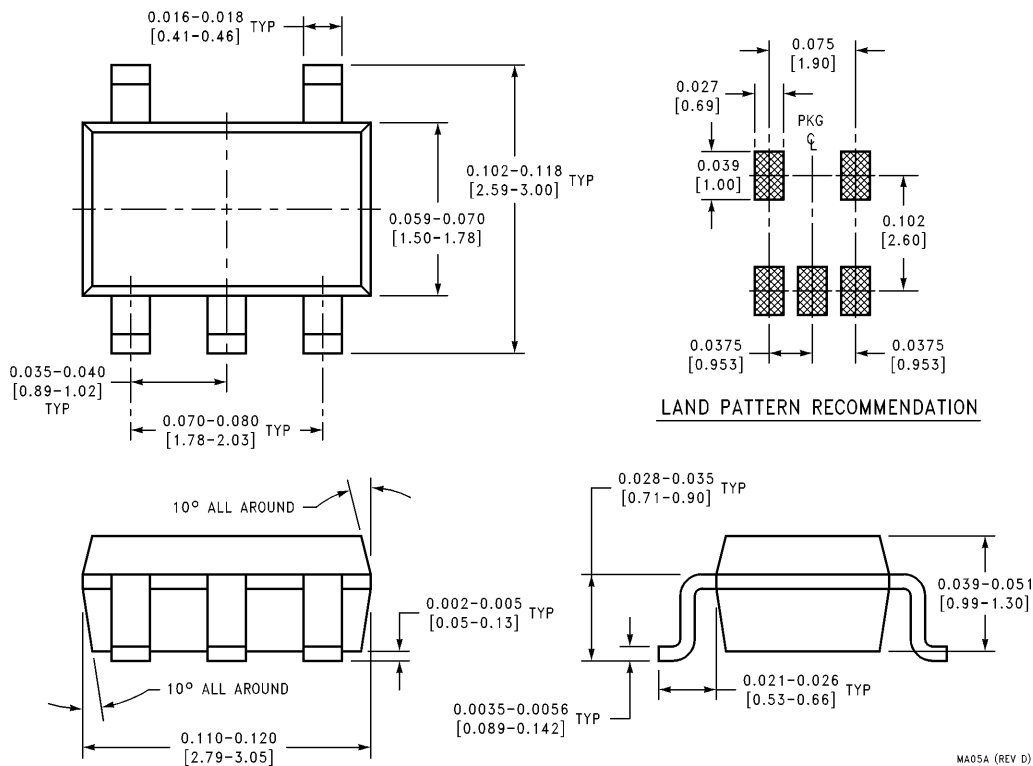

**Physical Dimensions** inches (millimeters) unless otherwise noted

**5-Lead Small Outline Package (M5)**  
**Ordering Number, See Page 1 of this Document**  
**NS Package Number MA05A**

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

<http://www.national.com>

**National Semiconductor Europe**

Fax: +49 (0) 180-530 85 86  
 Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
 Deutsch Tel: +49 (0) 180-530 85 85  
 English Tel: +49 (0) 180-532 78 32  
 Français Tel: +49 (0) 180-532 93 58  
 Italiano Tel: +49 (0) 180-534 16 80

**National Semiconductor Hong Kong Ltd.**

19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**

Tel: 81-043-299-2308  
 Fax: 81-043-299-2408