

## LMH6645/46/47

# 2.7V, 650µA, 55MHz, Rail-to-Rail Input and Output Amplifiers with Shutdown Option

### General Description

The LMH6645 (single) and LMH6646 (dual), rail-to-rail input and output voltage feedback amplifiers, offer high speed (55MHz), and low voltage operation (2.7V) in addition to micro-power shutdown capability (LMH6647, single).

Input common mode voltage range exceeds either supply by 0.3V, enhancing ease of use in multitude of applications where previously only inferior devices could be used. Output voltage range extends to within 20mV of either supply rails, allowing wide dynamic range especially in low voltage applications. Even with low supply current of 650µA/amplifier, output current capability is kept at a respectable ±20mA for driving heavier loads. Important device parameters such as BW, Slew Rate and output current are kept relatively independent of the operating supply voltage by a combination of process enhancements and design architecture.

In portable applications, the LMH6647 provides shutdown capability while keeping the turn-off current to less than 50µA. Both turn-on and turn-off characteristics are well behaved with minimal output fluctuations during transitions. This allows the part to be used in power saving mode, as well as multiplexing applications. Miniature packages (SOT23, MSOP-8, and SO-8) are further means to ease the adoption of these low power high speed devices in applications where board area is at a premium.

### Features




( $V_S = 2.7V$ ,  $T_A = 25^\circ C$ ,  $R_L = 1k\Omega$  to  $V^+/2$ ,  $A_V = +1$ . Typical values unless specified).

|                                |                   |
|--------------------------------|-------------------|
| ■ -3dB BW                      | 55MHz             |
| ■ Supply voltage range         | 2.5V to 12V       |
| ■ Slew rate                    | 22V/µs            |
| ■ Supply current               | 650µA/channel     |
| ■ Output short circuit current | 42mA              |
| ■ Linear output current        | ±20mA             |
| ■ Input common mode voltage    | 0.3V beyond rails |
| ■ Output voltage swing         | 20mV from rails   |
| ■ Input voltage noise          | 17nV/√Hz          |
| ■ Input current noise          | 0.75pA/√Hz        |


### Applications

- Active filters
- High speed portable devices
- Multiplexing applications (LMH6647)
- Current sense buffer
- High speed transducer amp

### Connection Diagrams

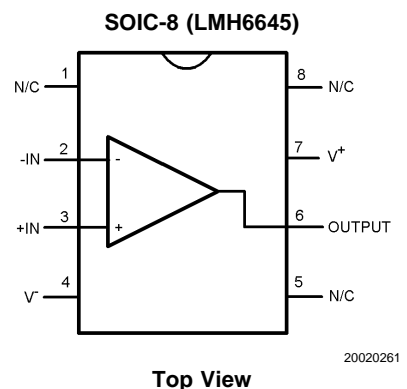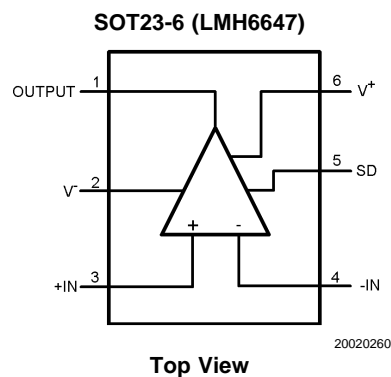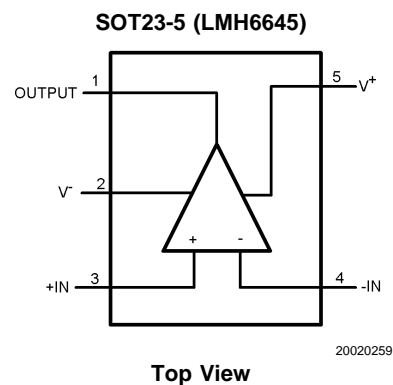

## Connection Diagrams (Continued)

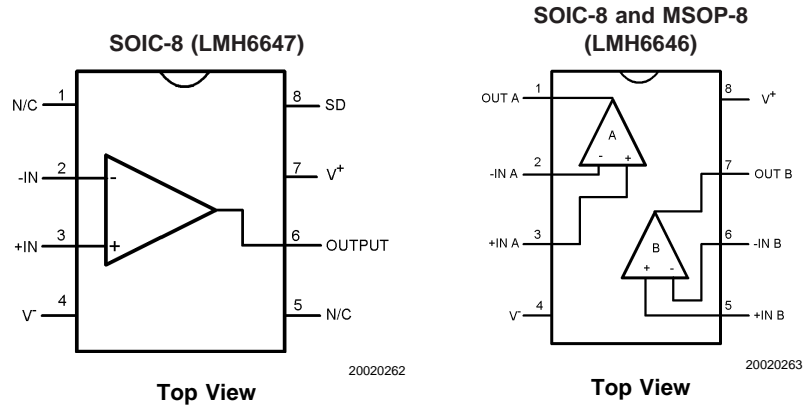

## Ordering Information

| Package      | Part Number | Package Marking | Transport Media          | NSC Drawing |
|--------------|-------------|-----------------|--------------------------|-------------|
| 5-Pin SOT-23 | LMH6645MF   | A68A            | 1k Units Tape and Reel   | MF05A       |
|              | LMH6645MFX  |                 | 3k Units Tape and Reel   |             |
| 6-Pin SOT-23 | LMH6647MF   | A69A            | 1k Units Tape and Reel   | MF06A       |
|              | LMH6647MFX  |                 | 3k Units Tape and Reel   |             |
| SOIC-8       | LMH6645MA   | LMH6645MA       | 95 Units Rails           | M08A        |
|              | LMH6645MAX  |                 | 2.5k Units Tape and Reel |             |
|              | LMH6646MA   | LMH6646MA       | 95 Units Rails           |             |
|              | LMH6646MAX  |                 | 2.5k Units Tape and Reel |             |
|              | LMH6647MA   | LMH6647MA       | 95 Units Rails           |             |
|              | LMH6647MAX  |                 | 2.5k Units Tape and Reel |             |
| MSOP-8       | LMH6646MM   | A70A            | 1k Units Tape and Reel   | MUA08A      |
|              | LMH6646MMX  |                 | 3.5k Units Tape and Reel |             |

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                                |                                 |
|--------------------------------|---------------------------------|
| ESD Tolerance                  |                                 |
| Human Body                     | 2KV (Note 2)                    |
| Machine Model                  | 200V (Note 9)                   |
| $V_{IN}$ Differential          | $\pm 2.5V$                      |
| Output Short Circuit Duration  | (Note 3, 11)                    |
| Supply Voltage ( $V^+ - V^-$ ) | 12.6V                           |
| Voltage at Input/Output pins   | $V^+ +0.8V, V^- -0.8V$          |
| Storage Temperature Range      | $-65^\circ C$ to $+150^\circ C$ |
| Junction Temperature (Note 4)  | $+150^\circ C$                  |

## Soldering Information

|                                 |               |
|---------------------------------|---------------|
| Infrared or Convection (20 sec) | $235^\circ C$ |
| Wave Soldering (10 sec)         | $260^\circ C$ |

**Operating Ratings** (Note 1)

|   |                                |
|---|--------------------------------|
| Supply Voltage ( $V^+ - V^-$ )                        | 2.5V to 12V                    |
| Junction Temperature Range (Note 4)                   | $-40^\circ C$ to $+85^\circ C$ |
| Package Thermal Resistance (Note 4) ( $\theta_{JA}$ ) |                                |
| SOT23-5   | $265^\circ C/W$                |
| SOT23-6   | $265^\circ C/W$                |
| SOIC-8  | $190^\circ C/W$                |
| MSOP-8  | $235^\circ C/W$                |

**2.7V Electrical Characteristics**

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ C$ ,  $V^+ = 2.7V$ ,  $V^- = 0V$ ,  $V_{CM} = V_O = V^+/2$ , and  $R_f = 2k\Omega$ , and  $R_L = 1k\Omega$  to  $V^+/2$ . **Boldface** limits apply at the temperature extremes.

| Symbol      | Parameter                                 | Conditions  | Min<br>(Note 6) | Typ<br>(Note 5) | Max<br>(Note 6) | Units            |
|-------------|---|---|-----------------|-----------------|-----------------|------------------|
| BW          | -3dB BW                                   | $A_V = +1, V_{OUT} = 200mV_{PP}, V_{CM} = 0.7V$               | 40              | 55              |                 | MHz              |
| $e_n$       | Input-Referred Voltage Noise              | $f = 100kHz$  |                 | 17              |                 | $nV/\sqrt{Hz}$   |
|             |   | $f = 1kHz$  |                 | 25              |                 |                  |
| $i_n$       | Input-Referred Current Noise              | $f = 100kHz$  |                 | 0.75            |                 | $pA/\sqrt{Hz}$   |
|             |   | $f = 1kHz$  |                 | 1.20            |                 |                  |
| CT Rej.     | Cross-Talk Rejection (LMH6646 only)       | $f = 5MHz, \text{Receiver: } R_f = R_g = 510\Omega, A_V = +2$ |                 | 47              |                 | dB               |
| SR          | Slew Rate                                 | $A_V = -1, V_O = 2V_{PP}$ (Note 8, 13)                        | 15              | 22              |                 | $V/\mu s$        |
| $T_{ON}$    | Turn-On Time (LMH6647 only)               |   |                 | 250             |                 | ns               |
| $T_{OFF}$   | Turn-Off Time (LMH6647 only)              |   |                 | 560             |                 | ns               |
| $TH_{SD}$   | Shutdown Threshold (LMH6647 only)         | $I_S \leq 50\mu A$  |                 | 1.95            | 2.30            | V                |
| $I_{SD}$    | Shutdown Pin Input Current (LMH6647 only) | (Note 7)  |                 | -20             |                 | $\mu A$          |
| $V_{OS}$    | Input Offset Voltage                      | $0V \leq V_{CM} \leq 2.7V$                                    | -3<br>-4        | $\pm 1$         | 3<br>4          | mV               |
| TC $V_{OS}$ | Input Offset Average Drift                | (Note 12)   |                 | $\pm 5$         |                 | $\mu V/^\circ C$ |
| $I_B$       | Input Bias Current                        | $V_{CM} = 2.5V$ (Note 7)                                      |                 | 0.40            | 2<br>2.2        | $\mu A$          |
|             |   | $V_{CM} = 0.5V$ (Note 7)                                      |                 | -0.68           | -2<br>-2.2      |                  |
| $I_{OS}$    | Input Offset Current                      | $0V \leq V_{CM} \leq 2.7V$                                    |                 | 1               | 500             | nA               |
| $R_{IN}$    | Common Mode Input Resistance              |   |                 | 3               |                 | $M\Omega$        |
| $C_{IN}$    | Common Mode Input Capacitance             |   |                 | 2               |                 | pF               |
| CMVR        | Input Common-Mode Voltage Range           | $CMRR \geq 50dB$  |                 | -0.5            | -0.3<br>-0.1    | V                |
|             |   |   | 3.0<br>2.8      | 3.2             |                 |                  |

## 2.7V Electrical Characteristics (Continued)

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ\text{C}$ ,  $V^+ = 2.7\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = V_O = V^+/2$ , and  $R_f = 2\text{k}\Omega$ , and  $R_L = 1\text{k}\Omega$  to  $V^+/2$ . **Boldface** limits apply at the temperature extremes.

| Symbol           | Parameter                    | Conditions  | Min<br>(Note 6) | Typ<br>(Note 5) | Max<br>(Note 6) | Units         |
|------------------|------------------------------|---|-----------------|-----------------|-----------------|---------------|
| CMRR             | Common Mode Rejection Ratio  | $V_{\text{CM}}$ Stepped from 0V to 2.7V                             | 46              | 77              |                 | dB            |
|                  |                              | $V_{\text{CM}}$ Stepped from 0V to 1.55V                            | 58              | 76              |                 |               |
| $A_{\text{VOL}}$ | Large Signal Voltage Gain    | $V_O = 0.35\text{V}$ to 2.35V                                       | 76<br><b>74</b> | 87              |                 | dB            |
| $V_O$            | Output Swing High            | $R_L = 1\text{k}$ to $V^+/2$  | 2.55            | 2.66            |                 | V             |
|                  |                              | $R_L = 10\text{k}$ to $V^+/2$                                       |                 | 2.68            |                 |               |
|                  | Output Swing Low             | $R_L = 1\text{k}$ to $V^+/2$  |                 | 40              | 150             | mV            |
|                  |                              | $R_L = 10\text{k}$ to $V^+/2$                                       |                 | 20              |                 |               |
| $I_{\text{SC}}$  | Output Short Circuit Current | Sourcing to $V^-$<br>$V_{\text{ID}} = 200\text{mV}$ (Note 10)       |                 | 43              |                 | mA            |
|                  |                              | Sinking to $V^+$<br>$V_{\text{ID}} = -200\text{mV}$ (Note 10)       |                 | 42              |                 |               |
| $I_{\text{OUT}}$ | Output Current               | $V_{\text{OUT}} = 0.5\text{V}$ from rails                           |                 | $\pm 20$        |                 | mA            |
| PSRR             | Power Supply Rejection Ratio | $V^+ = 2.7\text{V}$ to 3.7V or<br>$V^- = 0\text{V}$ to $-1\text{V}$ | 75              | 83              |                 | dB            |
| $I_S$            | Supply Current (per channel) | Normal Operation  |                 | 650             | 1250            | $\mu\text{A}$ |
|                  |                              | Shutdown Mode (LMH6647 only)  |                 | 15              | 50              |               |

## 5V Electrical Characteristics

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = V_O = V^+/2$ , and  $R_f = 2\text{k}\Omega$ , and  $R_L = 1\text{k}\Omega$  to  $V^+/2$ . **Boldface** limits apply at the temperature extremes.

| Symbol                  | Parameter                                 | Conditions  | Min<br>(Note 6) | Typ<br>(Note 5) | Max<br>(Note 6)   | Units                        |
|-------------------------|---|---|-----------------|-----------------|-------------------|------------------------------|
| BW                      | -3dB BW                                   | $A_V = +1$ , $V_{\text{OUT}} = 200\text{mV}_{\text{PP}}$              | 40              | 55              |                   | MHz                          |
| $e_n$                   | Input-Referred Voltage Noise              | $f = 100\text{kHz}$   |                 | 17              |                   | $\text{nV}/\sqrt{\text{Hz}}$ |
|                         |   | $f = 1\text{kHz}$   |                 | 25              |                   |                              |
| $i_n$                   | Input-Referred Current Noise              | $f = 100\text{kHz}$   |                 | 0.75            |                   | $\text{pA}/\sqrt{\text{Hz}}$ |
|                         |   | $f = 1\text{kHz}$   |                 | 1.20            |                   |                              |
| CT Rej.                 | Cross-Talk Rejection (LMH6646 only)       | $f = 5\text{MHz}$ , Receiver:<br>$R_f = R_g = 510\Omega$ , $A_V = +2$ |                 | 47              |                   | dB                           |
| SR                      | Slew Rate                                 | $A_V = -1$ , $V_O = 2\text{V}_{\text{PP}}$<br>(Note 8, 13)            | 15              | 22              |                   | $\text{V}/\mu\text{s}$       |
| $T_{\text{ON}}$         | Turn-On Time (LMH6647 only)               |   |                 | 210             |                   | ns                           |
| $T_{\text{OFF}}$        | Turn-Off Time (LMH6647 only)              |   |                 | 500             |                   | ns                           |
| $\text{TH}_{\text{SD}}$ | Shutdown Threshold (LMH6647 only)         | $I_S \leq 50\mu\text{A}$  |                 | 4.25            | 4.60              | V                            |
| $I_{\text{SD}}$         | Shutdown Pin Input Current (LMH6647 only) | (Note 7)  |                 | -20             |                   | $\mu\text{A}$                |
| $V_{\text{OS}}$         | Input Offset Voltage                      | $0\text{V} \leq V_{\text{CM}} \leq 5\text{V}$                         | -3<br><b>-4</b> | $\pm 1$         | 3<br><b>4</b>     | mV                           |
| TC $V_{\text{OS}}$      | Input Offset Average Drift                | (Note 12)   |                 | $\pm 5$         |                   | $\mu\text{V}/\text{C}$       |
| $I_B$                   | Input Bias Current                        | $V_{\text{CM}} = 4.8\text{V}$ (Note 7)                                |                 | +0.36           | +2<br><b>-2.2</b> | $\mu\text{A}$                |
|                         |   | $V_{\text{CM}} = 0.5\text{V}$ (Note 7)                                |                 | -0.68           | -2<br><b>-2.2</b> |                              |
| $I_{\text{OS}}$         | Input Offset Current                      | $0\text{V} \leq V_{\text{CM}} \leq 5\text{V}$                         |                 | 1               | 500               | nA                           |
| $R_{\text{IN}}$         | Common Mode Input Resistance              |   |                 | 3               |                   | $\text{M}\Omega$             |

## 5V Electrical Characteristics (Continued)

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{\text{CM}} = V_O = V^+/2$ , and  $R_f = 2\text{k}\Omega$ , and  $R_L = 1\text{k}\Omega$  to  $V^+/2$ . **Boldface** limits apply at the temperature extremes.

| Symbol           | Parameter                       | Conditions  | Min<br>(Note 6) | Typ<br>(Note 5)          | Max<br>(Note 6) | Units         |
|------------------|---------------------------------|---|-----------------|--------------------------|-----------------|---------------|
| $C_{\text{IN}}$  | Common Mode Input Capacitance   |   |                 | 2                        |                 | pF            |
| CMVR             | Input Common-Mode Voltage Range | CMRR $\geq 50\text{dB}$   |                 | -0.5                     | -0.3            | V             |
|                  |                                 |   |                 | <b>5.3</b><br><b>5.1</b> | 5.5             |               |
| CMRR             | Common Mode Rejection Ratio     | $V_{\text{CM}}$ Stepped from 0V to 5V                                 | 56              | 82                       |                 | dB            |
|                  |                                 | $V_{\text{CM}}$ Stepped from 0V to 3.8V                               | 66              | 85                       |                 |               |
| $A_{\text{VOL}}$ | Large Signal Voltage Gain       | $V_O = 1.5\text{V}$ to $3.5\text{V}$                                  | 76<br><b>74</b> | 85                       |                 | dB            |
| $V_O$            | Output Swing High               | $R_L = 1\text{k}$ to $V^+/2$  | 4.80            | 4.95                     |                 | V             |
|                  |                                 | $R_L = 10\text{k}$ to $V^+/2$   |                 | 4.98                     |                 |               |
|                  | Output Swing Low                | $R_L = 1\text{k}$ to $V^+/2$  |                 | 50                       | 200             | mV            |
|                  |                                 | $R_L = 10\text{k}$ to $V^+/2$   |                 | 20                       |                 |               |
| $I_{\text{SC}}$  | Output Short Circuit Current    | Sourcing to $V^-$<br>$V_{\text{ID}} = 200\text{mV}$ (Note 10)         |                 | 55                       |                 | mA            |
|                  |                                 | Sinking to $V^+$<br>$V_{\text{ID}} = -200\text{mV}$ (Note 10)         |                 | 53                       |                 |               |
| $I_{\text{OUT}}$ | Output Current                  | $V_{\text{OUT}} = 0.5\text{V}$ From rails                             |                 | $\pm 20$                 |                 | mA            |
| PSRR             | Power Supply Rejection Ratio    | $V^+ = 5\text{V}$ to $6\text{V}$ or $V^- = 0\text{V}$ to $-1\text{V}$ | 75              | 95                       |                 | dB            |
| $I_{\text{S}}$   | Supply Current (per channel)    | Normal Operation  |                 | 700                      | 1400            | $\mu\text{A}$ |
|                  |                                 | Shutdown Mode (LMH6647 only)  |                 | 10                       | 50              |               |

## $\pm 5\text{V}$ Electrical Characteristics

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = -5\text{V}$ ,  $V_{\text{CM}} = V_O = 0\text{V}$ ,  $R_f = 2\text{k}\Omega$ , and  $R_L = 1\text{k}\Omega$  to GND. **Boldface** limits apply at the temperature extremes.

| Symbol                  | Parameter                                 | Conditions  | Min<br>(Note 6) | Typ<br>(Note 5) | Max<br>(Note 6) | Units                        |
|-------------------------|---|---|-----------------|-----------------|-----------------|------------------------------|
| BW                      | -3dB BW                                   | $A_V = +1$ , $V_{\text{OUT}} = 200\text{mV}_{\text{PP}}$              | 40              | 55              |                 | MHz                          |
| $e_n$                   | Input-Referred Voltage Noise              | $f = 100\text{kHz}$   |                 | 17              |                 | $\text{nV}/\sqrt{\text{Hz}}$ |
|                         |   | $f = 1\text{kHz}$   |                 | 25              |                 |                              |
| $i_n$                   | Input-Referred Current Noise              | $f = 100\text{kHz}$   |                 | 0.75            |                 | $\text{pA}/\sqrt{\text{Hz}}$ |
|                         |   | $f = 1\text{kHz}$   |                 | 1.20            |                 |                              |
| CT Rej.                 | Cross-Talk Rejection (LMH6646 only)       | $f = 5\text{MHz}$ , Receiver:<br>$R_f = R_g = 510\Omega$ , $A_V = +2$ |                 | 47              |                 | dB                           |
| SR                      | Slew Rate                                 | $A_V = -1$ , $V_O = 2V_{\text{PP}}$ (Note 8)                          | 15              | 22              |                 | $\text{V}/\mu\text{s}$       |
| $T_{\text{ON}}$         | Turn-On Time (LMH6647 only)               |   |                 | 200             |                 | ns                           |
| $T_{\text{OFF}}$        | Turn-Off Time (LMH6647 only)              |   |                 | 700             |                 | ns                           |
| $\text{TH}_{\text{SD}}$ | Shutdown Threshold (LMH6647 only)         | $I_{\text{S}} \leq 50\mu\text{A}$                                     |                 | 4.25            | 4.60            | V                            |
| $I_{\text{SD}}$         | Shutdown Pin Input Current (LMH6647 only) | (Note 7)  |                 | -20             |                 | $\mu\text{A}$                |
| $V_{\text{OS}}$         | Input Offset Voltage                      | $-5\text{V} \leq V_{\text{CM}} \leq 5\text{V}$                        | -3<br><b>-4</b> | $\pm 1$         | 3<br><b>4</b>   | mV                           |
| TC $V_{\text{OS}}$      | Input Offset Average Drift                | (Note 12)   |                 | $\pm 5$         |                 | $\mu\text{V}/^\circ\text{C}$ |

**±5V Electrical Characteristics** (Continued)

Unless otherwise specified, all limits guaranteed for at  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = -5\text{V}$ ,  $V_{\text{CM}} = V_O = 0\text{V}$ ,  $R_f = 2\text{k}\Omega$ , and  $R_L = 1\text{k}\Omega$  to GND. **Boldface** limits apply at the temperature extremes.

| Symbol           | Parameter                       | Conditions   | Min<br>(Note 6)   | Typ<br>(Note 5) | Max<br>(Note 6)     | Units         |
|------------------|---------------------------------|--|-------------------|-----------------|---------------------|---------------|
| $I_B$            | Input Bias Current              | $V_{\text{CM}} = 4.8\text{V}$ (Note 7)                                 |                   | +0.40           | +2<br><b>+2.2</b>   | $\mu\text{A}$ |
|                  |                                 | $V_{\text{CM}} = -4.5\text{V}$ (Note 7)                                |                   | -0.65           | -2<br><b>-2.2</b>   |               |
| $I_{\text{OS}}$  | Input Offset Current            | $-5\text{V} \leq V_{\text{CM}} \leq 5\text{V}$                         |                   | 3               | 500                 | nA            |
| $R_{\text{IN}}$  | Common Mode Input Resistance    |  |                   | 3               |                     | M $\Omega$    |
| $C_{\text{IN}}$  | Common Mode Input Capacitance   |  |                   | 2               |                     | pF            |
| CMVR             | Input Common-Mode Voltage Range | CMRR $\geq 50\text{dB}$  |                   | -5.5            | -5.3<br><b>-5.1</b> | V             |
|                  |                                 |  | 5.3<br><b>5.1</b> | 5.5             |                     |               |
| CMRR             | Common Mode Rejection Ratio     | $V_{\text{CM}}$ Stepped from $-5\text{V}$ to $5\text{V}$               | 60                | 84              |                     | dB            |
|                  |                                 | $V_{\text{CM}}$ Stepped from $-5\text{V}$ to $3.5\text{V}$             | 66                | 104             |                     |               |
| $A_{\text{VOL}}$ | Large Signal Voltage Gain       | $V_O = -2\text{V}$ to $2\text{V}$                                      | 76<br><b>74</b>   | 85              |                     | dB            |
| $V_O$            | Output Swing High               | $R_L = 1\text{k}\Omega$  | 4.70              | 4.92            |                     | V             |
|                  |                                 | $R_L = 10\text{k}\Omega$   |                   | 4.97            |                     |               |
|                  | Output Swing Low                | $R_L = 1\text{k}\Omega$  |                   | -4.93           | -4.70               | V             |
|                  |                                 | $R_L = 10\text{k}\Omega$   |                   | -4.98           |                     |               |
| $I_{\text{SC}}$  | Output Short Circuit Current    | Sourcing to $V^-$<br>$V_{\text{ID}} = 200\text{mV}$ (Note 10)          |                   | 66              |                     | mA            |
|                  |                                 | Sinking to $V^+$<br>$V_{\text{ID}} = -200\text{mV}$ (Note 10)          |                   | 61              |                     |               |
| $I_{\text{OUT}}$ | Output Current                  | $V_{\text{OUT}} = 0.5\text{V}$ from rails                              |                   | $\pm 20$        |                     | mA            |
| PSRR             | Power Supply Rejection Ratio    | $V^+ = 5\text{V}$ to $6\text{V}$ or $V^- = -5\text{V}$ to $-6\text{V}$ | 76                | 95              |                     | dB            |
| $I_S$            | Supply Current (per channel)    | Normal Operation   |                   | 725             | 1600                | $\mu\text{A}$ |
|                  |                                 | Shutdown Mode (LMH6647 only)   |                   | 10              | 50                  |               |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.

**Note 2:** Human body model,  $1.5\text{k}\Omega$  in series with  $100\text{pF}$ .

**Note 3:** Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of  $150^\circ\text{C}$ .

**Note 4:** The maximum power dissipation is a function of  $T_{\text{J(MAX)}}$ ,  $\theta_{\text{JA}}$ , and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_{\text{J(MAX)}} - T_A) / \theta_{\text{JA}}$ . All numbers apply for packages soldered directly onto a PC board.

**Note 5:** Typical values represent the most likely parametric norm.

**Note 6:** All limits are guaranteed by testing or statistical analysis.

**Note 7:** Positive current corresponds to current flowing into the device.

**Note 8:** Slew rate is the average of the rising and falling slew rates.

**Note 9:** Machine Model,  $0\Omega$  in series with  $200\text{pF}$ .

**Note 10:** Short circuit test is a momentary test. See Note 11.


**Note 11:** Output short circuit duration is infinite for  $V_S < 6\text{V}$  at room temperature and below. For  $V_S > 6\text{V}$ , allowable short circuit duration is  $1.5\text{ms}$ .

**Note 12:** Offset voltage average drift determined by dividing the change in  $V_{\text{OS}}$  at temperature extremes into the total temperature change.

**Note 13:** Guaranteed based on characterization only.


# Typical Performance Characteristics At $T_J = 25^\circ\text{C}$ . Unless otherwise specified.

**Closed Loop Frequency Response for Various Temperature**

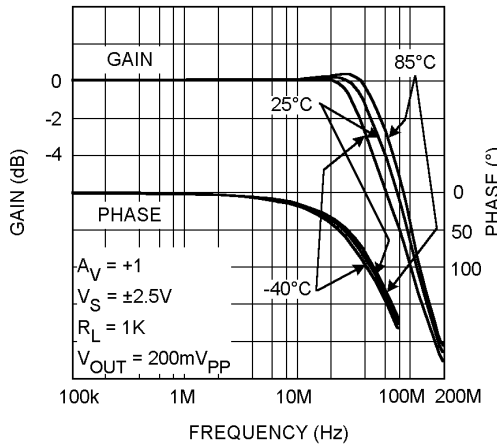


20020249

**Frequency Response for Various AV**

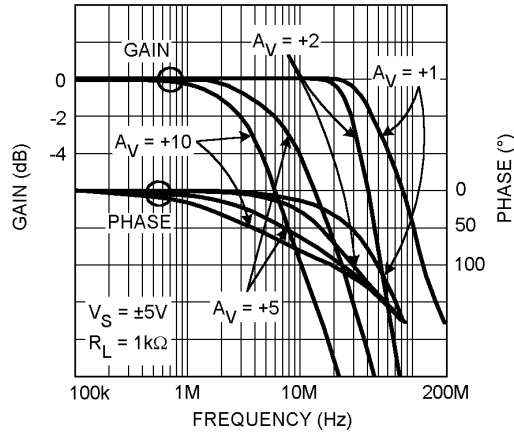


20020248

**Open Loop Gain/Phase vs. Frequency for Various Temperature**

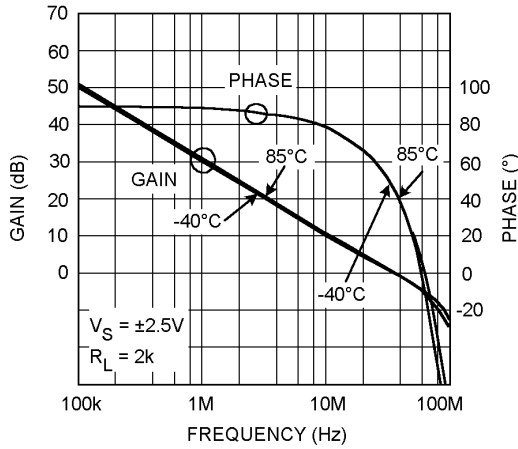


20020250

**THD vs. Output Swing**

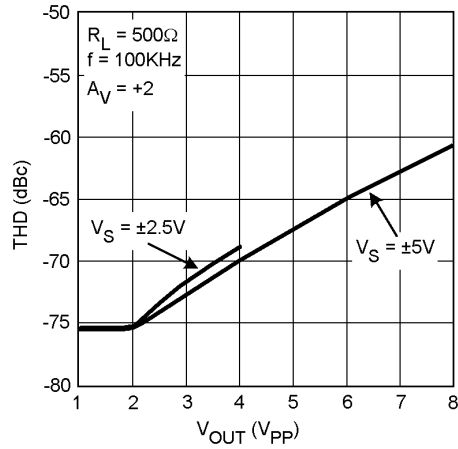


20020253

**THD vs. Output Swing**

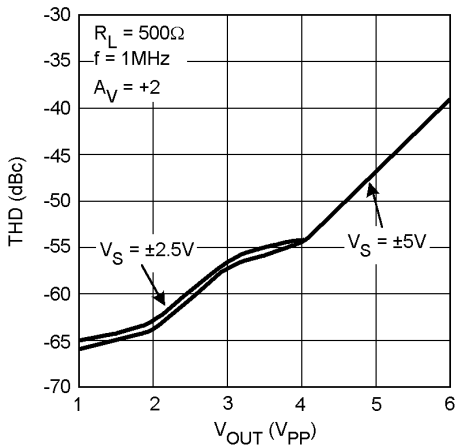


20020254

**Output Swing vs. Frequency**

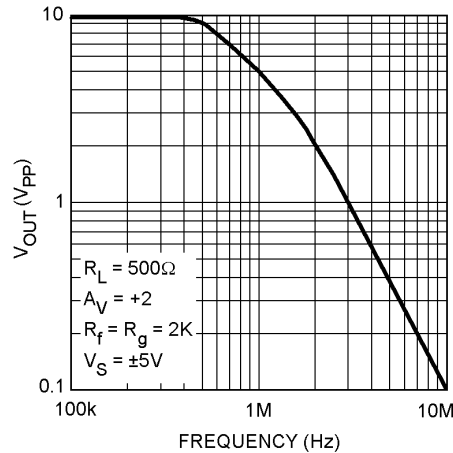


20020255


**Typical Performance Characteristics** At  $T_J = 25^\circ\text{C}$ . Unless otherwise specified. (Continued)

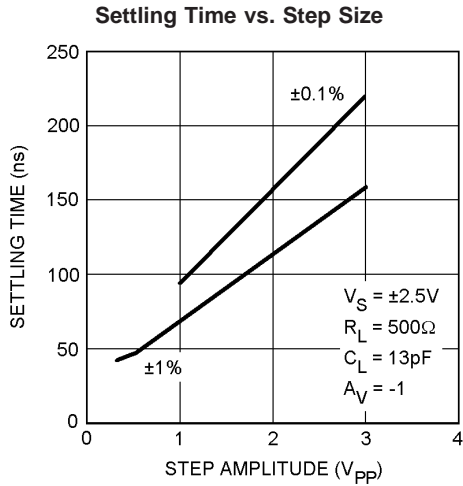


20020252

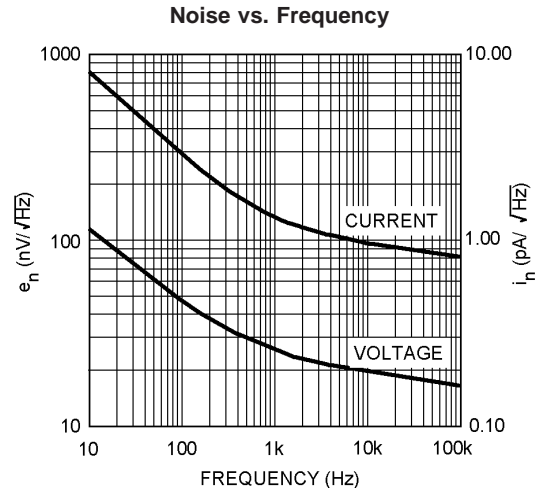


20020234

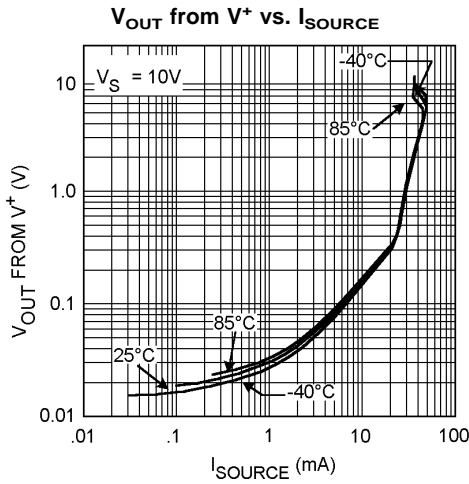


20020237

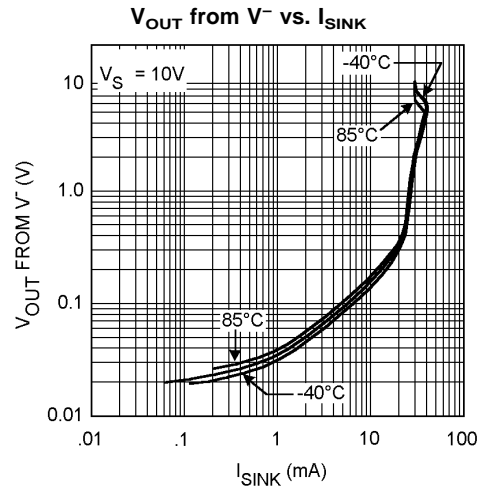

20020238

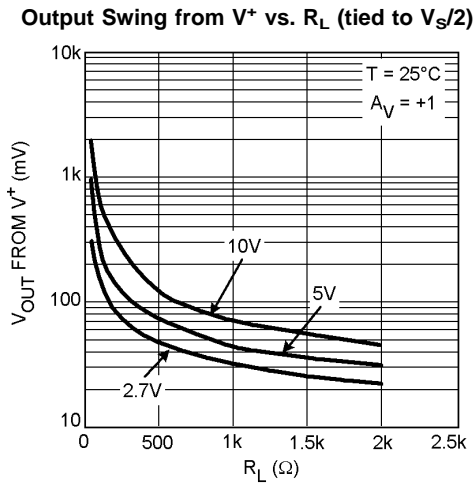

20020202

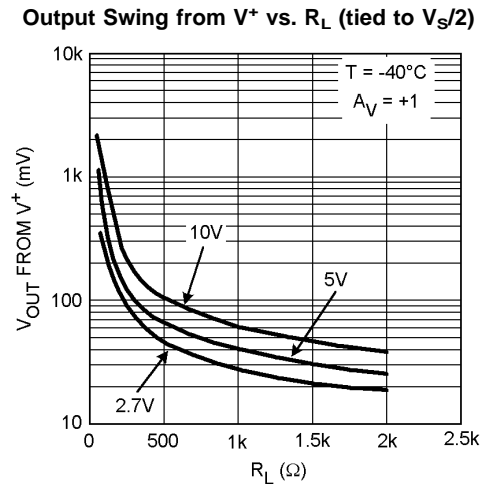


20020206




**Typical Performance Characteristics** At  $T_J = 25^\circ\text{C}$ . Unless otherwise specified. (Continued)

**Output Swing from  $V^+$  vs.  $R_L$  (tied to  $V_S/2$ )**

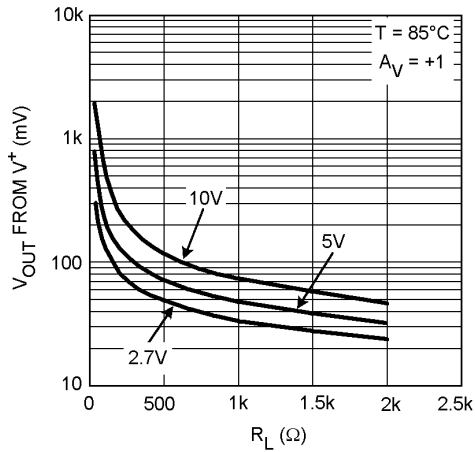


20020204

**Output Swing from  $V^-$  vs.  $R_L$  (tied to  $V_S/2$ )**

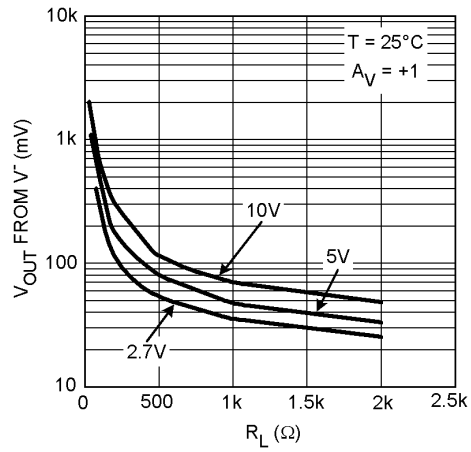


20020203

**Output Swing from  $V^-$  vs.  $R_L$  (tied to  $V_S/2$ )**

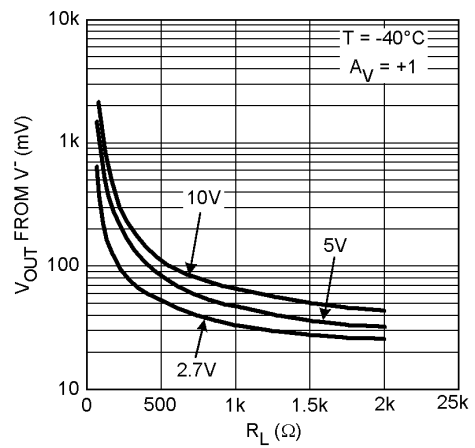


20020207

**Output Swing from  $V^-$  vs.  $R_L$  (tied to  $V_S/2$ )**

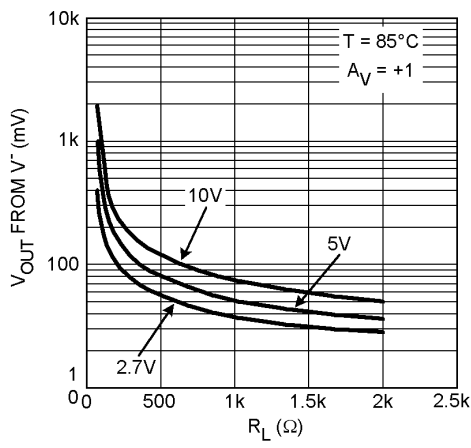


20020205

**Cap Load Tolerance and Setting Time vs. Closed Loop Gain**

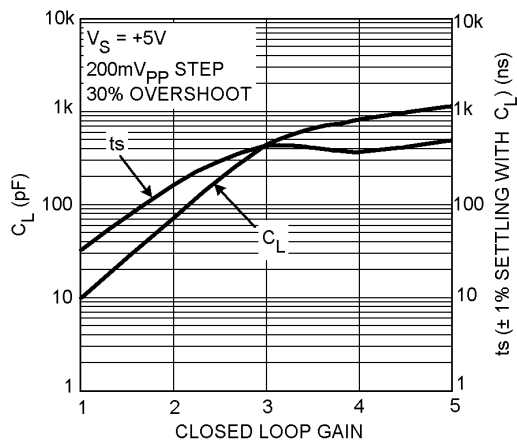


20020201

**$Z_{OUT}$  vs. Frequency**

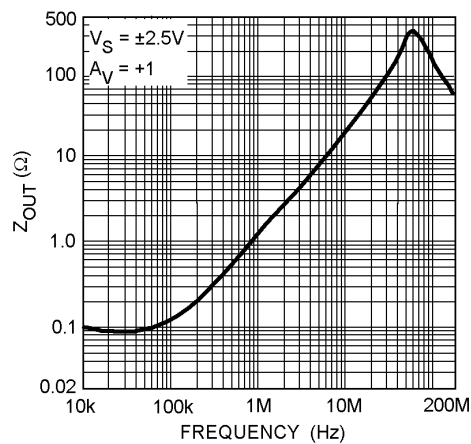


20020216

**Typical Performance Characteristics** At  $T_J = 25^\circ\text{C}$ . Unless otherwise specified. (Continued)

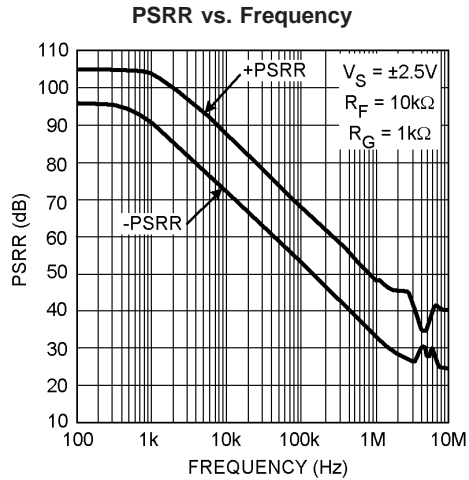


20020247

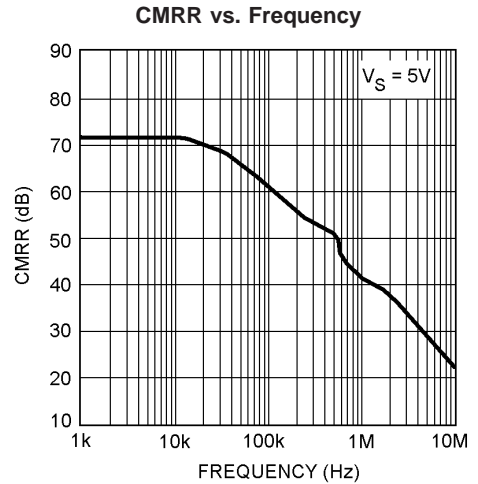


20020251


**Crosstalk Rejection vs. Frequency (Output to Output) (LMH6646)**

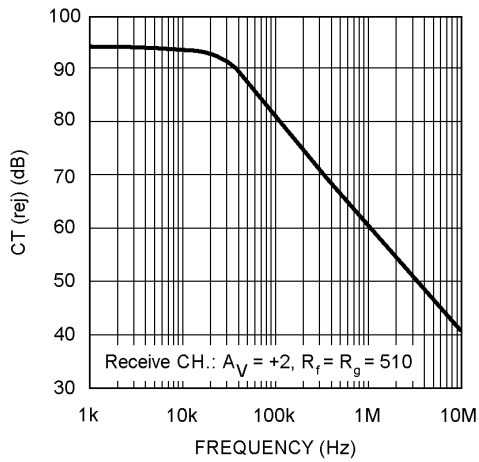


20020257

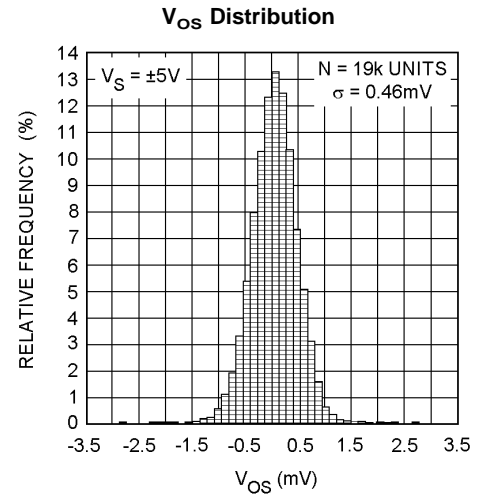

20020225






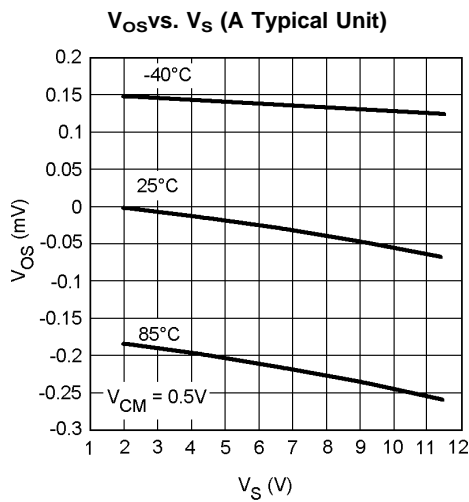


20020218






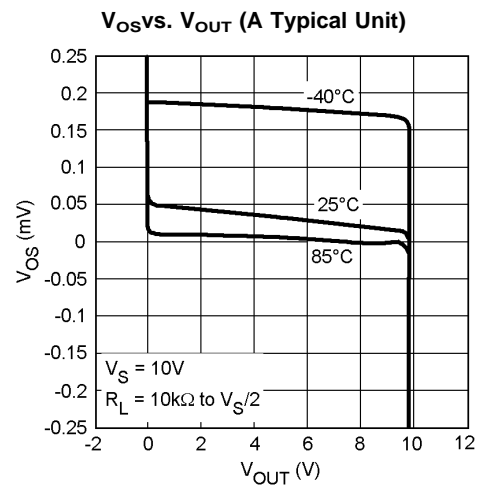


20020228

**Typical Performance Characteristics** At  $T_J = 25^\circ\text{C}$ . Unless otherwise specified. (Continued)

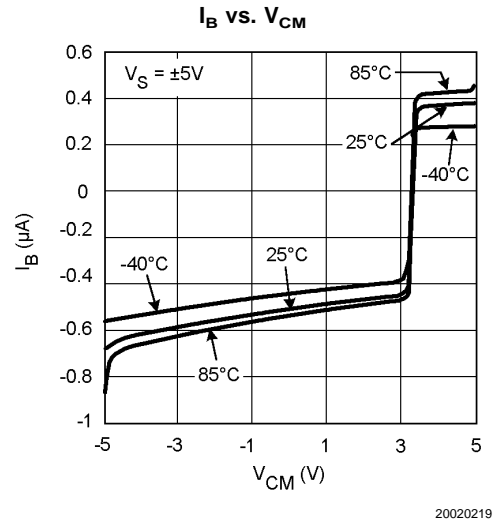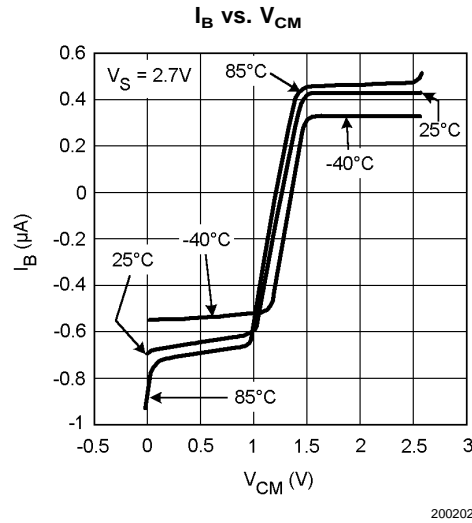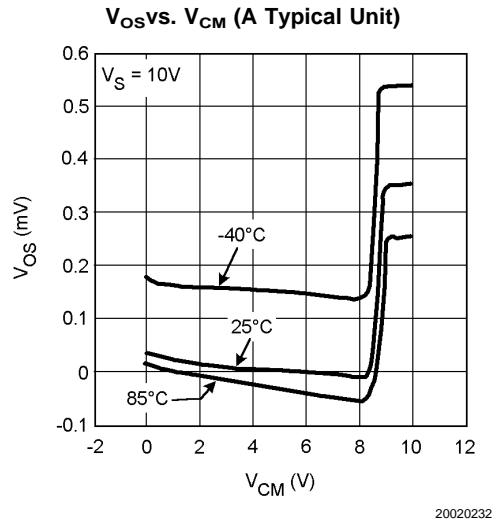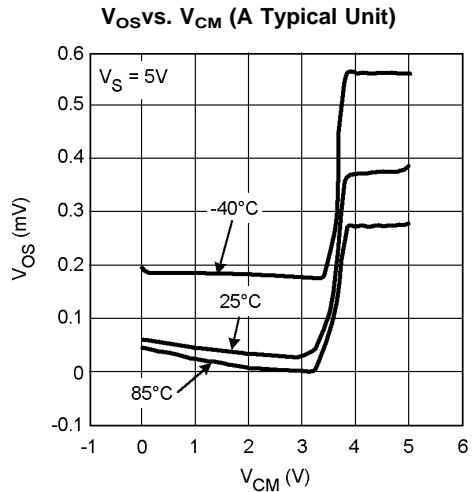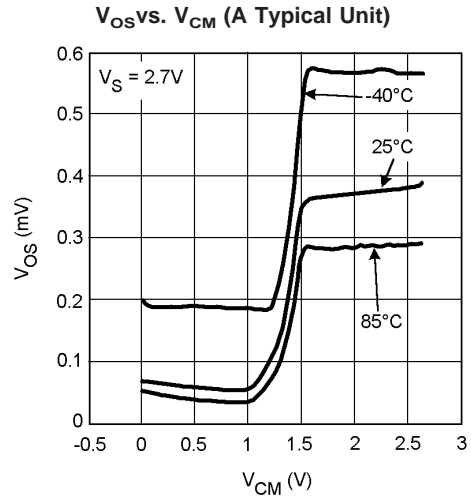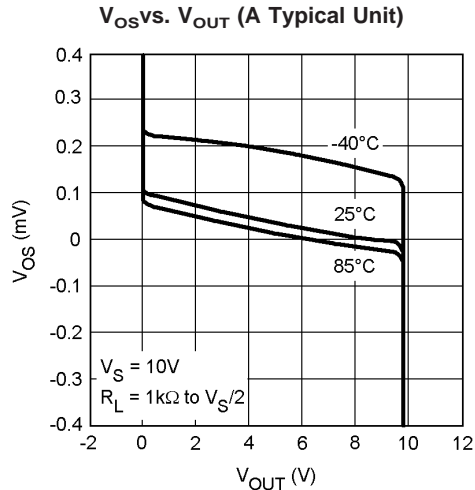


**Typical Performance Characteristics** At  $T_J = 25^\circ\text{C}$ . Unless otherwise specified. (Continued)

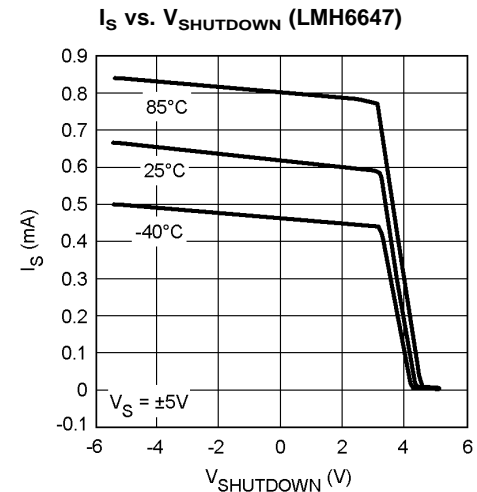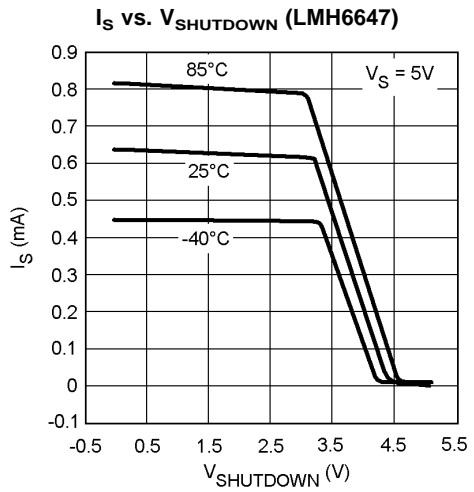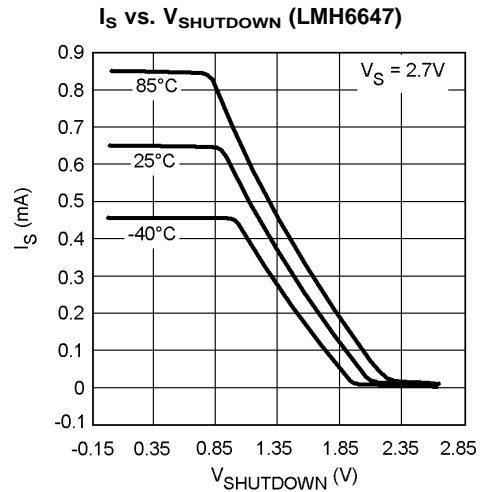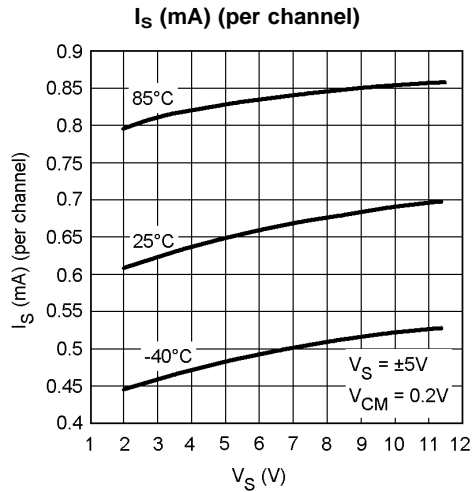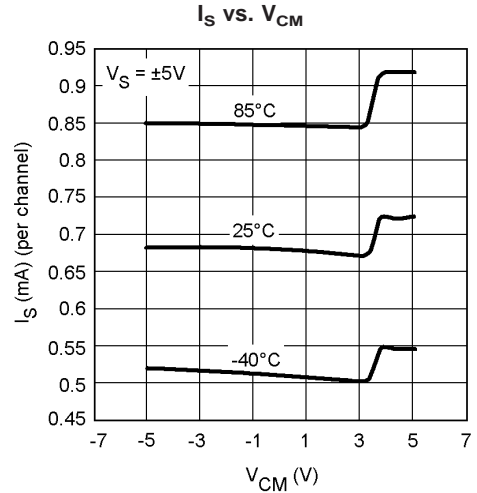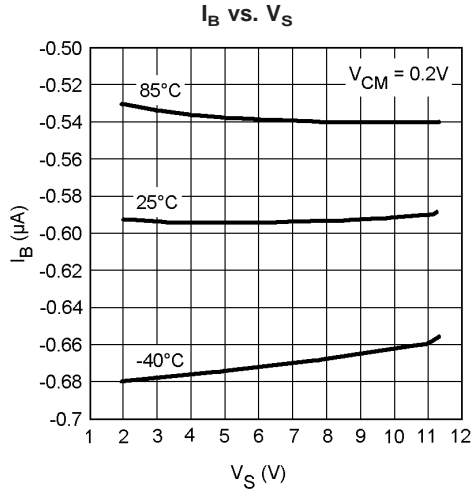


# Typical Performance Characteristics At $T_J = 25^\circ\text{C}$ . Unless otherwise specified. (Continued)

**Shutdown Pin and Supply Current vs. Shutdown Voltage**

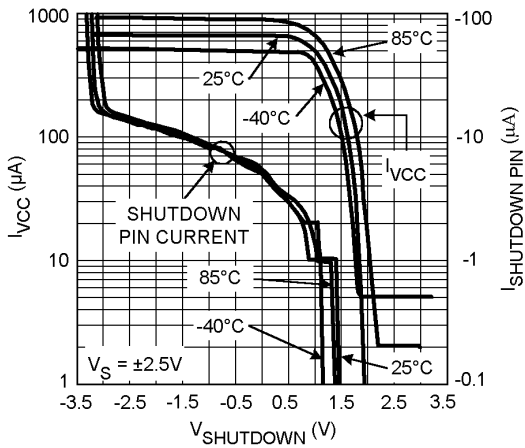


20020208

**Small Signal Step Response**

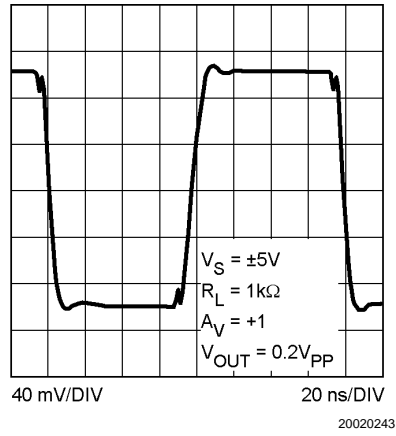


20020243

**Large Signal Step Response**

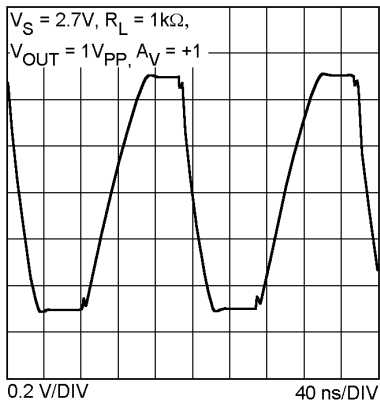


20020244

**Large Signal Step Response**

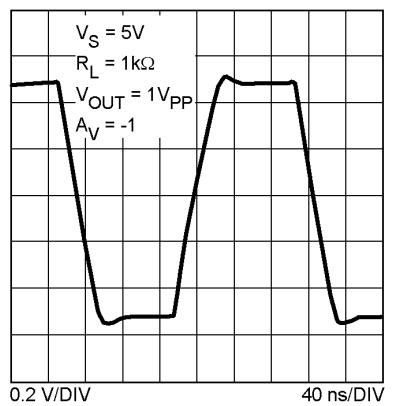

20020245

**Output Overload Recovery**

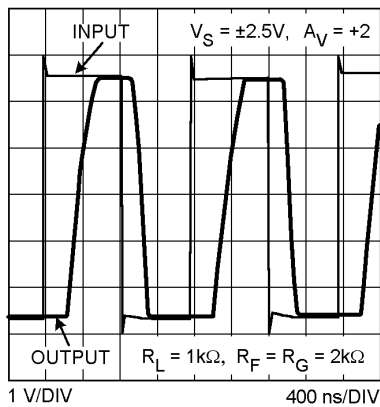

20020246

## Application Notes

### Circuit Description:

The LMH6645/6646/6647 family is based on National Semiconductor's proprietary VIP10 dielectrically isolated bipolar process.

This device family architecture features the following:

- Complimentary bipolar devices with exceptionally high  $f_t$  (~8GHz) even under low supply voltage (2.7V) and low Collector bias current.
- Rail-to-Rail input which allows the input common mode voltage to go beyond either rail by about 0.5V typically.
- A class A-B "turn-around" stage with improved noise, offset, and reduced power dissipation compared to similar speed devices (patent pending).
- Common Emitter push-pull output stage capable of 20mA output current (at 0.5V from the supply rails) while consuming only ~700 $\mu$ A of total supply current per channel. This architecture allows output to reach within milli-volts of either supply rail at light loads.
- Consistent performance from any supply voltage (2.7V-10V) with little variation with supply voltage for the most important specifications (e.g. BW, SR,  $I_{OUT}$ , etc.)

### Application Hints:


The total input common mode voltage range, which extends from below  $V^-$  to beyond  $V^+$ , is covered by both a PNP and a NPN stage. The NPN stage is switched on whenever the input is less than 1.2V from  $V^+$  and the PNP stage covers the rest of the range. In terms of the input voltage, there is an overlapping region where both stages are processing the input signal. This region is about 0.5V from beginning to the end. As far as the device application is concerned, this transition is a transparent operation. However, keep in mind that the input bias current value and direction will depend on which input stage is operating (see typical performance characteristics for plots). For low distortion applications, it is best to keep the input common mode voltage from transversing this transition point. Low gain settling applications, which generally encounter larger peak-to-peak input voltages, could be configured as inverting stages to eliminate common mode voltage fluctuations.

In terms of the output, when the output swing approaches either supply rail, the output transistor will enter a Quasi-saturated state. A subtle effect of this operational region is that there is an increase in supply current in this state (up to 1mA). The onset of Quasi-saturation region is a function of output loading (current) and varies from 100mV at no load to about 1V when output is delivering 20mA, as measured from supplies. Both input common mode voltage and output voltage level effect the supply current (see typical performance characteristics for plot).

With 2.7V supplies and a common mode input voltage range that extends beyond either supply rail, the LMH6645/6646/6647 family is well suited to many low voltage/low power applications. Even with 2.7V supplies, the

-3dB BW (@  $A_V = +1$ ) is typically 55MHz with a tested limit of 45MHz. Production testing guarantees that process variations will not compromise speed.

This device family is designed to avoid output phase reversal. With input over-drive, the output is kept near the supply rail (or as close to it as mandated by the closed loop gain setting and the input voltage). *Figure 1*, below, shows the input and output voltage when the input voltage significantly exceeds the supply voltages:

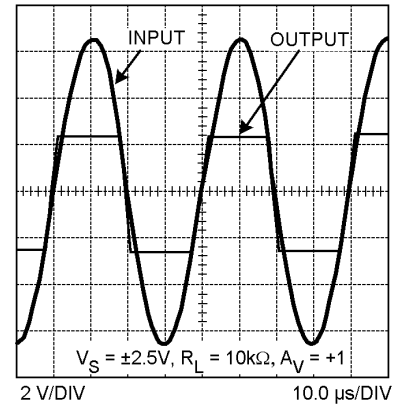

20020233

**FIGURE 1. Input/Output Shown with Exceeded Input CMVR**

As can be seen, the output does not exhibit any phase reversal as some op amps do. However, if the input voltage range is exceeded by more than a diode drop beyond either rail, the internal ESD protection diodes will start to conduct. The current flow in these ESD diodes should be externally limited.

### LMH6647


#### Micro-power Shutdown

The LMH6647 can be shutdown to save power and reduce its supply current to less than 50 $\mu$ A guaranteed, by applying a voltage to the SD pin. The SD pin is "active high" and needs to be tied to  $V^-$  for normal operation. This input is low current (<20 $\mu$ A, 4pF equivalent capacitance) and a resistor to  $V^-$  ( $\leq 20k\Omega$ ) will result in normal operation. Shutdown is guaranteed when SD pin is 0.4V or less from  $V^+$  at any operating supply voltage and temperature.

In the shutdown mode, essentially all internal device biasing is turned off in order to minimize supply current flow and the output goes into Hi-Z (high impedance) mode. Complete device Turn-on and Turn-off times vary considerably relative to the output loading conditions, output voltage, and input impedance, but is generally limited to less than 1 $\mu$ s (see tables for actual data).

## Application Notes (Continued)


During shutdown, the input stage has an equivalent circuit as shown below in *Figure 2*

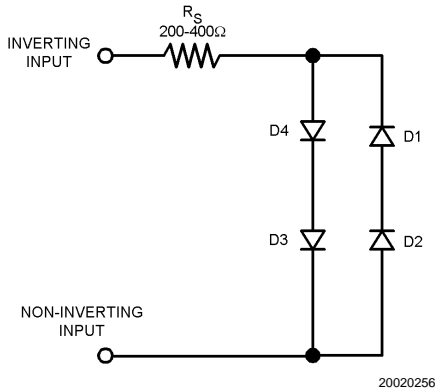

**FIGURE 2. LMH6647 Equivalent Input in Shutdown Mode**


As can be seen above, in shutdown, there may be current flow through the internal diodes shown, caused by input potential, if present. This current may flow through the external feedback resistor and result in an apparent output signal. In most shutdown applications the presence of this output is inconsequential. However, if the output is “forced” by another device such as in a multiplexer, the other device will need to conduct the current described in order to maintain the output potential.

To keep the output at or near ground during shutdown when there is no other device to hold the output low, a switch (transistor) could be used to shunt the output to ground. *Figure 3* shows a circuit where a NPN bipolar is used to keep the output near ground ( $-80\text{mV}$ ):

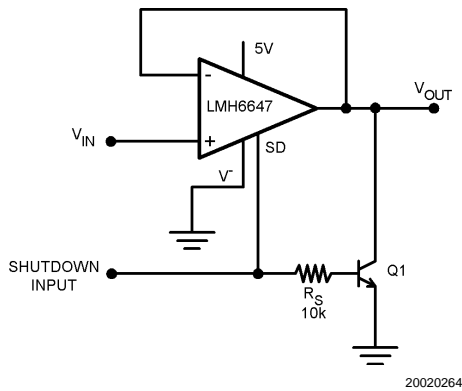

**FIGURE 3. Active Pull-Down Schematic**

*Figure 4* shows the output waveform.

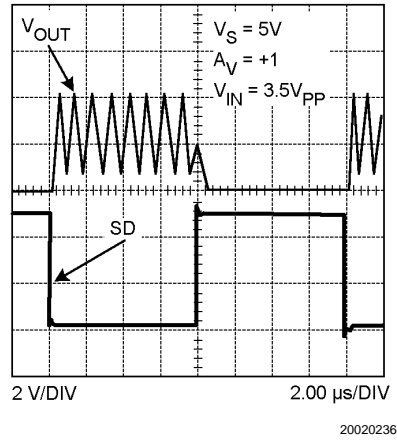


**FIGURE 4. Output Held Low by Active Pull-Down Circuit**

If bipolar transistor power dissipation is not tolerable, the switch could be by a N-channel enhancement mode MOSFET.

### 2.7V Single Supply RRIO 2:1 MUX:


The schematic show in *Figure 5* will function as a 2:1 MUX operating on a single 2.7V power supply, by utilizing the shutdown feature of the LMH6647:

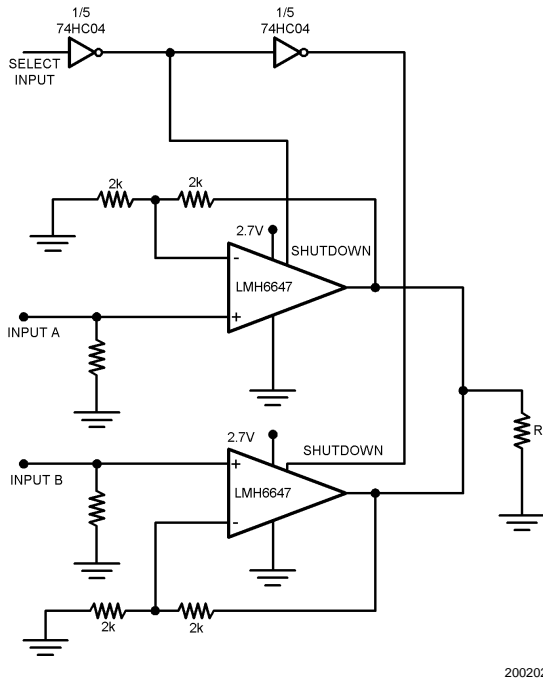

**FIGURE 5. 2:1 MUX Operating off a 2.7V Single Supply**

## Application Notes (Continued)

Figure 6 shows the MUX output when selecting between a 1MHz sine and a 250KHz triangular waveform.

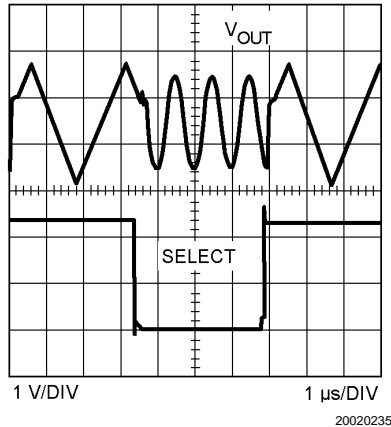

**FIGURE 6. 2:1 MUX Output**

As can be seen in *Figure 6*, the output is well behaved and there are no spikes or glitches due to the switching. Switching times are approximately around 500ns based on the time when the output is considered "valid".

### Printed Circuit Board Layout, Component Values Selection, and Evaluation Boards:

Generally, a good high-frequency layout will keep power supply and ground traces away from the inverting input and output pins. Parasitic capacitances on these nodes to

ground will cause frequency response peaking and possible circuit oscillations (see Application Note OA-15 for more information).

Another important parameter in working with high speed/high performance amplifiers, is the component values selection. Choosing large valued external resistors, will effect the closed loop behavior of the stage because of the interaction of these resistors with parasitic capacitances. These capacitors could be inherent to the device or a by-product of the board layout and component placement. Either way, keeping the resistor values lower, will diminish this interaction. On the other hand, choosing very low value resistors could load down nodes and will contribute to higher overall power dissipation.

National Semiconductor suggests the following evaluation boards as a guide for high frequency layout and as an aid in device testing and characterization:

| Device    | Package    | Evaluation Board PN |
|-----------|------------|---------------------|
| LMH6645MF | SOT23-5    | CLC730068           |
| LMH6645MA | 8-Pin SOIC | CLC730027           |
| LMH6646MA | 8-Pin SOIC | CLC730036           |
| LMH6646MM | 8-Pin MSOP | CLC730123           |
| LMH6647MA | 8-Pin SOIC | CLC730027           |
| LMH6647MF | SOT23-6    | CLC730116           |


These free evaluation boards are shipped when a device sample request is placed with National Semiconductor.

### LMH6647 Evaluation:

For normal operation, tie the SD pin to  $V^-$ .




**Physical Dimensions** inches (millimeters) unless otherwise noted

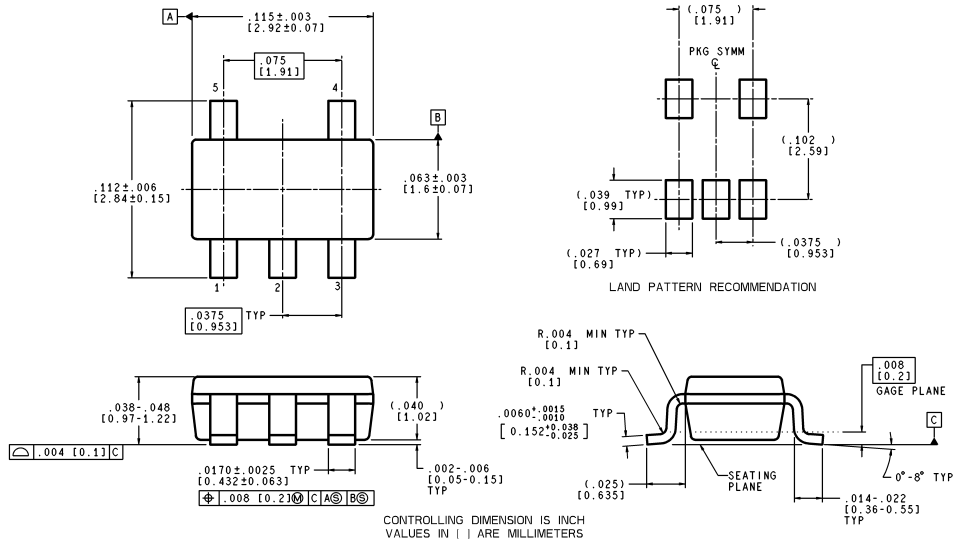

MF05A (Rev A)




**5-Pin SOT23  
NS Package Number MF05A**

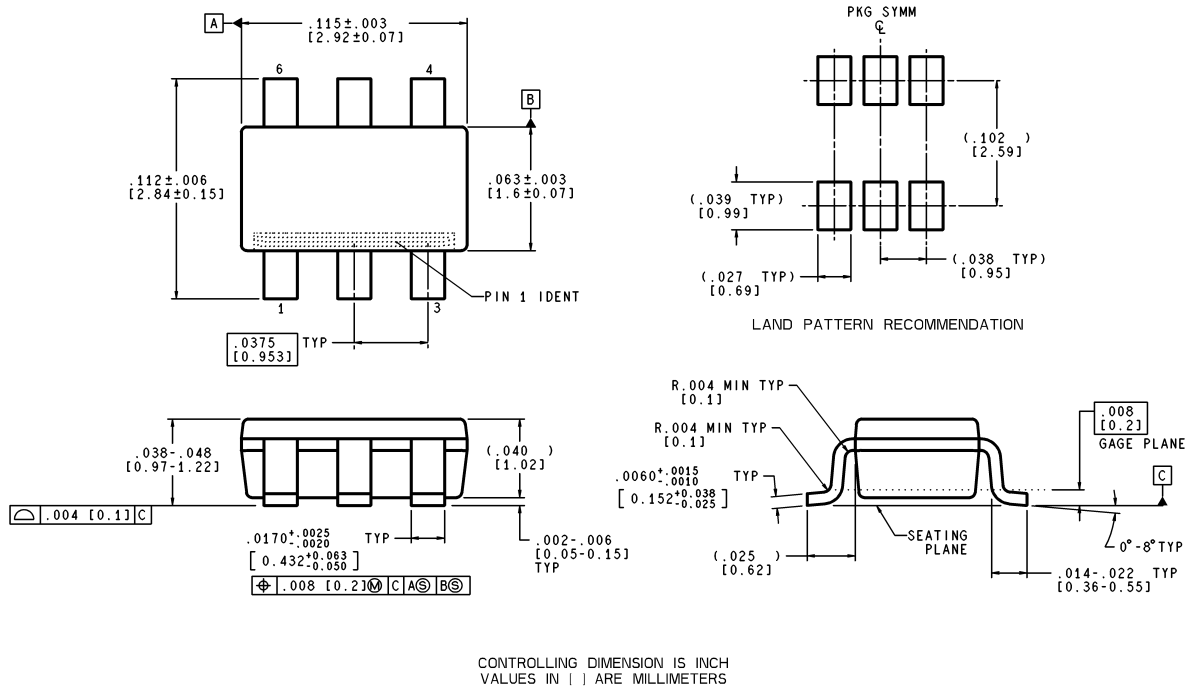





MF06A (Rev A)

**6-Pin SOT23  
NS Package Number MF06A**

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

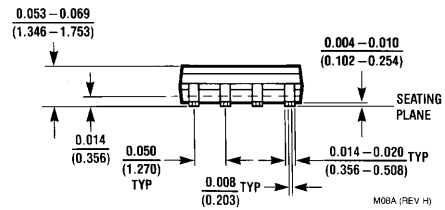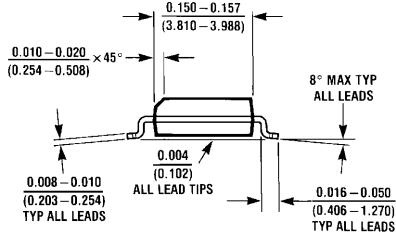

**8-Pin SOIC**  
**NS Package Number M08A**

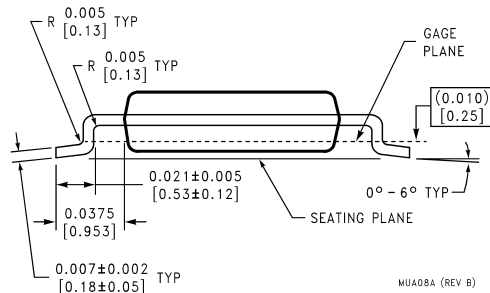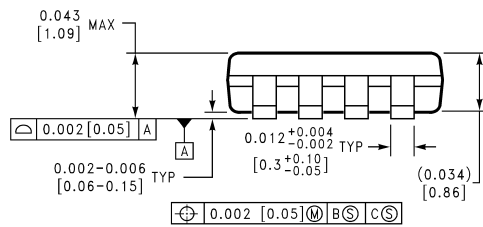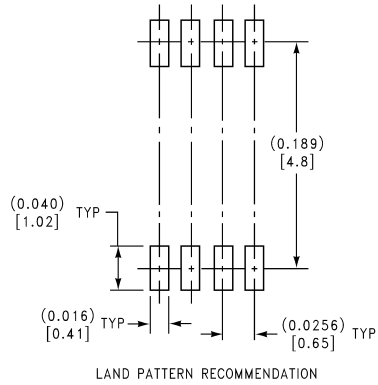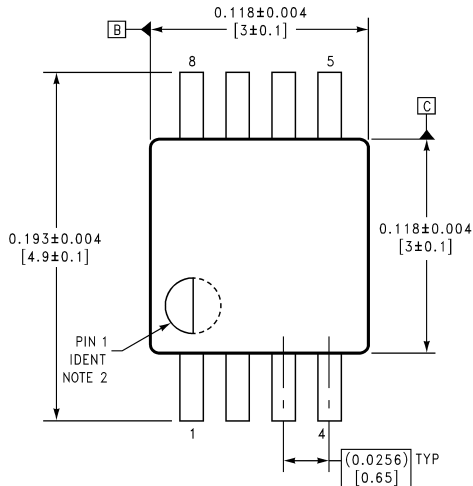

**8Pin MSOP**  
**NS Package Number MUA08A**

## Notes

### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 Americas  
 Email: support@nsc.com

[www.national.com](http://www.national.com)

**National Semiconductor Europe**

Fax: +49 (0) 180-530 85 86  
 Email: europe.support@nsc.com  
 Deutsch Tel: +49 (0) 69 9508 6208  
 English Tel: +44 (0) 870 24 0 2171  
 Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor Asia Pacific Customer Response Group**

Tel: 65-2544466  
 Fax: 65-2504466  
 Email: ap.support@nsc.com

**National Semiconductor Japan Ltd.**

Tel: 81-3-5639-7560  
 Fax: 81-3-5639-7507