

LM317L

LINEAR INTEGRATED CIRCUIT


LOW CURRENT 1.25V TO 37V ADJUSTABLE VOLTAGE REGULATOR

DESCRIPTION



The Contek LM317L is a monolithic integrated circuit, designed for use as positive adjustable voltage regulator. It is designed to supply until 100mA of load current with an output voltage adjustable over a 1.25V to 37V range.

FEATURES

- *Output voltage range: 1.25V to 37V
- *Output current in excess of 100mA
- *Line regulation typ. 0.01%
- *Load regulation typ. 0.1%
- *Thermal overload protection
- *Short circuit protection
- *Output transistor safe area compensation
- *Floating operation for high voltage applications

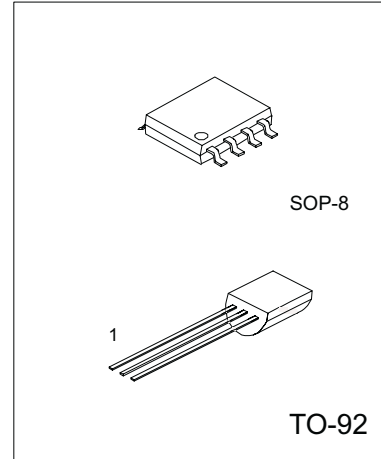

PIN CONFIGURATIONS

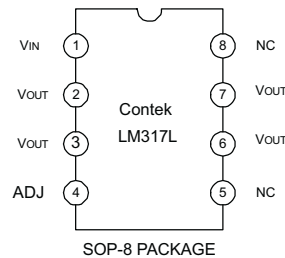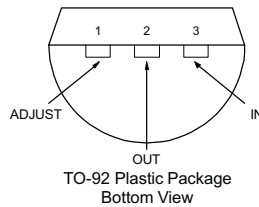

ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	VALUE	UNIT
Input-Output Differential Voltage	$V_i - V_o$	40	V
Power Dissipation	P_d	Internally Limited	
Operating Junction Temperature Range	T_{opr}	0~125	C
Storage Temperature Range	T_{str}	-55 ~ 150	C




Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com


LM317L

LINEAR INTEGRATED CIRCUIT

SCHEMATIC DIAGRAM

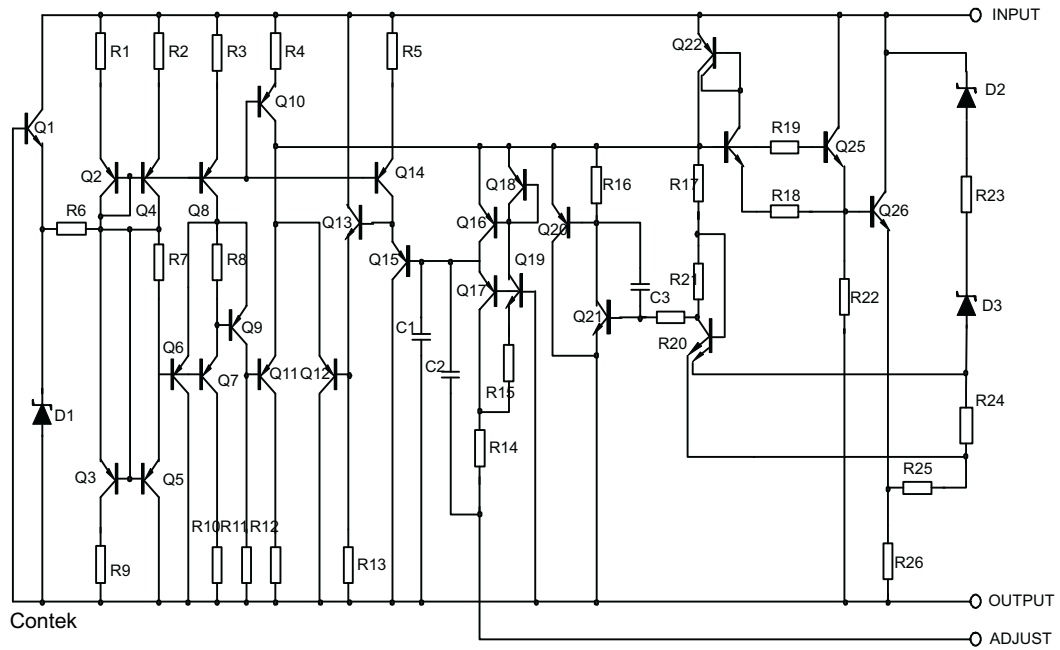

TEST CIRCUIT

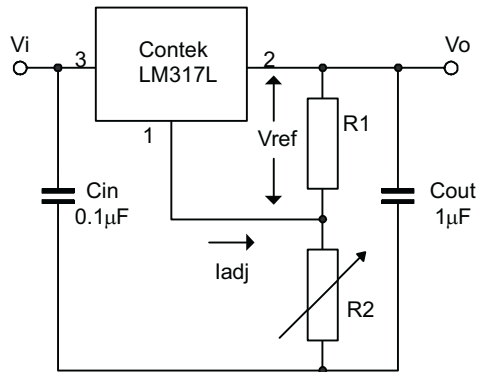

Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com



LM317L

LINEAR INTEGRATED CIRCUIT

ELECTRICAL CHARACTERISTICS ($V_i - V_o = 5V$, $I_o = 40mA$, $0 \leq T_j \leq 125$ C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Line Regulation	ΔV_o	$V_i - V_o = 3 \sim 40V$ $I_L < 20mA$	$T_j = 25$ C	0.01	0.04	%/V
				0.02	0.07	%/V
Load Regulation	ΔV_o	$V_o \leq 5V$ $I_o = 5 \sim 100mA$	$T_j = 25$ C	5	25	mV
				20	70	mV
		$V_o > 5V$ $I_o = 5 \sim 100mA$	$T_j = 25$ C	0.1	0.5	%
Adjustment Pin Current	I_{ADJ}			0.3	1.5	%
Adjustment Pin Current	ΔI_{ADJ}			50	100	μA
Adjustment Pin Current	ΔI_{ADJ}	$V_i - V_o = 3 \sim 40V$ $I_o = 5 \sim 100mA$, $P_d < 625$ mW		0.2	5	μA
Reference Voltage	V_{REF}	$V_i - V_o = 3 \sim 40V$ $I_o = 5 \sim 100$ mA, $P_d < 625$ mW	1.2	1.25	1.3	V
Output Voltage Temperature Stability	$\Delta V_o / V_o$			0.7		%
Minimum Load Current	$I_o(\min)$	$V_i - V_o = 40V$		3.5	5	mA
Maximum Output Current	$I_o(\max)$	$V_i - V_o = 3 \sim 13V$	100	200		mA
		$V_i - V_o = 40V$		50		
Output Noise Voltage (Percentage of V_o)	eN	B=10Hz~10KHz $T_j = 25$ C		0.003		%
Supply Voltage Rejection(*)	SVR	$T_j = 25$ C f=120Hz	CADJ=0	65		dB
			CADJ=10 μF	66	80	dB

(*) CADJ is connected between Adjust pin and Ground.

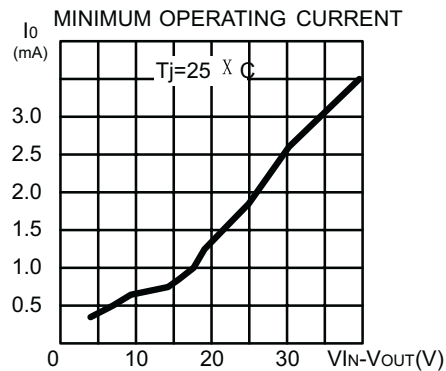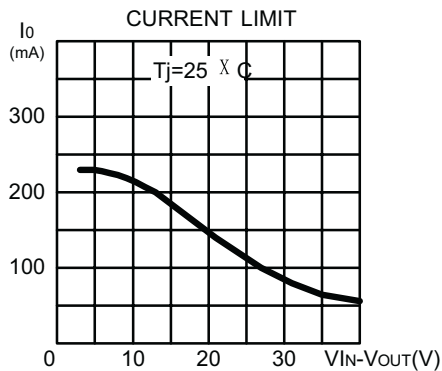

Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com


LM317L LINEAR INTEGRATED CIRCUIT

APPLICATION INFORMATION

The Contek LM317L provides an internal reference voltage of 1.25V between the output and adjustments terminals. This is used to set a constant current flow across an external resistor divider, giving an output voltage V_O of:

$$V_O = V_{REF} (1 + R_2/R_1) + I_{ADJ} R_2$$


The device is designed to minimize the term I_{ADJ} (100 μ A max) and to maintain it very constant with line and load changes. Usually, the error term $I_{ADJ} R_2$ can be neglected. To obtain the previous requirement, all the regulator quiescent current is returned to the output terminal, imposing a minimum load current condition. If the load is insufficient, the output voltage will rise. The Contek LM317L is a floating regulator, input-output differential voltage, supplies of very high voltage with respect to ground can be regulated as long as the maximum input-output differential is not exceeded. Furthermore, programmable regulators are easily obtainable and, by connecting a fixed resistor between the adjustment and output, the device can be used as a precision current regulator.

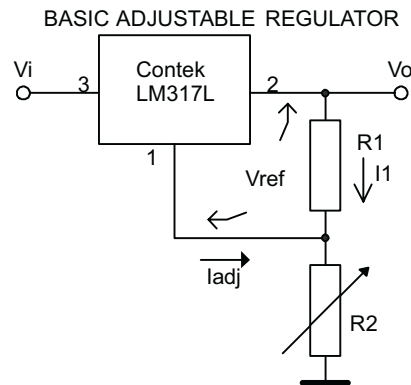


LM317L

LINEAR INTEGRATED CIRCUIT


VOLTAGE REGULATOR WITH PROTECTION DIODES

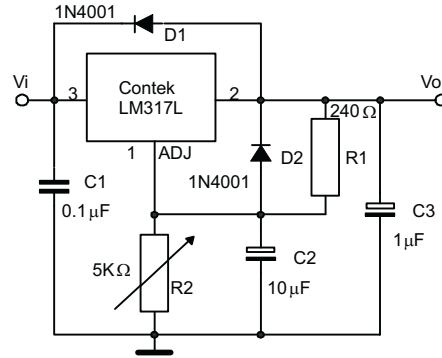

SLOW TURN-ON 15V REGULATOR

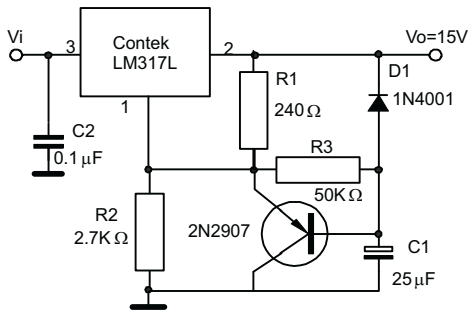


CURRENT REGULATOR

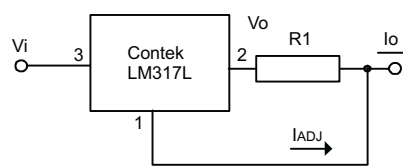


$$I_o = \frac{V_{ref}}{R_1} + I_{ADJ} \approx \frac{1.25V}{R_1}$$

5V ELECTRONIC SHUT-DOWN REGULATOR

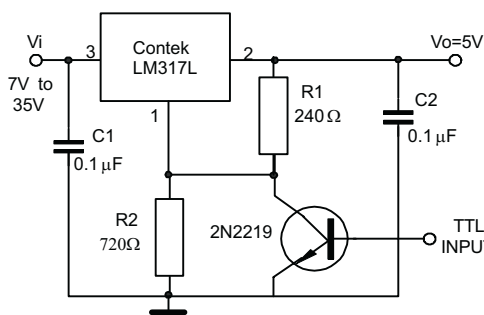

DIGITALLY SELECTED OUTPUTS

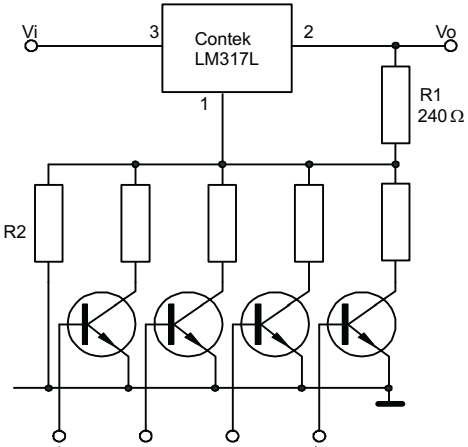

DIGITAL INPUTS(R2 sets maximum Vo)



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com