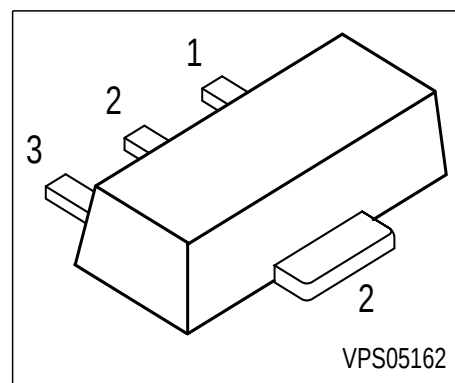


PNP Silicon High-Voltage Transistors

- Suitable for video output stages in TV sets and switching power supplies
- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary types: BFN16, BFN18 (NPN)



Type	Marking	Pin Configuration			Package
BFN17	DG	1 = B	2 = C	3 = E	SOT89
BFN19	DH	1 = B	2 = C	3 = E	SOT89

Maximum Ratings

Parameter	Symbol	BFN17	BFN19	Unit
Collector-emitter voltage	V_{CEO}	250	300	V
Collector-base voltage	V_{CBO}	250	300	
Emitter-base voltage	V_{EBO}	5	5	
DC collector current	I_C	200		mA
Peak collector current	I_{CM}	500		
Base current	I_B	100		
Peak base current	I_{BM}	200		
Total power dissipation, $T_S = 130\text{ °C}$	P_{tot}	1		W
Junction temperature	T_j	150		°C
Storage temperature	T_{sta}	-65 ... 150		

Thermal Resistance

Junction - soldering point ¹⁾	R_{thJS}	≤20	K/W
--	------------	-----	-----

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

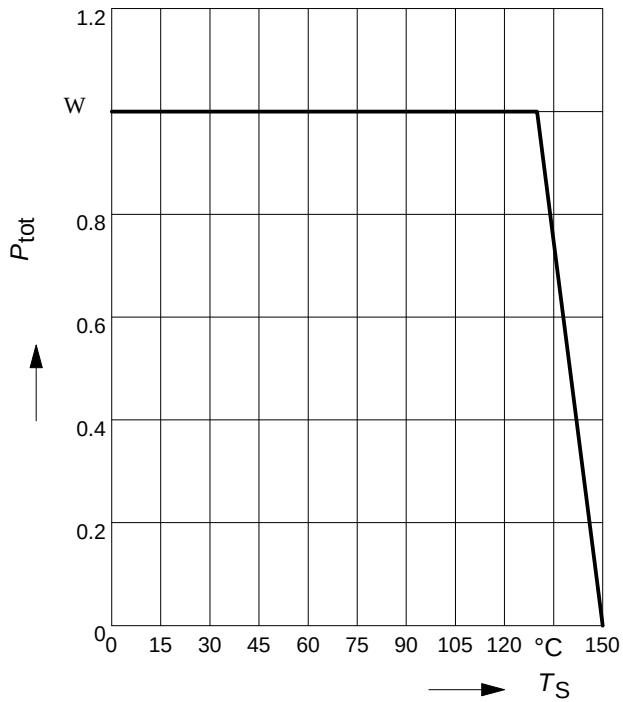
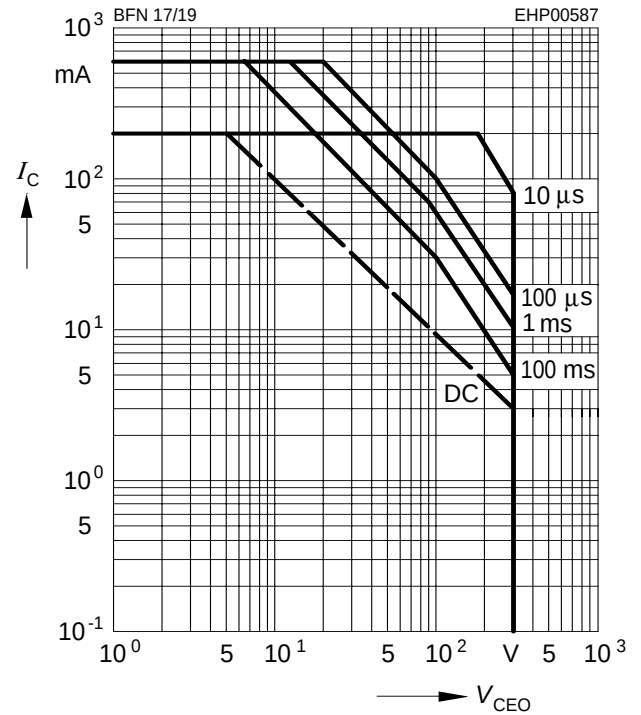
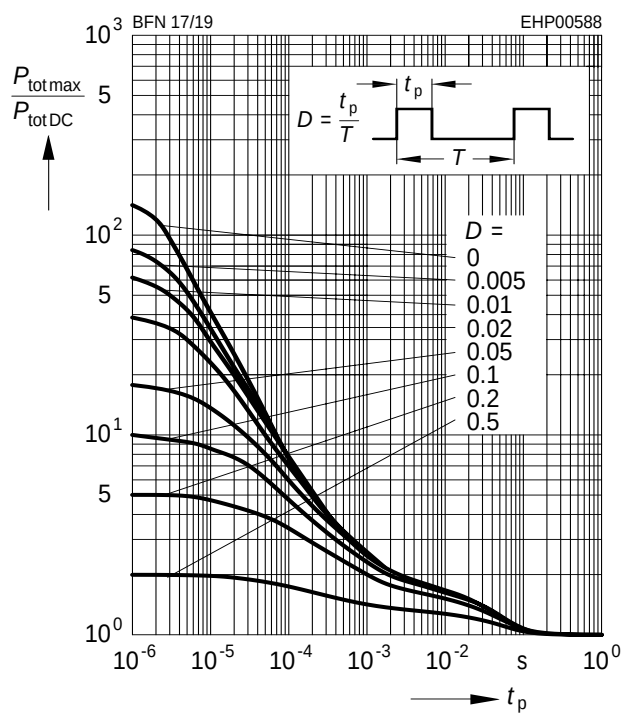
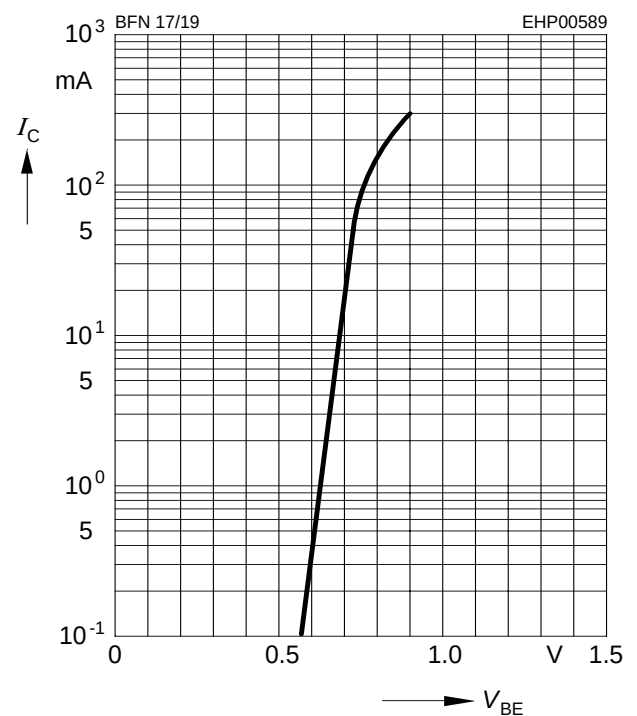
Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 1\text{ mA}$, $I_B = 0$	$V_{(BR)CEO}$	250	-	-	V
BFN17					
BFN19		300	-	-	
Collector-base breakdown voltage $I_C = 100\text{ }\mu\text{A}$, $I_E = 0$	$V_{(BR)CBO}$	250	-	-	
BFN17					
BFN19		300	-	-	
Emitter-base breakdown voltage $I_E = 100\text{ }\mu\text{A}$, $I_C = 0$	$V_{(BR)EBO}$	5	-	-	
Collector cutoff current $V_{CB} = 200\text{ V}$, $I_E = 0$	I_{CBO}	-	-	100	nA
BFN17					
$V_{CB} = 250\text{ V}$, $I_E = 0$	BFN19	-	-	100	
Collector cutoff current $V_{CB} = 200\text{ V}$, $I_E = 0$, $T_A = 150\text{ }^\circ\text{C}$	I_{CBO}	-	-	20	μA
BFN17					
$V_{CB} = 250\text{ V}$, $I_E = 0$, $T_A = 150\text{ }^\circ\text{C}$	BFN19	-	-	20	
Emitter cutoff current $V_{EB} = 5\text{ V}$, $I_C = 0$	I_{EBO}	-	-	100	nA
DC current gain 1) $I_C = 1\text{ mA}$, $V_{CE} = 10\text{ V}$	h_{FE}	25	-	-	-
$I_C = 10\text{ mA}$, $V_{CE} = 10\text{ V}$		40	-	-	
$I_C = 30\text{ mA}$, $V_{CE} = 10\text{ V}$	BFN17	40	-	-	
BFN19		30	-	-	
Collector-emitter saturation voltage1) $I_C = 20\text{ mA}$, $I_B = 2\text{ mA}$	V_{CEsat}	-	-	0.4	V
BFN17					
BFN19		-	-	0.5	
Base-emitter saturation voltage 1) $I_C = 20\text{ mA}$, $I_B = 2\text{ mA}$	V_{BEsat}	-	-	0.9	

1) Pulse test: $t < 300\mu\text{s}$; $D < 2\%$

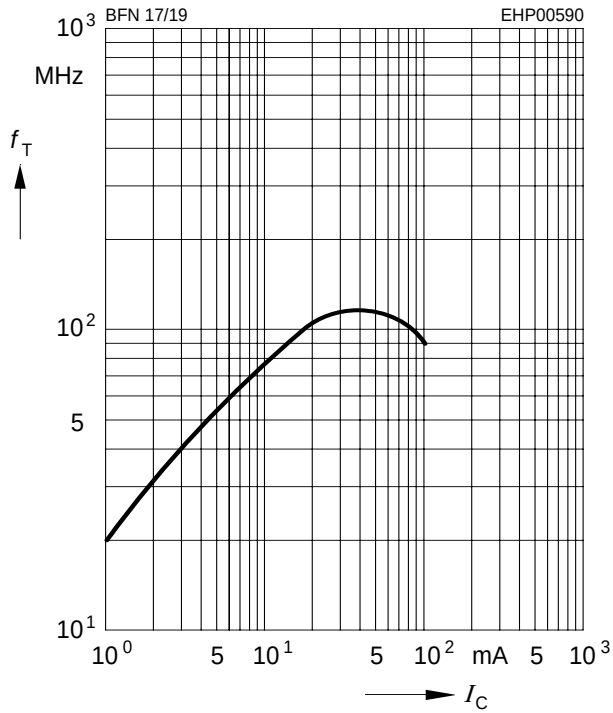
Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Transition frequency $I_C = 20\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 20\text{ MHz}$	f_T	-	100	-	MHz
Collector-base capacitance $V_{CB} = 30\text{ V}$, $f = 1\text{ MHz}$	C_{cb}	-	2.5	-	pF

Total power dissipation $P_{\text{tot}} = f(T_S)$

Operating range $I_C = f(V_{\text{CEO}})$
 $T_A = 25^\circ\text{C}, D = 0$

Permissible pulse load
 $P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

Collector current $I_C = f(V_{\text{BE}})$
 $V_{\text{CE}} = 10\text{V}$


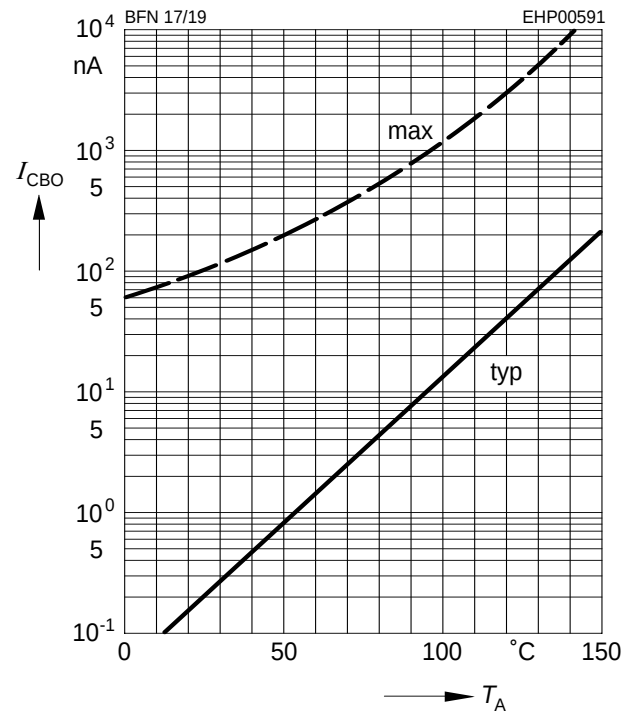
Transition frequency $f_T = f(I_C)$

$V_{CE} = 10V$



Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 200V$



DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 10V$

