



**ECG941, ECG941D,  
ECG941M**  
INTERNALLY-COMPENSATED  
OPERATIONAL AMPLIFIER




**Features:**

- No Frequency Compensation Required
- Short-Circuit Protection
- Offset Voltage Null Capability
- Large Common-Mode and Differential Voltage Ranges
- Low Power Consumption
- No Latch Up


**General Description** - High performance monolithic operational amplifier constructed on a single silicon chip. It is intended for a wide range of analog applications. High common mode voltage range and absence of "latch-up" tendencies make it ideal for use as a voltage follower. The high gain and wide range of operating voltages provide superior performance in integrator, summing amplifier, and general feedback applications. The device is short-circuit protected and requires no external components for frequency compensation. The internal 6 dB/octave roll-off insures stability in closed loop applications.

**Absolute Maximum Ratings**

- Supply Voltage ..... ±18 V
- Internal Power Dissipation (Note 1)
  - Metal Can ..... 500 mW
  - Plastic & Mini DIP ..... 310 mW
- Differential Input Voltage ..... ±30 V
- Input Voltage (Note 2) ..... ±15 V
- Storage Temperature Range
  - Metal Can, Plastic & Mini DIP, ... -55°C to +125°C
  - Operating Temperature Range ..... 0° C to +70° C
- Lead Temperature (Soldering)
  - Metal Can (60 seconds) ..... 300° C
  - Plastic & Mini DIP (10 seconds) .. 260° C
- Output Short Circuit Duration (Note 3) ..... Indefinite

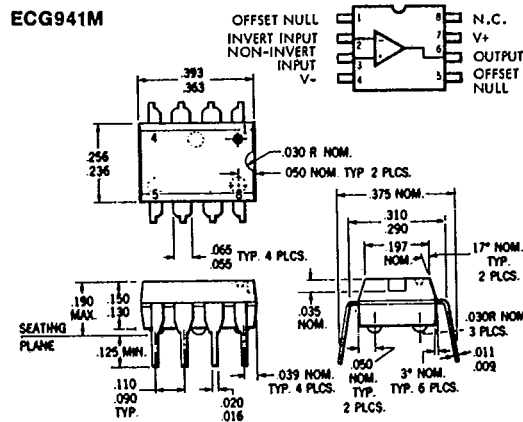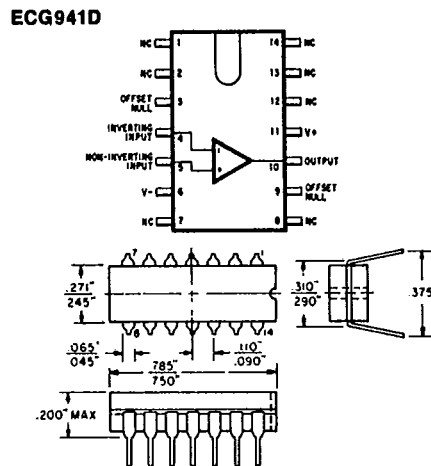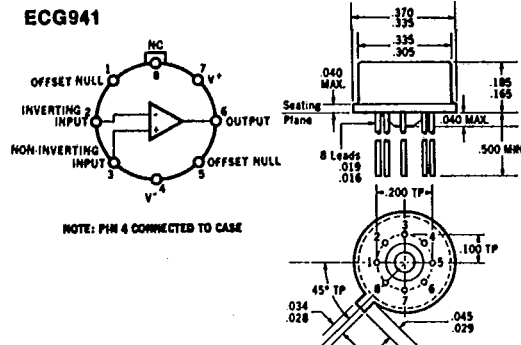



EQUIVALENT CIRCUIT

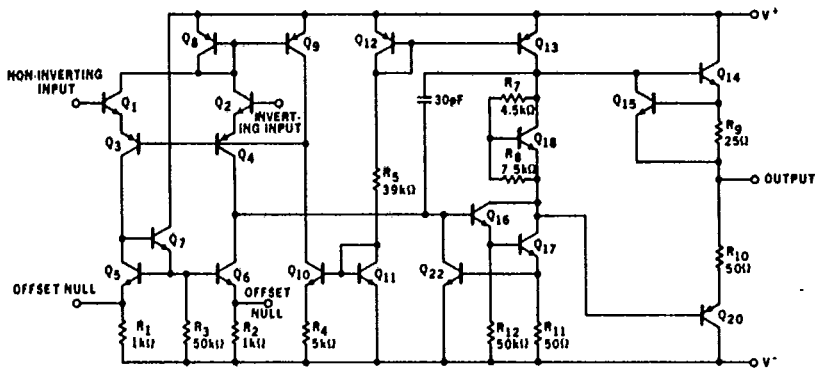

ELECTRICAL CHARACTERISTICS ( $V_S = \pm 15V$ ,  $T_A = 25^\circ C$  unless otherwise specified)


PARAMETERS (see definitions)	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Input Offset Voltage	$R_S \leq 10 k\Omega$		2.0	6.0	mV
Input Offset Current			20	200	nA
Input Bias Current			80	500	nA
Input Resistance		0.3	2.0		M $\Omega$
Input Capacitance			1.4		pF
Offset Voltage Adjustment Range			$\pm 15$		mV
Input Voltage Range		$\pm 12$	$\pm 13$		V
Common Mode Rejection Ratio	$R_S \leq 10 k\Omega$	70	90		dB
Supply Voltage Rejection Ratio	$R_S \leq 10 k\Omega$		30	150	$\mu V/V$
Large-Signal Voltage Gain	$R_L \geq 2 k\Omega$ , $V_{out} = \pm 10V$	20,000	200,000		
Output Voltage Swing	$R_L \geq 10 k\Omega$	$\pm 12$	$\pm 14$		V
	$R_L \geq 2 k\Omega$	$\pm 10$	$\pm 13$		V
Output Resistance			75		$\Omega$
Output Short-Circuit Current			25		mA
Supply Current			1.7	2.8	mA
Power Consumption			50	85	mW
Transient Response (unity gain)	$V_{in} = 20 mV$ , $R_L = 2 k\Omega$ , $C_L \leq 100 pF$				
Risettime			0.3		$\mu s$
Overshoot			5.0		%
Slew Rate	$R_L \geq 2 k\Omega$		0.5		V/ $\mu s$
The following specifications apply for $0^\circ C \leq T_A \leq +70^\circ C$ :					
Input Offset Voltage				7.5	mV
Input Offset Current				300	nA
Input Bias Current				800	nA
Large-Signal Voltage Gain	$R_L \geq 2 k\Omega$ , $V_{out} = \pm 10V$	15,000			
Output Voltage Swing	$R_L \geq 2 k\Omega$	$\pm 10$	$\pm 13$		V

TYPICAL PERFORMANCE CURVES

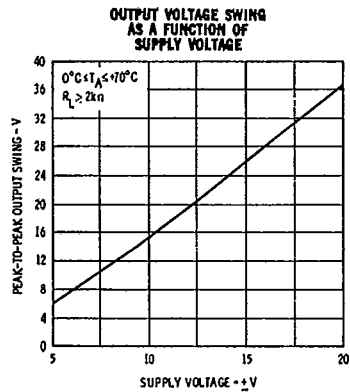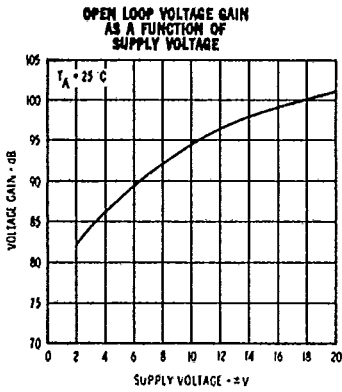


TYPICAL PERFORMANCE CURVES


INPUT COMMON MODE VOLTAGE RANGE AS A FUNCTION OF SUPPLY VOLTAGE




POWER CONSUMPTION AS A FUNCTION OF SUPPLY VOLTAGE




INPUT BIAS CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE

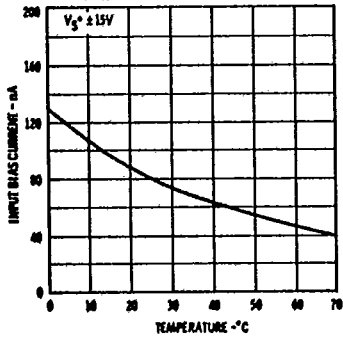


INPUT RESISTANCE AS A FUNCTION OF AMBIENT TEMPERATURE

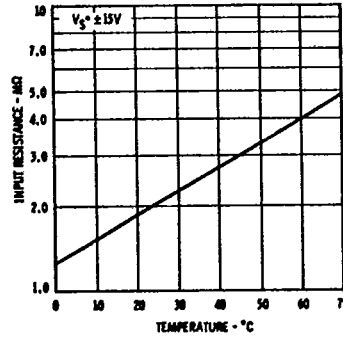


INPUT OFFSET CURRENT AS A FUNCTION OF SUPPLY VOLTAGE

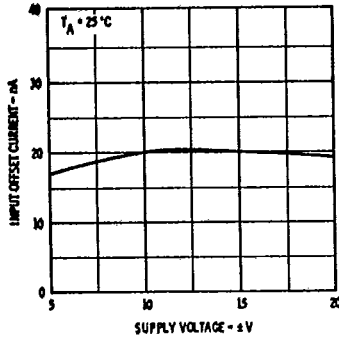


INPUT OFFSET CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE

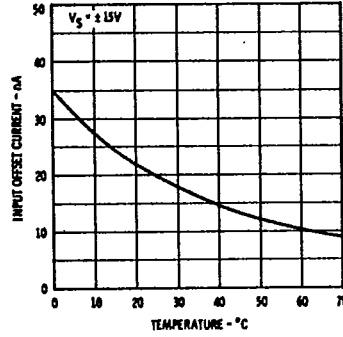


**POWER CONSUMPTION AS A FUNCTION OF AMBIENT TEMPERATURE**




**OUTPUT VOLTAGE SWING AS A FUNCTION OF LOAD RESISTANCE**




**OUTPUT SHORT-CIRCUIT CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE**




**ABSOLUTE MAXIMUM POWER DISSIPATION AS A FUNCTION OF AMBIENT TEMPERATURE**



**INPUT NOISE VOLTAGE AS A FUNCTION OF FREQUENCY**




**INPUT NOISE CURRENT AS A FUNCTION OF FREQUENCY**




TYPICAL PERFORMANCE CURVES


BROADBAND NOISE FOR VARIOUS BANDWIDTHS

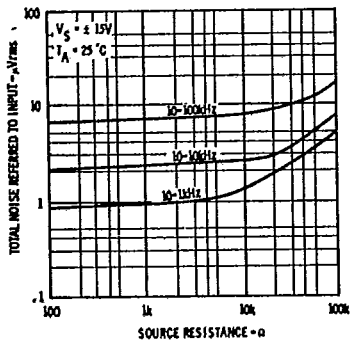


OPEN LOOP VOLTAGE GAIN AS A FUNCTION OF FREQUENCY

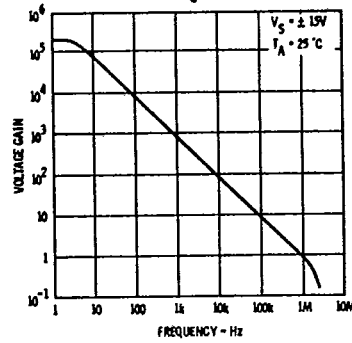


OPEN LOOP PHASE RESPONSE AS A FUNCTION OF FREQUENCY

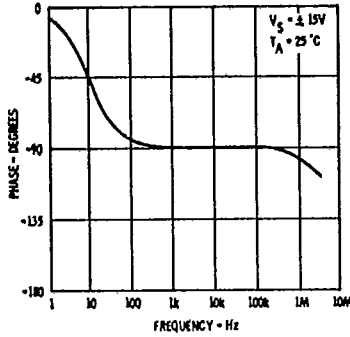


OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY




INPUT RESISTANCE AND INPUT CAPACITANCE AS A FUNCTION OF FREQUENCY

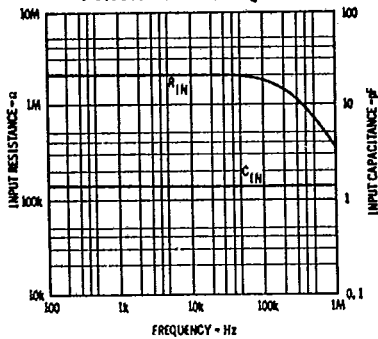


OUTPUT RESISTANCE AS A FUNCTION OF FREQUENCY




**COMMON MODE REJECTION RATIO AS A FUNCTION OF FREQUENCY**




**TRANSIENT RESPONSE**




**TRANSIENT TEST CIRCUIT**




**VOLTAGE FOLLOWER LARGE-SIGNAL PULSE RESPONSE**




**FREQUENCY CHARACTERISTICS AS A FUNCTION OF SUPPLY VOLTAGE**



**VOLTAGE OFFSET NULL CIRCUIT**




**FREQUENCY CHARACTERISTICS AS A FUNCTION OF AMBIENT TEMPERATURE**




TYPICAL APPLICATIONS

UNITY-GAIN VOLTAGE FOLLOWER




$R_{IN} = 400 \text{ M}\Omega$   
 $C_{IN} = 1 \text{ pF}$   
 $R_{out} < 1 \Omega$   
 $B.W. = 1 \text{ MHz}$

NON-INVERTING AMPLIFIER

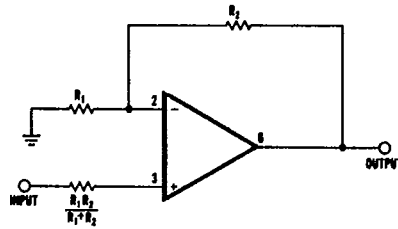


GAIN	R <sub>1</sub>	R <sub>2</sub>	B.W.	R <sub>IN</sub>
10	1 kΩ	9 kΩ	100 kHz	400 MΩ
100	100 Ω	9.9 kΩ	10 kHz	280 MΩ
1000	100 Ω	99.9 kΩ	1 kHz	80 MΩ

INVERTING AMPLIFIER

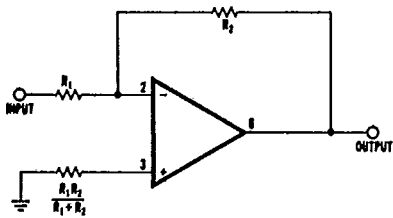

GAIN	R <sub>1</sub>	R <sub>2</sub>	B.W.	R <sub>IN</sub>
1	10 kΩ	10 kΩ	1 MHz	10 kΩ
10	1 kΩ	10 kΩ	100 kHz	1 kΩ
100	1 kΩ	100 kΩ	10 kHz	1 kΩ
1000	100 Ω	100 kΩ	1 kHz	100 Ω


CLIPPING AMPLIFIER

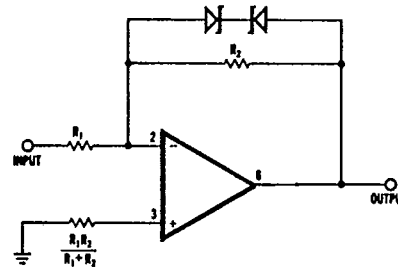

$$\frac{E_{out}}{E_{in}} = \frac{R_2}{R_1} \text{ if } |E_{out}| \leq V_z + 0.7 \text{ V}$$


where  $V_z = \text{Zener breakdown voltage}$

SIMPLE INTEGRATOR

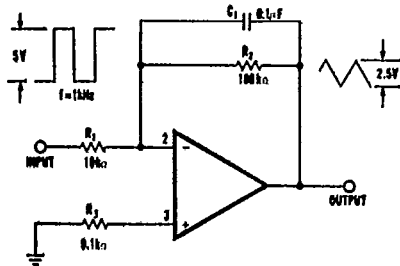

$$E_{out} = -\frac{1}{R_1 C_1} \int E_{in} dt$$


SIMPLE DIFFERENTIATOR

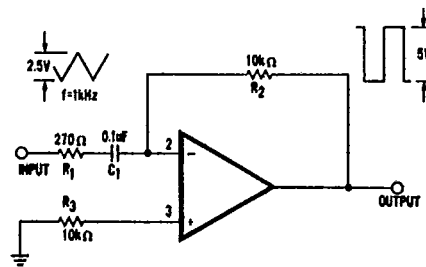

$$E_{out} = -R_2 C_1 \frac{dE_{in}}{dt}$$


TYPICAL APPLICATIONS

LOW DRIFT LOW NOISE AMPLIFIER

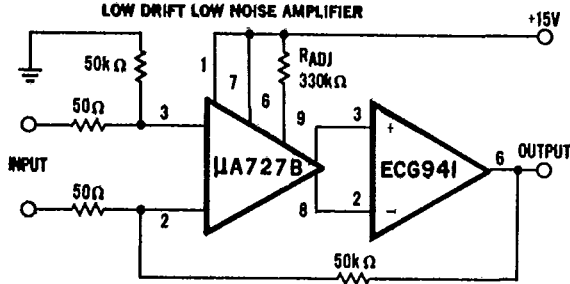


Voltage Gain = 10<sup>3</sup>  
 Input Offset Voltage Drift = 0.6 μV/°C  
 Input Offset Current Drift = 2.0 pA/°C


HIGH SLEW RATE POWER AMPLIFIER

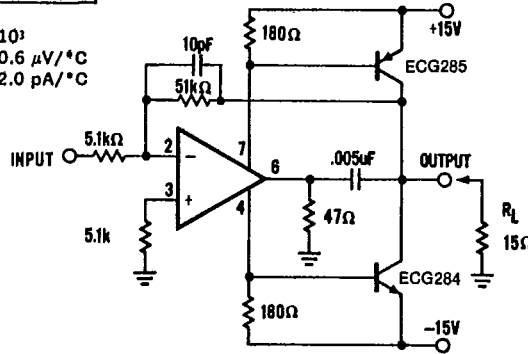

NOTCH FILTER USING THE ECG941 AS A GYRATOR

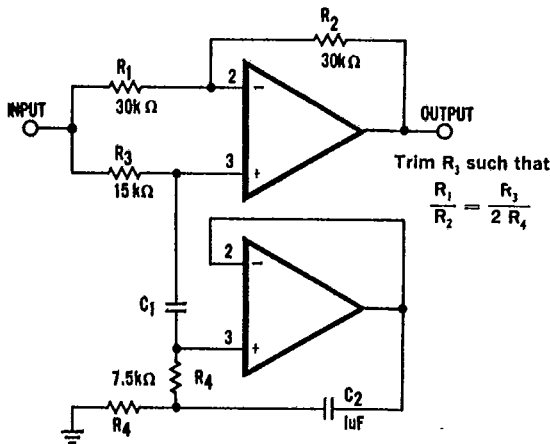

NOTCH FREQUENCY AS A FUNCTION OF C<sub>1</sub>

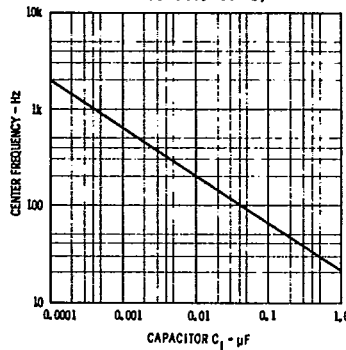

DEFINITION OF TERMS

- INPUT OFFSET VOLTAGE** — That voltage which must be applied between the input terminals to obtain zero output voltage. The input offset voltage may also be defined for the case where two equal resistances are inserted in series with the input leads.
- INPUT OFFSET CURRENT** — The difference in the currents into the two input terminals with the output at zero volts.
- INPUT BIAS CURRENT** — The average of the two input currents.
- INPUT RESISTANCE** — The resistance looking into either input terminal with the other grounded.
- INPUT CAPACITANCE** — The capacitance looking into either input terminal with the other grounded.
- LARGE-SIGNAL VOLTAGE GAIN** — The ratio of the maximum output voltage swing with load to the change in input voltage required to drive the output from zero to this voltage.
- OUTPUT RESISTANCE** — The resistance seen looking into the output terminal with the output at null. This parameter is defined only under small signal conditions at frequencies above a few hundred cycles to eliminate the influence of drift and thermal feedback.
- OUTPUT SHORT-CIRCUIT CURRENT** — The maximum output current available from the amplifier with the output shorted to ground or to either supply.
- SUPPLY CURRENT** — The DC current from the supplies required to operate the amplifier with the output at zero and with no load current.
- POWER CONSUMPTION** — The DC power required to operate the amplifier with the output at zero and with no load current.
- TRANSIENT RESPONSE** — The closed-loop step-function response of the amplifier under small-signal conditions.
- INPUT VOLTAGE RANGE** — The range of voltage which, if exceeded on either input terminal, could cause the amplifier to cease functioning properly.
- INPUT COMMON MODE REJECTION RATIO** — The ratio of the input voltage range to the maximum change in input offset voltage over this range.
- SUPPLY VOLTAGE REJECTION RATIO** — The ratio of the change in input offset voltage to the change in supply voltage producing it.
- OUTPUT VOLTAGE SWING** — The peak output swing, referred to zero, that can be obtained without clipping.