

DATA SHEET

For a complete data sheet, please also download:

- The IC04 LOCMOS HE4000B Logic Family Specifications HEF, HEC
- The IC04 LOCMOS HE4000B Logic Package Outlines/Information HEF, HEC

HEF4511B **MSI** BCD to 7-segment latch/decoder/driver

Product specification
File under Integrated Circuits, IC04

January 1995

BCD to 7-segment latch/decoder/driver



HEF4511B

MSI

DESCRIPTION

The HEF4511B is a BCD to 7-segment latch/decoder/driver with four address inputs (D_A to D_D), an active LOW latch enable input ($\overline{EL}$), an active LOW ripple blanking input ($\overline{BI}$), an active LOW lamp test input ($\overline{LT}$), and seven active HIGH n-p-n bipolar transistor segment outputs (O_a to O_g).



When $\overline{EL}$ is LOW, the state of the segment outputs (O_a to O_g) is determined by the data on D_A to D_D . When $\overline{EL}$ goes HIGH, the last data present on D_A to D_D are stored in the latches and the segment outputs remain stable. When $\overline{LT}$ is LOW, all the segment outputs are HIGH independent of all other input conditions. With $\overline{LT}$ HIGH, a LOW on $\overline{BI}$ forces all segment outputs LOW. The inputs $\overline{LT}$ and $\overline{BI}$ do not affect the latch circuit.

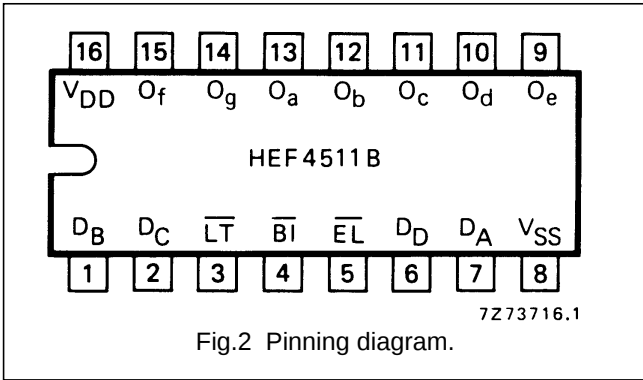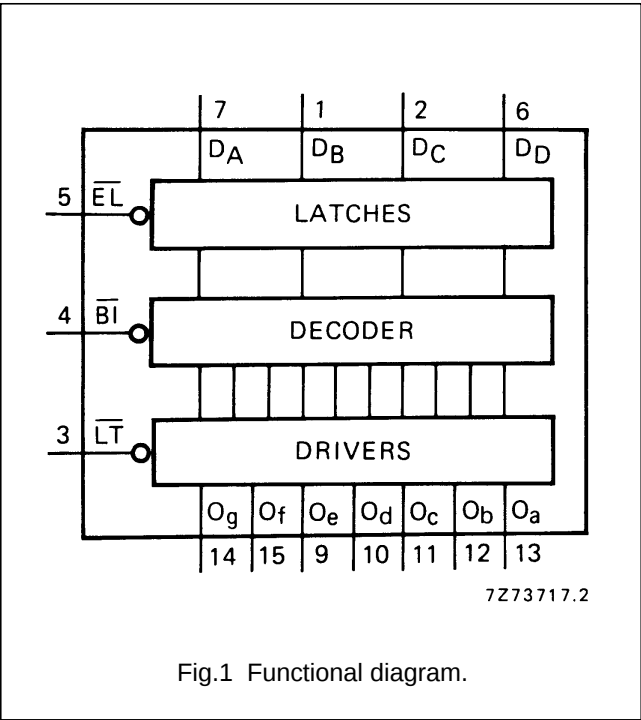

- HEF4511BP(N): 16-lead DIL; plastic (SOT38-1)
- HEF4511BD(F): 16-lead DIL; ceramic (cerdip) (SOT74)
- HEF4511BT(D): 16-lead SO; plastic (SOT109-1)
- (): Package Designator North America

PINNING

- D_A to D_D address (data) inputs
- $\overline{EL}$ latch enable input (active LOW)
- $\overline{BI}$ ripple blanking input (active LOW)
- $\overline{LT}$ lamp test input (active LOW)
- O_a to O_g segment outputs

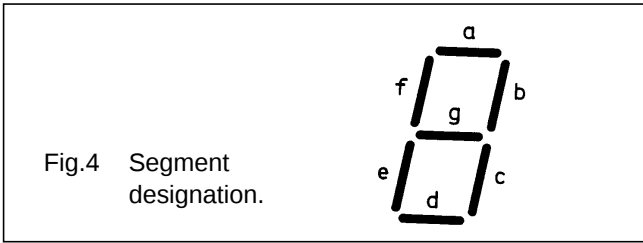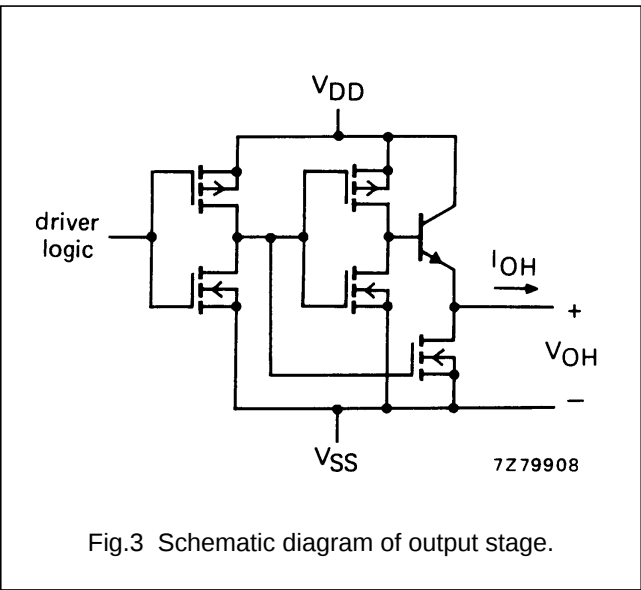

FAMILY DATA, I_{DD} LIMITS category MSI

See Family Specifications

BCD to 7-segment latch/decoder/driver

HEF4511B
MSI


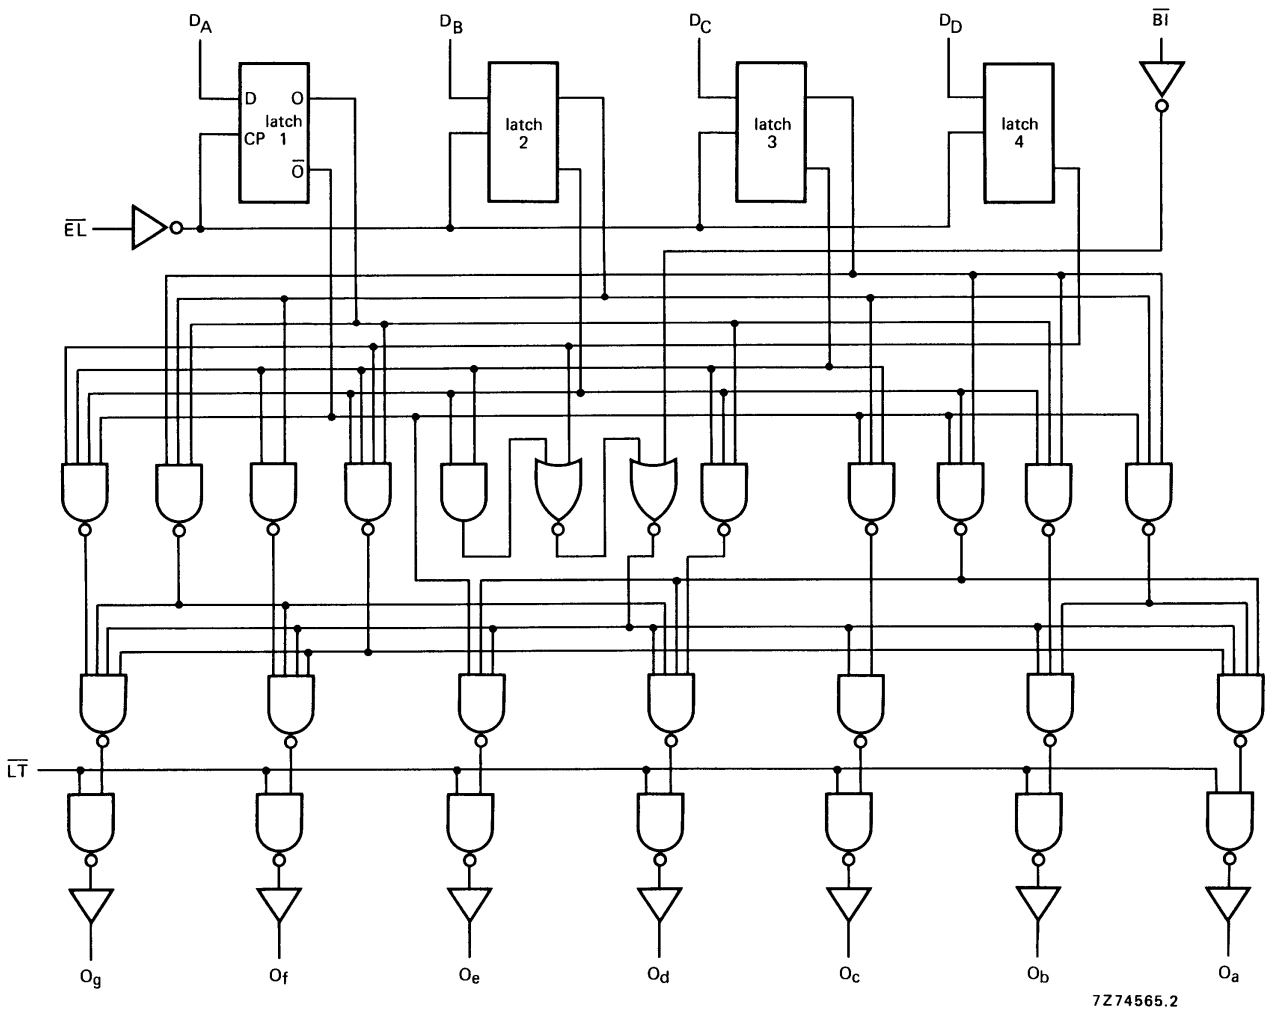


Fig.5 Logic diagram; for one latch see Fig.6.

BCD to 7-segment latch/decoder/driver

HEF4511B

MSI

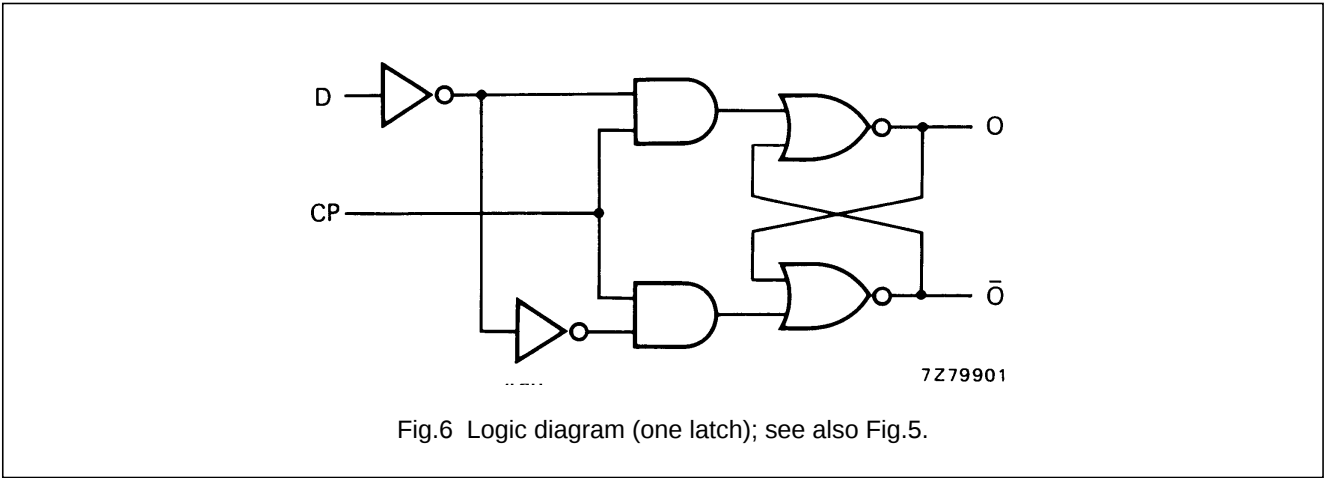


FUNCTION TABLE

INPUTS							OUTPUTS							DISPLAY
$\overline{EL}$	$\overline{BI}$	$\overline{LT}$	D_D	D_C	D_B	D_A	O_a	O_b	O_c	O_d	O_e	O_f	O_g	
X	X	L	X	X	X	X	H	H	H	H	H	H	H	8
X	L	H	X	X	X	X	L	L	L	L	L	L	L	blank
L	H	H	L	L	L	L	H	H	H	H	H	H	L	0
L	H	H	L	L	L	H	L	H	H	L	L	L	L	1
L	H	H	L	L	H	L	H	H	L	H	H	L	H	2
L	H	H	L	L	H	H	H	H	H	H	L	L	H	3
L	H	H	L	H	L	L	L	H	H	L	L	H	H	4
L	H	H	L	H	L	H	H	L	H	H	L	H	H	5
L	H	H	L	H	H	L	L	L	H	H	H	H	H	6
L	H	H	L	H	H	H	H	H	H	L	L	L	L	7
L	H	H	H	L	L	L	H	H	H	H	H	H	H	8
L	H	H	H	L	L	H	H	H	H	L	L	H	H	9
L	H	H	H	L	H	L	L	L	L	L	L	L	L	blank
L	H	H	H	L	H	H	L	L	L	L	L	L	L	blank
L	H	H	H	H	L	L	L	L	L	L	L	L	L	blank
L	H	H	H	H	H	L	L	L	L	L	L	L	L	blank
L	H	H	H	H	H	H	L	L	L	L	L	L	L	blank
H	H	H	X	X	X	X	*							*

Note

1. H = HIGH state (the more positive voltage)
L = LOW state (the less positive voltage)
X = state is immaterial
- * Depends upon the BCD code applied during the LOW to HIGH transition of $\overline{EL}$.

BCD to 7-segment latch/decoder/driver

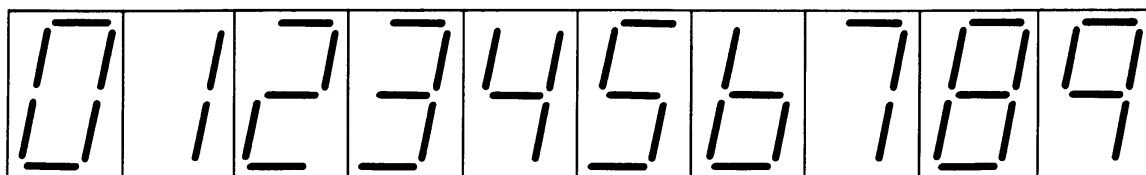HEF4511B
MSI

7272856

Fig.7 Display.

RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134).

Output (source) current HIGH $-I_{OH}$ max. 25 mA

For other RATINGS see Family Specifications.

Note

1. A destructive high current mode may occur if V_I and V_O are not constrained to the range $V_{SS} \leq V_I$ or $V_O \leq V_{DD}$.

BCD to 7-segment latch/decoder/driver

HEF4511B
MSI

DC CHARACTERISTICS

 $V_{SS} = 0\text{ V}$

HEF	V_{DD} V	I_{OH} mA	SYMBOL	$T_{amb} (^{\circ}\text{C})$					
				-40		+ 25		+ 85	
				MIN.	MAX.	MIN.	TYP.	MIN.	MAX.
Output voltage HIGH	5	0	V_{OH}	4,10		4,10	4,40	4,10	V
	10	0		9,10		9,10	9,40	9,10	V
	15	0		14,10		14,10	14,40	14,10	V
Output voltage HIGH	5	5	V_{OH}				4,20		V
	10	5					9,20		V
	15	5					14,20		V
Output voltage HIGH	5	10	V_{OH}	3,60		3,60	4,05	3,30	V
	10	10		8,75		8,75	9,10	8,45	V
	15	10		13,75		13,75	14,10	13,45	V
Output voltage HIGH	5	15	V_{OH}				4,00		V
	10	15					9,00		V
	15	15					14,00		V
Output voltage HIGH	5	20	V_{OH}	2,80		2,80	3,80	2,50	V
	10	20		8,10		8,10	9,00	7,80	V
	15	20		13,10		13,10	14,00	12,80	V
Output voltage HIGH	5	25	V_{OH}				3,70		V
	10	25					8,90		V
	15	25					14,00		V

BCD to 7-segment latch/decoder/driver

HEF4511B
MSI

HEC	V _{DD} V	I _{OH} mA	SYMBOL	T _{amb} (°C)					
				-55		+ 25		+ 125	
				MIN.	MAX.	MIN.	TYP.	MIN.	MAX.
Output voltage HIGH	5	0	V _{OH}	4,10		4,10	4,40	4,10	V
	10	0		9,10		9,10	9,90	9,10	V
	15	0		14,10		14,10	14,40	14,40	V
Output voltage HIGH	5	5	V _{OH}				4,30		V
	10	5					9,30		V
	15	5					14,30		V
Output voltage HIGH	5	10	V _{OH}	3,60		3,60	4,25	3,20	V
	10	10		8,75		8,75	9,25	8,35	V
	15	10		13,75		13,75	14,25	13,35	V
Output voltage HIGH	5	15	V _{OH}				4,20		V
	10	15					9,20		V
	15	15					14,20		V
Output voltage HIGH	5	20	V _{OH}	2,80		2,80	4,20	2,30	V
	10	20		8,10		8,10	9,20	7,60	V
	15	20		13,10		13,10	14,20	12,60	V
Output voltage HIGH	5	25	V _{OH}				4,15		V
	10	25					9,20		V
	15	25					14,20		V

AC CHARACTERISTICS

V_{SS} = 0 V; T_{amb} = 25 °C; input transition times ≤ 20 ns

	V _{DD} V	TYPICAL FORMULA FOR P (μW)	
Dynamic power dissipation per package (P)	5	$1\,000 f_i + \sum (f_o C_L) \times V_{DD}^2$	where f _i = input freq. (MHz) f _o = output freq. (MHz) C _L = load capacitance (pF) $\sum (f_o C_L)$ = sum of outputs V _{DD} = supply voltage (V)
	10	$4\,000 f_i + \sum (f_o C_L) \times V_{DD}^2$	
	15	$10\,000 f_i + \sum (f_o C_L) \times V_{DD}^2$	

BCD to 7-segment latch/decoder/driver

HEF4511B
MSI

AC CHARACTERISTICS


 $V_{SS} = 0\text{ V}$; $T_{amb} = 25\text{ °C}$; $C_L = 50\text{ pF}$; input transition times $\leq 20\text{ ns}$

	V_{DD} V	SYMBOL	MIN.	TYP.	MAX.	TYPICAL EXTRAPOLATION FORMULA
Propagation delays						
$D_n \rightarrow O_n$	5			155	310 ns	128 ns + (0,55 ns/pF) C_L
HIGH to LOW	10	t_{PHL}		60	120 ns	49 ns + (0,23 ns/pF) C_L
	15			40	80 ns	32 ns + (0,16 ns/pF) C_L
LOW to HIGH	5	t_{PLH}		135	270 ns	108 ns + (0,55 ns/pF) C_L
	10			55	110 ns	44 ns + (0,23 ns/pF) C_L
	15			40	80 ns	32 ns + (0,16 ns/pF) C_L
$\overline{EL} \rightarrow O_n$	5			160	320 ns	133 ns + (0,55 ns/pF) C_L
HIGH to LOW	10	t_{PHL}		60	120 ns	49 ns + (0,23 ns/pF) C_L
	15			45	90 ns	37 ns + (0,16 ns/pF) C_L
LOW to HIGH	5	t_{PLH}		160	320 ns	133 ns + (0,55 ns/pF) C_L
	10			70	140 ns	59 ns + (0,23 ns/pF) C_L
	15			50	100 ns	42 ns + (0,16 ns/pF) C_L
$\overline{BI} \rightarrow O_n$	5			120	240 ns	93 ns + (0,55 ns/pF) C_L
HIGH to LOW	10	t_{PHL}		50	100 ns	39 ns + (0,23 ns/pF) C_L
	15			35	70 ns	27 ns + (0,16 ns/pF) C_L
$\overline{BI} \rightarrow O_n$	5			105	210 ns	78 ns + (0,55 ns/pF) C_L
LOW to HIGH	10	t_{PLH}		40	80 ns	29 ns + (0,23 ns/pF) C_L
	15			30	60 ns	22 ns + (0,16 ns/pF) C_L
$\overline{LT} \rightarrow O_n$	5			80	160 ns	52 ns + (0,55 ns/pF) C_L
HIGH to LOW	10	t_{PHL}		30	60 ns	19 ns + (0,23 ns/pF) C_L
	15			20	40 ns	12 ns + (0,16 ns/pF) C_L
LOW to HIGH	5	t_{PLH}		60	120 ns	33 ns + (0,55 ns/pF) C_L
	10			30	60 ns	19 ns + (0,23 ns/pF) C_L
	15			25	50 ns	17 ns + (0,16 ns/pF) C_L
Output transition times	5			60	120 ns	10 ns + (1,0 ns/pF) C_L
HIGH to LOW	10	t_{THL}		30	60 ns	9 ns + (0,42 ns/pF) C_L
	15			20	40 ns	6 ns + (0,28 ns/pF) C_L
LOW to HIGH	5	t_{TLH}		25	50 ns	20 ns + (1,0 ns/pF) C_L
	10			16	32 ns	13 ns + (0,06 ns/pF) C_L
	15			13	26 ns	10 ns + (0,06 ns/pF) C_L

BCD to 7-segment latch/decoder/driver

HEF4511B
MSI

	V _{DD} V	SYMBOL	MIN.	TYP.	MAX.	TYPICAL EXTRAPOLATION FORMULA
Minimum $\overline{EL}$ pulse width; LOW	5	t_{WELL}	80	40	ns	see also waveforms Fig.8
	10		40	20	ns	
	15		35	17	ns	
Set-up time $D_n \rightarrow \overline{EL}$	5	t_{su}	50	25	ns	
	10		25	12	ns	
	15		20	9	ns	
Hold-time $D_n \rightarrow \overline{EL}$	5	t_{hold}	60	30	ns	
	10		30	15	ns	
	15		25	12	ns	

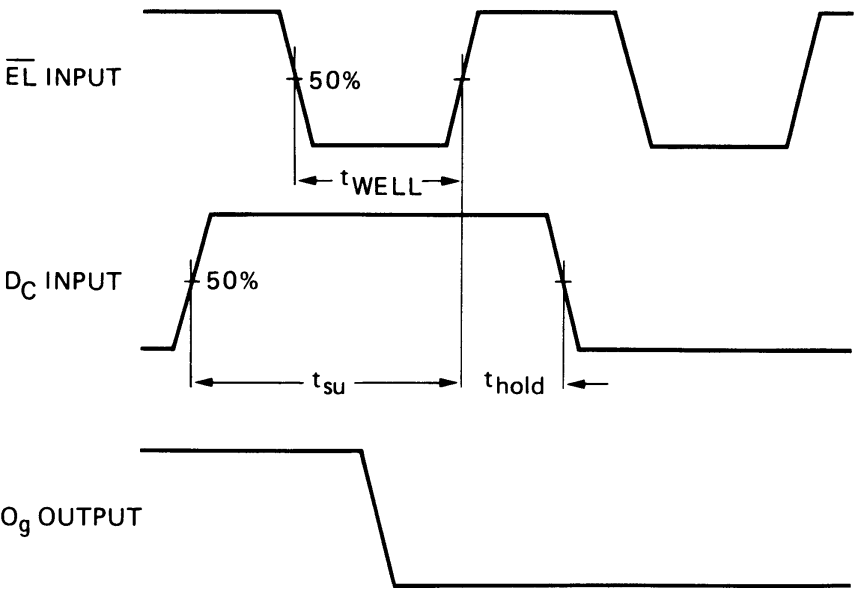

Conditions:
 $D_D = \text{LOW}$
 $D_A = D_B = \overline{B}_1 = \overline{L}\overline{T} = \text{HIGH}$

Fig.8 Waveforms showing minimum $\overline{EL}$ pulse width, set-up and hold time for D_C to $\overline{EL}$.

BCD to 7-segment latch/decoder/driver

HEF4511B
MSI

APPLICATION INFORMATION

Some examples of applications for the HEF4511B are:

- Driving LED displays.
- Driving incandescent displays.
- Driving fluorescent displays.
- Driving LCD displays.
- Driving gas discharge displays.

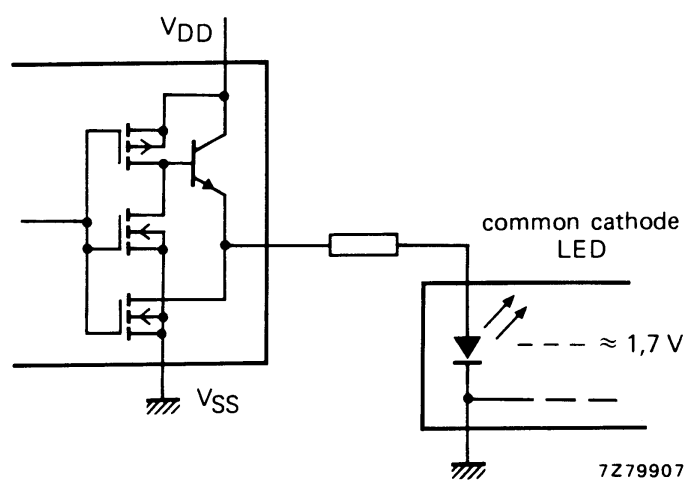


Fig.9 Connection to common cathode LED display readout.

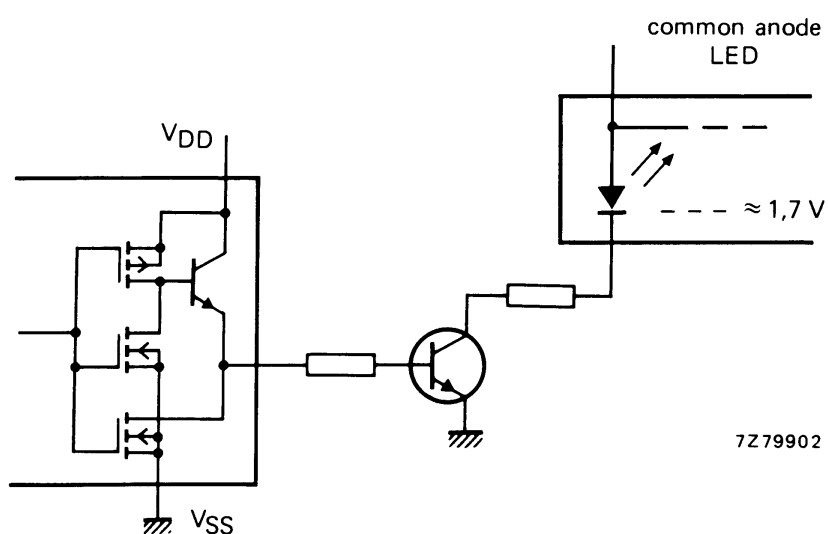
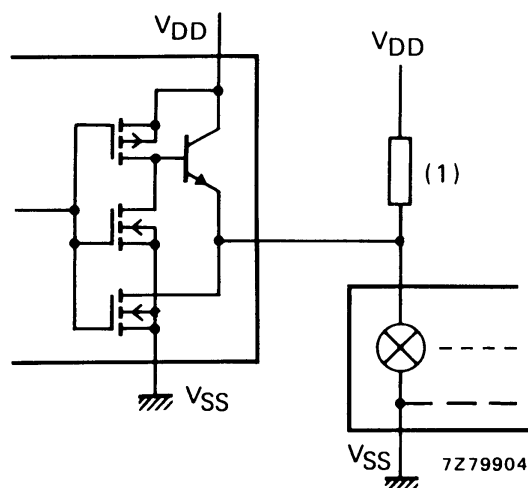


Fig.10 Connection to common anode LED display readout.

BCD to 7-segment latch/decoder/driver

HEF4511B
MSI

- (1) A filament pre-warm resistor is recommended to reduce filament thermal shock and increase the effective cold resistance of the filament.

Fig.11 Connection to incandescent display readout.

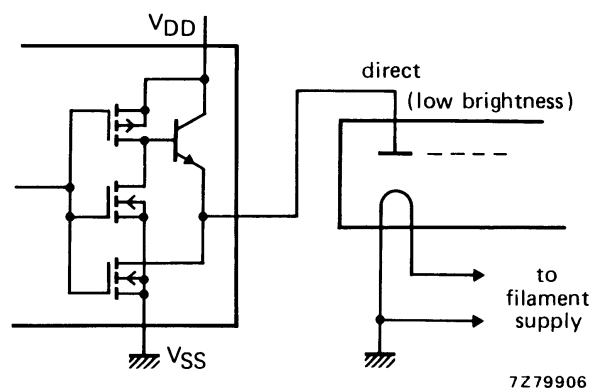


Fig.12 Connection to fluorescent display readout.

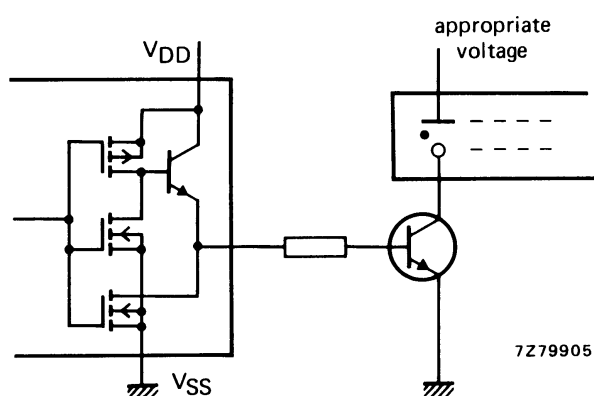


Fig.13 Connection to gas discharge display readout.

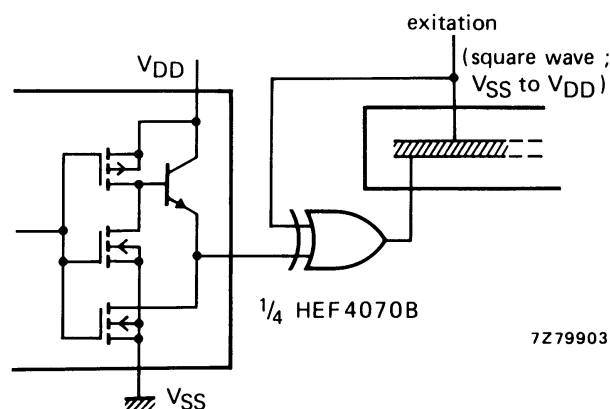


Fig.14 Connection to liquid crystal (LCD) display readout. Direct d.c. drive of LCDs not recommended for life of LCD readouts.