

HA17524P/FP

Switching Regulator Controller

HITACHI


Features

- Pulse width modulation (PWM)
- Wide oscillation frequency range: 450 kHz(typ)
- Low quiescent current: 5 mA typ
- Good line regulation (0.2% typ) and load regulation (0.4% typ)
- Independent output stages for 2 channels
- Wide external circuit applications including single-end and push-pull method
- Reference power source output stage and switching output stage include current limiting protection circuit.

Ordering Information

Type No.	Package
HA17524P	16 pin dual in line plastic(DP-16)
HA17524FP	16 pin flat plastic (FP-16DA)

Pin Arrangement

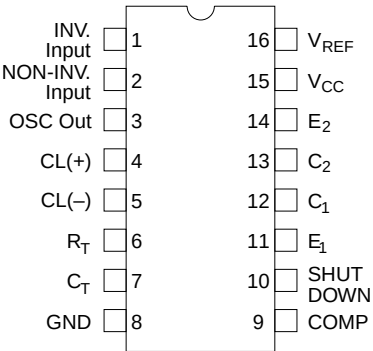

(Top View)

Functional Description

Principals of HA17524 Operation

The HA17524 switching regulator circuit, using pulse width modulation (PWM), is constructed as shown in figure 1.

Timing resistances R_T and timing capacitance C_T control the oscillation frequency. C_T is charged by a constant current generated by R_T . Ramp signals (saw-tooth waves) at the C_T terminal generated by this oscillator is available for reference input signal to comparator which control the pulse width.

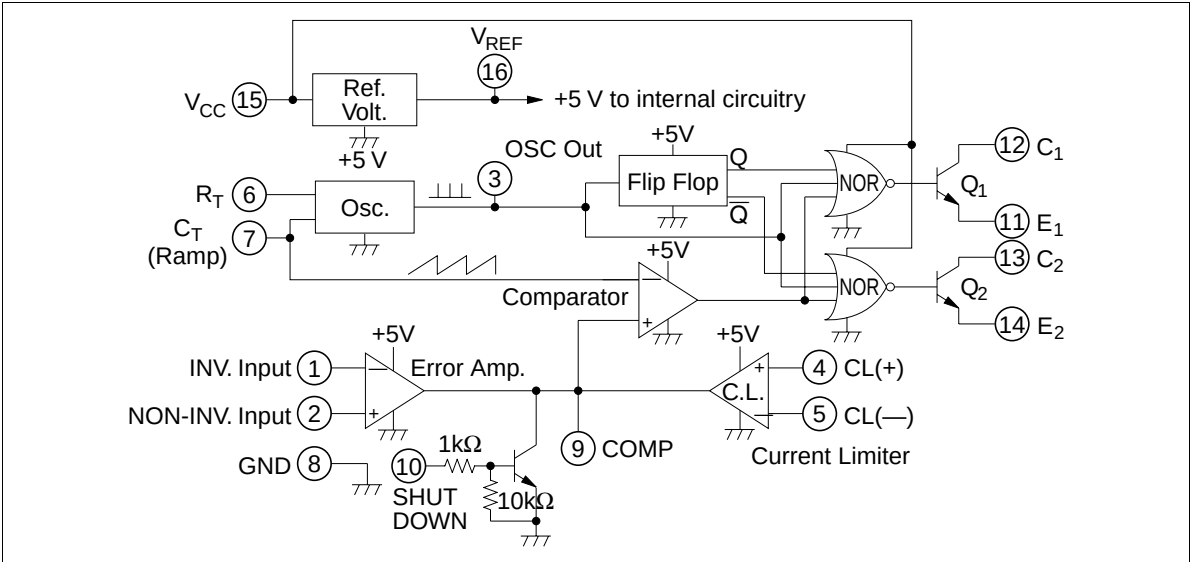



Figure 1 HA17524 Block Diagram

The reference voltage connects to the non-inverted or inverted input terminal of the error amplifier via resistance divider (figure 2).

The output voltage from the error amplifier is compared with the ramp signal capacitance C_T (figure 1). The comparator can provide a signal with modulated pulse width.


This signal, then, controls output transistors Q_1 and Q_2 , making an open loop to stabilize output voltage.

Outputs from the error amplifier, the current limiter, and the shut-down circuit are connected together at the comparator, so that an input signal from any one of these circuits can break the output stage.

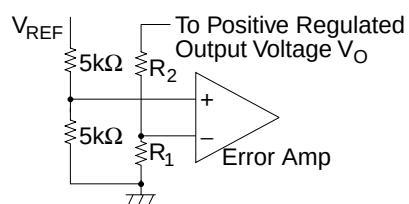

(a) Forward Output Stabilizing Source

$$V_O = 2.5 \frac{R_1 + R_2}{R_1} \text{ (V)}$$

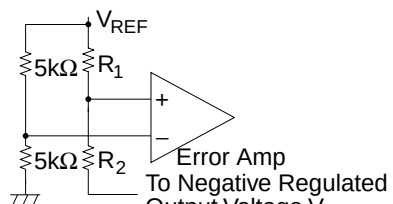

(b) Reverse Output Stabilizing Source

$$V_O = 5 - 2.5 \frac{R_1 + R_2}{R_1} \text{ (V)}$$

Figure 2 Error Amplifier Biasing

Blocks Description

Oscillator: The oscillation frequency f is calculated from the following equations. Figure 3 shows one example.

$$f = 1.15 / (R_T \cdot C_T)$$

$$R_T = 1.8\text{k} \text{ to } 100\text{ k}\Omega$$

$$C_T = 0.001\mu \text{ to } 0.1\mu\text{F}$$

$$f = 140\text{ Hz to } 500\text{ kHz}$$

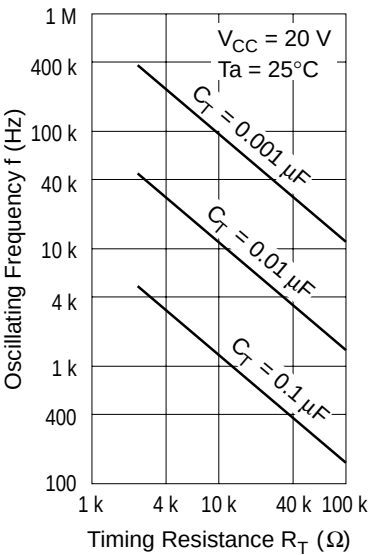


Figure 3 Oscillating Frequency vs Timing Resistance

Then the ramp wave shown in figure 4 is available at pin 7, C_T terminal, since C_T is charged by the constant current I generated by R_T .

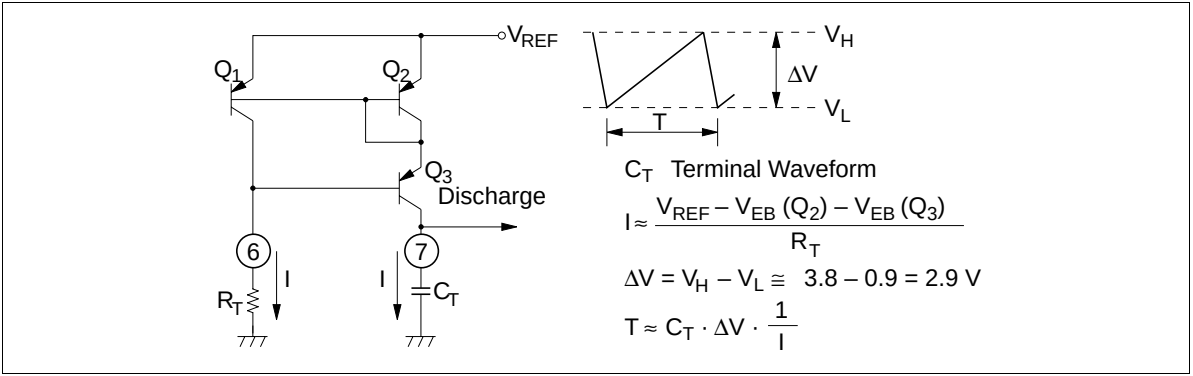


Figure 4 Oscillating Circuit and C_T Terminal Waveform

The oscillator output pulse signal is used as the flip flop clock pulse and as switching pulses for the output transistors, synchronous to the clock pulse.

The pulse-widths which can be controlled by the timing capacitor C_T as shown in figure 5, increases output dead time.

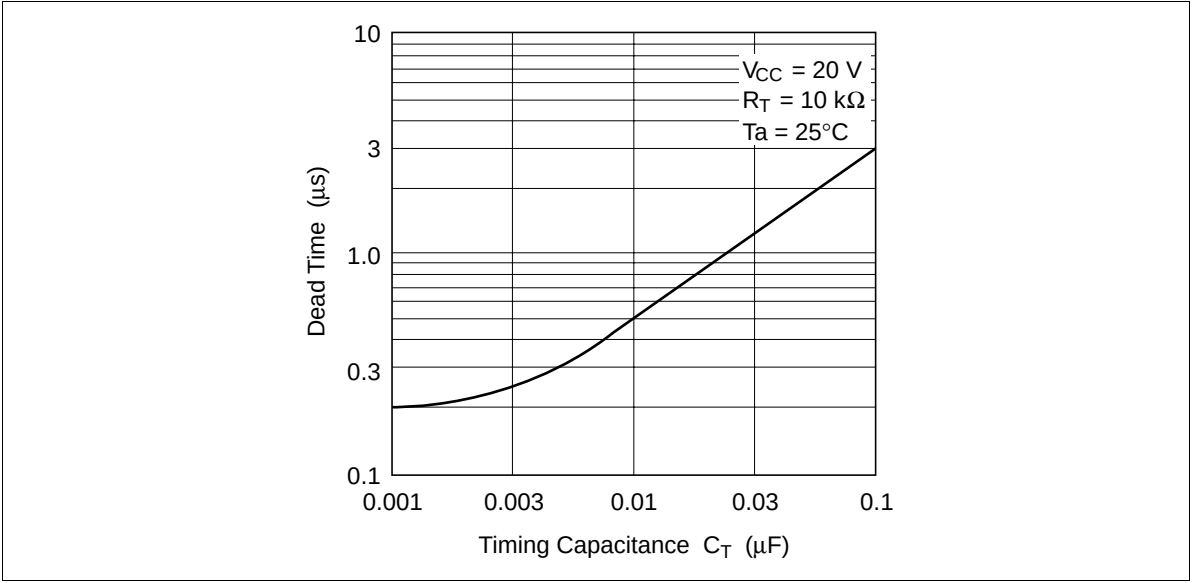


Figure 5 Dead Time vs Timing Capacitance

Reference Voltage: The built-in regulator (reference voltage: $V_{REF} = 5 \pm 0.4 \text{ V}$) can be used as a reference power supply for the error amplifier, which determines output voltage (V_{OUT}). It is also connected as a bias source for another circuits in IC.

Error Amplifier: Figure 2 shows error amplifier biasing, applied input voltage must be set within the range of common-mode input voltage (1.8 V to 3.4 V). Inserting a resistor and capacitor between phase compensation terminal (pin 9) and GND in series provides phase compensation.

Current Limiter: The sense amplifier threshold voltage (V_s) for the current limiter is:

$$V_S = V_{BE}(Q) + I_1 R_2 - V_{BE}(Q_2)$$

$$= I_1 R_2$$

$$= 200 \text{ mV typ}$$

At the current limiter sense amp shown in figure 6, when $V^+ - V^- = 200$ mV, Q_1 turns on, phase compensation terminal becomes low and the output switching element is cut off.

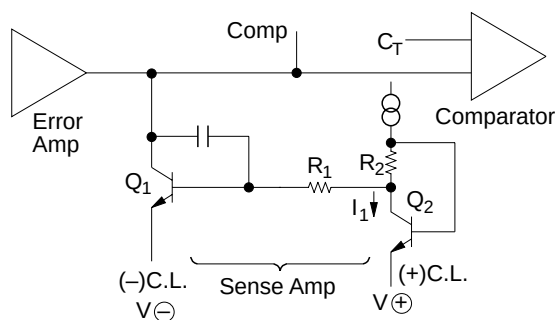


Figure 6 Current Limiter Sense Amplifier

Figure 7 shows an example of detecting current limit. The input voltage range is -0.7 V to $+1.0\text{ V}$; The current limit detection output is provided from GND line.

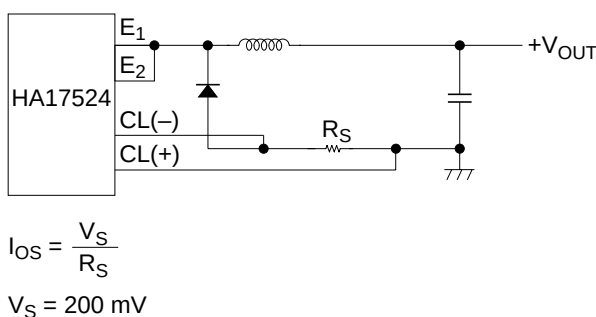


Figure 7 Current Limit Detector Example Operating Waveforms

Operating Waveforms

Figure 9 shows operating waveforms at every part, when stepdown voltage type chopper switching regulator (figure 8) is used. Operating condition are as follows: $f = 20\text{ kHz}$, $V_{OUT} = 5\text{ V}$. At the output section, two channels are connected in parallel. Operating waveforms inside the IC are also shown.

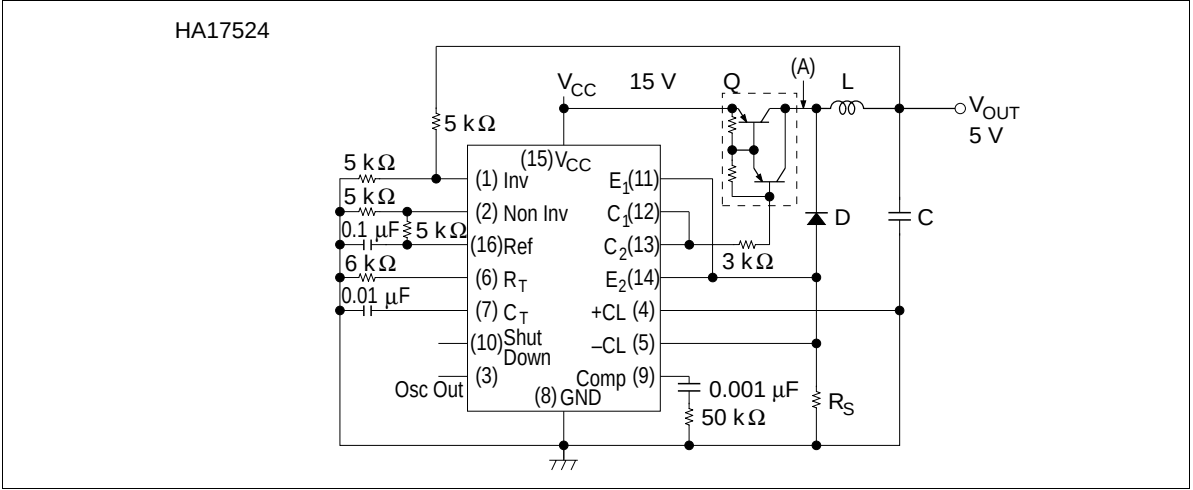


Figure 8 Stepdown Voltage Type Chopper Switching Regulator

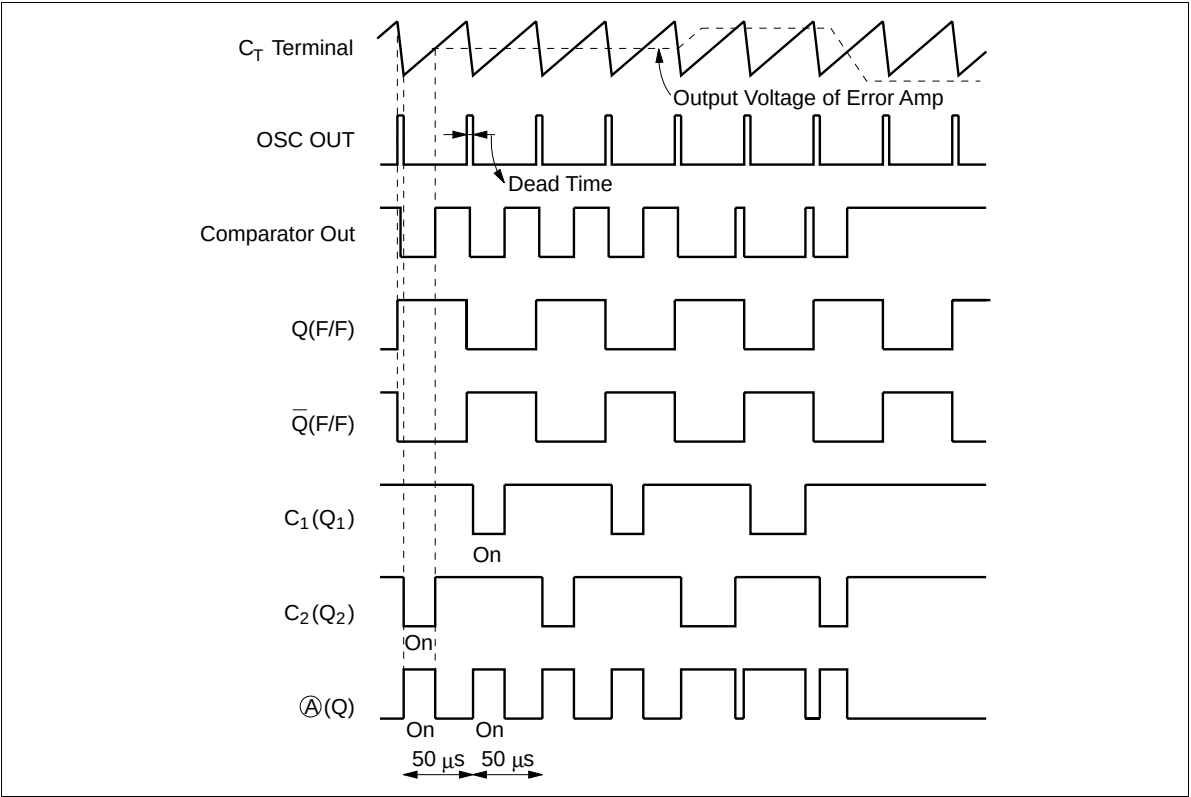


Figure 9 Operating Waveforms

Circuit Applications

Simplified inverting Regulator: Figure 10 shows the circuit configuration of HA17524 inverting regulator for light load ($V_{OUT} = -5\text{ V}$)

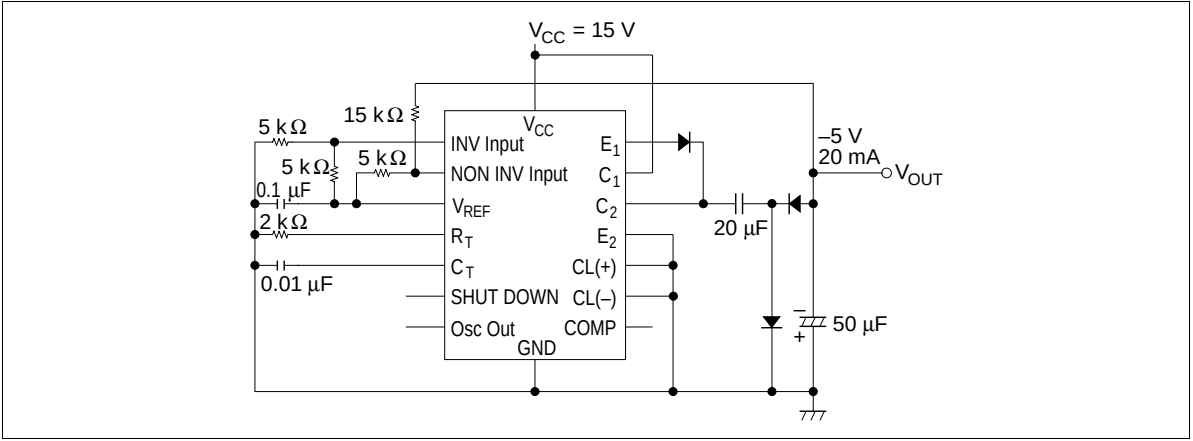


Figure 10 Simple Polarity Conversion

Tracking Switching Regulator: Figure 11 shows the circuit configuration of a tracking regulator that uses a transformer. ($V_{OUT} = \pm 15\text{ V}$)

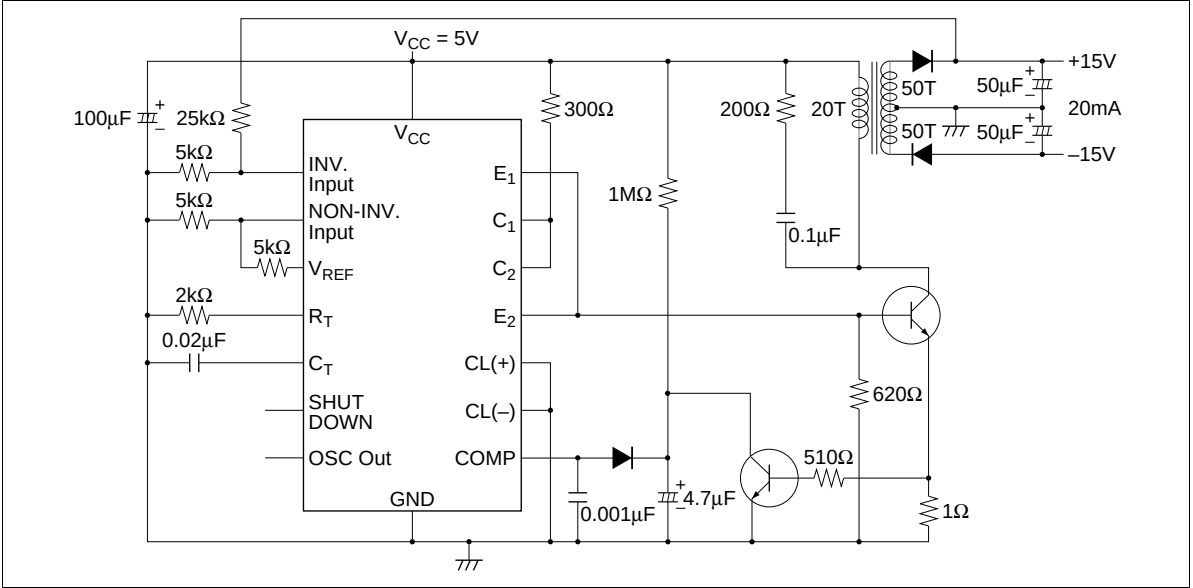


Figure 11 Tracking Switching Regulator

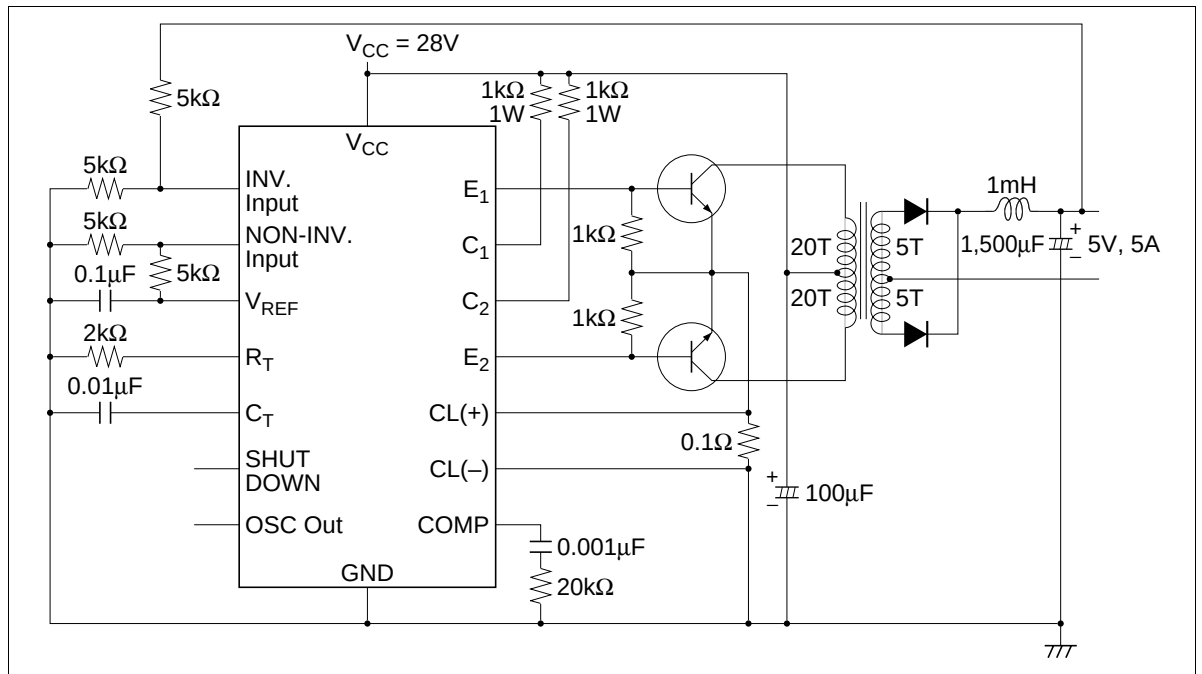


Figure 12 Push-Pull Switching Regulator

Note

Compared with conventional series regulators, switching regulators generate high frequency noise by switching current quickly. To reduce noise

1. As a general rule, insert line filter to reduce noise at the input.
2. To reduce noise at the output:
 - a. Twist output wiring together.
 - b. Do not bundle power source and output wiring.
 - c. Insert capacitor should be inserted at the load side.
 - d. Ground the power frame.
3. When choosing external parts (external switching transistor, diode, coil, etc) consider their capacitance and characteristics.

Absolute Maximum Ratings (Unless otherwise specified, Ta = +25°C)

Item	Symbol	Rating	Unit	Note
Supply voltage	V _{CC}	40	V	1, 2
Collector output current	I _C	100	mA	
Reference output current	I _{REF}	50	mA	
Current through C _T terminal	I _{CT}	5	mA	
Continuous total power dissipation	P _T	600	mW	3
Operating free-air temperature range	Topr	−20 to +75	°C	
Storage temperature range	Tstg	−55 to +125	°C	

- Notes:
- 1. With respect to network ground terminal
 - 2. The reference voltage can be given by connecting the V_{CC} and 5 V reference output pins both to the supply voltage. In this configuration, V_{CC} = 6 V max.
 - 3. HA17524P: Value at Ta ≤ 52.7°C, If Ta > 52.7°C, derate by 8.3 mW/°C

Electrical Characteristics (V_{CC} = 20 V, f = 20 kHz, Ta = 25°C)



Item		Symbol	Min	Typ	Max	Unit	Test Conditions
Regulator	Output voltage	V _{REF}	4.6	5.0	5.4	V	
	Input regulation	δV _{OLine}	—	10	30	mV	V _{CC} = 8 to 40 V
	Ripple rejection	R _{REJ}	—	66	—	dB	f = 120 Hz
	Output regulation	δV _{OLoad}	—	20	50	mV	I _{out} = 0 to 20 mA
	Output voltage change with output temperature	δV _O /δTa	—	0.3	1.0	%	Ta = 0 to +70°C
			—	0.4	1.36	%	Ta = −20 to +75°C
Error amplifier	Short-circuit output current (Note)	I _{OS}	—	100	—	mA	V _{REF} = 0
	Input offset voltage	V _{IO}	—	2	10	mV	V _{IC} = 2.5 V
	Input bias current	I _I	—	2	10	μA	V _{IC} = 2.5 V
	Open-loop voltage gain	A _{VD}	—	60	—	dB	
	Common-mode input voltage range	V _{CM}	1.8 to 3.4	—	—	V	Ta = 25°C
	Common-mode Rejection ratio	CMR	—	70	—	dB	
	Unity-gain bandwidth	BW	—	3	—	MHz	
Oscillator	Output swing	V _{OPP}	0.5	—	3.8	V	
	OSC frequency	f	—	450	—	kHz	C _T = 0.001 μF, R _T = 2 kΩ
	Standard deviation of frequency	Δ f	—	5	—	%	V _{CC} = 8 to 40 V, R _T = 1.8 to 100 kΩ, C = Const
	Frequency stability	δf _{Line} δf/δTa	—	—	1.0	%	V _{CC} = 8 to 40 V
			—	5.0	10	%	Ta = 0 to +70°C
			—	5.0	13.6	%	Ta = −20 to +75°C
Comparator	Output amplitude	V _{3(peak)}	—	3.5	—	V	Pin 3
	Output pulse width	T _P	—	0.5	—	μs	C _T = 0.01 μF, Pin 3
	Maximum duty cycle	Dmax	45	—	—	%	
		Vth 0	—	1.0	—	V	Duty cycle = 0
	Threshold voltage	Vth max	—	3.5	—	V	Duty cycle = max
		I _I	—	−1	—	μA	



Note: Duration of the short-circuit should not exceed one second.


Electrical Characteristics (V_{CC} = 20 V, f = 20 kHz, Ta = 25°C) (cont)

Item		Symbol	Min	Typ	Max	Unit	Test Conditions
Current limiter	Input voltage range	V _{IS}	−0.7 to +1.0	—	—	V	
	Sense voltage	V _S	180	200	220	mV	V(Pin 9) = 2 V, Ta = 25°C V(Pin 2) − V(Pin 1) ≥ 50 mV
	Sensevoltage change with temperature	δV _S /δTa	—	0.2	—	mV/°C	Ta = −20 to +75°C
Output	Collector-emitter breakdown voltage	V _{CE}	40	—	—	V	
	Collector off-state current	I _{Leak}	—	0.01	50	μA	V _{CE} = 40 V
	Collector-emitter saturation voltage	V _{CE(sat)}	—	1	2	V	I _C = 50 mA
	Emitter output voltage	V _E	17	18	—	V	V _{CC} = 20 V, I _E = −250 μA
	Rise time	tr	—	0.2	—	μs	R _C = 2 kΩ
	Fall time	tf	—	0.1	—	μs	
Total device	Standby current	I _{ST}	—	5.0	10	mA	V _{CC} = 40 V, V ₂ = 2 V, Pins 1, 4, 7, 8, 9, 11, 14grounded, All other pins open

Characteristic Curves

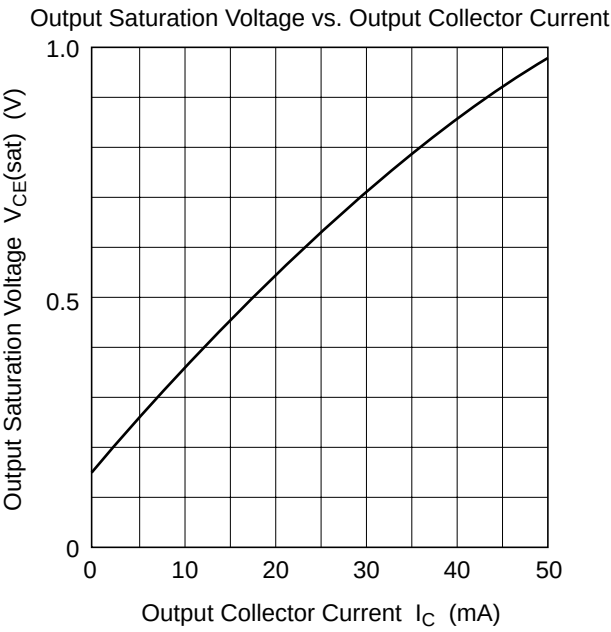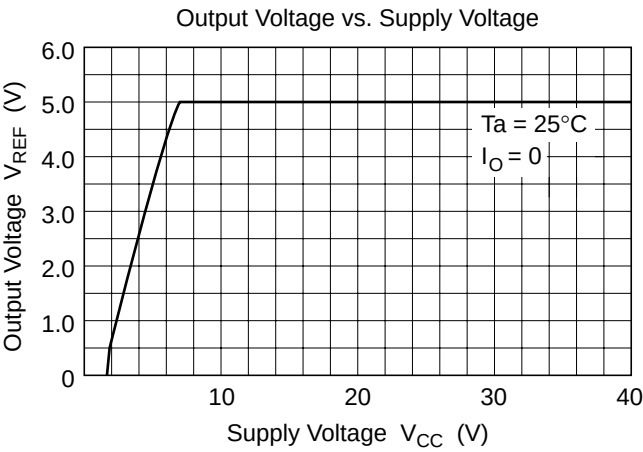


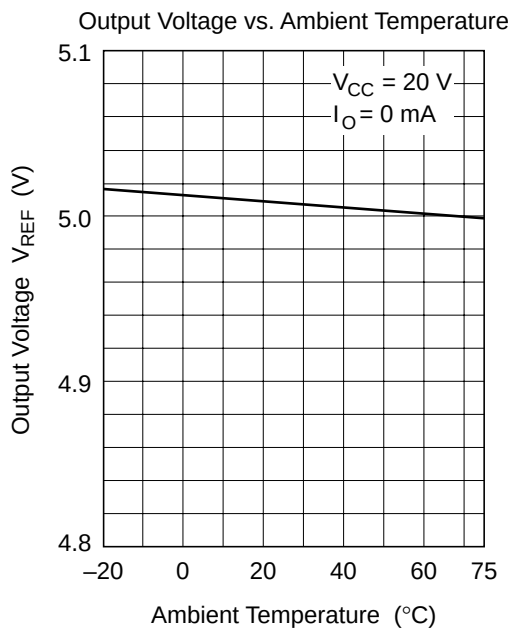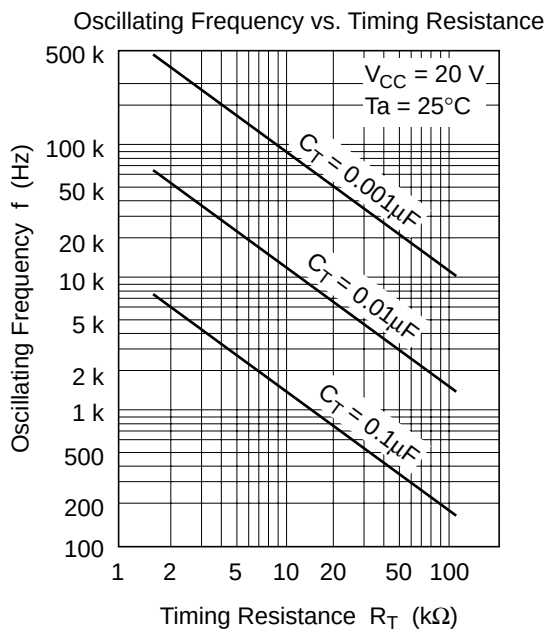

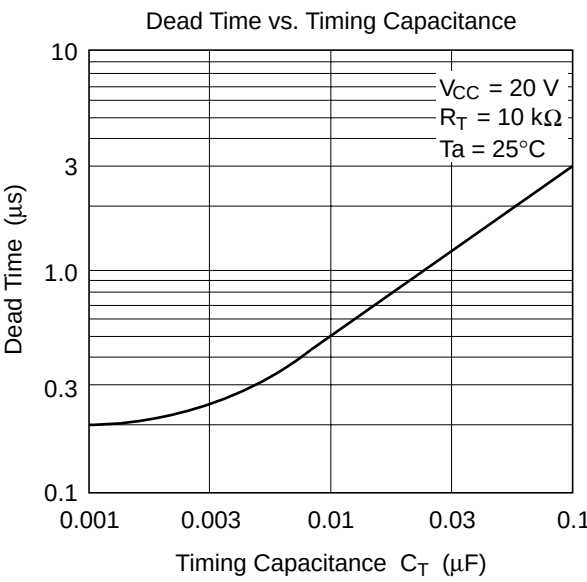


Package Dimensions

Unit: mm

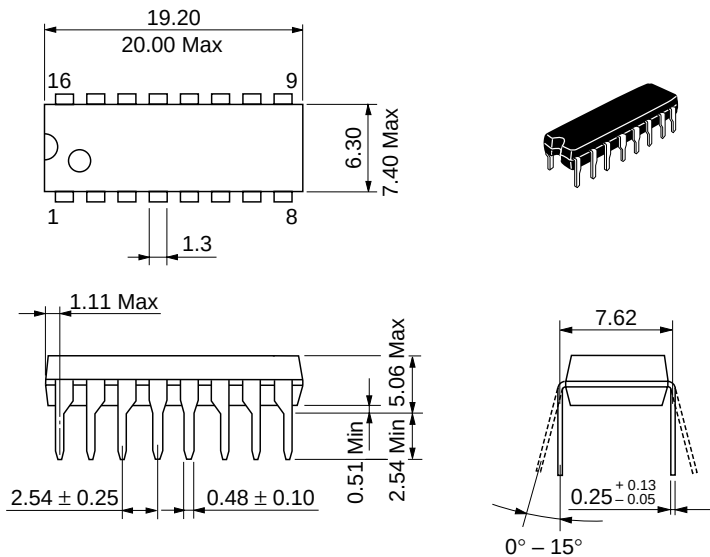

Hitachi Code	DP-16
JEDEC	Conforms
EIAJ	Conforms
Mass (reference value)	1.07 g

Unit: mm

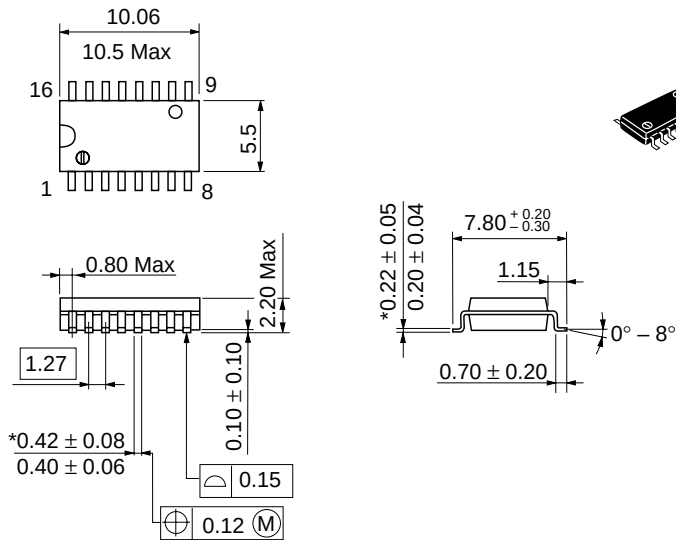

*Dimension including the plating thickness
Base material dimension

Hitachi Code	FP-16DA
JEDEC	—
EIAJ	Conforms
Mass (reference value)	0.24 g

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
 5. This product is not designed to be radiation resistant.
 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
 7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	: http://semiconductor.hitachi.com/
	Europe	: http://www.hitachi-eu.com/hel/ecg
	Asia (Singapore)	: http://www.has.hitachi.com.sg/grp3/sicd/index.htm
	Asia (Taiwan)	: http://www.hitachi.com.tw/E/Product/SICD_Frame.htm
	Asia (HongKong)	: http://www.hitachi.com.hk/eng/bo/grp3/index.htm
	Japan	: http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1> (408) 433-0223	Hitachi Europe GmbH Electronic components Group Dornacher StraÙe 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00 Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 778322	Hitachi Asia Pte. Ltd. 16 Collyer Quay #20-00 Hitachi Tower Singapore 049318 Tel: 535-2100 Fax: 535-1533 Hitachi Asia Ltd. Taipei Branch Office 3F, Hung Kuo Building, No.167, Tun-Hwa North Road, Taipei (105) Tel: <886> (2) 2718-3666 Fax: <886> (2) 2718-8180	Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: <852> (2) 735 9218 Fax: <852> (2) 730 0281 Telex: 40815 HITEC HX
--	---	--	--

Copyright ' Hitachi, Ltd., 1998. All rights reserved. Printed in Japan.