


PNP Silicon AF Transistor

- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary type: SMBTA 06 (NPN)

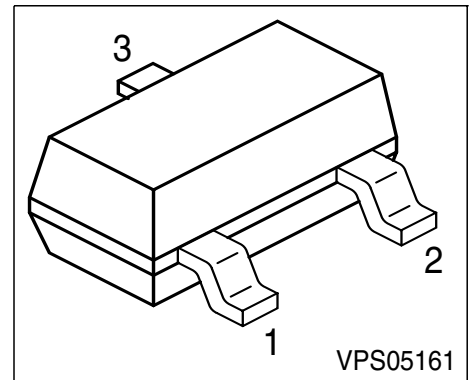

Type	Marking	Pin Configuration			Package
SMBTA 56	s2G	1=B	2=E	3=C	SOT-23

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	80	V
Collector-base voltage	V_{CBO}	80	
Emitter-base voltage	V_{EBO}	4	
DC collector current	I_C	500	mA
Peak collector current	I_{CM}	1	A
Base current	I_B	100	mA
Peak base current	I_{BM}	200	
Total power dissipation, $T_S = 79\text{ °C}$	P_{tot}	330	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Junction ambient ¹⁾	R_{thJA}	≤285	K/W
Junction - soldering point	R_{thJS}	≤215	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm² Cu


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 1\text{ mA}, I_B = 0$	$V_{(BR)CEO}$	80	-	-	V
Collector-base breakdown voltage $I_C = 100\text{ }\mu\text{A}, I_B = 0$	$V_{(BR)CBO}$	80	-	-	
Emitter-base breakdown voltage $I_E = 10\text{ }\mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	4	-	-	
Collector cutoff current $V_{CB} = 80\text{ V}, I_E = 0$	I_{CBO}	-	-	100	nA
Collector cutoff current $V_{CB} = 80\text{ V}, I_E = 0, T_A = 150\text{ }^\circ\text{C}$	I_{CBO}	-	-	20	μA
Collector cutoff current $V_{CE} = 60\text{ V}, I_B = 0$	I_{CEO}	-	-	100	nA
DC current gain 1) $I_C = 10\text{ mA}, V_{CE} = 1\text{ V}$ $I_C = 100\text{ mA}, V_{CE} = 1\text{ V}$	h_{FE}	100 100	- -	- -	-
Collector-emitter saturation voltage1) $I_C = 100\text{ mA}, I_B = 10\text{ mA}$	V_{CEsat}	-	-	0.25	V
Base-emitter voltage 1) $I_C = 100\text{ mA}, V_{CE} = 1\text{ V}$	$V_{BE(ON)}$	-	-	1.2	
AC Characteristics					
Transition frequency $I_C = 20\text{ mA}, V_{CE} = 5\text{ V}, f = 20\text{ MHz}$	f_T	-	100	-	MHz
Collector-base capacitance $V_{CB} = 10\text{ V}, f = 1\text{ MHz}$	C_{cb}	-	12	-	pF

1) Pulse test: $t \leq 300\mu\text{s}$, $D = 2\%$


Total power dissipation $P_{\text{tot}} = f(T_A^*; T_S)$

* Package mounted on epoxy

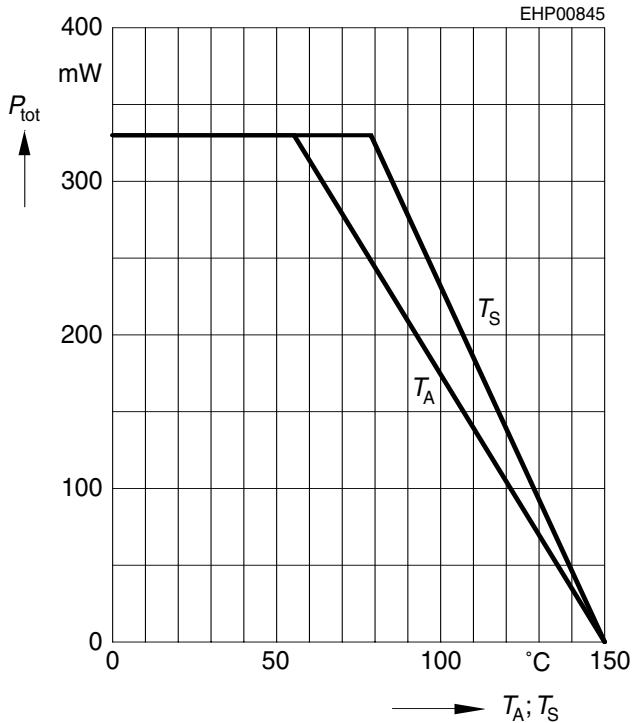


Collector current $I_C = f(V_{\text{BE}})$

$V_{\text{CE}} = 1\text{V}$

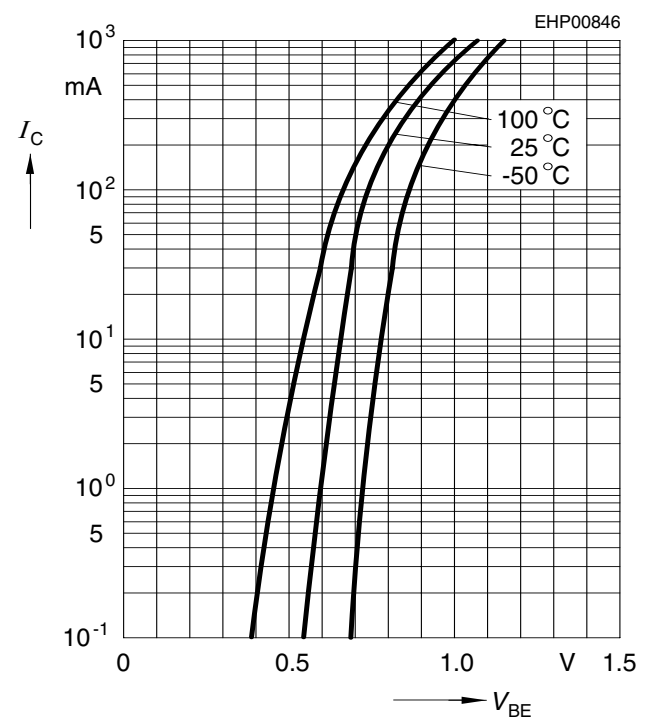


Permissible pulse load

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

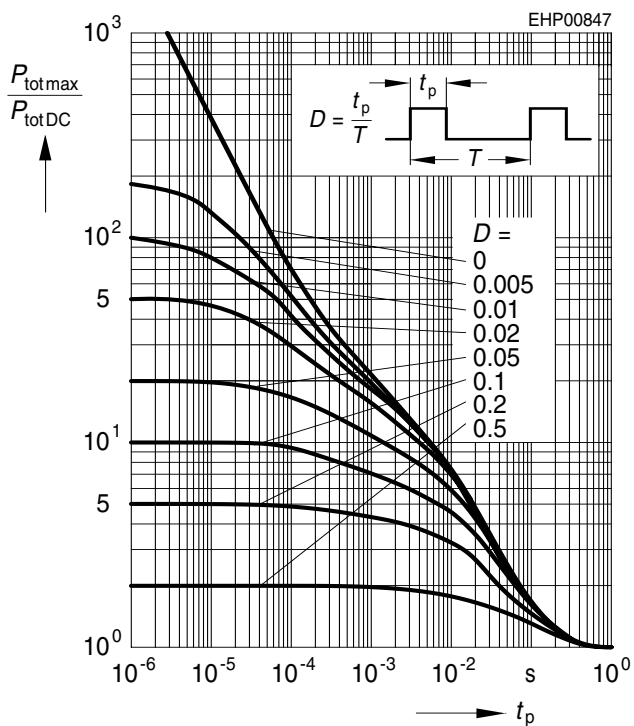


Transition frequency $f_T = f(I_C)$

$V_{\text{CE}} = 5\text{V}$

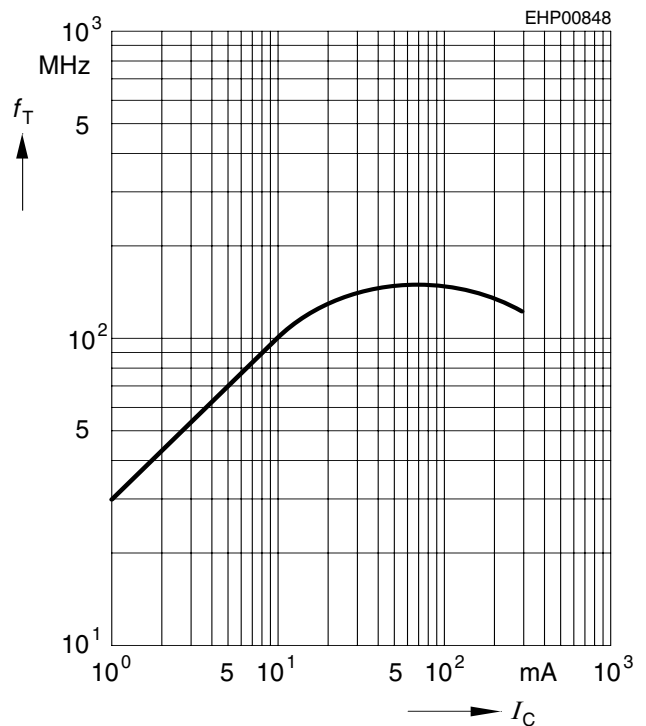


Base-emitter saturation voltage


$$I_C = f(V_{BEsat}), h_{FE} = 10$$

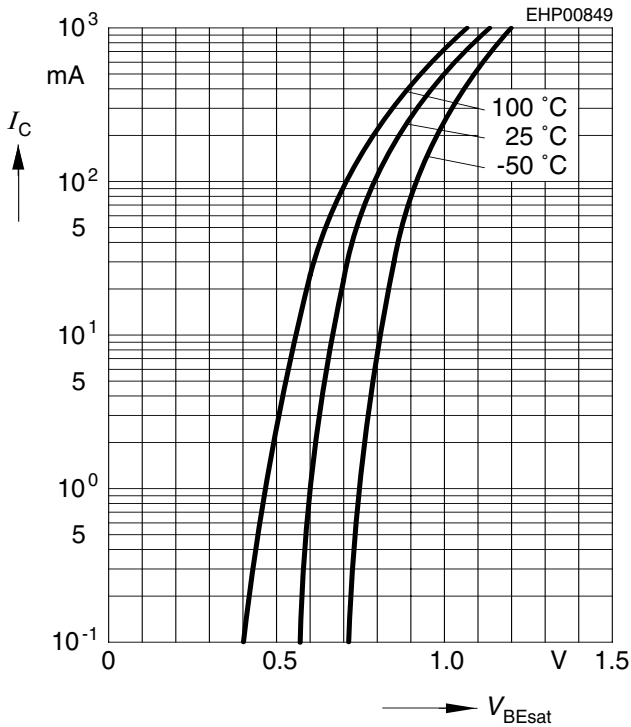
Collector-emitter saturation voltage

$$I_C = f(V_{CEsat}), h_{FE} = 10$$

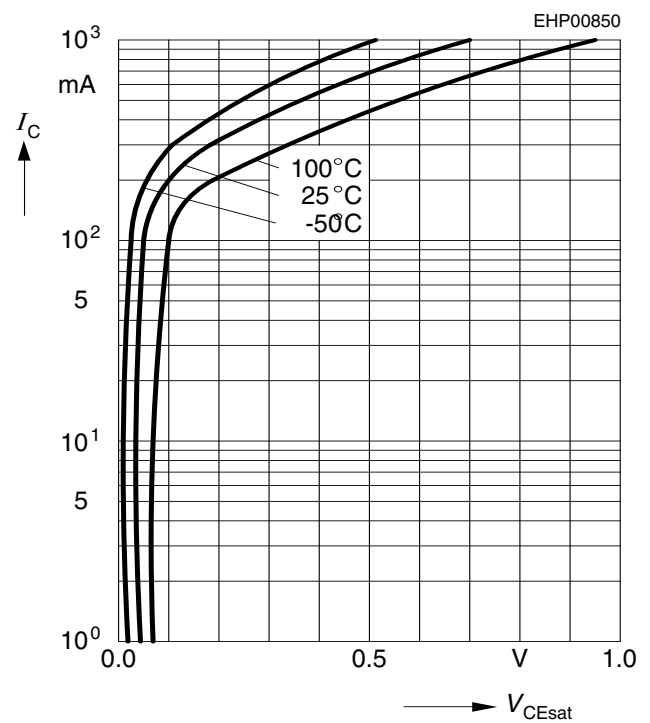
Collector cutoff current $I_{CBO} = f(T_A)$

$$V_{CB} = 80V$$

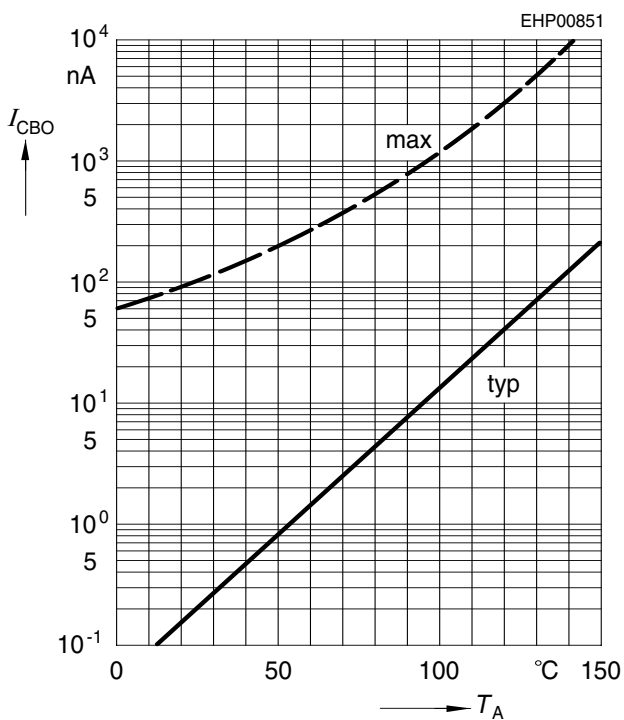
DC current gain $h_{FE} = f(I_C)$

$$V_{CE} = 1V$$

