


## Silicon Switching Diodes


- Switching applications
- High breakdown voltage



### BAW78D



### BAW79D



| Type   | Package | Configuration  | Marking |
|--------|---------|----------------|---------|
| BAW78D | SOT89   | single         | GD      |
| BAW79D | SOT89   | common cathode | GH      |

**Maximum Ratings** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                  | Symbol    | Value       | Unit             |
|--------------------------------------------|-----------|-------------|------------------|
| Diode reverse voltage                      | $V_R$     | 400         | V                |
| Peak reverse voltage                       | $V_{RM}$  | 400         |                  |
| Forward current                            | $I_F$     | 1           | A                |
| Peak forward current                       | $I_{FM}$  | 1           |                  |
| Surge forward current, $t = 1 \mu\text{s}$ | $I_{FS}$  | 10          |                  |
| Total power dissipation                    | $P_{tot}$ |             | W                |
| BAW78D, $T_S \leq 125^\circ\text{C}$       |           | 1           |                  |
| BAW79D, $T_S \leq 115^\circ\text{C}$       |           | 1           |                  |
| Junction temperature                       | $T_j$     | 150         | $^\circ\text{C}$ |
| Storage temperature                        | $T_{stg}$ | -65 ... 150 |                  |


### Thermal Resistance

| Parameter                                | Symbol     | Value     | Unit |
|------------------------------------------|------------|-----------|------|
| Junction - soldering point <sup>1)</sup> | $R_{thJS}$ |           | K/W  |
| BAW78D                                   |            | $\leq 25$ |      |
| BAW79D                                   |            | $\leq 35$ |      |

<sup>1</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter                                                                                           | Symbol     | Values |        |          | Unit    |
|-----------------------------------------------------------------------------------------------------|------------|--------|--------|----------|---------|
|                                                                                                     |            | min.   | typ.   | max.     |         |
| DC Characteristics                                                                                  |            |        |        |          |         |
| Breakdown voltage<br>$I_{(BR)} = 100 \mu A$                                                         | $V_{(BR)}$ | 400    | -      | -        | V       |
| Reverse current<br>$V_R = 400 V$<br>$V_R = 400 V, T_A = 150 ^\circ C$                               | $I_R$      | -      | -      | 1<br>50  | $\mu A$ |
| Forward voltage<br>$I_F = 1 A$<br>$I_F = 2 A$                                                       | $V_F$      | -      | -      | 1.6<br>2 | V       |
| AC Characteristics                                                                                  |            |        |        |          |         |
| Diode capacitance<br>$V_R = 0 V, f = 1 MHz$                                                         | $C_T$      | -      | 10     | -        | pF      |
| Reverse recovery time<br>$I_F = 200mA, I_R = 200mA$ , measured at $I_R = 20mA$<br>$R_L = 100\Omega$ | $t_{rr}$   | -      | 1<br>, | -        | $\mu s$ |

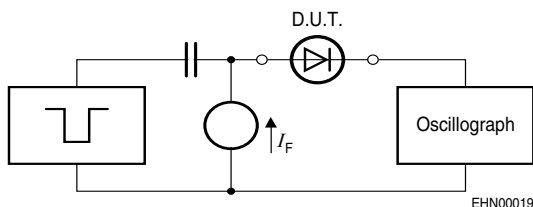
**Test circuit for reverse recovery time**


Puls generator:  $t_p = 10\mu\text{s}$ ,  $D = 0.05$ ,  
 $t_r = 0.6\text{ns}$ ,  $R_i = 50\Omega$

Oscilloscop:  $R = 50\Omega$ ,  $t_r = 0.35\text{ns}$   
 $C \leq 1\text{pF}$


Reverse current  $I_R = f(T_A)$

$V_R = 400V$

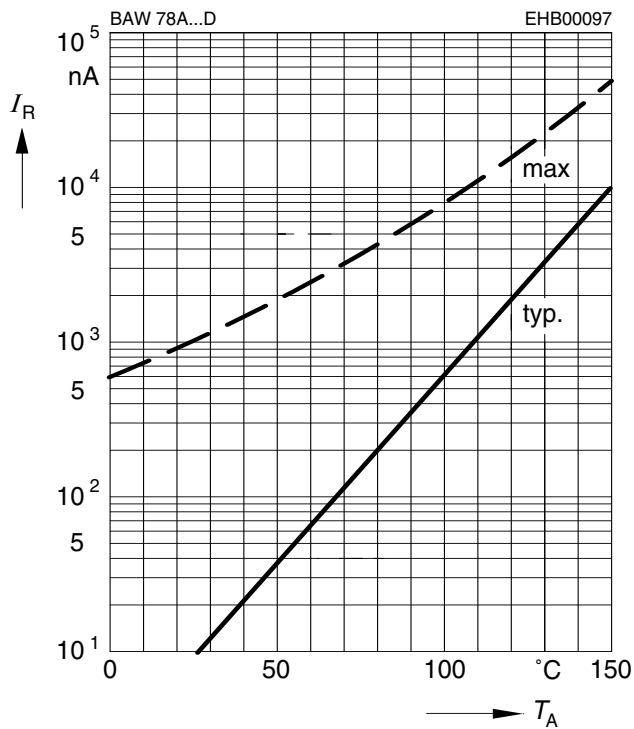


Forward current  $I_F = f(V_F)$

$T_A = 25^\circ C$

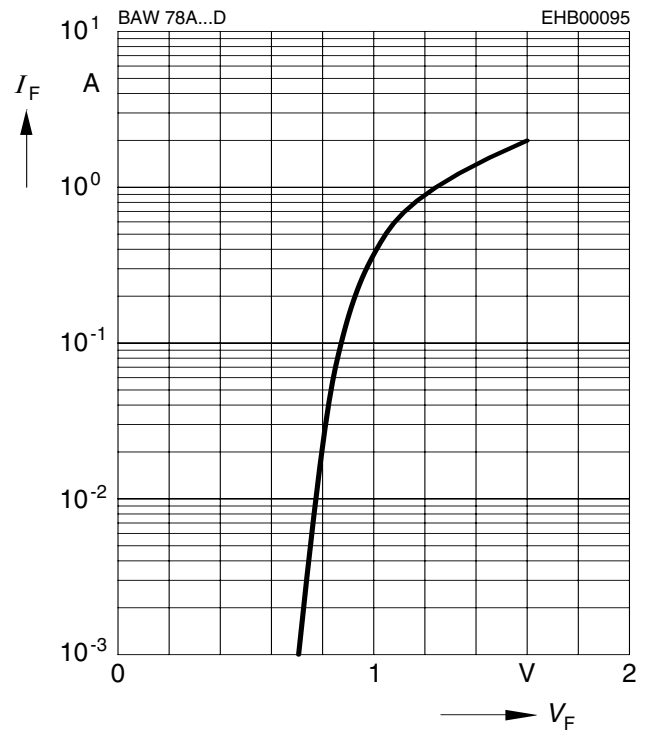


Peak forward current  $I_{FM} = f(t_p)$

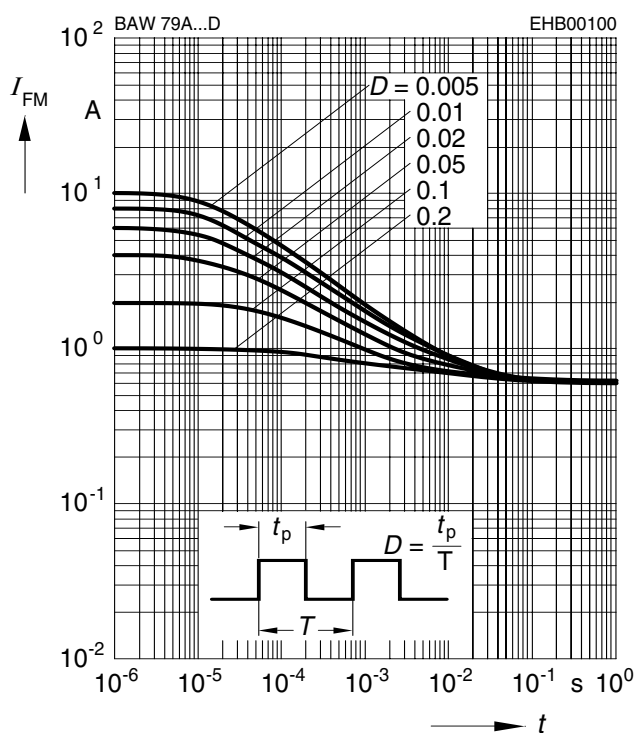

Forward current  $I_F = f(T_S)$

BAW78D

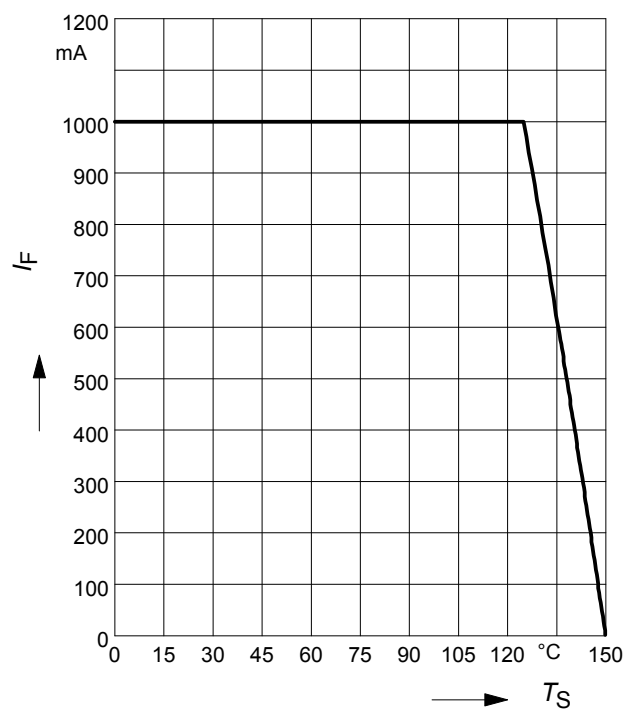

**Forward current  $I_F = f(T_S)$**

BAW79D

