



Silicon Switching Diodes

- Switching applications
- High breakdown voltage
- Common cathode

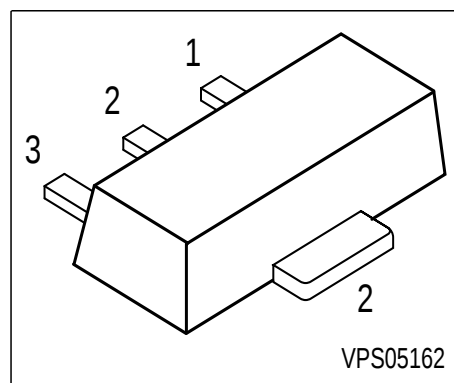

Type	Marking	Pin Configuration			Package
BAW79A	GE	1 = A1	2 = C1/2	3 = A2	SOT89
BAW79B	GF	1 = A1	2 = C1/2	3 = A2	SOT89
BAW79C	GG	1 = A1	2 = C1/2	3 = A2	SOT89
BAW79D	GH	1 = A1	2 = C1/2	3 = A2	SOT89

Maximum Ratings

Parameter	Symbol	BAW 79A	BAW 79B	BAW 79C	BAW 79D	Unit
Diode reverse voltage	V_R	50	100	200	400	V
Peak reverse voltage	V_{RM}	50	100	200	400	
Forward current	I_F	1				A
Peak forward current	I_{FM}	1				
Surge forward current, t = 1 μs	I_{FS}	10				
Total power dissipation, $T_S = 115\text{ °C}$	P_{tot}	1				W
Junction temperature	T_j	150				°C
Storage temperature	T_{stg}	-65 ... 150				

Thermal Resistance


Junction - soldering point ¹⁾	R_{thJS}	≤ 35	K/W
--	------------	-----------	-----

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit	
		min.	typ.	max.		
DC characteristics						
Breakdown voltage $I_{(BR)} = 100 \mu A$ BAW79A BAW79B BAW79C BAW79D	$V_{(BR)}$	 50 100 200 400	 - - - -	 - - - -	V	
Forward voltage $I_F = 1 A$ $I_F = 2 A$	V_F	 - -	 - -	 1.6 2		
Reverse current $V_R = V_{Rmax}$	I_R	 -	 -	 1		μA
Reverse current $V_R = V_{Rmax} , T_A = 150 \text{ }^{\circ}C$	I_R	 -	 -	 50		
AC characteristics						
Diode capacitance $V_R = 0 V, f = 1 MHz$	C_D	 -	 10	 -	pF	
Reverse recovery time $I_F = 200 mA, I_R = 200 mA, R_L = 100 \Omega,$ measured at $I_R = 20mA$	t_{rr}	 -	 1	 -	μs	


Test circuit for reverse recovery time

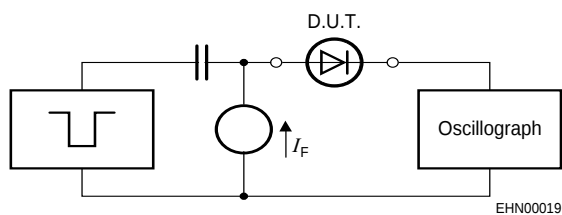

Pulse generator: $t_p = 10 \mu\text{s}$, $D = 0.05$,
 $t_r = 0.6 \text{ ns}$, $R_i = 50 \Omega$


Oscilloscope: $R = 50 \Omega$, $t_r = 0.35 \text{ ns}$,
 $C \leq 1 \text{ pF}$

Forward current $I_F = f(T_S)$

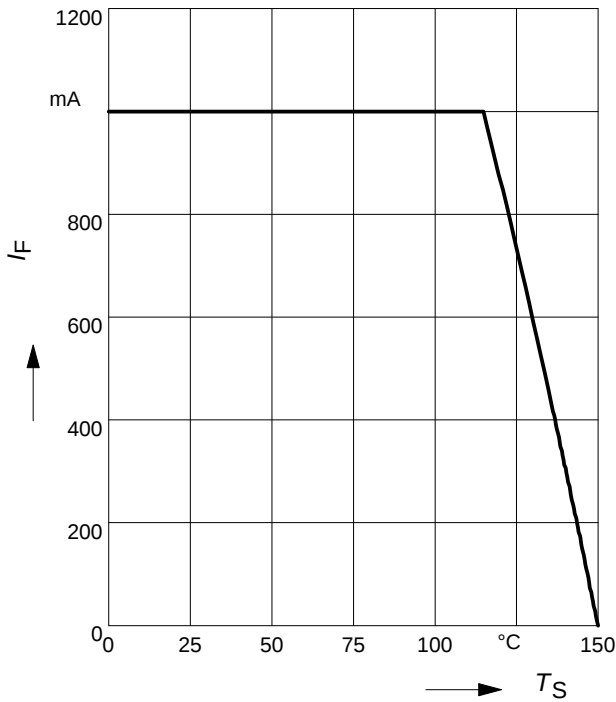


Forward current $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

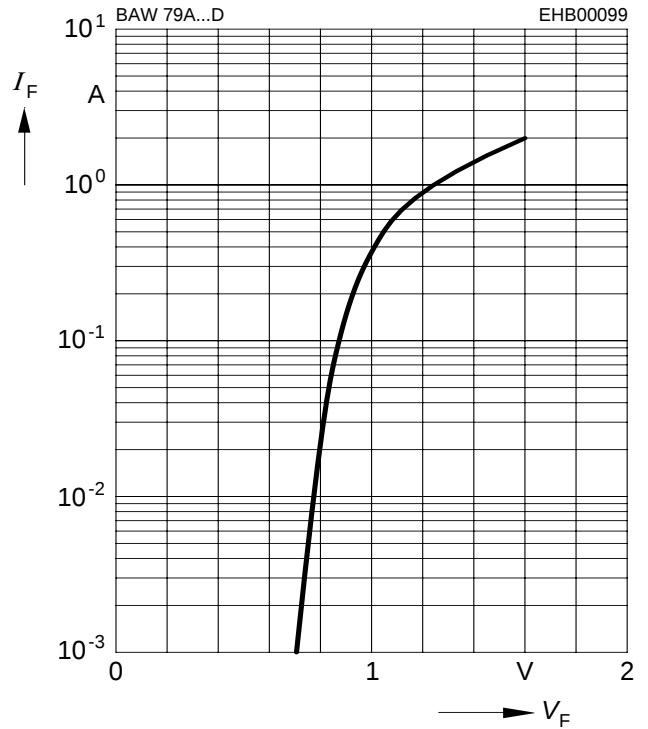

Peak forward current $I_{FM} = f(t_p)$

$T_A = 25^\circ\text{C}$

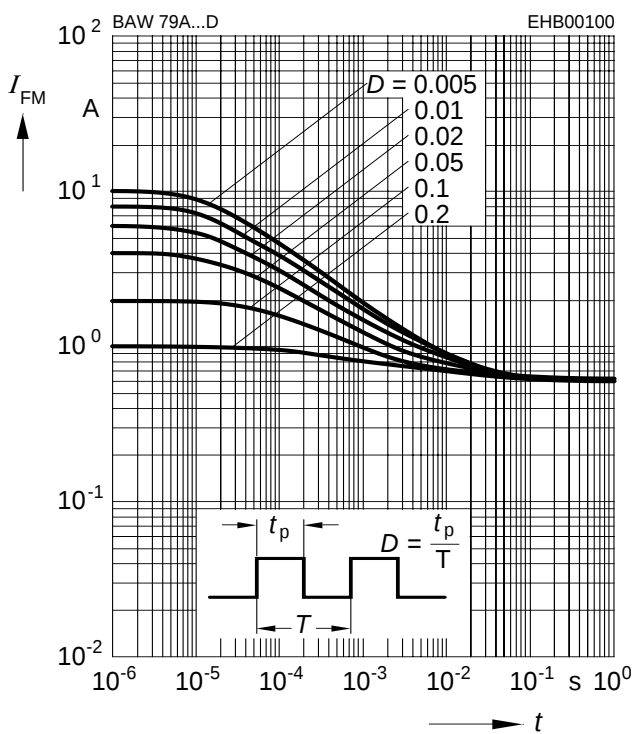

Reverse current $I_R = f(T_A)$

$V_R = V_{Rmax}$

