


PNP Silicon AF Transistors

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage
- Complementary types: BCX 54 ... BCX 56 (NPN)

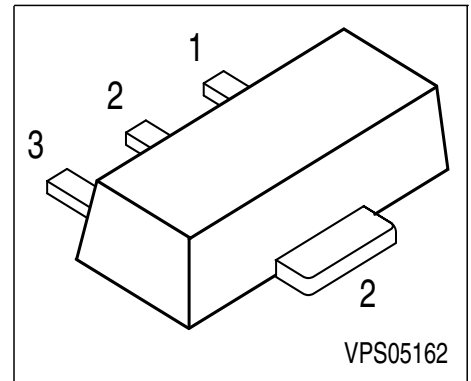

Type	Marking	Pin Configuration			Package
BCX 51	AA	1 = B	2 = C	3 = E	SOT-89
BCX 51-10	AC	1 = B	2 = C	3 = E	SOT-89
BCX 51-16	AD	1 = B	2 = C	3 = E	SOT-89
BCX 52	AE	1 = B	2 = C	3 = E	SOT-89
BCX 52-10	AG	1 = B	2 = C	3 = E	SOT-89
BCX 52-16	AM	1 = B	2 = C	3 = E	SOT-89
BCX 53	AH	1 = B	2 = C	3 = E	SOT-89
BCX 53-10	AK	1 = B	2 = C	3 = E	SOT-89
BCX 53-16	AL	1 = B	2 = C	3 = E	SOT-89

Maximum Ratings

Parameter	Symbol	BCX 51	BCX 52	BCX 53	Unit
Collector-emitter voltage	V_{CEO}	45	60	80	V
Collector-base voltage	V_{CBO}	45	60	100	
Emitter-base voltage	V_{EBO}	5	5	5	
DC collector current	I_C	1			A
Peak collector current	I_{CM}	1.5			
Base current	I_B	100			mA
Peak base current	I_{BM}	200			
Total power dissipation, $T_S = 130\text{ °C}$	P_{tot}	1			W
Junction temperature	T_j	150			°C
Storage temperature	T_{stg}	-65 ... 150			

Thermal Resistance

Junction ambient 1)	R_{thJA}	≤ 75	K/W
Junction - soldering point	R_{thJS}	≤ 20	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm² Cu


Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit	
		min.	typ.	max.		
DC Characteristics						
Collector-emitter breakdown voltage $I_C = 10\text{ mA}$, $I_B = 0$ BXP 51 BXP 52 BXP 53	$V_{(BR)CEO}$	45 60 80	- - -	- - -	V	
Collector-base breakdown voltage $I_C = 100\text{ }\mu\text{A}$, $I_B = 0$ BXP 51 BXP 52 BXP 53	$V_{(BR)CBO}$	45 60 100	- - -	- - -		
Emitter-base breakdown voltage $I_E = 10\text{ }\mu\text{A}$, $I_C = 0$	$V_{(BR)EBO}$	5	-	-		
Collector cutoff current $V_{CB} = 30\text{ V}$, $I_E = 0$	I_{CBO}	-	-	100		nA
Collector cutoff current $V_{CB} = 30\text{ V}$, $I_E = 0$, $T_A = 150\text{ }^\circ\text{C}$	I_{CBO}	-	-	20		μA
DC current gain 1) $I_C = 5\text{ mA}$, $V_{CE} = 2\text{ V}$	h_{FE}	25	-	-		-
DC current gain 1) $I_C = 150\text{ mA}$, $V_{CE} = 2\text{ V}$ BCX51...53 hFE-grp. 10 hFE-grp. 16	h_{FE}	40 63 100	- 100 160	250 160 250	-	
DC current gain 1) $I_C = 500\text{ mA}$, $V_{CE} = 2\text{ V}$	h_{FE}	25	-	-		
Collector-emitter saturation voltage1) $I_C = 500\text{ mA}$, $I_B = 50\text{ mA}$	V_{CEsat}	-	-	0.5		V
Base-emitter voltage 1) $I_C = 500\text{ mA}$, $V_{CE} = 2\text{ V}$	$V_{BE(ON)}$	-	-	1		
AC Characteristics						
Transition frequency $I_C = 50\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 20\text{ MHz}$	f_T	-	125	-	MHz	


1) Pulse test: $t \leq 300\mu\text{s}$, $D = 2\%$

Total power dissipation $P_{\text{tot}} = f(T_A^*; T_S)$


* Package mounted on epoxy

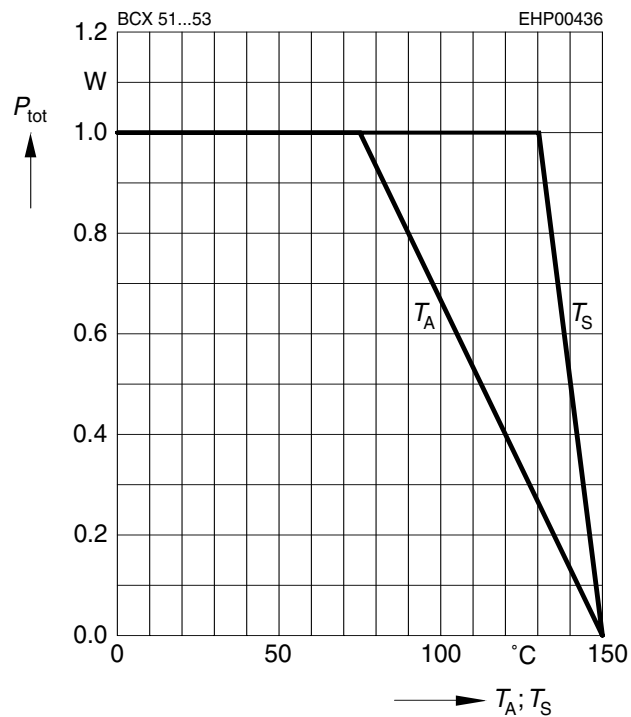
Collector current $I_C = f(V_{\text{BE}})$


$V_{\text{CE}} = 2\text{V}$

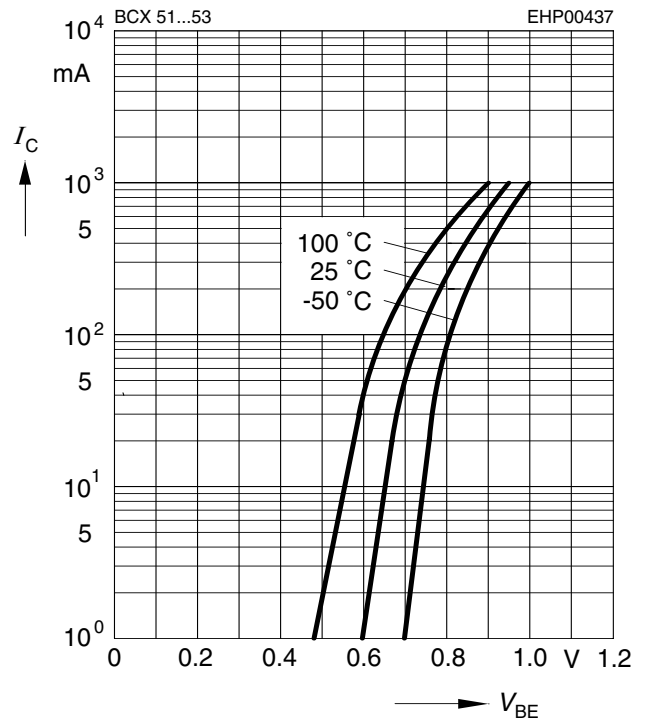
Permissible pulse load

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

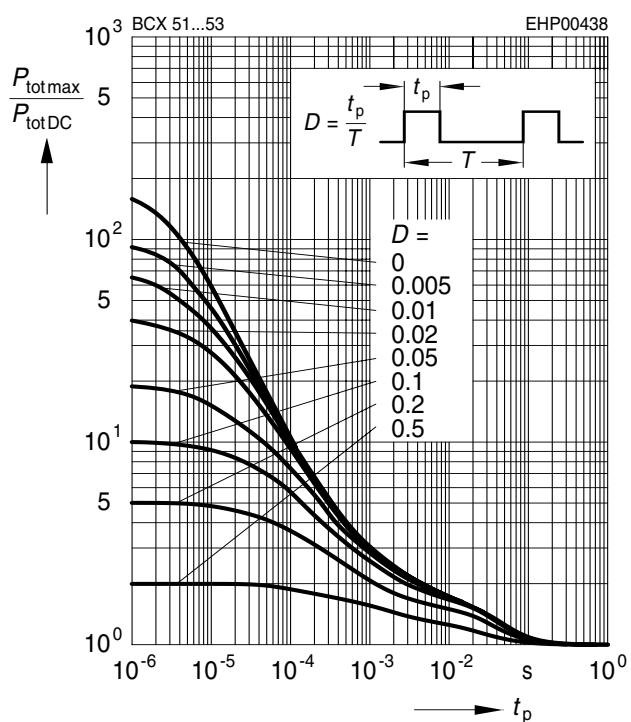

Transition frequency $f_T = f(I_C)$

$V_{\text{CE}} = 10\text{V}$

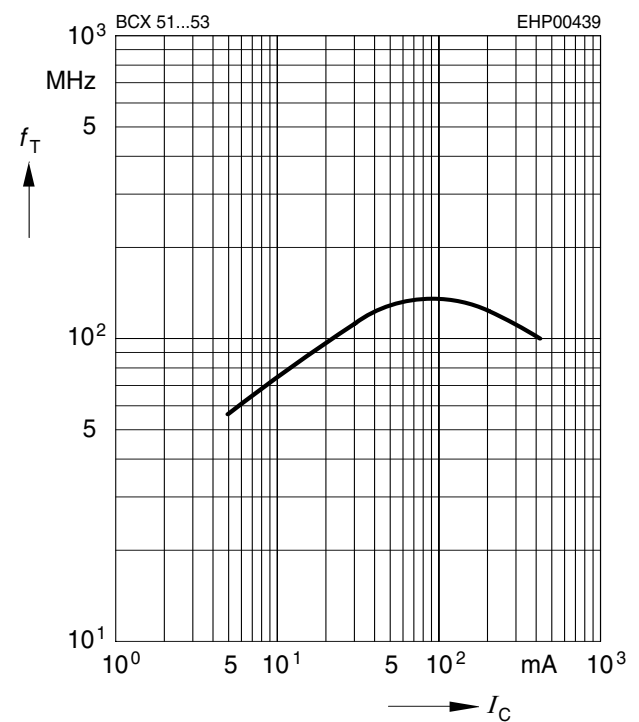


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 2V$

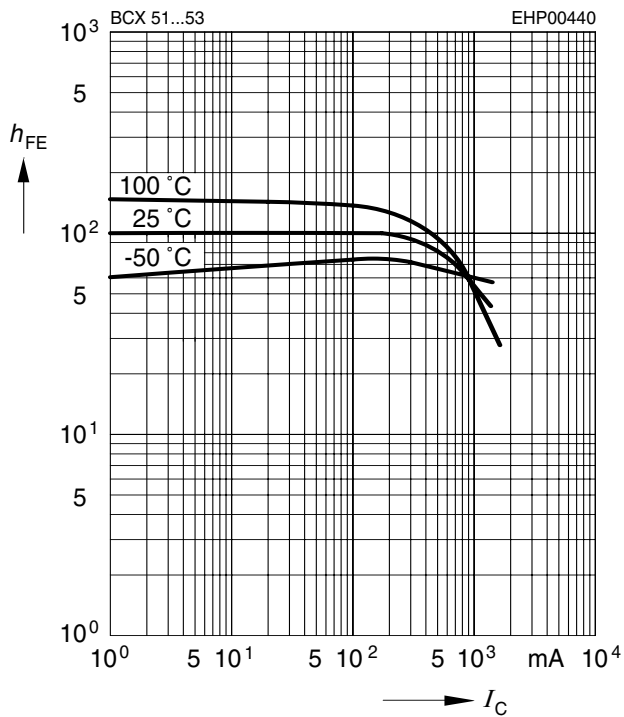


Collector-emitter saturation voltage

$I_C = f(V_{CEsat}), h_{FE} = 10$

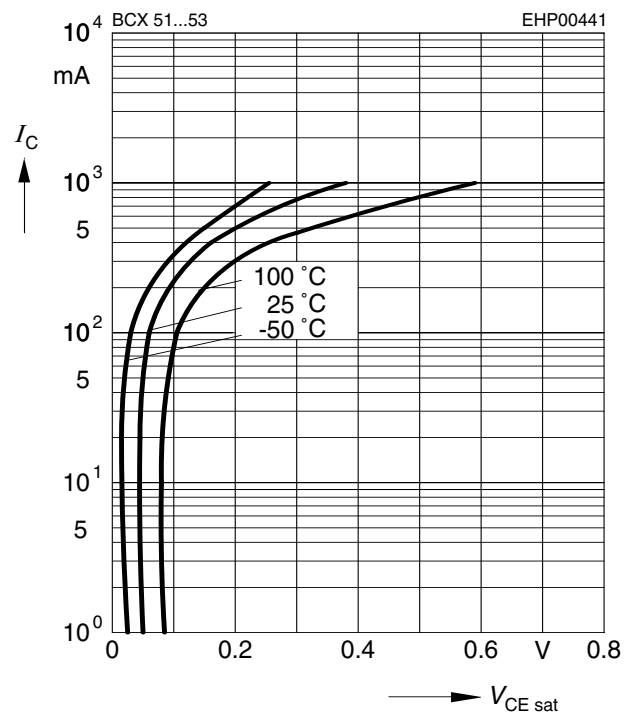

Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CB} = 30V$

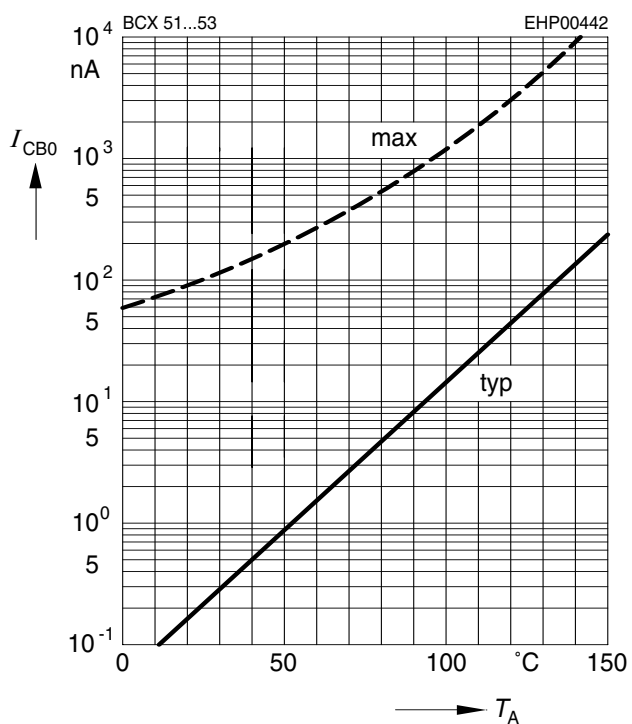

Base-emitter saturation voltage

$I_C = f(V_{BEsat}), h_{FE} = 10$

