


## SMALL SIGNAL NPN TRANSISTORS


Type	Marking
BSV52	B2
SO2369	N11
SO2369A	N81

- SILICON EPITAXIAL PLANAR NPN TRANSISTORS
- MINIATURE PLASTIC PACKAGE FOR APPLICATION IN SURFACE MOUNTING CIRCUITS
- LOW CURRENT, FAST SWITCHING APPLICATIONS.



**SOT-23**

### INTERNAL SCHEMATIC DIAGRAM



SC08960

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value		Unit
		SO2369/A	BSV52	
$V_{CES}$	Collector-Emitter Voltage ( $V_{BE} = 0$ )	40	20	V
$V_{CBO}$	Collector-Base Voltage ( $I_E = 0$ )	40	20	V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	15	12	V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	4.5	5	V
$I_{CM}$	Collector Peak Current	0.2		A
$P_{tot}$	Total Dissipation at $T_c = 25^\circ\text{C}$	200		mW
$T_{stg}$	Storage Temperature	-65 to 150		$^\circ\text{C}$
$T_j$	Max. Operating Junction Temperature	150		$^\circ\text{C}$

# BSV52/SO2369/SO2369A

## THERMAL DATA

$R_{thj-amb}$	Thermal Resistance Junction-Ambient	Max	620	$^{\circ}\text{C}/\text{W}$
$R_{thj-SR}$	Thermal Resistance Junction-Substrate	Max	400	$^{\circ}\text{C}/\text{W}$

• Mounted on a ceramic substrate area = 7 x 5 x 0.5 mm

## ELECTRICAL CHARACTERISTICS ( $T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{CBO}$	Collector Cut-off Current ( $I_E = 0$ )	$V_{CB} = 20\text{ V}$ for <b>SO2369/SO2369A</b> $V_{CB} = 10\text{ V}$ for <b>BSV52</b> $V_{CB} = 10\text{ V}$ $T_j = 150^{\circ}\text{C}$ for <b>BSV52</b>			400 100 5	nA nA $\mu\text{A}$
$I_{CES}$	Collector Cut-off Current ( $V_{BE} = 0$ )	$V_{CB} = 20\text{ V}$ for <b>SO2369A</b>			400	nA
$V_{(BR)CES}^*$	Collector-Emitter Breakdown Voltage ( $I_B = 0$ )	$I_C = 10\ \mu\text{A}$ for <b>SO2369/SO2369A</b> for <b>BSV52</b>	40 20			V V
$V_{(BR)CEO}^*$	Collector-Emitter Breakdown Voltage ( $I_B = 0$ )	$I_C = 10\text{ mA}$ for <b>SO2369/SO2369A</b> for <b>BSV52</b>	15 12			V V
$V_{(BR)CBO}^*$	Collector-Base Breakdown Voltage ( $I_B = 0$ )	$I_C = 10\ \mu\text{A}$ for <b>SO2369/SO2369A</b> for <b>BSV52</b>	40 20			V V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ( $I_C = 0$ )	$I_E = 10\ \mu\text{A}$ for <b>SO2369/SO2369A</b> for <b>BSV52</b>	4.5 5			V V
$V_{CE(sat)}^*$	Collector-Emitter Saturation Voltage	$I_C = 10\text{ mA}$ $I_B = 0.3\text{ mA}$ for <b>BSV52</b> $I_C = 10\text{ mA}$ $I_B = 1\text{ mA}$ for <b>SO2369A</b> for <b>BSV52</b> $I_C = 30\text{ mA}$ $I_B = 3\text{ mA}$ for <b>SO2369 BSV52</b> $I_C = 50\text{ mA}$ $I_B = 5\text{ mA}$ for <b>BSV52</b> $I_C = 100\text{ mA}$ $I_B = 10\text{ mA}$ for <b>SO2369A</b>			0.3 0.2 0.25 0.25 0.4 0.5	V V V V V V
$V_{BE(sat)}^*$	Collector-Base Saturation Voltage	$I_C = 10\text{ mA}$ $I_B = 1\text{ mA}$ $I_C = 30\text{ mA}$ $I_B = 3\text{ mA}$ for <b>SO2369A</b> $I_C = 50\text{ mA}$ $I_B = 5\text{ mA}$ for <b>BSV52</b> $I_C = 100\text{ mA}$ $I_B = 10\text{ mA}$ for <b>SO2369A</b>	0.7		0.85 1.15 1.2 1.6	V V V V
$h_{FE}^*$	DC Current Gain	$I_C = 1\text{ mA}$ $V_{CE} = 1\text{ V}$ for <b>BSV52</b> $I_C = 10\text{ mA}$ $V_{CE} = 0.35\text{ V}$ for <b>SO2369A</b> $I_C = 10\text{ mA}$ $V_{CE} = 1\text{ V}$ for <b>All types</b> $I_C = 30\text{ mA}$ $V_{CE} = 0.4\text{ V}$ for <b>SO2369A</b> $I_C = 50\text{ mA}$ $V_{CE} = 1\text{ V}$ for <b>BSV52</b> $I_C = 100\text{ mA}$ $V_{CE} = 1\text{ V}$ for <b>SO2369A</b> $I_C = 100\text{ mA}$ $V_{CE} = 2\text{ V}$ for <b>SO2369</b>	25 40 40 30 25 20 20		120 120	

\* Pulsed: Pulse duration = 300  $\mu\text{s}$ , duty cycle  $\leq 2\%$


## ELECTRICAL CHARACTERISTICS (Continued)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$f_T$	Transition Frequency	$I_C = 10 \text{ mA}$ $V_{CE} = 10 \text{ V}$ $f = 100 \text{ MHz}$ for <b>SO2369A</b> for <b>BSV52/SO2369</b>	500 400			MHz MHz
$C_{CB}$	Collector Base Capacitance	$I_E = 0$ $V_{CE} = 5 \text{ V}$ $f = 1 \text{ MHz}$			4	pF
$C_{EB}$	Emitter Base Capacitance	$I_C = 0$ $V_{EB} = 1 \text{ V}$ $f = 1 \text{ MHz}$ for <b>BSV52</b>			4.5	pF
$t_{on}$	Turn On Time	$I_C = 10 \text{ mA}$ $V_{BE} = -0.5 \text{ V}$ $I_B = 3 \text{ mA}$			12	ns
$t_s$	Storage Time	$I_C = 10 \text{ mA}$ $I_{B1} = -I_{B2} = 10 \text{ mA}$			13	ns
$t_{off}$	Turn Off Time	$I_C = 10 \text{ mA}$ $I_{B1} = 3 \text{ mA}$ $I_{B2} = -1.5 \text{ mA}$			18	ns

\* Pulsed: Pulse duration = 300  $\mu\text{s}$ , duty cycle  $\leq 2\%$

**SOT-23 MECHANICAL DATA**

DIM.	mm			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	0.85		1.1	33.4		43.3
B	0.65		0.95	25.6		37.4
C	1.20		1.4	47.2		55.1
D	2.80		3	110.2		118
E	0.95		1.05	37.4		41.3
F	1.9		2.05	74.8		80.7
G	2.1		2.5	82.6		98.4
H	0.38		0.48	14.9		18.8
L	0.3		0.6	11.8		23.6
M	0		0.1	0		3.9
N	0.3		0.65	11.8		25.6
O	0.09		0.17	3.5		6.7

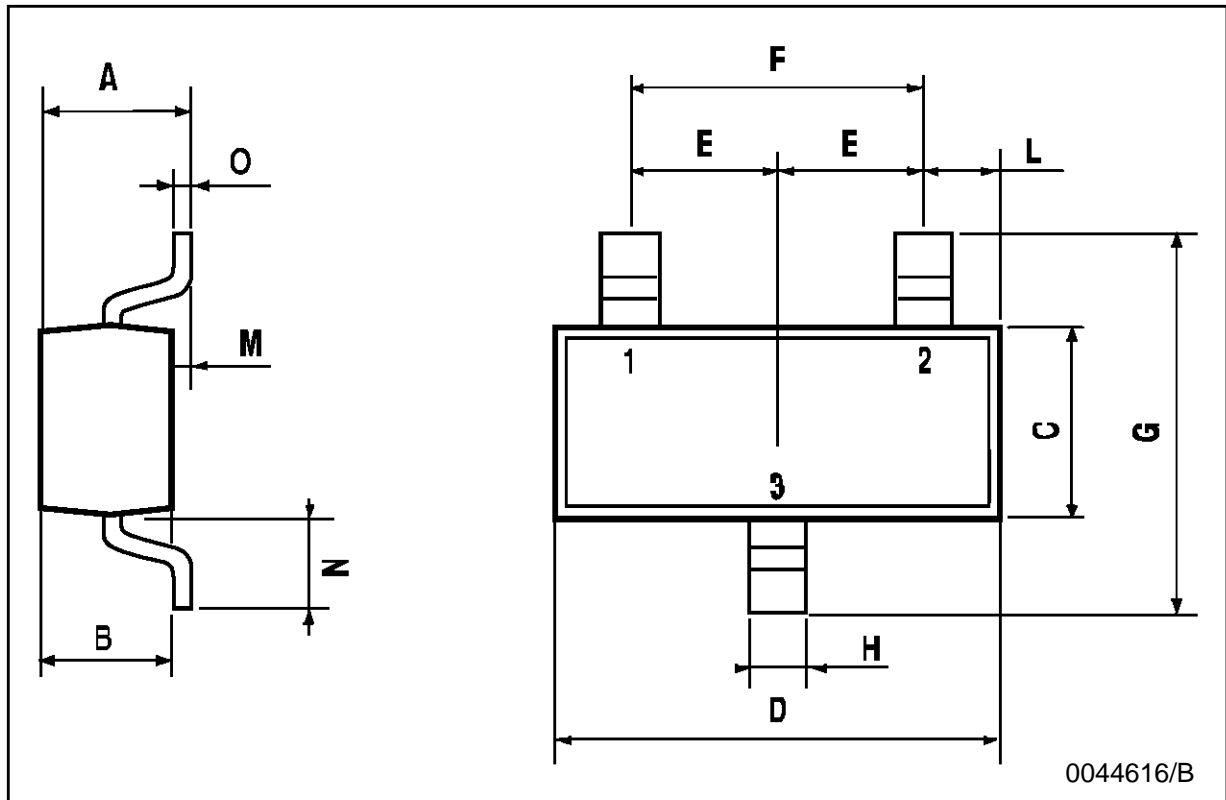

0044616/B

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1995 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A