

Bias Resistor Transistor

PNP Silicon Surface Mount Transistor with Monolithic Bias Resistor Network


This new series of digital transistors is designed to replace a single device and its external resistor bias network. The BRT (Bias Resistor Transistor) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space. The device is housed in the SC-59 package which is designed for low power surface mount applications.

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- The SC-59 package can be soldered using wave or reflow.

The modified gull-winged leads absorb thermal stress during soldering eliminating the possibility of damage to the die.


- Available in 8 mm embossed tape and reel

Use the Device Number to order the 7 inch/3000 unit reel.

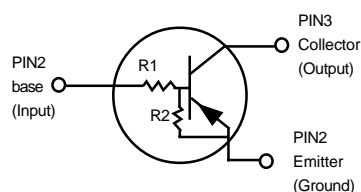

MUN2111RT1
MUN2112RT1
MUN2113RT1
MUN2114RT1
MUN2115RT1
MUN2116RT1
MUN2130RT1
MUN2131RT1
MUN2132RT1
MUN2133RT1
MUN2134RT1

PNP SILICON
BIAS RESISTOR
TRANSISTOR



CASE 318-03, STYLE 1
(SC - 59)

MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

| Rating | Symbol | Value | Unit |
|--|------------------|-------|-------|
| Collector-Base Voltage | V _{CBO} | 50 | Vdc |
| Collector-Emitter Voltage | V _{CEO} | 50 | Vdc |
| Collector Current | I _C | 100 | mAdc |
| Total Power Dissipation @ T _A = 25°C ⁽¹⁾ | P _D | 200 | mW |
| Derate above 25°C | | 1.6 | mW/°C |

THERMAL CHARACTERISTICS

| Rating | Symbol | Value | Unit |
|--|-----------------------------------|-------------|------|
| Thermal Resistance — Junction-to-Ambient (surface mounted) | R _{θJA} | 625 | °C/W |
| Operating and Storage Temperature Range | T _J , T _{stg} | -65 to +150 | °C |
| Maximum Temperature for Soldering Purposes | T _L | 260 | °C |
| Time in Solder Bath | | 10 | Sec |

DEVICE MARKING AND RESISTOR VALUES

| Device | Marking | R1 (K) | R2 (K) |
|---------------------------|---------|--------|--------|
| MUN2111RT1 | 6A | 10 | 10 |
| MUN2112RT1 | 6B | 22 | 22 |
| MUN2113RT1 | 6C | 47 | 47 |
| MUN2114RT1 | 6D | 10 | 47 |
| MUN2115RT1 ⁽²⁾ | 6E | 10 | ∞ |
| MUN2116RT1 ⁽²⁾ | 6F | 4.7 | ∞ |
| MUN2130RT1 ⁽²⁾ | 6G | 1.0 | 1.0 |
| MUN2131RT1 ⁽²⁾ | 6H | 2.2 | 2.2 |
| MUN2132RT1 ⁽²⁾ | 6J | 4.7 | 4.7 |
| MUN2133RT1 ⁽²⁾ | 6K | 4.7 | 47 |
| MUN2134RT1 ⁽²⁾ | 6L | 22 | 47 |

1. Device mounted on a FR-4 glass epoxy printed circuit board using the minimum recommended footprint.

2. New devices. Updated curves to follow in subsequent data sheets.

MUN2111RT1 SERIES

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | | Symbol | Min | Typ | Max | Unit |
|--|------------|---------------|------------|------------|------|------|
| OFF CHARACTERISTICS | | | | | | |
| Collector-Base Cutoff Current ($V_{CB}=50V$, $I_E = 0$) | | I_{CBO} | - | - | 100 | nAdc |
| Collector-Emitter Cutoff Current ($V_{CE} = 50\text{ V}$, $I_B = 0$) | | I_{CEO} | - | - | 500 | nAdc |
| Emitter-Base Cutoff Current ($V_{EB} = 6.0\text{ V}$, $I_C = 0$) | MUN2111RT1 | I_{EBO} | - | - | 0.5 | mAdc |
| | MUN2112RT1 | | - | - | 0.2 | |
| | MUN2113RT1 | | - | - | 0.1 | |
| | MUN2114RT1 | | - | - | 0.2 | |
| | MUN2115RT1 | | - | - | 0.9 | |
| | MUN2116RT1 | | - | - | 1.9 | |
| | MUN2130RT1 | | - | - | 4.3 | |
| | MUN2131RT1 | | - | - | 2.3 | |
| | MUN2132RT1 | | - | - | 1.5 | |
| | MUN2133RT1 | | - | - | 0.18 | |
| MUN2134RT1 | | - | - | 0.13 | | |
| Collector-Base Breakdown Voltage ($I_C = 10\text{ }\mu A$, $I_E = 0$) | | $V_{(BR)CBO}$ | 50 | - | - | Vdc |
| Collector-Emitter Breakdown Voltage ⁽³⁾ ($I_C=2.0mA$, $I_B=0$) | | $V_{(BR)CEO}$ | 50 | - | - | Vdc |
| ON CHARACTERISTICS ⁽³⁾ | | | | | | |
| DC Current Gain ($V_{CE} = 10\text{ V}$, $I_C = 5.0\text{ mA}$) | MUN2111RT1 | h_{FE} | 35 | 60 | - | |
| | MUN2112RT1 | | 60 | 100 | - | |
| | MUN2113RT1 | | 80 | 140 | - | |
| | MUN2114RT1 | | 80 | 140 | - | |
| | MUN2115RT1 | | 160 | 250 | - | |
| | MUN2116RT1 | | 160 | 250 | - | |
| | MUN2130RT1 | | 3.0 | 5.0 | - | |
| | MUN2131RT1 | | 8.0 | 15 | - | |
| | MUN2132RT1 | | 15 | 27 | - | |
| | MUN2133RT1 | | 80 | 140 | - | |
| MUN2134RT1 | | 80 | 130 | - | | |
| Collector-Emitter Saturation Voltage ($I_C=10mA$, $I_E=0.3mA$) | | $V_{CE(sat)}$ | | | | Vdc |
| ($I_C = 10\text{ mA}$, $I_B = 0.3\text{ mA}$) | MUN2111RT1 | MUN2112RT1 | | | 0.25 | |
| | MUN2113RT1 | MUN2114RT1 | MUN2115RT1 | MUN2130RT1 | | |
| ($I_C = 10\text{ mA}$, $I_B = 5.0\text{ mA}$) | MUN2131RT1 | | | | 0.25 | |
| ($I_C = 10\text{ mA}$, $I_B = 1.0\text{ mA}$) | MUN2116RT1 | MUN2132RT1 | | | | |
| | MUN2134RT1 | | | | 0.25 | |
| Output Voltage (on) | | V_{OL} | | | | Vdc |
| ($V_{CC}=5.0V, V_B=2.5V$, $R_L=1.0k\Omega$) | MUN2111RT1 | | | | | |
| | MUN2112RT1 | MUN2114RT1 | MUN2115RT1 | MUN2116RT1 | | |
| | MUN2130RT1 | MUN2131RT1 | MUN2132RT1 | MUN2133RT1 | | |
| | MUN2134RT1 | | | | | |
| ($V_{CC} = 5.0V, V_B=3.5V$, $R_L= 1.0k\Omega$) | MUN2113RT1 | | | | 0.2 | |

3. Pulse Test: Pulse Width < 300 ms, Duty Cycle < 2.0%

MUN2111RT1 SERIES
ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|-----------|-------|------|-------|------------|
| Output Voltage (off) ($V_{CC} = 5.0\text{V}$, $V_B = 0.5\text{V}$, $R_L = 1.0\text{k}\Omega$) | V_{OH} | 4.9 | — | — | Vdc |
| ($V_{CC} = 5.0\text{V}$, $V_B = 0.050\text{V}$, $R_L = 1.0\text{k}\Omega$) | | | | | |
| ($V_{CC} = 5.0\text{V}$, $V_B = 0.25\text{V}$, $R_L = 1.0\text{k}\Omega$) | | | | | |
| MUN2130RT1 | | | | | |
| MUN2115RT1 | | | | | |
| MUN2116RT1 | | | | | |
| MUN2131RT1 | | | | | |
| MUN2132RT1 | | | | | |
| Input Resistor | R_1 | 7.0 | 10 | 13 | k Ω |
| MUN2111RT1 | | 15.4 | 22 | 28.6 | |
| MUN2112RT1 | | 32.9 | 47 | 61.1 | |
| MUN2113RT1 | | 7.0 | 10 | 13 | |
| MUN2114RT1 | | 7.0 | 10 | 13 | |
| MUN2115RT1 | | 3.3 | 4.7 | 6.1 | |
| MUN2116RT1 | | 0.7 | 1.0 | 1.3 | |
| MUN2130RT1 | | 1.5 | 2.2 | 2.9 | |
| MUN2131RT1 | | 3.3 | 4.7 | 6.1 | |
| MUN2132RT1 | | 3.3 | 4.7 | 6.1 | |
| MUN2133RT1 | | 15.4 | 22 | 28.6 | |
| MUN2134RT1 | | | | | |
| Resistor Ratio | R_1/R_2 | 0.8 | 1.0 | 1.2 | |
| MUN2111RT1 MUN2112RT1 MUN2113RT1 | | 0.17 | 0.21 | 0.25 | |
| MUN2114RT1 | | — | — | — | |
| MUN2115RT1 MUN2116RT1 | | 0.8 | 1.0 | 1.2 | |
| MUN2130RT1 MUN2131RT1 MUN2132RT1 | | 0.055 | 0.1 | 0.185 | |
| MUN2133RT1 | | 0.38 | 0.47 | 0.56 | |
| MUN2134RT1 | | | | | |

MUN2111RT1 SERIES

TYPICAL ELECTRICAL CHARACTERISTICS MUN2111RT1

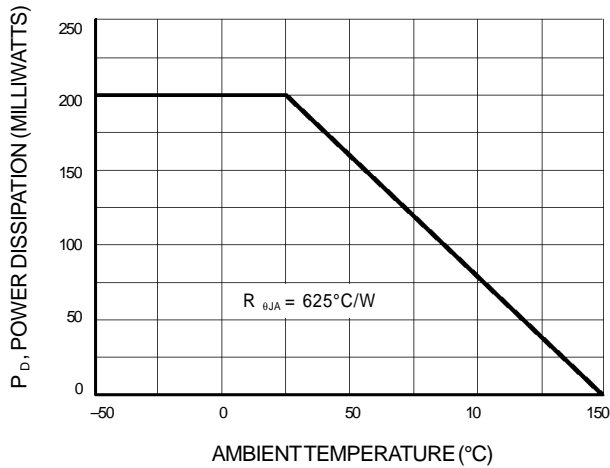


Figure 1. Derating Curve

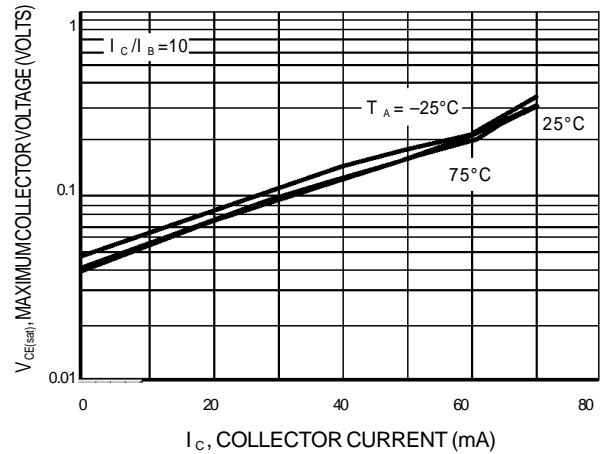


Figure 2. $V_{CE(sat)}$ versus I_C

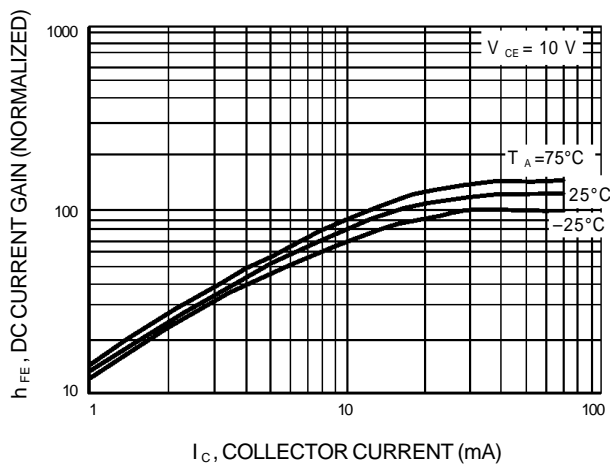


Figure 3. DC Current Gain

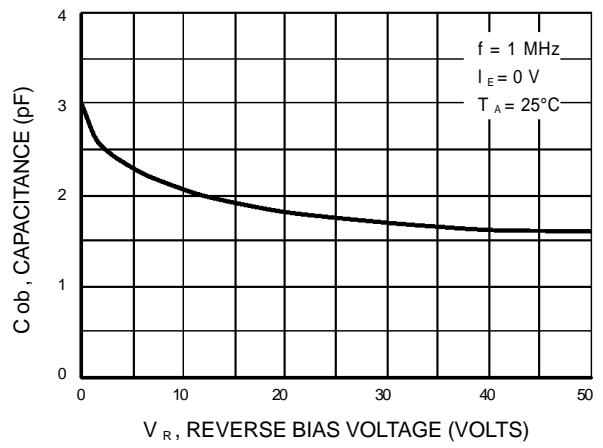


Figure 4. Output Capacitance

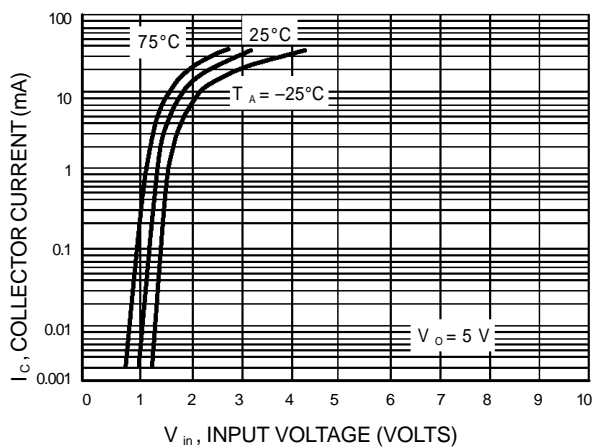


Figure 5. Output Current versus Input Voltage

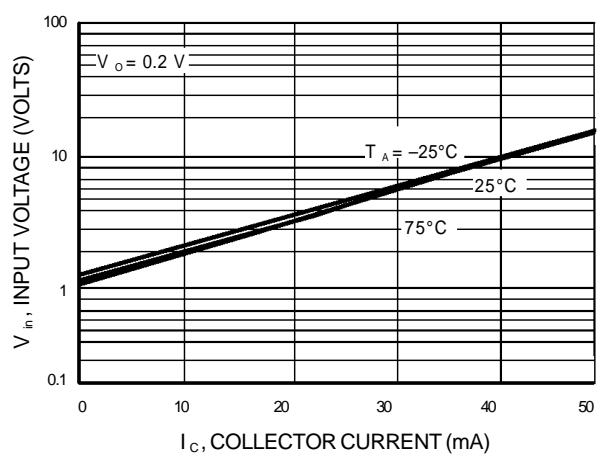


Figure 6. Input Voltage versus Output Current

MUN2111RT1 SERIES

TYPICAL ELECTRICAL CHARACTERISTICS

MUN2112RT1

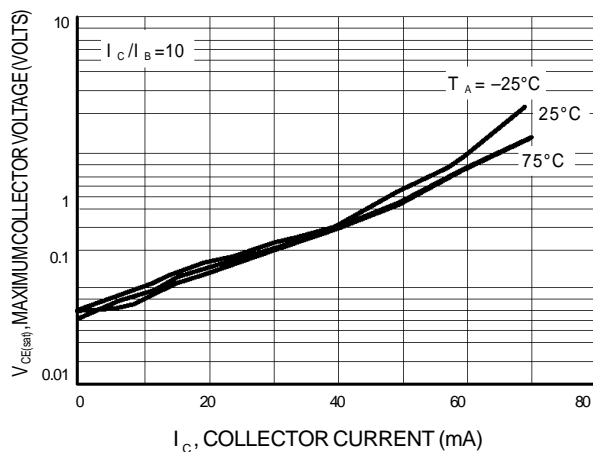


Figure 7. $V_{CE(sat)}$ versus I_C

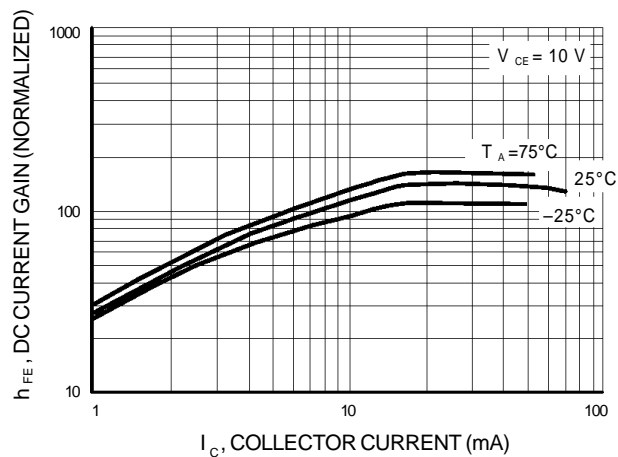


Figure 8. DC Current Gain

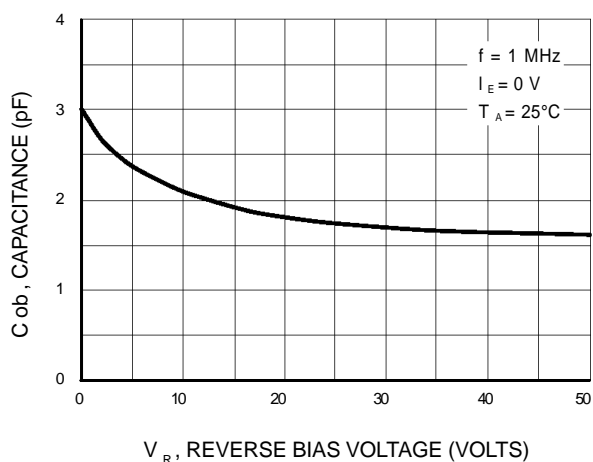


Figure 9. Output Capacitance

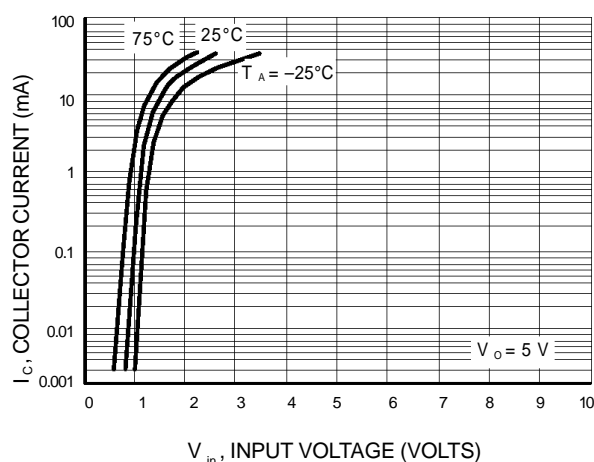


Figure 10. Output Current versus Input Voltage

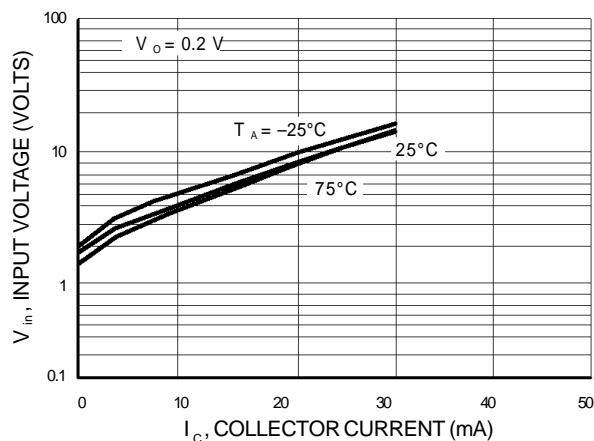


Figure 11. Input Voltage versus Output Current

MUN2111RT1 SERIES

TYPICAL ELECTRICAL CHARACTERISTICS

MUN2113RT1

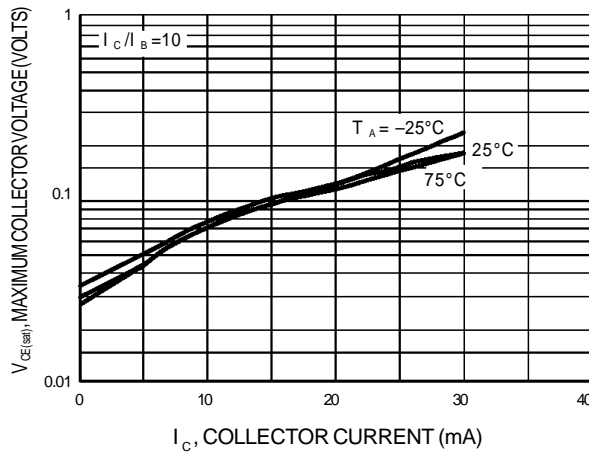


Figure 12. $V_{CE(sat)}$ versus I_C

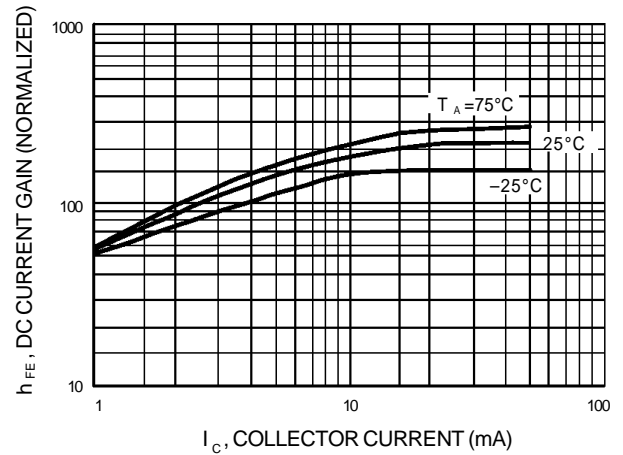


Figure 13. DC Current Gain

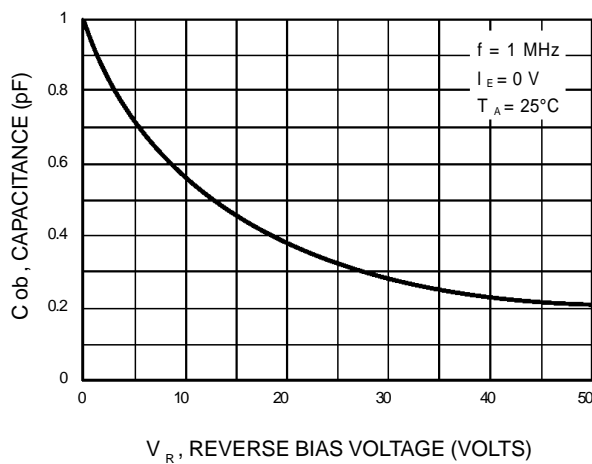


Figure 14. Output Capacitance

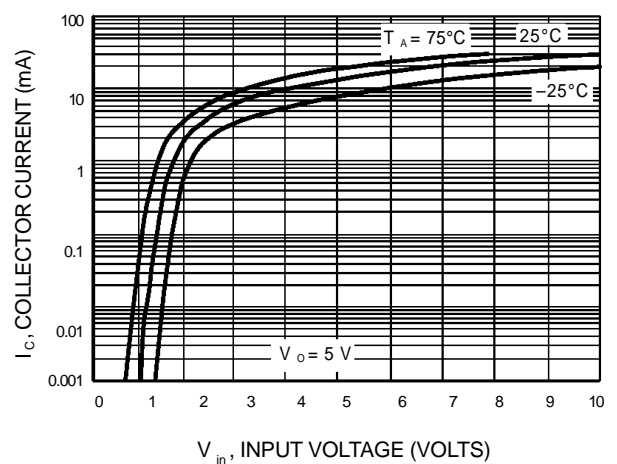


Figure 15. Output Current versus Input Voltage

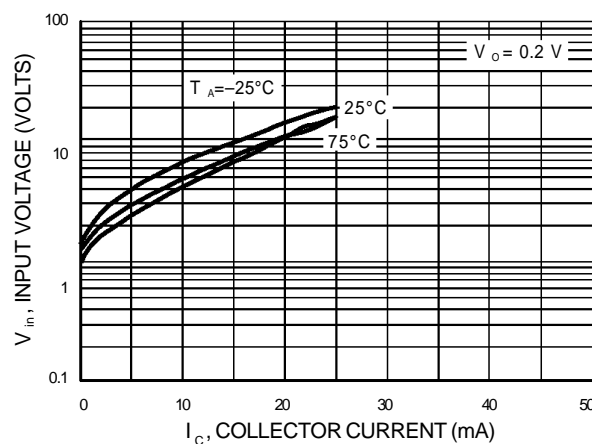


Figure 16. Input Voltage versus Output Current

MUN2111RT1 SERIES

TYPICAL ELECTRICAL CHARACTERISTICS MUN2114RT1

