


## OCTAL BUS BUFFER WITH 3 STATE OUTPUTS (INVERTED)

- HIGH SPEED:  $t_{PD} = 4 \text{ ns (TYP.)}$  at  $V_{CC} = 5V$
- LOW POWER DISSIPATION:  
 $I_{CC} = 8 \mu A \text{ (MAX.)}$  at  $T_A = 25^\circ C$
- HIGH NOISE IMMUNITY:  
 $V_{NIH} = V_{NIL} = 28\% V_{CC} \text{ (MIN.)}$
- $50\Omega$  TRANSMISSION LINE DRIVING CAPABILITY
- SYMMETRICAL OUTPUT IMPEDANCE:  
 $|I_{OH}| = I_{OL} = 24 \text{ mA (MIN.)}$
- BALANCED PROPAGATION DELAYS:  
 $t_{PLH} \cong t_{PHL}$
- OPERATING VOLTAGE RANGE:  
 $V_{CC} \text{ (OPR)} = 2V \text{ to } 6V$
- PIN AND FUNCTION COMPATIBLE WITH 74 SERIES 240
- IMPROVED LATCH-UP IMMUNITY

### DESCRIPTION

The AC240 is an advanced CMOS OCTAL BUS BUFFER (3-STATE) fabricated with sub-micron silicon gate and double-layer metal wiring C<sup>2</sup>MOS technology. It is ideal for low power applications

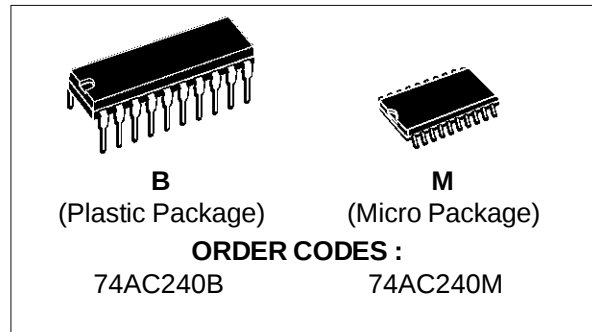


maintaining high speed operation similar to equivalent Bipolar Schottky TTL.

$\overline{G}$  control output governs four BUS BUFFERS.


This device is designed to be used with 3 state memory address drivers, etc.

All inputs and outputs are equipped with protection circuits against static discharge, giving them 2KV ESD immunity and transient excess voltage.

### PIN CONNECTION AND IEC LOGIC SYMBOLS

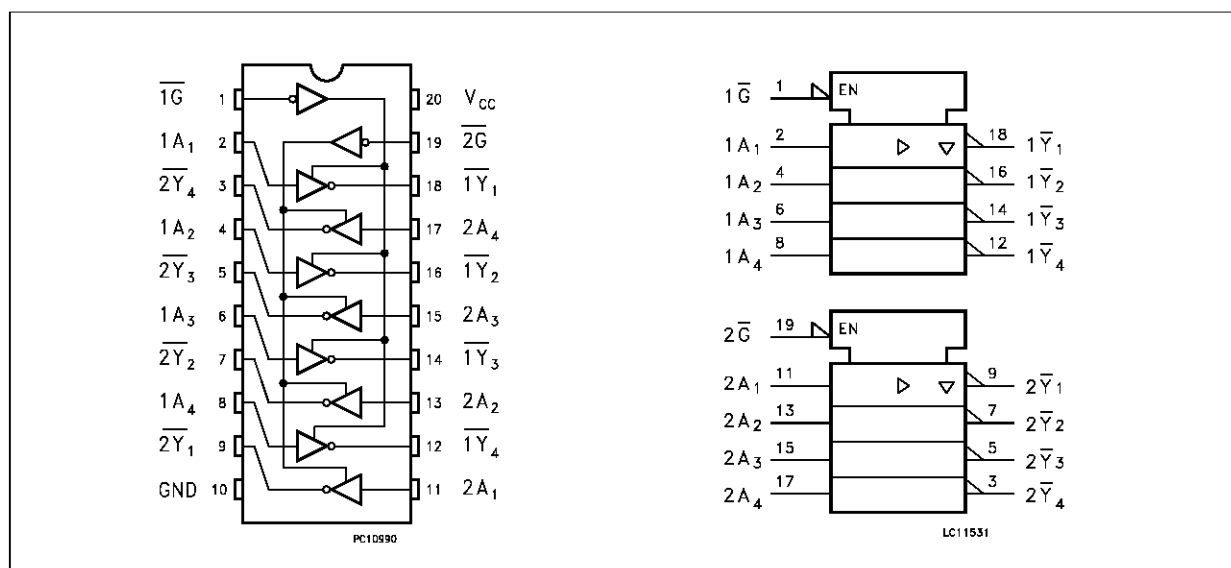

INPUT AND OUTPUT EQUIVALENT CIRCUIT

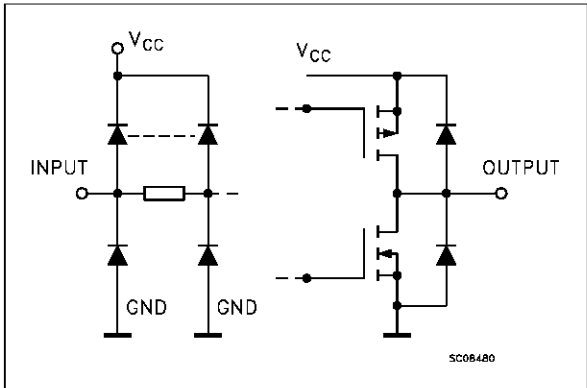

PIN DESCRIPTION

| PIN No         | SYMBOL                               | NAME AND FUNCTION       |
|----------------|--------------------------------------|-------------------------|
| 1              | $\overline{1G}$                      | Output Enable Input     |
| 2, 4, 6, 8     | 1A1 to 1A4                           | Data Inputs             |
| 9, 7, 5, 3     | $\overline{2Y1}$ to $\overline{2Y4}$ | Data Outputs            |
| 11, 13, 15, 17 | 2A1 to 2A4                           | Data Inputs             |
| 18, 16, 14, 12 | $\overline{1Y1}$ to $\overline{1Y4}$ | Data Outputs            |
| 19             | $\overline{2G}$                      | Output Enabel Input     |
| 10             | GND                                  | Ground (0V)             |
| 20             | V <sub>CC</sub>                      | Positive Supply Voltage |

TRUTH TABLE

| INPUT          |                | OUTPUT           |
|----------------|----------------|------------------|
| $\overline{G}$ | A <sub>n</sub> | $\overline{Y_n}$ |
| L              | L              | H                |
| L              | H              | L                |
| H              | X              | Z                |

X: "H" or "L"  
Z: High impedance

ABSOLUTE MAXIMUM RATINGS

| Symbol                              | Parameter                            | Value                         | Unit |
|-------------------------------------|--------------------------------------|-------------------------------|------|
| V <sub>CC</sub>                     | Supply Voltage                       | -0.5 to +7                    | V    |
| V <sub>I</sub>                      | DC Input Voltage                     | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| V <sub>O</sub>                      | DC Output Voltage                    | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>                     | DC Input Diode Current               | ± 20                          | mA   |
| I <sub>OK</sub>                     | DC Output Diode Current              | ± 20                          | mA   |
| I <sub>O</sub>                      | DC Output Current                    | ± 50                          | mA   |
| I <sub>CC</sub> or I <sub>GND</sub> | DC V <sub>CC</sub> or Ground Current | ± 400                         | mA   |
| T <sub>stg</sub>                    | Storage Temperature                  | -65 to +150                   | °C   |
| T <sub>L</sub>                      | Lead Temperature (10 sec)            | 300                           | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

RECOMMENDED OPERATING CONDITIONS

| Symbol          | Parameter                                                            | Value                | Unit |
|-----------------|----------------------------------------------------------------------|----------------------|------|
| V <sub>CC</sub> | Supply Voltage                                                       | 2 to 6               | V    |
| V <sub>I</sub>  | Input Voltage                                                        | 0 to V <sub>CC</sub> | V    |
| V <sub>O</sub>  | Output Voltage                                                       | 0 to V <sub>CC</sub> | V    |
| T <sub>op</sub> | Operating Temperature:                                               | -40 to +85           | °C   |
| dt/dv           | Input Rise and Fall Time V <sub>CC</sub> = 3.0, 4.5 or 5.5 V(note 1) | 8                    | ns/V |

1) V<sub>IN</sub> from 30% to 70% of V<sub>CC</sub>

## DC SPECIFICATIONS

| Symbol           | Parameter                             | Test Conditions        |                                                                                                |                        | Value |       |              |      |      | Unit |
|------------------|---------------------------------------|------------------------|------------------------------------------------------------------------------------------------|------------------------|-------|-------|--------------|------|------|------|
|                  |                                       | V <sub>CC</sub><br>(V) |                                                                                                | T <sub>A</sub> = 25 °C |       |       | -40 to 85 °C |      |      |      |
|                  |                                       |                        |                                                                                                | Min.                   | Typ.  | Max.  | Min.         | Max. |      |      |
| V <sub>IH</sub>  | High Level Input Voltage              | 3.0                    | V <sub>O</sub> = 0.1 V or<br>V <sub>CC</sub> - 0.1 V                                           | 2.1                    | 1.5   |       | 2.1          |      | V    |      |
|                  |                                       | 4.5                    |                                                                                                | 3.15                   | 2.25  |       | 3.15         |      |      |      |
|                  |                                       | 5.5                    |                                                                                                | 3.85                   | 2.75  |       | 3.85         |      |      |      |
| V <sub>IL</sub>  | Low Level Input Voltage               | 3.0                    | V <sub>O</sub> = 0.1 V or<br>V <sub>CC</sub> - 0.1 V                                           |                        | 1.5   | 0.9   |              | 0.9  | V    |      |
|                  |                                       | 4.5                    |                                                                                                |                        | 2.25  | 1.35  |              | 1.35 |      |      |
|                  |                                       | 5.5                    |                                                                                                |                        | 2.75  | 1.65  |              | 1.65 |      |      |
| V <sub>OH</sub>  | High Level Output Voltage             | 3.0                    | V <sub>I</sub> <sup>(*)</sup> =<br>V <sub>IH</sub> or<br>V <sub>IL</sub>                       | I <sub>O</sub> =50 μA  | 2.9   | 2.99  |              | 2.9  | V    |      |
|                  |                                       | 4.5                    |                                                                                                | I <sub>O</sub> =50 μA  | 4.4   | 4.49  |              | 4.4  |      |      |
|                  |                                       | 5.5                    |                                                                                                | I <sub>O</sub> =50 μA  | 5.4   | 5.49  |              | 5.4  |      |      |
|                  |                                       | 3.0                    |                                                                                                | I <sub>O</sub> =-12 mA | 2.56  |       |              | 2.46 |      |      |
|                  |                                       | 4.5                    |                                                                                                | I <sub>O</sub> =-24 mA | 3.86  |       |              | 3.76 |      |      |
|                  |                                       | 5.5                    |                                                                                                | I <sub>O</sub> =-24 mA | 4.86  |       |              | 4.76 |      |      |
| V <sub>OL</sub>  | Low Level Output Voltage              | 3.0                    | V <sub>I</sub> <sup>(*)</sup> =<br>V <sub>IH</sub> or<br>V <sub>IL</sub>                       | I <sub>O</sub> =50 μA  |       | 0.002 | 0.1          |      | 0.1  | V    |
|                  |                                       | 4.5                    |                                                                                                | I <sub>O</sub> =50 μA  |       | 0.001 | 0.1          |      | 0.1  |      |
|                  |                                       | 5.5                    |                                                                                                | I <sub>O</sub> =50 μA  |       | 0.001 | 0.1          |      | 0.1  |      |
|                  |                                       | 3.0                    |                                                                                                | I <sub>O</sub> =12 mA  |       |       | 0.36         |      | 0.44 |      |
|                  |                                       | 4.5                    |                                                                                                | I <sub>O</sub> =24 mA  |       |       | 0.36         |      | 0.44 |      |
|                  |                                       | 5.5                    |                                                                                                | I <sub>O</sub> =24 mA  |       |       | 0.36         |      | 0.44 |      |
| I <sub>I</sub>   | Input Leakage Current                 | 5.5                    | V <sub>I</sub> = V <sub>CC</sub> or GND                                                        |                        |       | ±0.1  |              | ±1   | μA   |      |
| I <sub>OZ</sub>  | 3 State Output Leakage Current        | 5.5                    | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>V <sub>O</sub> = V <sub>CC</sub> or GND |                        |       | ±0.5  |              | ±5   | μA   |      |
| I <sub>CC</sub>  | Quiescent Supply Current              | 5.5                    | V <sub>I</sub> = V <sub>CC</sub> or GND                                                        |                        |       | 8     |              | 80   | μA   |      |
| I <sub>OLD</sub> | Dynamic Output Current<br>(note 1, 2) | 5.5                    | V <sub>OLD</sub> = 1.65 V max                                                                  |                        |       |       |              | 75   | mA   |      |
| I <sub>OHD</sub> |                                       |                        | V <sub>OHD</sub> = 3.85 V min                                                                  |                        |       |       |              | -75  | mA   |      |

1) Maximum test duration 2ms, one output loaded at time

2) Incident wave switching is guaranteed on transmission lines with impedances as low as 50 Ω.

(\*) All outputs loaded.

AC ELECTRICAL CHARACTERISTICS (C<sub>L</sub> = 50 pF, R<sub>L</sub> = 500 Ω, Input t<sub>r</sub> = t<sub>f</sub> = 3 ns)

| Symbol                               | Parameter              | Test Condition                            |  | Value                  |        |           |              |             | Unit |
|--------------------------------------|------------------------|-------------------------------------------|--|------------------------|--------|-----------|--------------|-------------|------|
|                                      |                        | V <sub>CC</sub><br>(V)                    |  | T <sub>A</sub> = 25 °C |        |           | -40 to 85 °C |             |      |
|                                      |                        |                                           |  | Min.                   | Typ.   | Max.      | Min.         | Max.        |      |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay Time | 3.3 <sup>(*)</sup><br>5.0 <sup>(**)</sup> |  | 1.5<br>1.5             | 5<br>4 | 8<br>6.5  | 1.5<br>1.5   | 9<br>7      | ns   |
| t <sub>PZL</sub><br>t <sub>PZH</sub> | Output Enable Time     | 3.3 <sup>(*)</sup><br>5.0 <sup>(**)</sup> |  | 1.5<br>1.5             | 7<br>5 | 10.5<br>8 | 1.5<br>1.5   | 11.5<br>8.5 |      |
| t <sub>PLZ</sub><br>t <sub>PHZ</sub> | Output Disable Time    | 3.3 <sup>(*)</sup><br>5.0 <sup>(**)</sup> |  | 1.5<br>1.5             | 7<br>6 | 10.5<br>9 | 1.5<br>1.5   | 11.5<br>9.5 | ns   |

(\*) Voltage range is 3.3V ± 0.3V


(\*\*) Voltage range is 5V ± 0.5V

CAPACITIVE CHARACTERISTICS

| Symbol           | Parameter                              | Test Conditions        |  | Value                  |      |      |              |      | Unit |
|------------------|----------------------------------------|------------------------|--|------------------------|------|------|--------------|------|------|
|                  |                                        | V <sub>CC</sub><br>(V) |  | T <sub>A</sub> = 25 °C |      |      | -40 to 85 °C |      |      |
|                  |                                        |                        |  | Min.                   | Typ. | Max. | Min.         | Max. |      |
| C <sub>IN</sub>  | Input Capacitance                      | 5.0                    |  |                        | 4    |      |              |      | pF   |
| C <sub>OUT</sub> | Output Capacitance                     | 5.0                    |  |                        | 8    |      |              |      | pF   |
| C <sub>PD</sub>  | Power Dissipation Capacitance (note 1) | 5.0                    |  |                        | 21   |      |              |      | pF   |

1) C<sub>PD</sub> is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation. I<sub>CC(opr)</sub> = C<sub>PD</sub> • V<sub>CC</sub> • f<sub>IN</sub> + I<sub>CC/n</sub> (per circuit)

TEST CIRCUIT


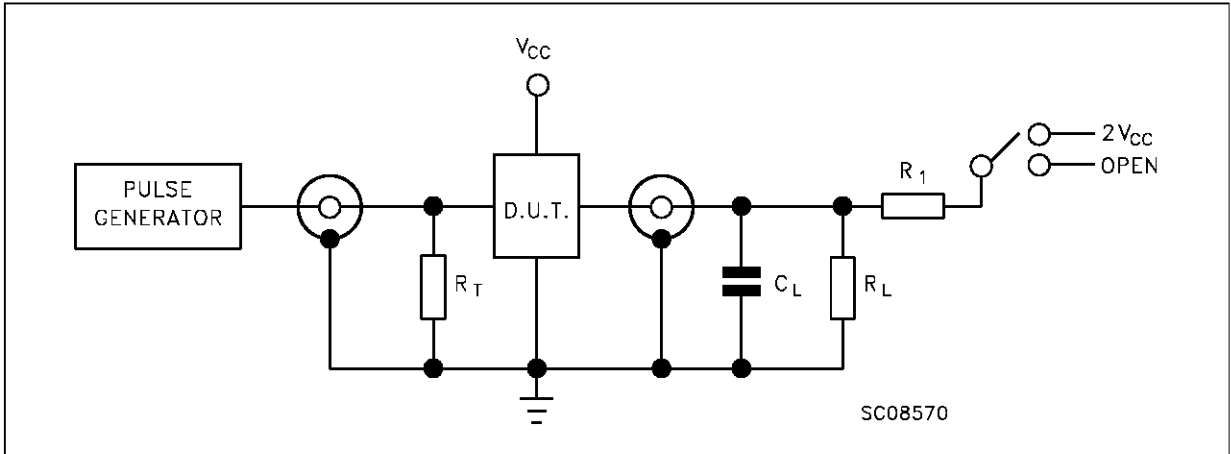


| TEST                                | SWITCH           |
|-------------------------------------|------------------|
| t <sub>PLH</sub> , t <sub>PHL</sub> | Open             |
| t <sub>PZL</sub> , t <sub>PLZ</sub> | 2V <sub>CC</sub> |
| t <sub>PZH</sub> , t <sub>PHZ</sub> | Open             |

C<sub>L</sub> = 50 pF or equivalent (includes jig and probe capacitance)


R<sub>L</sub> = R<sub>T</sub> = 500Ω or equivalent

R<sub>T</sub> = Z<sub>OUT</sub> of pulse generator (typically 50Ω)

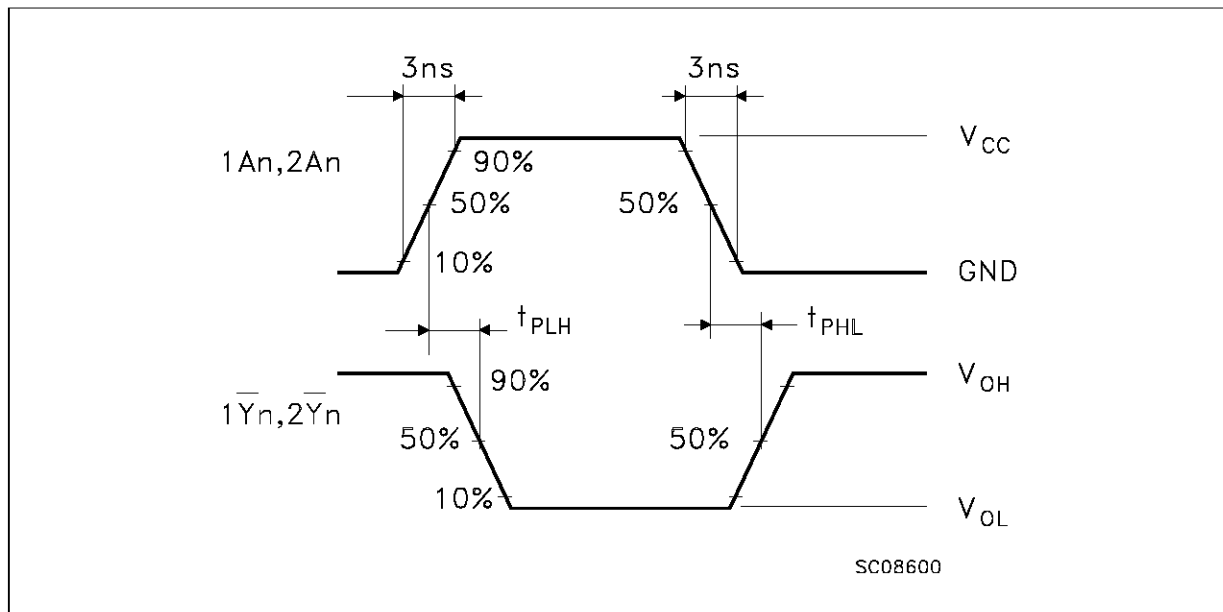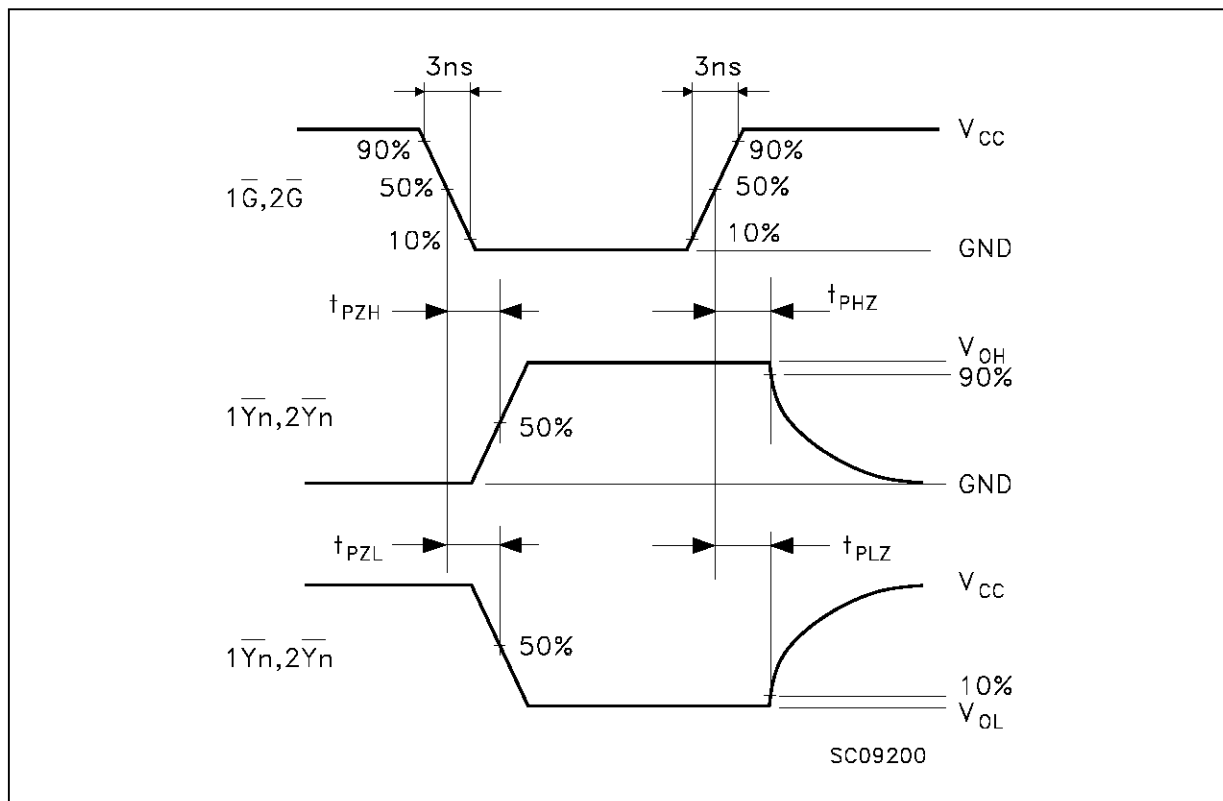**WAVEFORM 1: PROPAGATION DELAYS** ( $f=1\text{MHz}$ ; 50% duty cycle)**WAVEFORM 2: OUTPUT ENABLE AND DISABLE TIME** ( $f=1\text{MHz}$ ; 50% duty cycle)


Plastic DIP20 (0.25) MECHANICAL DATA

| DIM. | mm    |       |      | inch  |       |       |
|------|-------|-------|------|-------|-------|-------|
|      | MIN.  | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.254 |       |      | 0.010 |       |       |
| B    | 1.39  |       | 1.65 | 0.055 |       | 0.065 |
| b    |       | 0.45  |      |       | 0.018 |       |
| b1   |       | 0.25  |      |       | 0.010 |       |
| D    |       |       | 25.4 |       |       | 1.000 |
| E    |       | 8.5   |      |       | 0.335 |       |
| e    |       | 2.54  |      |       | 0.100 |       |
| e3   |       | 22.86 |      |       | 0.900 |       |
| F    |       |       | 7.1  |       |       | 0.280 |
| l    |       |       | 3.93 |       |       | 0.155 |
| L    |       | 3.3   |      |       | 0.130 |       |
| Z    |       |       | 1.34 |       |       | 0.053 |

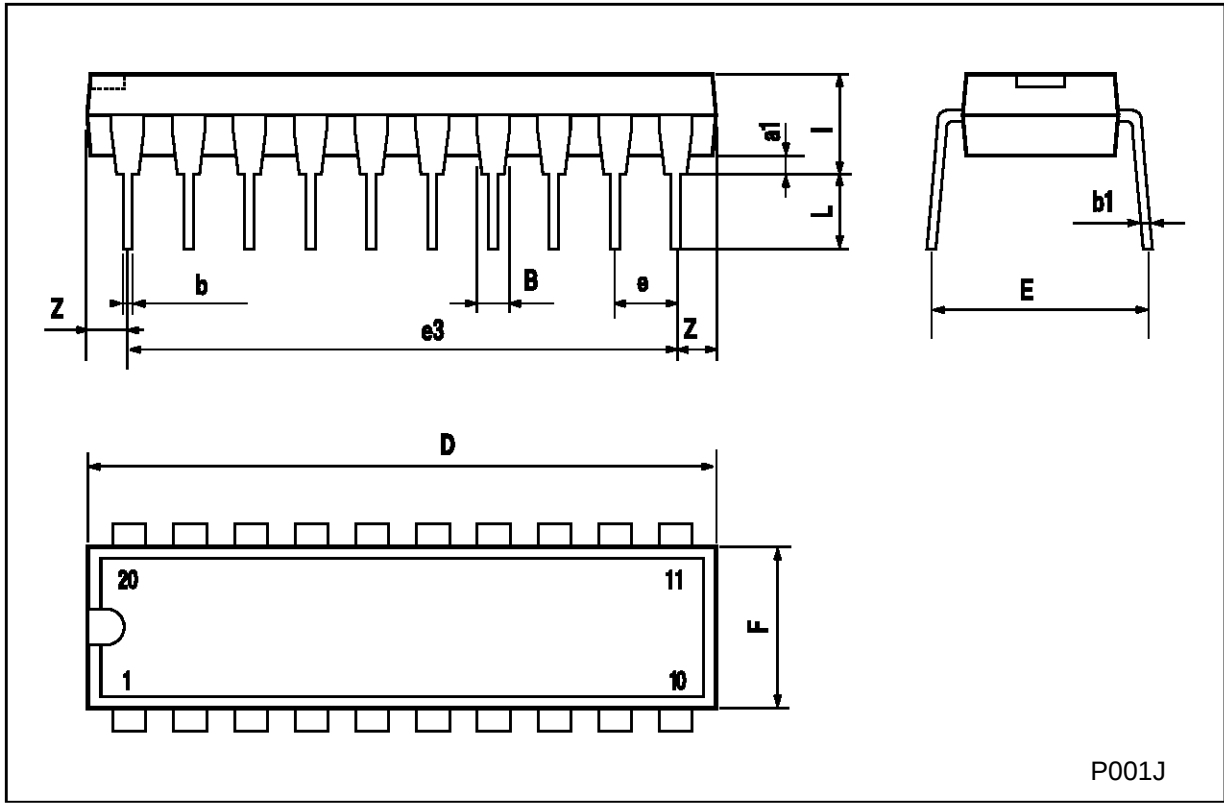

## SO20 MECHANICAL DATA

| DIM. | mm         |       |       | inch  |       |       |
|------|------------|-------|-------|-------|-------|-------|
|      | MIN.       | TYP.  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |            |       | 2.65  |       |       | 0.104 |
| a1   | 0.10       |       | 0.20  | 0.004 |       | 0.007 |
| a2   |            |       | 2.45  |       |       | 0.096 |
| b    | 0.35       |       | 0.49  | 0.013 |       | 0.019 |
| b1   | 0.23       |       | 0.32  | 0.009 |       | 0.012 |
| C    |            | 0.50  |       |       | 0.020 |       |
| c1   | 45° (typ.) |       |       |       |       |       |
| D    | 12.60      |       | 13.00 | 0.496 |       | 0.512 |
| E    | 10.00      |       | 10.65 | 0.393 |       | 0.419 |
| e    |            | 1.27  |       |       | 0.050 |       |
| e3   |            | 11.43 |       |       | 0.450 |       |
| F    | 7.40       |       | 7.60  | 0.291 |       | 0.299 |
| L    | 0.50       |       | 1.27  | 0.19  |       | 0.050 |
| M    |            |       | 0.75  |       |       | 0.029 |
| S    | 8° (max.)  |       |       |       |       |       |

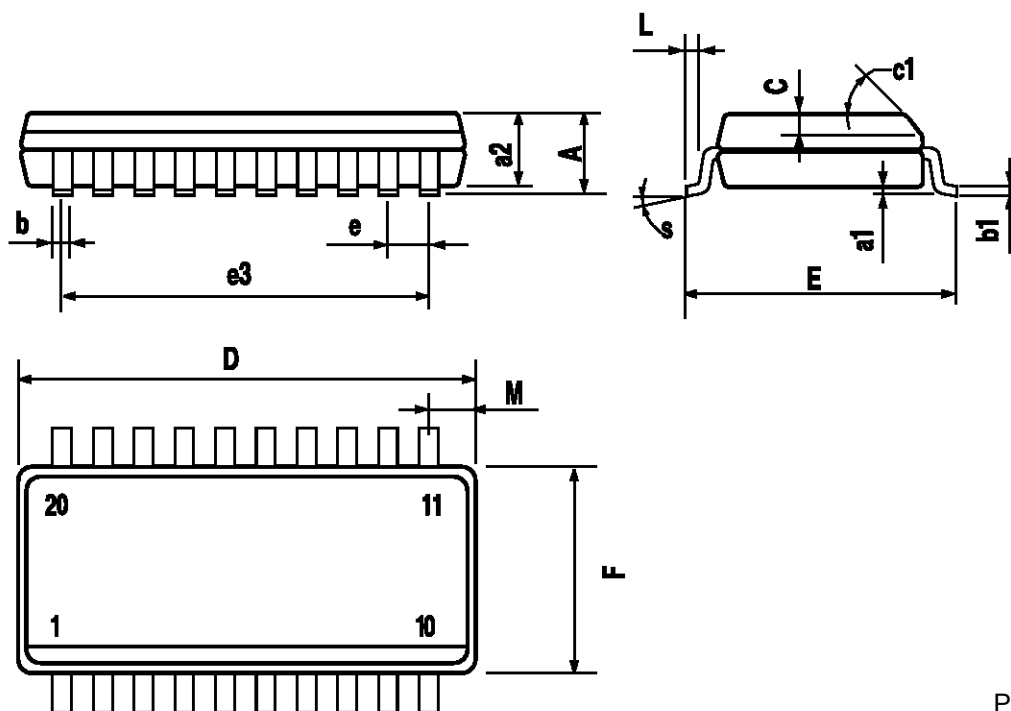

P013L

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A