




# 74ACT574

## OCTAL D-TYPE FLIP-FLOP WITH 3 STATE OUTPUTS (NON INVERTED)

- HIGH SPEED:  
 $f_{MAX} = 270\text{MHz}$  (TYP.) at  $V_{CC} = 5.0\text{V}$
- LOW POWER DISSIPATION:  
 $I_{CC} = 4\mu\text{A}$  (MAX.) at  $T_A = 25^\circ\text{C}$
- COMPATIBLE WITH TTL OUTPUTS  
 $V_{IH} = 2\text{V}$  (MIN.),  $V_{IL} = 0.8\text{V}$  (MAX.)
- $50\Omega$  TRANSMISSION LINE DRIVING CAPABILITY
- SYMMETRICAL OUTPUT IMPEDANCE:  
 $|I_{OH}| = I_{OL} = 24\text{mA}$  (MIN)
- BALANCED PROPAGATION DELAYS:  
 $t_{PLH} \equiv t_{PHL}$
- OPERATING VOLTAGE RANGE:  
 $V_{CC}$  (OPR) =  $4.5\text{V}$  to  $5.5\text{V}$
- PIN AND FUNCTION COMPATIBLE WITH 74 SERIES 574
- IMPROVED LATCH-UP IMMUNITY

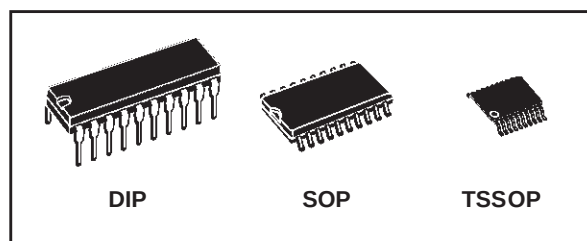

### ORDER CODES

| PACKAGE | TUBE      | T & R       |
|---------|-----------|-------------|
| DIP     | 74ACT574B |             |
| SOP     | 74ACT574M | 74ACT574MTR |
| TSSOP   |           | 74ACT574TTR |

### DESCRIPTION

The 74ACT574 is an advanced high-speed CMOS OCTAL D-TYPE FLIP-FLOP with 3 STATE OUTPUT NON INVERTING fabricated with sub-micron silicon gate and double-layer metal wiring C<sup>2</sup>MOS technology.

These 8 bit D-Type Flip-Flop are controlled by a clock input (CK) and an output enable input ( $\overline{OE}$ ). On the positive transition of the clock, the Q outputs will be set to the logic that were setup at the D inputs.

While the ( $\overline{OE}$ ) input is low, the 8 outputs will be in


a normal logic state (high or low logic level) and while high level the outputs will be in a high impedance state.

The output control does not affect the internal operation of flip-flops; that is, the old data can be retained or the new data can be entered even while the outputs are off.


This device is designed to interface directly High Speed CMOS systems with TTL and NMOS components.

All inputs and outputs are equipped with protection circuits against static discharge, giving them 2KV ESD immunity and transient excess voltage.

### PIN CONNECTION AND IEC LOGIC SYMBOLS

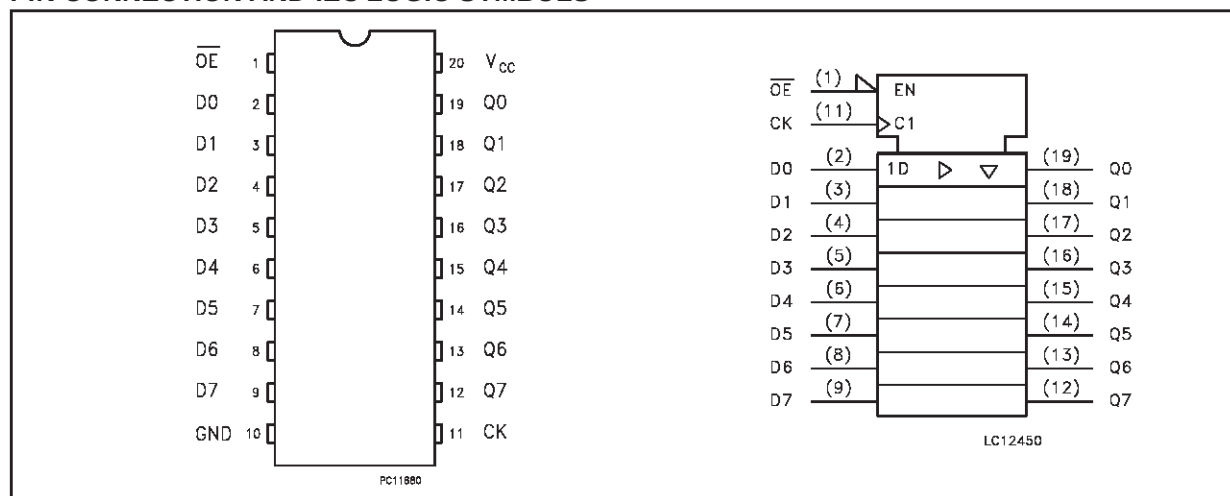

INPUT AND OUTPUT EQUIVALENT CIRCUIT

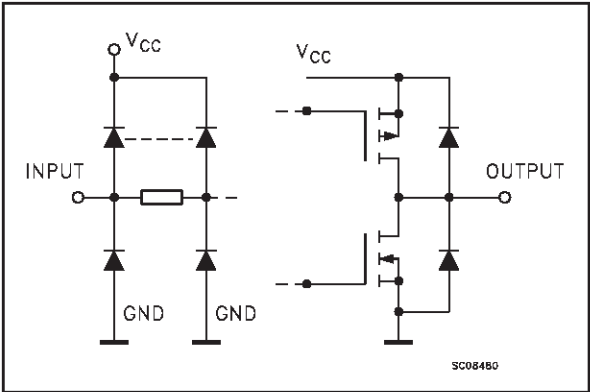

PIN DESCRIPTION


| PIN No                         | SYMBOL                 | NAME AND FUNCTION                      |
|--------------------------------|------------------------|----------------------------------------|
| 1                              | $\overline{\text{OE}}$ | 3-State Output Enable (Active LOW)     |
| 2, 3, 4, 5, 6, 7, 8, 9         | D0 to D7               | Data Inputs                            |
| 12, 13, 14, 15, 16, 17, 18, 19 | Q0 to Q7               | 3-State Outputs                        |
| 11                             | CK                     | Clock Input (LOW-to-HIGH Edge Trigger) |
| 10                             | GND                    | Ground (0V)                            |
| 20                             | V <sub>CC</sub>        | Positive Supply Voltage                |

TRUTH TABLE

| INPUTS                 |    |   | OUTPUT    |
|------------------------|----|---|-----------|
| $\overline{\text{OE}}$ | CK | D | Q         |
| H                      | X  | X | Z         |
| L                      |    | X | NO CHANGE |
| L                      |    | L | L         |
| L                      |    | H | H         |

X : Don't Care  
Z : High Impedance

LOGIC DIAGRAM

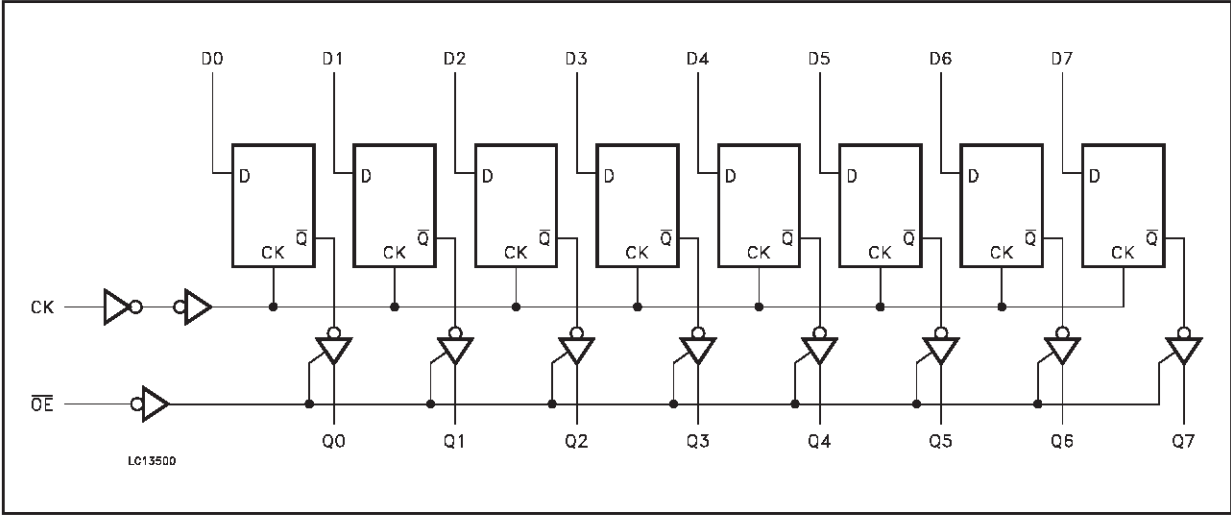

This logic diagram has not be used to estimate propagation delays

**ABSOLUTE MAXIMUM RATINGS**

| Symbol                | Parameter                     | Value                  | Unit |
|-----------------------|-------------------------------|------------------------|------|
| $V_{CC}$              | Supply Voltage                | -0.5 to +7             | V    |
| $V_I$                 | DC Input Voltage              | -0.5 to $V_{CC} + 0.5$ | V    |
| $V_O$                 | DC Output Voltage             | -0.5 to $V_{CC} + 0.5$ | V    |
| $I_{IK}$              | DC Input Diode Current        | $\pm 20$               | mA   |
| $I_{OK}$              | DC Output Diode Current       | $\pm 20$               | mA   |
| $I_O$                 | DC Output Current             | $\pm 50$               | mA   |
| $I_{CC}$ or $I_{GND}$ | DC $V_{CC}$ or Ground Current | $\pm 400$              | mA   |
| $T_{stg}$             | Storage Temperature           | -65 to +150            | °C   |
| $T_L$                 | Lead Temperature (10 sec)     | 300                    | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

**RECOMMENDED OPERATING CONDITIONS**

| Symbol   | Parameter                                                  | Value         | Unit |
|----------|------------------------------------------------------------|---------------|------|
| $V_{CC}$ | Supply Voltage                                             | 4.5 to 5.5    | V    |
| $V_I$    | Input Voltage                                              | 0 to $V_{CC}$ | V    |
| $V_O$    | Output Voltage                                             | 0 to $V_{CC}$ | V    |
| $T_{op}$ | Operating Temperature                                      | -55 to 125    | °C   |
| dt/dv    | Input Rise and Fall Time $V_{CC} = 4.5$ to $5.5V$ (note 1) | 8             | ns/V |

1)  $V_{IN}$  from 0.8V to 2.0V

## DC SPECIFICATIONS

| Symbol           | Parameter                             | Test Condition         |                                                                                                | Value                 |       |       |             |      |              |      | Unit |
|------------------|---------------------------------------|------------------------|------------------------------------------------------------------------------------------------|-----------------------|-------|-------|-------------|------|--------------|------|------|
|                  |                                       | V <sub>CC</sub><br>(V) |                                                                                                | T <sub>A</sub> = 25°C |       |       | -40 to 85°C |      | -55 to 125°C |      |      |
|                  |                                       |                        |                                                                                                | Min.                  | Typ.  | Max.  | Min.        | Max. | Min.         | Max. |      |
| V <sub>IH</sub>  | High Level Input Voltage              | 4.5                    | V <sub>O</sub> = 0.1 V or<br>V <sub>CC</sub> -0.1V                                             | 2.0                   | 1.5   |       | 2.0         |      | 2.0          |      | V    |
|                  |                                       | 5.5                    |                                                                                                | 2.0                   | 1.5   |       | 2.0         |      | 2.0          |      |      |
| V <sub>IL</sub>  | Low Level Input Voltage               | 4.5                    | V <sub>O</sub> = 0.1 V or<br>V <sub>CC</sub> -0.1V                                             |                       | 1.5   | 0.8   |             | 0.8  |              | 0.8  | V    |
|                  |                                       | 5.5                    |                                                                                                |                       | 1.5   | 0.8   |             | 0.8  |              | 0.8  |      |
| V <sub>OH</sub>  | High Level Output Voltage             | 4.5                    | I <sub>O</sub> =-50 μA                                                                         | 4.4                   | 4.49  |       | 4.4         |      | 4.4          |      | V    |
|                  |                                       | 5.5                    | I <sub>O</sub> =-50 μA                                                                         | 5.4                   | 5.49  |       | 5.4         |      | 5.4          |      |      |
|                  |                                       | 4.5                    | I <sub>O</sub> =-24 mA                                                                         | 3.86                  |       |       | 3.76        |      | 3.7          |      |      |
|                  |                                       | 5.5                    | I <sub>O</sub> =-24 mA                                                                         | 4.86                  |       |       | 4.76        |      | 4.7          |      |      |
| V <sub>OL</sub>  | Low Level Output Voltage              | 4.5                    | I <sub>O</sub> =50 μA                                                                          |                       | 0.001 | 0.1   |             | 0.1  |              | 0.1  | V    |
|                  |                                       | 5.5                    | I <sub>O</sub> =50 μA                                                                          |                       | 0.001 | 0.1   |             | 0.1  |              | 0.1  |      |
|                  |                                       | 4.5                    | I <sub>O</sub> =24 mA                                                                          |                       |       | 0.36  |             | 0.44 |              | 0.5  |      |
|                  |                                       | 5.5                    | I <sub>O</sub> =24 mA                                                                          |                       |       | 0.36  |             | 0.44 |              | 0.5  |      |
| I <sub>I</sub>   | Input Leakage Current                 | 5.5                    | V <sub>I</sub> = V <sub>CC</sub> or GND                                                        |                       |       | ± 0.1 |             | ± 1  |              | ± 1  | μA   |
| I <sub>OZ</sub>  | High Impedance Output Leakage Current | 5.5                    | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>V <sub>O</sub> = V <sub>CC</sub> or GND |                       |       | ± 0.5 |             | ± 5  |              | ± 5  | μA   |
| I <sub>CCT</sub> | Max I <sub>CC</sub> /Input            | 5.5                    | V <sub>I</sub> = V <sub>CC</sub> - 2.1V                                                        |                       | 0.6   |       |             | 1.5  |              | 1.6  | mA   |
| I <sub>CC</sub>  | Quiescent Supply Current              | 5.5                    | V <sub>I</sub> = V <sub>CC</sub> or GND                                                        |                       |       | 4     |             | 40   |              | 80   | μA   |
| I <sub>OLD</sub> | Dynamic Output Current                | 5.5                    | V <sub>OLD</sub> = 1.65 V max                                                                  |                       |       |       |             | 75   |              | 50   | mA   |
| I <sub>OHD</sub> | Current (note 1, 2)                   |                        | V <sub>OHD</sub> = 3.85 V min                                                                  |                       |       |       |             | -75  |              | -50  | mA   |

1) Maximum test duration 2ms, one output loaded at time

2) Incident wave switching is guaranteed on trasmission lines with impedances as low as 50Ω

**AC ELECTRICAL CHARACTERISTICS** ( $C_L = 50 \text{ pF}$ ,  $R_L = 500 \Omega$ , Input  $t_r = t_f = 3\text{ns}$ )


| Symbol                            | Parameter                       | Test Condition         |  | Value                 |      |      |             |      |              |      |     | Unit |
|-----------------------------------|---------------------------------|------------------------|--|-----------------------|------|------|-------------|------|--------------|------|-----|------|
|                                   |                                 | V <sub>CC</sub><br>(V) |  | T <sub>A</sub> = 25°C |      |      | -40 to 85°C |      | -55 to 125°C |      |     |      |
|                                   |                                 |                        |  | Min.                  | Typ. | Max. | Min.        | Max. | Min.         | Max. |     |      |
| t <sub>PLH</sub> t <sub>PHL</sub> | Propagation Delay Time CK to Q  | 5.0 <sup>(*)</sup>     |  |                       | 5.0  | 10.0 |             | 11.0 |              | 11.0 | ns  |      |
| t <sub>PZL</sub> t <sub>PZH</sub> | Output Enable Time              | 5.0 <sup>(*)</sup>     |  |                       | 5.5  | 9.0  |             | 10.0 |              | 10.0 | ns  |      |
| t <sub>PLZ</sub> t <sub>PHZ</sub> | Output Disable Time             | 5.0 <sup>(*)</sup>     |  |                       | 5.0  | 8.5  |             | 9.0  |              | 9.0  | ns  |      |
| t <sub>W</sub>                    | CK Pulse Width HIGH or LOW      | 5.0 <sup>(*)</sup>     |  |                       | 1.5  | 3.0  |             | 4.0  |              | 4.0  | ns  |      |
| t <sub>s</sub>                    | Setup Time D to CK, HIGH or LOW | 5.0 <sup>(*)</sup>     |  |                       | 1.0  | 2.5  |             | 3.0  |              | 3.0  | ns  |      |
| t <sub>h</sub>                    | Hold Time D to CK, HIGH or LOW  | 5.0 <sup>(*)</sup>     |  |                       | -1.0 | 2.5  |             | 3.0  |              | 3.0  | ns  |      |
| f <sub>MAX</sub>                  | Maximum CK Frequency            | 5.0 <sup>(*)</sup>     |  | 100                   | 270  |      | 85          |      | 85           |      | MHz |      |

(\*) Voltage range is  $5.0\text{V} \pm 0.5\text{V}$ **CAPACITIVE CHARACTERISTICS**

| Symbol           | Parameter                              | Test Condition         |                         | Value                 |      |      |             |      |              |      |    | Unit |
|------------------|----------------------------------------|------------------------|-------------------------|-----------------------|------|------|-------------|------|--------------|------|----|------|
|                  |                                        | V <sub>CC</sub><br>(V) |                         | T <sub>A</sub> = 25°C |      |      | -40 to 85°C |      | -55 to 125°C |      |    |      |
|                  |                                        |                        |                         | Min.                  | Typ. | Max. | Min.        | Max. | Min.         | Max. |    |      |
| C <sub>IN</sub>  | Input Capacitance                      | 5.0                    |                         |                       | 4    |      |             |      |              |      | pF |      |
| C <sub>OUT</sub> | Output Capacitance                     | 5.0                    |                         |                       | 8    |      |             |      |              |      | pF |      |
| C <sub>PD</sub>  | Power Dissipation Capacitance (note 1) | 5.0                    | f <sub>IN</sub> = 10MHz |                       | 26   |      |             |      |              |      | pF |      |

1)  $C_{PD}$  is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation.  $I_{CC(opr)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}/n$  (per circuit)


TEST CIRCUIT

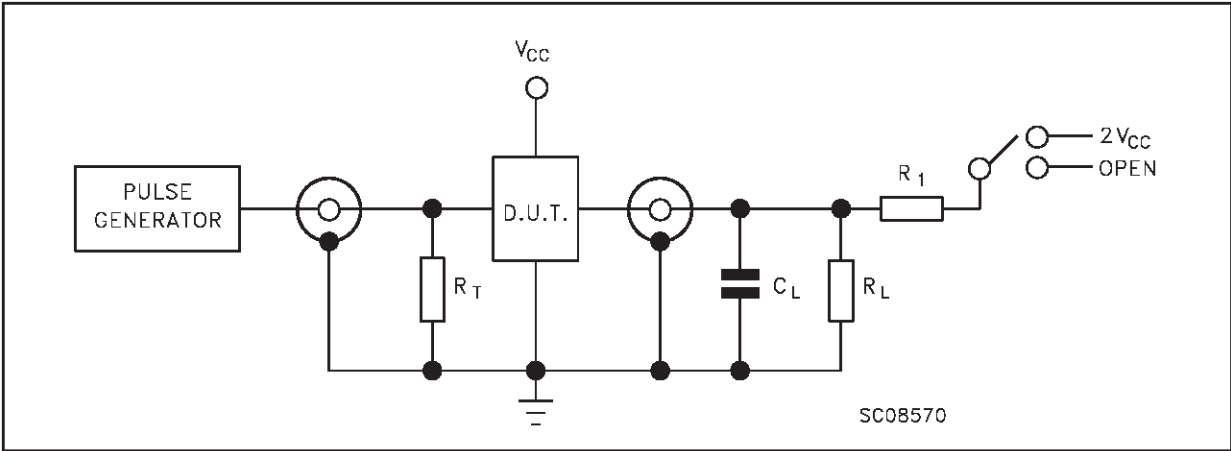

| TEST                  | SWITCH    |
|-----------------------|-----------|
| $t_{PLH}$ , $t_{PHL}$ | Open      |
| $t_{PZL}$ , $t_{PLZ}$ | $2V_{CC}$ |
| $t_{PZH}$ , $t_{PHZ}$ | Open      |

$C_L$  = 50pF or equivalent (includes jig and probe capacitance)  
 $R_L = R_1$  = 500Ω or equivalent  
 $R_T$  =  $Z_{OUT}$  of pulse generator (typically 50Ω)


WAVEFORM 1: PROPAGATION DELAYS, SETUP AND HOLD TIMES (f=1MHz; 50% duty cycle)

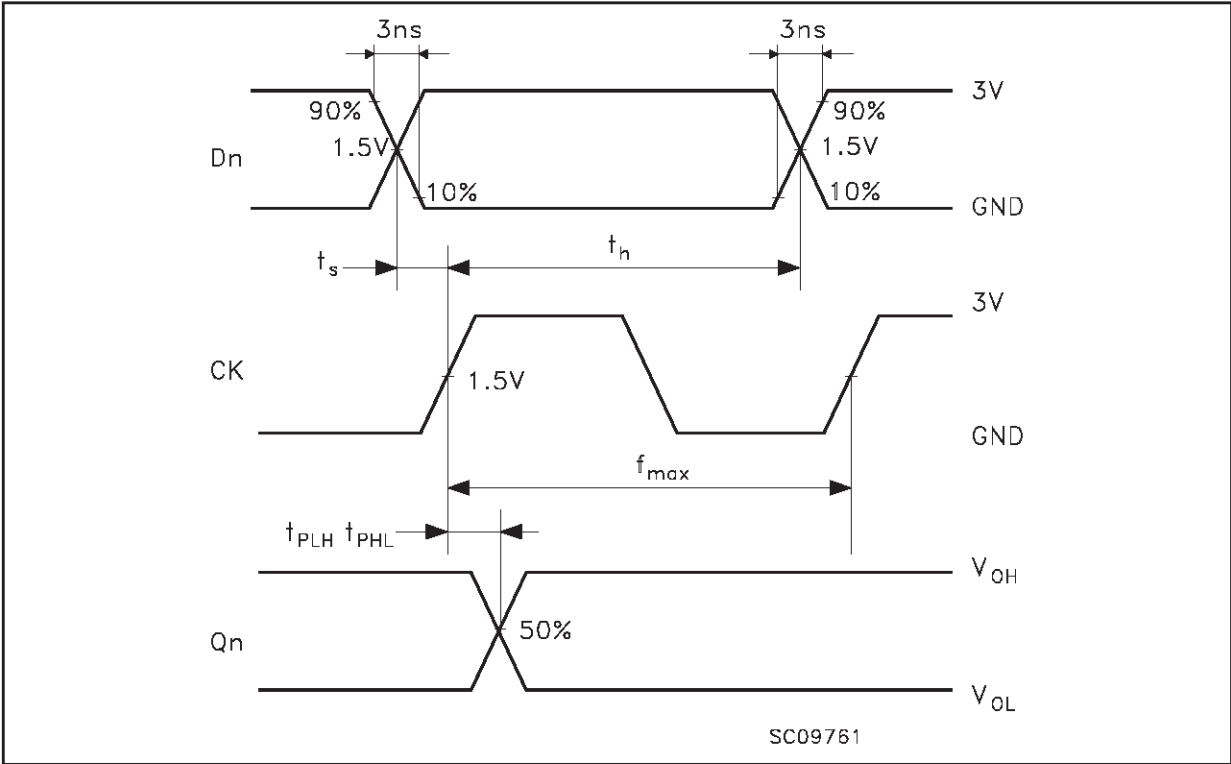



## Plastic DIP-20 (0.25) MECHANICAL DATA

| DIM. | mm    |       |      | inch  |       |       |
|------|-------|-------|------|-------|-------|-------|
|      | MIN.  | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.254 |       |      | 0.010 |       |       |
| B    | 1.39  |       | 1.65 | 0.055 |       | 0.065 |
| b    |       | 0.45  |      |       | 0.018 |       |
| b1   |       | 0.25  |      |       | 0.010 |       |
| D    |       |       | 25.4 |       |       | 1.000 |
| E    |       | 8.5   |      |       | 0.335 |       |
| e    |       | 2.54  |      |       | 0.100 |       |
| e3   |       | 22.86 |      |       | 0.900 |       |
| F    |       |       | 7.1  |       |       | 0.280 |
| I    |       |       | 3.93 |       |       | 0.155 |
| L    |       | 3.3   |      |       | 0.130 |       |
| Z    |       |       | 1.34 |       |       | 0.053 |

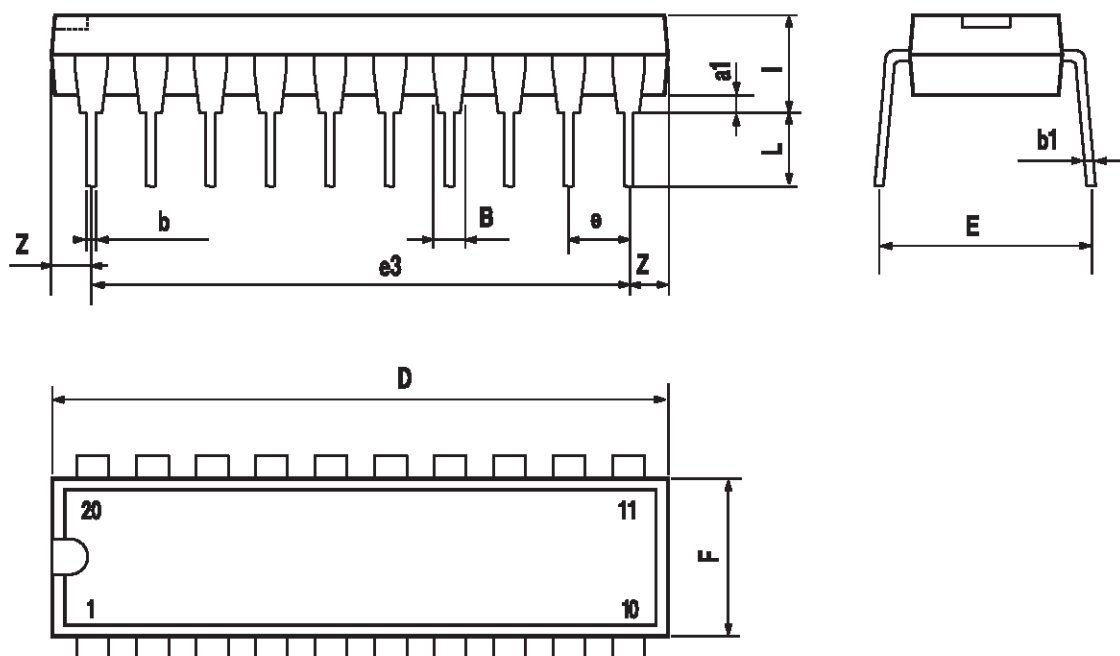


P001J



## SO-20 MECHANICAL DATA


| DIM. | mm        |       |       | inch  |       |       |
|------|-----------|-------|-------|-------|-------|-------|
|      | MIN.      | TYP.  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |           |       | 2.65  |       |       | 0.104 |
| a1   | 0.10      |       | 0.20  | 0.004 |       | 0.007 |
| a2   |           |       | 2.45  |       |       | 0.096 |
| b    | 0.35      |       | 0.49  | 0.013 |       | 0.019 |
| b1   | 0.23      |       | 0.32  | 0.009 |       | 0.012 |
| C    |           | 0.50  |       |       | 0.020 |       |
| c1   | 45 (typ.) |       |       |       |       |       |
| D    | 12.60     |       | 13.00 | 0.496 |       | 0.512 |
| E    | 10.00     |       | 10.65 | 0.393 |       | 0.419 |
| e    |           | 1.27  |       |       | 0.050 |       |
| e3   |           | 11.43 |       |       | 0.450 |       |
| F    | 7.40      |       | 7.60  | 0.291 |       | 0.299 |
| L    | 0.50      |       | 1.27  | 0.19  |       | 0.050 |
| M    |           |       | 0.75  |       |       | 0.029 |
| S    | 8 (max.)  |       |       |       |       |       |

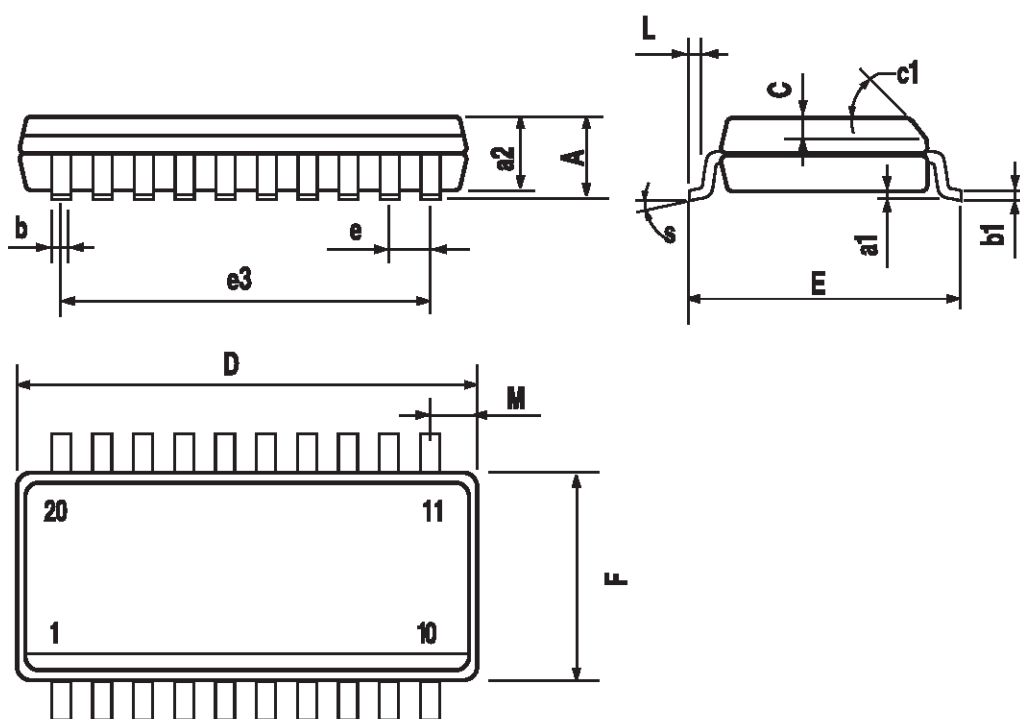

P013L

## TSSOP20 MECHANICAL DATA

| DIM. | mm   |          |      | inch   |            |        |
|------|------|----------|------|--------|------------|--------|
|      | MIN. | TYP.     | MAX. | MIN.   | TYP.       | MAX.   |
| A    |      |          | 1.1  |        |            | 0.433  |
| A1   | 0.05 | 0.10     | 0.15 | 0.002  | 0.004      | 0.006  |
| A2   | 0.85 | 0.9      | 0.95 | 0.335  | 0.354      | 0.374  |
| b    | 0.19 |          | 0.30 | 0.0075 |            | 0.0118 |
| c    | 0.09 |          | 0.2  | 0.0035 |            | 0.0079 |
| D    | 6.4  | 6.5      | 6.6  | 0.252  | 0.256      | 0.260  |
| E    | 6.25 | 6.4      | 6.5  | 0.246  | 0.252      | 0.256  |
| E1   | 4.3  | 4.4      | 4.48 | 0.169  | 0.173      | 0.176  |
| e    |      | 0.65 BSC |      |        | 0.0256 BSC |        |
| K    | 0°   | 4°       | 8°   | 0°     | 4°         | 8°     |
| L    | 0.50 | 0.60     | 0.70 | 0.020  | 0.024      | 0.028  |

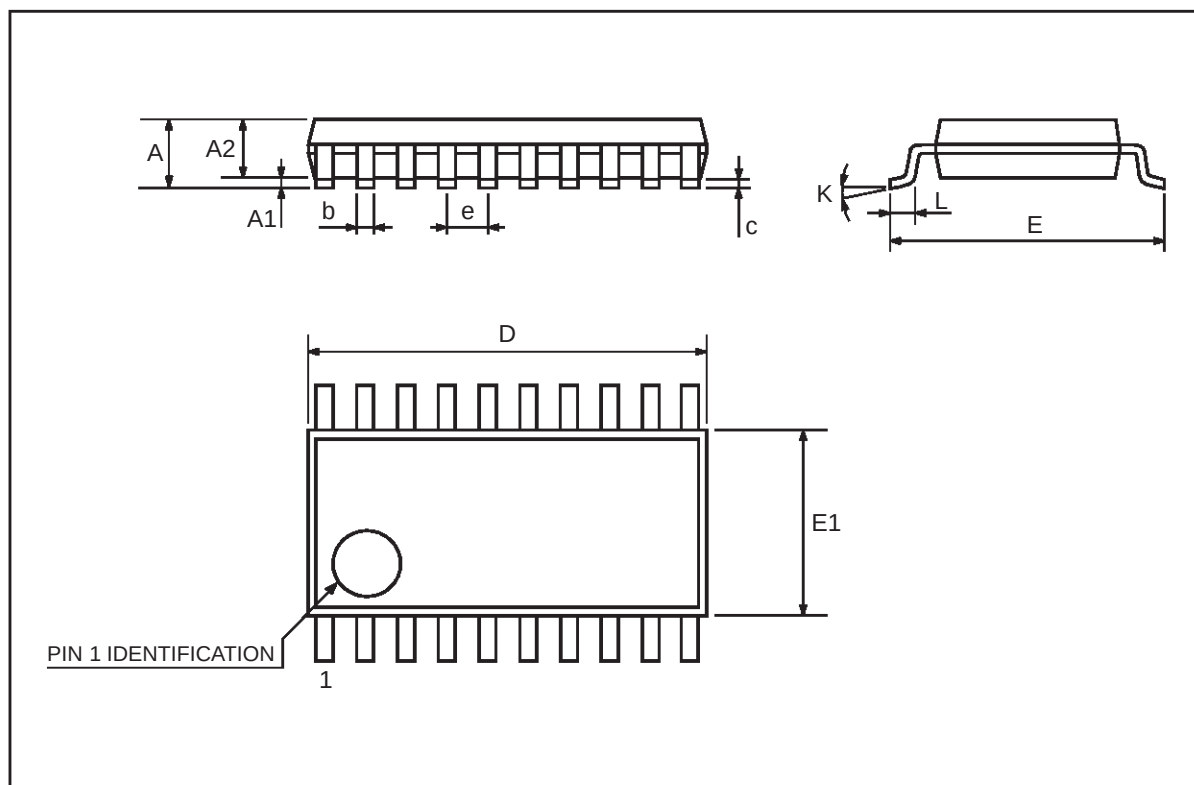

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>

