

**2SC5228**

VHF to UHF Wide-Band Low-Noise Amplifier Applications


Features

- Low noise : $NF=1.0\text{dB}$ typ ($f=1\text{GHz}$).
- High gain : $|S_{21e}|^2=13.5\text{dB}$ typ ($f=1\text{GHz}$).
- High cutoff frequency : $f_T=7\text{GHz}$ typ.

Package Dimensions

unit:mm

2110A

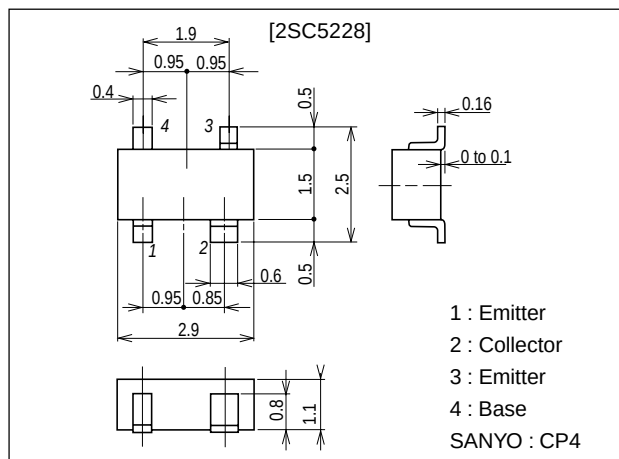

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CBO}		20	V
Collector-to-Emitter Voltage	V_{CEO}		10	V
Emitter-to-Base Voltage	V_{EBO}		2	V
Collector Current	I_C		70	mA
Collector Dissipation	P_C		200	mW
Junction Temperature	T_J		150	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{CB}=10\text{V}, I_E=0$			1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=1\text{V}, I_C=0$			10	μA
DC Current Gain	h_{FE}	$V_{CE}=5\text{V}, I_C=20\text{mA}$	60*		270*	
Gain-Bandwidth Product	f_T	$V_{CE}=5\text{V}, I_C=20\text{mA}$	5	7		GHz
Output Capacitance	C_{ob}	$V_{CB}=10\text{V}, f=1\text{MHz}$		0.75	1.2	pF
Reverse Transfer Capacitance	C_{re}	$V_{CB}=10\text{V}, f=1\text{MHz}$		0.4		pF
Forward Transfer Gain	$ S_{21e} ^2$ 1	$V_{CE}=5\text{V}, I_C=20\text{mA}, f=1\text{GHz}$	11	13.5		dB
	$ S_{21e} ^2$ 2	$V_{CE}=2\text{V}, I_C=3\text{mA}, f=1\text{GHz}$		9		dB
Noise Figure	NF	$V_{CE}=5\text{V}, I_C=7\text{mA}, f=1\text{GHz}$		1.0	1.8	dB

* : The 2SC5228 is classified by 20mA h_{FE} as follows :

60	3	120	90	4	180	135	5	270
----	---	-----	----	---	-----	-----	---	-----

Marking : LN
 h_{FE} rank : 3, 4, 5








■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Business Headquarters


TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

21599TH (KT)/13095YK (KOTO) TA-0157 No.5035-1/5

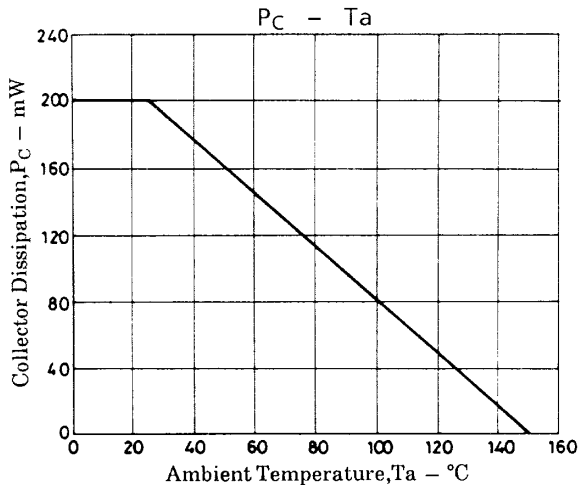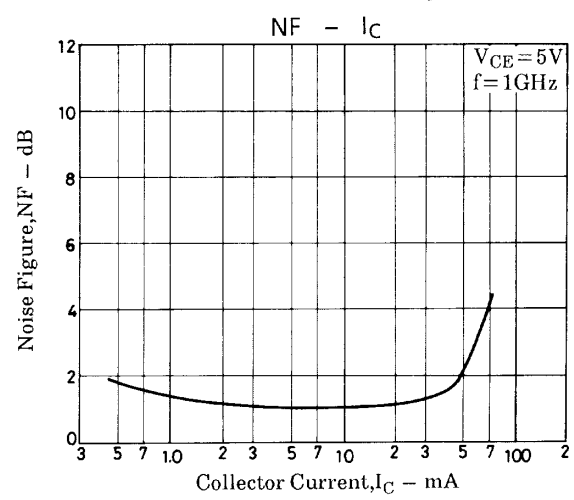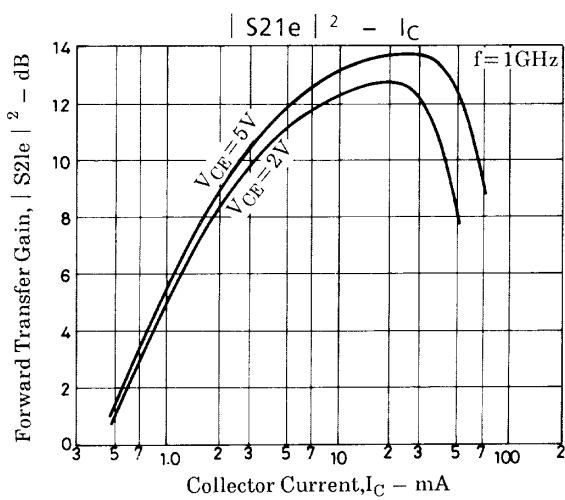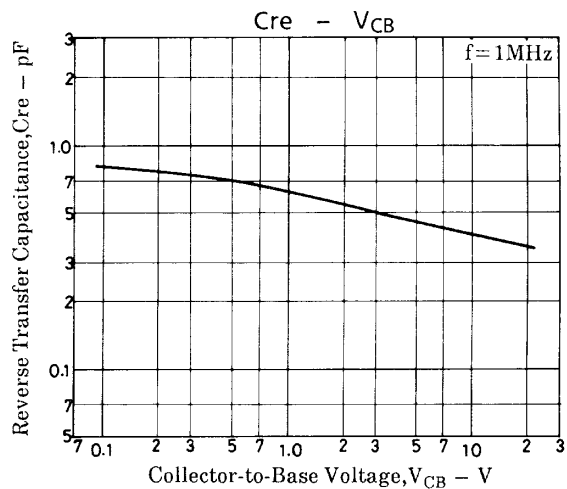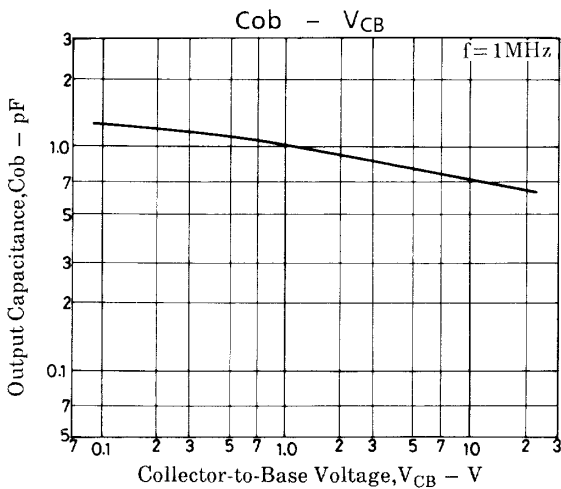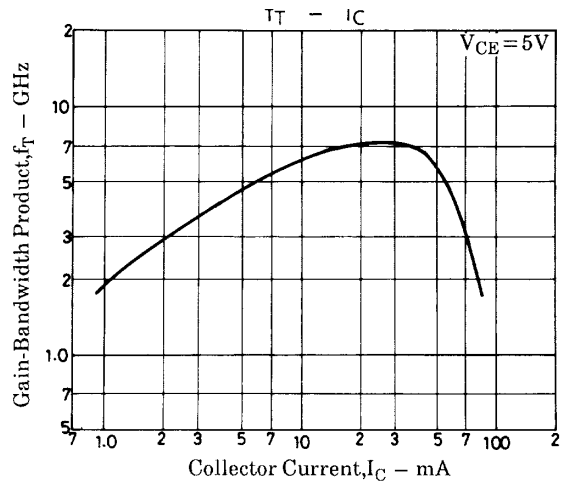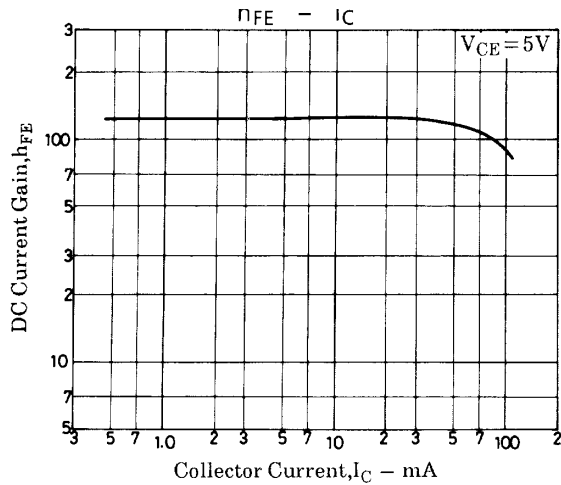


S Parameters


f = 100MHz, 200 to 2000MHz (200MHz step)

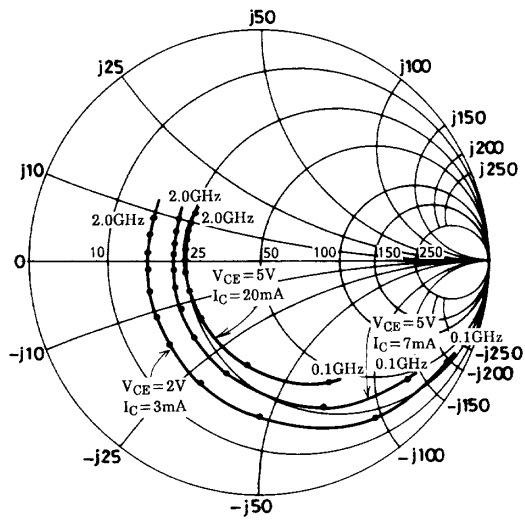


f = 100MHz, 200 to 2000MHz (200MHz step)

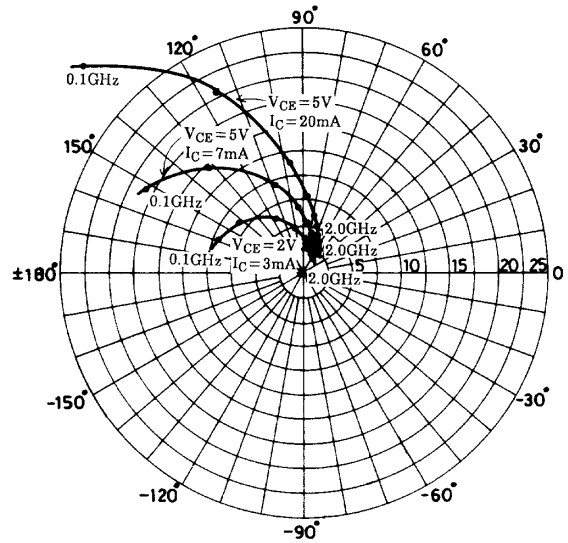

f = 100MHz, 200 to 2000MHz (200MHz step)

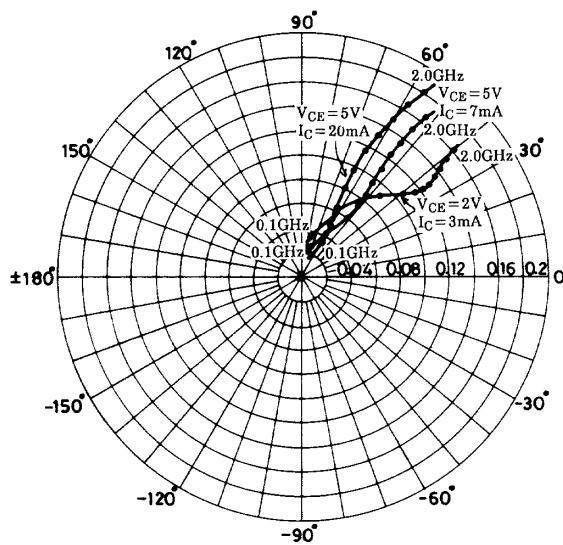

f = 100MHz, 200 to 2000MHz (200MHz step)

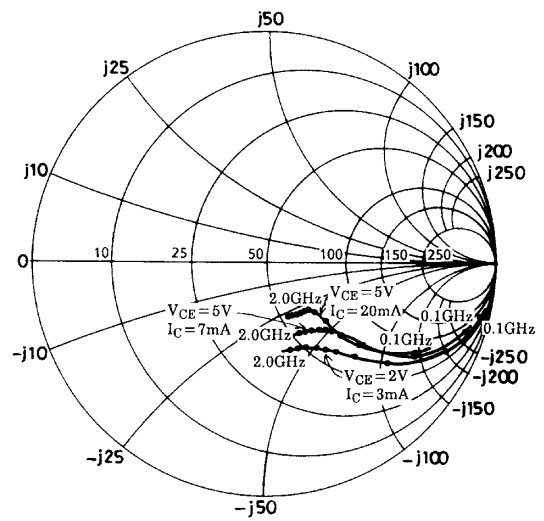

2SC5228

S parameters (Common emitter)

$V_{CE}=5V$, $I_C=7mA$, $Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.803	-38.2	18.190	151.5	0.026	71.3	0.903	-19.3
200	0.677	-68.5	14.614	131.5	0.042	59.3	0.753	-31.5
400	0.508	-132.7	9.484	108.0	0.061	51.6	0.549	-41.1
600	0.442	-132.7	6.775	95.1	0.073	50.9	0.453	-44.2
800	0.407	-151.0	5.256	85.7	0.086	52.1	0.406	-46.4
1000	0.393	-163.5	4.285	78.5	0.098	53.1	0.383	-48.9
1200	0.386	-174.5	3.628	71.7	0.111	53.8	0.373	-51.1
1400	0.386	175.3	3.161	65.9	0.125	53.8	0.363	-53.6
1600	0.387	168.3	2.786	60.2	0.138	53.5	0.354	-56.9
1800	0.393	161.0	2.517	55.1	0.152	53.2	0.348	-60.7
2000	0.402	152.6	2.298	49.9	0.166	52.1	0.345	-64.5

$V_{CE}=5V$, $I_C=20mA$, $Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.592	-62.6	30.943	136.5	0.021	66.1	0.753	-31.2
200	0.458	-99.8	20.624	115.6	0.032	59.8	0.541	-41.9
400	0.367	-138.1	11.531	97.4	0.048	61.6	0.370	-45.0
600	0.347	-157.3	7.914	88.0	0.064	63.6	0.310	-45.5
800	0.338	-171.6	6.036	80.6	0.081	64.2	0.287	-47.0
1000	0.336	179.1	4.880	74.7	0.098	64.0	0.276	-49.7
1200	0.337	170.8	4.113	69.2	0.116	63.2	0.274	-52.4
1400	0.342	163.6	3.558	64.0	0.133	61.7	0.268	-55.4
1600	0.346	157.4	3.134	59.2	0.150	60.0	0.262	-59.3
1800	0.352	151.2	2.824	54.4	0.167	58.5	0.259	-63.8
2000	0.361	145.6	2.575	50.0	0.182	56.4	0.256	-68.2

$V_{CE}=2V$, $I_C=3mA$, $Z_O=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.903	-28.0	9.365	159.3	0.035	74.8	0.955	-14.2
200	0.826	-53.3	8.413	142.1	0.063	62.2	0.865	-25.8
400	0.672	-92.0	6.269	117.1	0.094	46.7	0.684	-39.7
600	0.589	-118.0	4.748	101.4	0.109	39.7	0.565	-46.8
800	0.540	-138.3	3.789	89.6	0.117	36.7	0.497	-51.4
1000	0.515	-152.4	3.141	80.8	0.125	36.0	0.459	-55.1
1200	0.503	-165.2	2.687	72.2	0.131	36.2	0.438	-58.3
1400	0.495	-175.9	2.353	65.4	0.138	37.2	0.420	-61.6
1600	0.494	175.2	2.088	58.8	0.146	38.0	0.411	-65.0
1800	0.495	166.4	1.894	52.7	0.155	39.4	0.400	-69.2
2000	0.502	158.1	1.732	46.9	0.163	40.0	0.396	-73.6

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of February, 1999. Specifications and information herein are subject to change without notice.