


## OCTAL DUAL SUPPLY BUS TRANSCEIVER

- **HIGH SPEED:**  
 $t_{PD} = 6.5ns$  (MAX.) at  
 $V_{CCA} = 5.0V$ ,  $V_{CCB} = 5.0V$
- **LOW POWER DISSIPATION:**  
 $I_{CCA} = I_{CCB} = 5\mu A$  (MAX.) at  $T_A = 25^\circ C$
- **LOW NOISE:**  $V_{OLP} = 0.3V$  (TYP.) at  
 $V_{CCA} = 5.0V$   $V_{CCB} = 3.3V$
- **SYMMETRICAL OUTPUT IMPEDANCE:**  
 $|I_{OH}| = I_{OL} = 24mA$  (MIN)
- **BALANCED PROPAGATION DELAYS:**  
 $t_{PLH} \approx t_{PHL}$
- **OPERATING VOLTAGE RANGE:**  
 $V_{CCA}(OPR) = 4.5V$  to  $5.5V$  (1.2V Data Retention)  
 $V_{CCB}(OPR) = 2.7V$  to  $5.5V$  (1.2V Data Retention)  
 PIN AND FUNCTION COMPATIBLE WITH  
 74 SERIES C4245
- **IMPROVED LATCH-UP IMMUNITY**

### DESCRIPTION

The 74LVXC4245 is a dual supply 8 bit configurable low voltage CMOS OCTAL BUS TRANSCEIVER fabricated with sub-micron silicon gate and double-layer metal wiring C<sup>2</sup>MOS technology. Designed for use as an interface between a 5V bus and a 3.3V to 5V bus in a mixed 5V/3.3V supply systems, it achieves high speed operation while maintaining the CMOS low power dissipation.

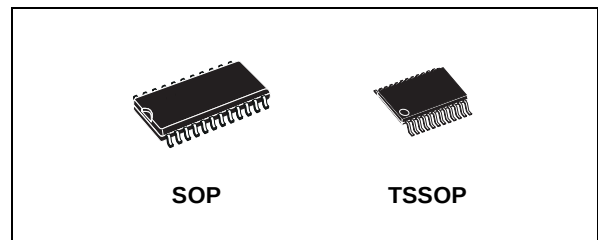

### ORDER CODES


| PACKAGE | TUBE        | T & R         |
|---------|-------------|---------------|
| SOP     | 74LVXC4245M | 74LVXC4245MTR |
| TSSOP   |             | 74LVXC4245TTR |

This IC is intended for two-way asynchronous communication between data buses and the direction of data transmission is determined by DIR input. The enable input  $\bar{G}$  can be used to disable the device so that the buses are effectively isolated.


The A-port interfaces with the 5V bus, the B-port with the 3.3V to 5V bus.

All inputs are equipped with protection circuits against static discharge, giving them 2KV ESD immunity and transient excess voltage.

### PIN CONNECTION AND IEC LOGIC SYMBOLS

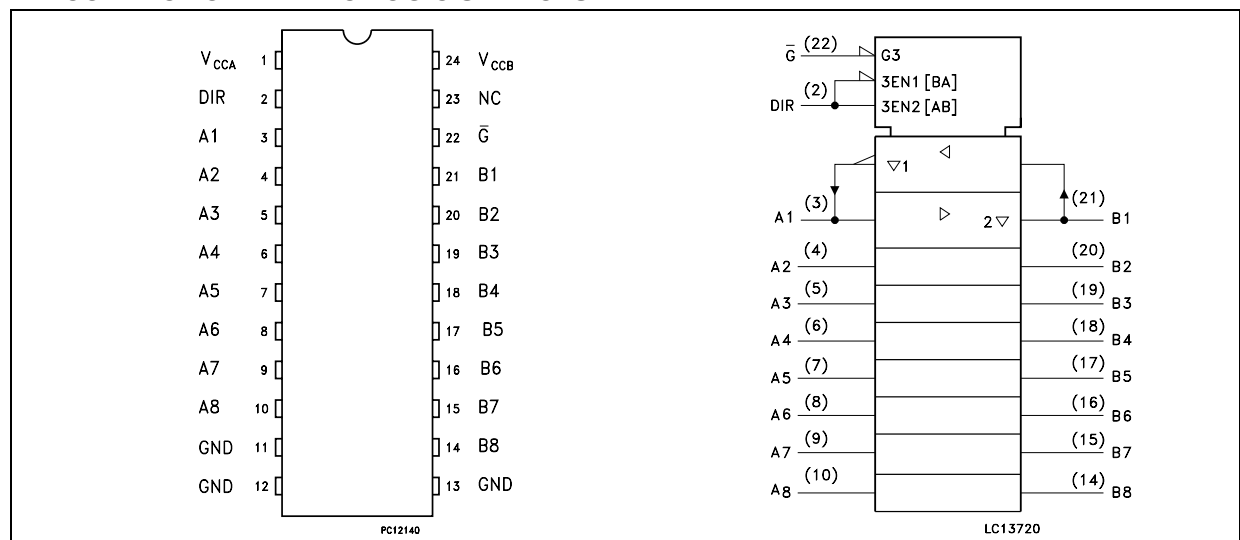

## INPUT AND OUTPUT EQUIVALENT CIRCUIT

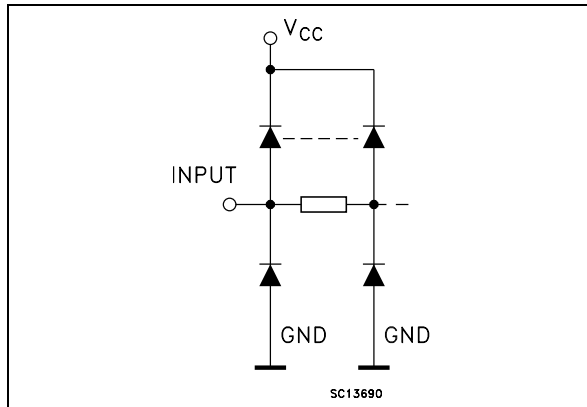

## PIN DESCRIPTION

| PIN No                         | SYMBOL    | NAME AND FUNCTION       |
|--------------------------------|-----------|-------------------------|
| 2                              | DIR       | Directional Control     |
| 3, 4, 5, 6, 7, 8, 9, 10        | A1 to A8  | Data Inputs/Outputs     |
| 21, 20, 19, 18, 17, 16, 15, 14 | B1 to B8  | Data Inputs/Outputs     |
| 22                             | G         | Output Enable Input     |
| 11, 12, 13                     | GND       | Ground (0V)             |
| 23                             | NC        | Not Connected           |
| 1                              | $V_{CCA}$ | Positive Supply Voltage |
| 24                             | $V_{CCB}$ | Positive Supply Voltage |

## TRUTH TABLE

| INPUTS         |     | FUNCTION |        | OUTPUT |
|----------------|-----|----------|--------|--------|
| $\overline{G}$ | DIR | A BUS    | B BUS  |        |
| L              | L   | OUTPUT   | INPUT  | A = B  |
| L              | H   | INPUT    | OUTPUT | B = A  |
| H              | X   | Z        | Z      | Z      |

X : Don't Care  
Z : High Impedance

## ABSOLUTE MAXIMUM RATINGS

| Symbol     | Parameter                     | Value                   | Unit |
|------------|-------------------------------|-------------------------|------|
| $V_{CCA}$  | Supply Voltage                | -0.5 to +7.0            | V    |
| $V_{CCB}$  | Supply Voltage                | -0.5 to +7.0            | V    |
| $V_I$      | DC Input Voltage              | -0.5 to $V_{CCA} + 0.5$ | V    |
| $V_{I/OA}$ | DC I/O Voltage                | -0.5 to $V_{CCA} + 0.5$ | V    |
| $V_{I/OB}$ | DC I/O Voltage                | -0.5 to $V_{CCB} + 0.5$ | V    |
| $I_{IK}$   | DC Input Diode Current        | $\pm 20$                | mA   |
| $I_{OK}$   | DC Output Diode Current       | $\pm 50$                | mA   |
| $I_{OA}$   | DC Output Current             | $\pm 50$                | mA   |
| $I_{OB}$   | DC Output Current             | $\pm 50$                | mA   |
| $I_{CCA}$  | DC $V_{CC}$ or Ground Current | $\pm 200$               | mA   |
| $I_{CCB}$  | DC $V_{CC}$ or Ground Current | $\pm 100$               | mA   |
| $P_d$      | Power Dissipation             | 180                     | mW   |
| $T_{stg}$  | Storage Temperature           | -65 to +150             | °C   |
| $T_L$      | Lead Temperature (10 sec)     | 300                     | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

## RECOMMENDED OPERATING CONDITIONS

| Symbol     | Parameter                         | Value          | Unit |
|------------|-----------------------------------|----------------|------|
| $V_{CCA}$  | Supply Voltage (note 1)           | 4.5 to 5.5     | V    |
| $V_{CCB}$  | Supply Voltage (note 1)           | 2.7 to 5.5     | V    |
| $V_I$      | Input Voltage                     | 0 to $V_{CCA}$ | V    |
| $V_{I/OA}$ | I/O Voltage                       | 0 to $V_{CCA}$ | V    |
| $V_{I/OB}$ | I/O Voltage                       | 0 to $V_{CCB}$ | V    |
| $T_{op}$   | Operating Temperature             | -40 to 85      | °C   |
| dt/dv      | Input Rise and Fall Time (note 2) | 0 to 10        | ns/V |

1)  $V_{IN}$  from 30% to 70% of  $V_{CC}$ 2)  $V_{CCA} = 4.5$  to  $5.5V$ ;  $V_{CCB} = 2.7$  to  $3.6V$ ;DC SPECIFICATIONS FOR  $V_{CCA}$ 

| Symbol             | Parameter                                                  | Test Condition          |                         |                                                                                                                                                                 | Value                  |      |       |              |      |              |      | Unit |
|--------------------|------------------------------------------------------------|-------------------------|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------|-------|--------------|------|--------------|------|------|
|                    |                                                            | V <sub>CCA</sub><br>(V) | V <sub>CCB</sub><br>(V) |                                                                                                                                                                 | T <sub>A</sub> = 25 °C |      |       | -40 to 85 °C |      | -55 to 125°C |      |      |
|                    |                                                            |                         |                         |                                                                                                                                                                 | Min.                   | Typ. | Max.  | Min.         | Max. | Min.         | Max. |      |
| V <sub>IHA</sub>   | High Level Input Voltage                                   | 4.5                     | 2.7                     |                                                                                                                                                                 | 2.0                    |      |       | 2.0          |      | 2.0          |      | V    |
|                    |                                                            | 4.5                     | 3.6                     |                                                                                                                                                                 | 2.0                    |      |       | 2.0          |      | 2.0          |      |      |
|                    |                                                            | 5.5                     | 5.5                     |                                                                                                                                                                 | 2.0                    |      |       | 2.0          |      | 2.0          |      |      |
| V <sub>ILA</sub>   | Low Level Input Voltage                                    | 4.5                     | 2.7                     |                                                                                                                                                                 |                        |      | 0.8   |              | 0.8  |              | 0.8  | V    |
|                    |                                                            | 4.5                     | 3.6                     |                                                                                                                                                                 |                        |      | 0.8   |              | 0.8  |              | 0.8  |      |
|                    |                                                            | 5.5                     | 5.5                     |                                                                                                                                                                 |                        |      | 0.8   |              | 0.8  |              | 0.8  |      |
| V <sub>OHA</sub>   | High Level Output Voltage                                  | 4.5                     | 3.0                     | I <sub>O</sub> =-100 μA                                                                                                                                         | 4.4                    | 4.5  |       | 4.4          |      | 4.4          |      | V    |
|                    |                                                            | 4.5                     | 3.0                     | I <sub>O</sub> =-24 mA                                                                                                                                          | 3.86                   |      |       | 3.76         |      | 3.76         |      |      |
| V <sub>OLA</sub>   | Low Level Output Voltage                                   | 4.5                     | 3.0                     | I <sub>O</sub> =100 μA                                                                                                                                          |                        | 0    | 0.1   |              | 0.1  |              | 0.1  | V    |
|                    |                                                            | 4.5                     | 3.0                     | I <sub>O</sub> =24 mA                                                                                                                                           |                        |      | 0.36  |              | 0.44 |              | 0.44 |      |
| I <sub>IA</sub>    | Input Leakage Current                                      | 5.5                     | 3.6                     | V <sub>I</sub> = V <sub>CC</sub> or GND                                                                                                                         |                        |      | ± 0.1 |              | ± 1  |              | ± 1  | μA   |
| I <sub>OZA</sub>   | High Impedance Output Leakage Current                      | 5.5                     | 3.6                     | V <sub>IA</sub> = V <sub>IHA</sub> or V <sub>ILA</sub><br>V <sub>IB</sub> = V <sub>IHB</sub> or V <sub>ILB</sub><br>V <sub>I/OA</sub> = V <sub>CCA</sub> or GND |                        |      | ± 0.5 |              | ± 5  |              | ± 5  | μA   |
| I <sub>CCTA</sub>  | Quiescent Supply Current                                   | 5.5                     | 3.6                     | V <sub>IA</sub> = V <sub>CCA</sub> or GND<br>V <sub>IB</sub> = V <sub>CCB</sub> or GND                                                                          |                        |      | 5     |              | 50   |              | 50   | μA   |
| I <sub>CCTAF</sub> | Quiescent V <sub>CCA</sub> Supply Current as B Port Floats | 5.5                     | Open                    | V <sub>IA</sub> = V <sub>CCA</sub> or GND<br>G= DIR = V <sub>CCA</sub><br>V <sub>IB</sub> = Open                                                                |                        |      | 5     |              | 50   |              | 50   | μA   |
| ΔI <sub>CCTA</sub> | Maximum Quiescent Supply Current / Input (An, DIR, G)      | 5.5                     | 5.5                     | V <sub>IA</sub> = V <sub>CCA</sub> - 2.1V<br>V <sub>IB</sub> = V <sub>CCB</sub> or GND                                                                          |                        |      | 1.35  |              | 1.5  |              | 1.5  | mA   |

DC SPECIFICATIONS FOR  $V_{CCB}$ 

| Symbol             | Parameter                                | Test Condition          |                         |                                                                                                       | Value                  |      |       |              |      |              | Unit |      |
|--------------------|------------------------------------------|-------------------------|-------------------------|-------------------------------------------------------------------------------------------------------|------------------------|------|-------|--------------|------|--------------|------|------|
|                    |                                          | V <sub>CCA</sub><br>(V) | V <sub>CCB</sub><br>(V) |                                                                                                       | T <sub>A</sub> = 25 °C |      |       | -40 to 85 °C |      | -55 to 125°C |      |      |
|                    |                                          |                         |                         |                                                                                                       | Min.                   | Typ. | Max.  | Min.         | Max. | Min.         |      | Max. |
| V <sub>IHB</sub>   | High Level Input Voltage                 | 4.5                     | 2.7                     |                                                                                                       | 2.0                    |      |       | 2.0          |      | 2.0          |      | V    |
|                    |                                          | 4.5                     | 3.6                     |                                                                                                       | 2.0                    |      |       | 2.0          |      | 2.0          |      |      |
|                    |                                          | 4.5                     | 5.5                     |                                                                                                       | 3.85                   |      |       | 3.85         |      | 3.85         |      |      |
| V <sub>ILB</sub>   | Low Level Input Voltage                  | 4.5                     | 2.7                     |                                                                                                       |                        |      | 0.8   |              | 0.8  |              | 0.8  | V    |
|                    |                                          | 4.5                     | 3.6                     |                                                                                                       |                        |      | 0.8   |              | 0.8  |              | 0.8  |      |
|                    |                                          | 4.5                     | 5.5                     |                                                                                                       |                        |      | 1.65  |              | 1.65 |              | 1.65 |      |
| V <sub>OHB</sub>   | High Level Output Voltage                | 4.5                     | 3.0                     | I <sub>O</sub> =-100 μA                                                                               | 2.9                    | 3.0  |       | 2.9          |      | 2.9          |      | V    |
|                    |                                          | 4.5                     | 3.0                     | I <sub>O</sub> =-12 mA                                                                                | 2.56                   | 2.85 |       | 2.46         |      | 2.46         |      |      |
|                    |                                          | 4.5                     | 3.0                     | I <sub>O</sub> =-24 mA                                                                                | 2.35                   | 2.65 |       | 2.25         |      | 2.25         |      |      |
|                    |                                          | 4.5                     | 2.7                     | I <sub>O</sub> =-12 mA                                                                                | 2.3                    | 2.5  |       | 2.2          |      | 2.2          |      |      |
|                    |                                          | 4.5                     | 2.7                     | I <sub>O</sub> =-24 mA                                                                                | 2.1                    | 2.3  |       | 2.0          |      | 2.0          |      |      |
|                    |                                          | 4.5                     | 4.5                     | I <sub>O</sub> =-24 mA                                                                                | 3.86                   | 4.25 |       | 3.76         |      | 3.76         |      |      |
| V <sub>OLB</sub>   | Low Level Output Voltage                 | 4.5                     | 3.0                     | I <sub>O</sub> =100 μA                                                                                |                        | 0.0  | 0.1   |              | 0.1  |              | 0.1  | V    |
|                    |                                          | 4.5                     | 3.0                     | I <sub>O</sub> =24 mA                                                                                 |                        | 0.21 | 0.36  |              | 0.44 |              | 0.44 |      |
|                    |                                          | 4.5                     | 2.7                     | I <sub>O</sub> =12 mA                                                                                 |                        | 0.11 | 0.36  |              | 0.44 |              | 0.44 |      |
|                    |                                          | 4.5                     | 2.7                     | I <sub>O</sub> =24 mA                                                                                 |                        | 0.22 | 0.42  |              | 0.50 |              | 0.50 |      |
|                    |                                          | 4.5                     | 4.5                     | I <sub>O</sub> =24 mA                                                                                 |                        | 0.18 | 0.36  |              | 0.44 |              | 0.44 |      |
| I <sub>IB</sub>    | Input Leakage Current                    | 5.5                     | 5.5                     | V <sub>I</sub> = V <sub>CCA</sub> or GND                                                              |                        |      | ± 0.1 |              | ± 1  |              | ± 1  | μA   |
| I <sub>OZB</sub>   | High Impedance Output Leakage Current    | 5.5                     | 5.5                     | V <sub>IA</sub> = V <sub>IHA</sub> or V <sub>ILA</sub><br>V <sub>I/OB</sub> = V <sub>CCb</sub> or GND |                        |      | ± 0.5 |              | ± 5  |              | ± 5  | μA   |
| I <sub>CCtB</sub>  | Quiescent Supply Current                 | 5.5                     | 5.5                     | V <sub>IA</sub> = V <sub>CCA</sub> or GND<br>V <sub>IB</sub> = V <sub>CCB</sub> or GND                |                        |      | 5     |              | 50   |              | 50   | μA   |
| ΔI <sub>CCtB</sub> | Maximum Quiescent Supply Current / Input | 5.5                     | 3.6                     | V <sub>IA</sub> = V <sub>CCA</sub> or GND<br>V <sub>IB</sub> = V <sub>CCB</sub> - 0.6V                |                        |      | 0.35  |              | 0.5  |              | 0.5  | mA   |

## DYNAMIC SWITCHING CHARACTERISTICS

| Symbol            | Parameter                                  | Test Condition          |                         |  | Value                  |      |      |              |      |              |      |   | Unit |
|-------------------|--------------------------------------------|-------------------------|-------------------------|--|------------------------|------|------|--------------|------|--------------|------|---|------|
|                   |                                            | V <sub>CCA</sub><br>(V) | V <sub>CCB</sub><br>(V) |  | T <sub>A</sub> = 25 °C |      |      | -40 to 85 °C |      | -55 to 125°C |      |   |      |
|                   |                                            |                         |                         |  | Min.                   | Typ. | Max. | Min.         | Max. | Min.         | Max. |   |      |
| V <sub>OLPA</sub> | Dynamic Low Level Quiet Output (note 1, 2) | 5.0                     | 3.3                     |  |                        | 1.0  | 1.5  |              |      |              |      | V |      |
|                   |                                            | 5.0                     | 3.3                     |  | -1.2                   | -0.6 |      |              |      |              |      |   |      |
| V <sub>OLPB</sub> | Dynamic Low Level Quiet Output (note 1, 2) | 5.0                     | 3.3                     |  |                        | 0.8  | 1.2  |              |      |              |      | V |      |
|                   |                                            | 5.0                     | 3.3                     |  | -0.8                   | -0.5 |      |              |      |              |      |   |      |
| V <sub>IHDA</sub> | Dynamic High Voltage Input (note 1, 3)     | 5.0                     | 3.3                     |  |                        |      | 2    |              |      |              |      | V |      |
| V <sub>ILDA</sub> | Dynamic Low Voltage Input (note 1, 3)      | 5.0                     | 3.3                     |  | 0.8                    |      |      |              |      |              |      | V |      |
| V <sub>IHDB</sub> | Dynamic High Voltage Input (note 1, 3)     | 5.0                     | 3.3                     |  |                        |      | 2    |              |      |              |      | V |      |
| V <sub>ILDB</sub> | Dynamic Low Voltage Input (note 1, 3)      | 5.0                     | 3.3                     |  | 0.8                    |      |      |              |      |              |      | V |      |

1) Worst case package

2) Max number of output defined as (n). Data inputs are driven 0V to 3.3V, (n-1) outputs switching and one output at GND

3) Max number of data inputs (n) switching. (n-1) switching 0V to 3.3V. Inputs under test switching: 3V to threshold (V<sub>ILD</sub>). 0V to threshold (V<sub>IHD</sub>) f = 1MHz

AC ELECTRICAL CHARACTERISTICS ( $C_L = 50\text{pF}$ , Input  $t_r = t_f = 3\text{ns}$ )

| Symbol                                 | Parameter                             | Test Condition          |     | Value <sup>(3)</sup>  |      |      |             |      |              |      | Unit |    |
|----------------------------------------|---------------------------------------|-------------------------|-----|-----------------------|------|------|-------------|------|--------------|------|------|----|
|                                        |                                       | V <sub>CCB</sub><br>(V) |     | T <sub>A</sub> = 25°C |      |      | -40 to 85°C |      | -55 to 125°C |      |      |    |
|                                        |                                       |                         |     | Min.                  | Typ. | Max. | Min.        | Max. | Min.         | Max. |      |    |
| t <sub>PLH</sub>                       | Propagation Delay Time (An to Bn)     | 2.7 to 3.6              |     | 1.0                   | 5.5  | 7.5  | 1.0         | 8.0  | 1.0          | 8.5  | ns   |    |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     | 1.0                   | 4.9  | 6.5  | 1.0         | 7.0  | 1.0          | 7.5  |      |    |
| t <sub>PHL</sub>                       | Propagation Delay Time (An to Bn)     | 2.7 to 3.6              |     | 1.0                   | 5.0  | 7.0  | 1.0         | 7.5  | 1.0          | 7.5  |      |    |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     | 1.0                   | 4.0  | 5.5  | 1.0         | 6.0  | 1.0          | 6.5  |      |    |
| t <sub>PZL</sub>                       | Output <u>Enable</u> Time (G to Bn)   | 2.7 to 3.6              |     |                       | 1.0  | 6.7  | 9.0         | 1.0  | 10.0         | 1.0  | 10.5 | ns |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     |                       | 1.0  | 5.6  | 7.5         | 1.0  | 8.0          | 1.0  | 8.5  |    |
| t <sub>PZH</sub>                       | Output <u>Enable</u> Time (G to Bn)   | 2.7 to 3.6              | 1.0 |                       | 6.9  | 9.5  | 1.0         | 10.0 | 1.0          | 10.5 |      |    |
|                                        |                                       | 5.0 <sup>(*)</sup>      | 1.0 |                       | 5.7  | 7.5  | 1.0         | 8.0  | 1.0          | 8.5  |      |    |
| t <sub>PLZ</sub>                       | Output <u>Disable</u> Time (G to Bn)  | 2.7 to 3.6              |     |                       | 1.0  | 6.0  | 9.0         | 1.0  | 9.5          | 1.0  | 9.5  | ns |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     |                       | 1.0  | 4.8  | 7.0         | 1.0  | 7.5          | 1.0  | 7.5  |    |
| t <sub>PHZ</sub>                       | Output <u>Disable</u> Time (G to Bn)  | 2.7 to 3.6              |     | 1.0                   | 4.2  | 6.5  | 1.0         | 7.0  | 1.0          | 7.5  |      |    |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     | 1.0                   | 3.8  | 5.5  | 1.0         | 6.0  | 1.0          | 6.5  |      |    |
| t <sub>PLH</sub>                       | Propagation Delay Time (Bn to An)     | 2.7 to 3.6              |     |                       | 1.0  | 5.6  | 7.5         | 1.0  | 8.0          | 1.0  | 8.5  | ns |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     |                       | 1.0  | 4.7  | 6.5         | 1.0  | 7.0          | 1.0  | 7.5  |    |
| t <sub>PHL</sub>                       | Propagation Delay Time (Bn to An)     | 2.7 to 3.6              | 1.0 |                       | 4.3  | 6.0  | 1.0         | 6.5  | 1.0          | 7.0  |      |    |
|                                        |                                       | 5.0 <sup>(*)</sup>      | 1.0 |                       | 3.9  | 5.0  | 1.0         | 5.5  | 1.0          | 5.5  |      |    |
| t <sub>PZL</sub>                       | Output <u>Enable</u> Time (G to An)   | 2.7 to 3.6              |     |                       | 1.0  | 8.0  | 10.0        | 1.0  | 11.0         | 1.0  | 11.5 | ns |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     |                       | 1.0  | 7.4  | 9.0         | 1.0  | 10.0         | 1.0  | 10.5 |    |
| t <sub>PZH</sub>                       | Output <u>Enable</u> Time (G to An)   | 2.7 to 3.6              |     | 1.0                   | 6.3  | 8.0  | 1.0         | 8.5  | 1.0          | 8.5  |      |    |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     | 1.0                   | 6.1  | 7.5  | 1.0         | 8.5  | 1.0          | 8.5  |      |    |
| t <sub>PLZ</sub>                       | Output <u>Disable</u> Time (G to An)  | 2.7 to 3.6              |     |                       | 1.0  | 3.4  | 5.5         | 1.0  | 6.0          | 1.0  | 6.5  | ns |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     |                       | 1.0  | 3.4  | 5.5         | 1.0  | 6.0          | 1.0  | 6.5  |    |
| t <sub>PHZ</sub>                       | Output <u>Disable</u> Time (G to An)  | 2.7 to 3.6              | 1.0 |                       | 2.9  | 5.0  | 1.0         | 5.5  | 1.0          | 6.0  |      |    |
|                                        |                                       | 5.0 <sup>(*)</sup>      | 1.0 |                       | 2.9  | 4.5  | 1.0         | 5.0  | 1.0          | 5.5  |      |    |
| t <sub>OSLH</sub><br>t <sub>OSHL</sub> | Output To Output Skew Time (note1, 2) | 2.7 to 3.6              |     |                       |      | 0.5  | 1.0         |      | 1.5          |      | 1.5  | ns |
|                                        |                                       | 5.0 <sup>(*)</sup>      |     |                       |      | 0.5  | 1.0         |      | 1.5          |      | 1.5  |    |

1) Skew is defined as the absolute value of the difference between the actual propagation delay for any two outputs of the same device switching in the same direction, either HIGH or LOW ( $t_{OSLH} = |t_{PLHm} - t_{PLHn}|$ ,  $t_{OSHL} = |t_{PHLm} - t_{PHLn}|$ )

2) Parameter guaranteed by design

3) Typical values referred at  $V_{CCA} = 5.0\text{V}$ ,  $V_{CCB} = 5.0\text{V}$  or  $V_{CCA} = 5.0\text{V}$ ,  $V_{CCB} = 3.3\text{V}$


(\*) Voltage Range is  $5.0\text{V} \pm 0.5$

## CAPACITIVE CHARACTERISTICS

| Symbol           | Parameter                                      | Test Condition          |                         |  | Value                  |      |      |              |      |              | Unit |      |
|------------------|------------------------------------------------|-------------------------|-------------------------|--|------------------------|------|------|--------------|------|--------------|------|------|
|                  |                                                | V <sub>CCA</sub><br>(V) | V <sub>CCB</sub><br>(V) |  | T <sub>A</sub> = 25 °C |      |      | -40 to 85 °C |      | -55 to 125°C |      |      |
|                  |                                                |                         |                         |  | Min.                   | Typ. | Max. | Min.         | Max. | Min.         |      | Max. |
| C <sub>INA</sub> | Input Capacitance                              | open                    | open                    |  |                        | 4.5  | 10   |              | 10   |              | 10   | V    |
| C <sub>I/O</sub> | Input/Output Capacitance                       | 5.0                     | 3.3                     |  |                        | 10   |      |              |      |              |      | V    |
| C <sub>PD</sub>  | Dynamic Low Level Quiet Output (note 1) A to B | 5.0                     | 3.3                     |  |                        | 55   |      |              |      |              |      | V    |
| C <sub>PD</sub>  | Dynamic Low Level Quiet Output (note 1) B to A | 5.0                     | 3.3                     |  |                        | 40   |      |              |      |              |      | V    |

1) C<sub>PD</sub> is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average current can be obtained by the following equation.  $I_{CC(opr)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}/8$  (per circuit)

## TEST CIRCUIT


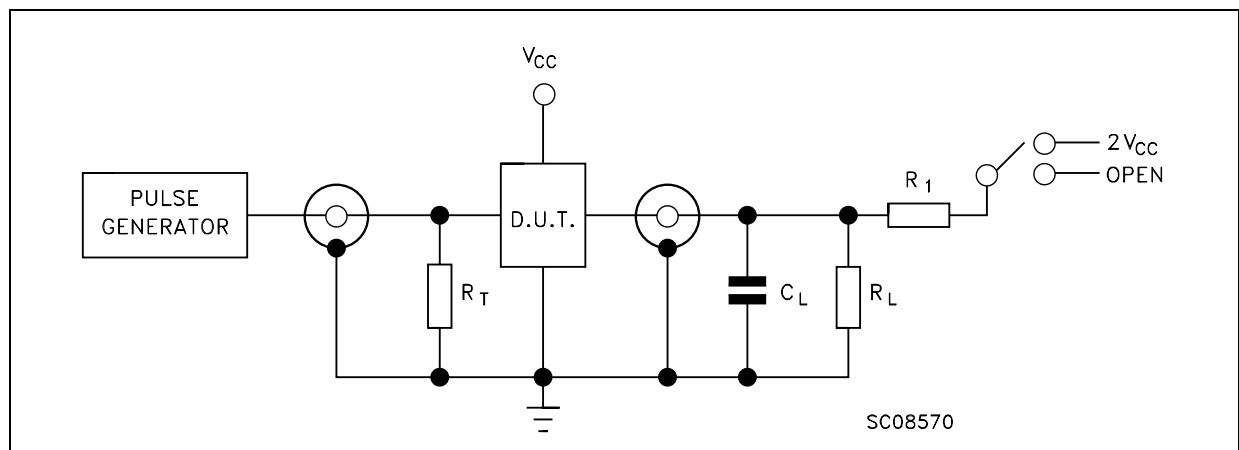


| TEST                                 | SWITCH           |
|--------------------------------------|------------------|
| t <sub>PLH</sub> , t <sub>PHL</sub>  | Open             |
| t <sub>PZLH</sub> , t <sub>PLZ</sub> | 2V <sub>CC</sub> |
| t <sub>PZH</sub> , t <sub>PHZ</sub>  | Open             |

C<sub>L</sub> = 50pF or equivalent (includes jig and probe capacitance)


R<sub>L</sub> = R<sub>1</sub> = 500Ω or equivalent

R<sub>T</sub> = Z<sub>OUT</sub> of pulse generator (typically 50Ω)

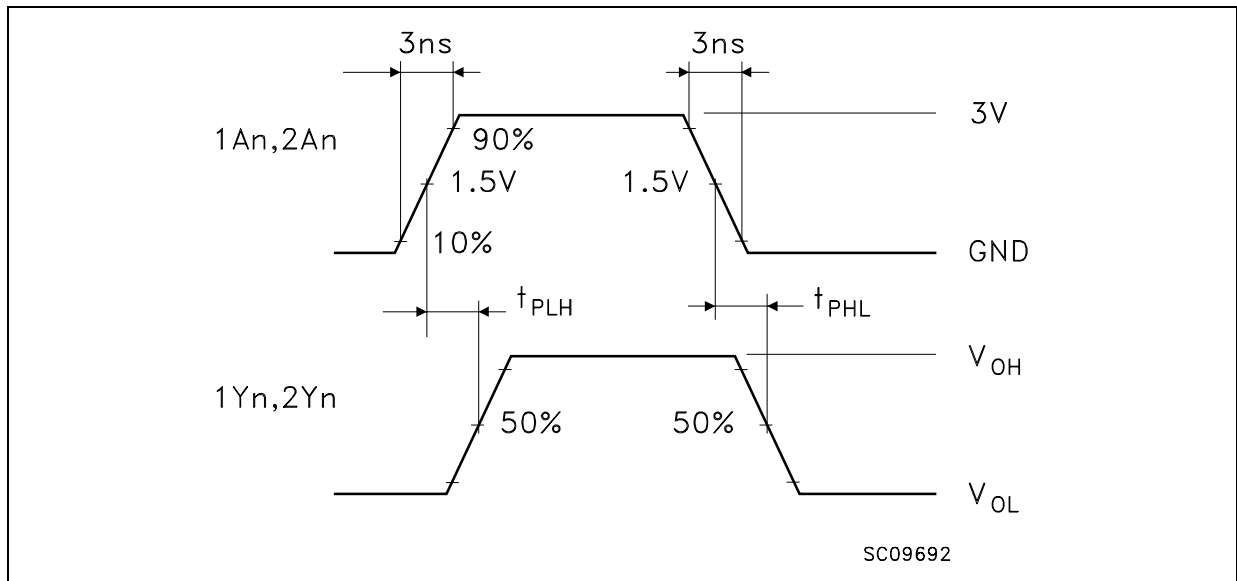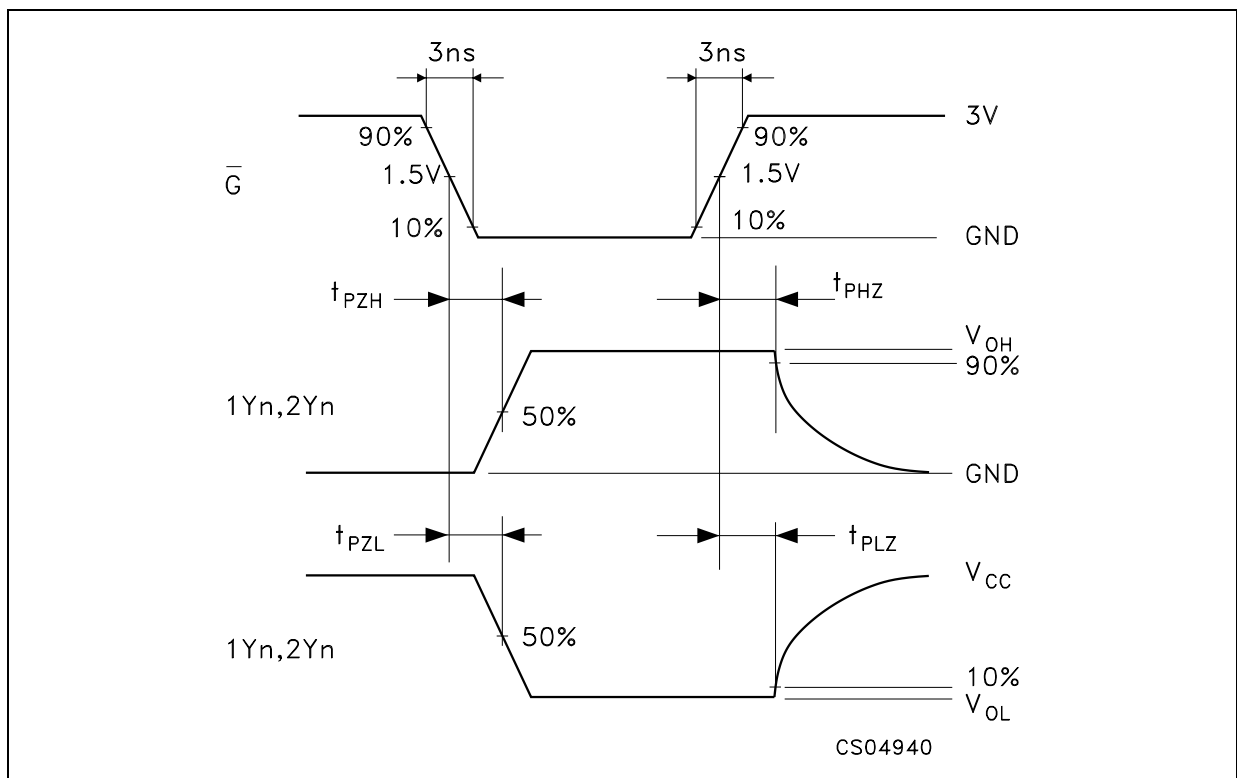**WAVEFORM 1: PROPAGATION DELAYS** ( $f=1\text{MHz}$ ; 50% duty cycle)**WAVEFORM 2: OUTPUT ENABLE AND DISABLE TIME** ( $f=1\text{MHz}$ ; 50% duty cycle)


## SO-24 MECHANICAL DATA

| DIM. | mm.        |       |       | inch  |       |       |
|------|------------|-------|-------|-------|-------|-------|
|      | MIN.       | TYP   | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |            |       | 2.65  |       |       | 0.104 |
| a1   | 0.1        |       | 0.2   | 0.004 |       | 0.008 |
| a2   |            |       | 2.45  |       |       | 0.096 |
| b    | 0.35       |       | 0.49  | 0.014 |       | 0.019 |
| b1   | 0.23       |       | 0.32  | 0.009 |       | 0.012 |
| C    |            | 0.5   |       |       | 0.020 |       |
| c1   | 45° (typ.) |       |       |       |       |       |
| D    | 15.20      |       | 15.60 | 0.598 |       | 0.614 |
| E    | 10.00      |       | 10.65 | 0.393 |       | 0.419 |
| e    |            | 1.27  |       |       | 0.050 |       |
| e3   |            | 13.97 |       |       | 0.550 |       |
| F    | 7.40       |       | 7.60  | 0.291 |       | 0.300 |
| L    | 0.50       |       | 1.27  | 0.020 |       | 0.050 |
| S    | 8° (max.)  |       |       |       |       |       |

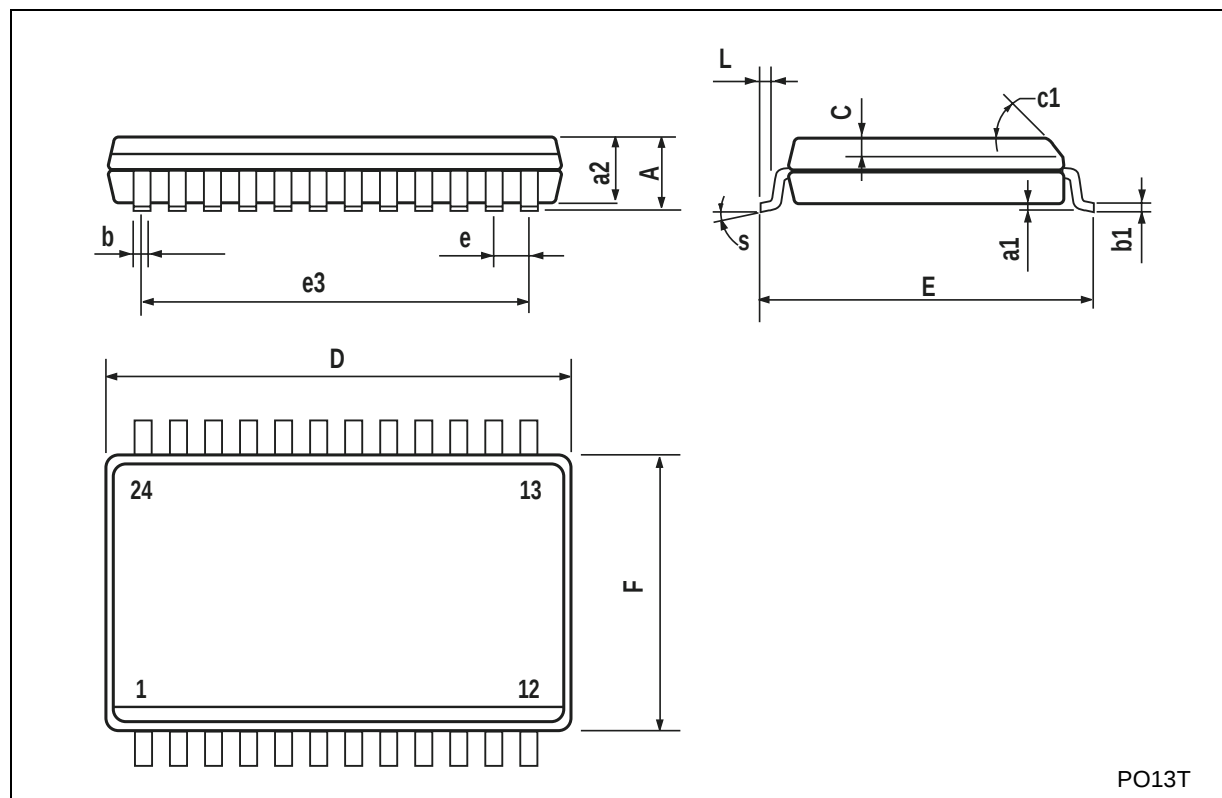

## TSSOP24 MECHANICAL DATA

| DIM. | mm.  |          |      | inch   |            |        |
|------|------|----------|------|--------|------------|--------|
|      | MIN. | TYP      | MAX. | MIN.   | TYP.       | MAX.   |
| A    |      |          | 1.1  |        |            | 0.043  |
| A1   | 0.05 |          | 0.15 | 0.002  |            | 0.006  |
| A2   |      | 0.9      |      |        | 0.035      |        |
| b    | 0.19 |          | 0.30 | 0.0075 |            | 0.0118 |
| c    | 0.09 |          | 0.20 | 0.0035 |            | 0.0079 |
| D    | 7.7  |          | 7.9  | 0.303  |            | 0.311  |
| E    | 6.25 |          | 6.5  | 0.246  |            | 0.256  |
| E1   | 4.3  |          | 4.5  | 0.169  |            | 0.177  |
| e    |      | 0.65 BSC |      |        | 0.0256 BSC |        |
| K    | 0°   |          | 8°   | 0°     |            | 8°     |
| L    | 0.50 |          | 0.70 | 0.020  |            | 0.028  |

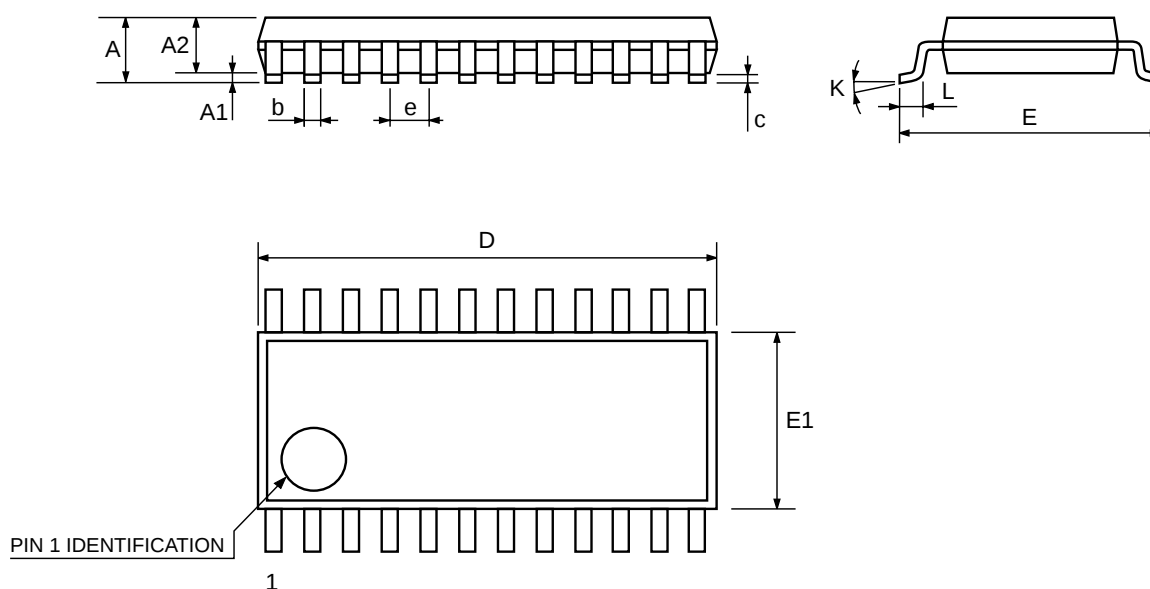

7047476A

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>

