

2SC5628

Silicon NPN Epitaxial
High Frequency Amplifier / Oscillator

HITACHI

ADE-208-979A (Z)

2nd. Edition


April 2001

Features

- Super compact package;
($1.4 \times 0.8 \times 0.59\text{mm}$)
- High power gain and low noise figure;
(PG = 9 dB, NF = 1.1 dB typ, at $f = 900\text{ Mhz}$, $V_{CE} = 1\text{ V}$)

Outline

MFPAK



1. Emitter
2. Base
3. Collector

Note: Marking is "XZ-".

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Ratings	Unit
Collector to base voltage	V _{CBO}	15	V
Collector to emitter voltage	V _{CEO}	8	V
Emitter to base voltage	V _{EBO}	1.5	V
Collector current	I _C	50	mA
Collector power dissipation	Pc	80	mW
Junction temperature	Tj	150	°C
Storage temperature	Tstg	−55 to +150	°C

Electrical Characteristics (Ta = 25°C)


Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector to base breakdown voltage	V _{(BR)CBO}	15	—	—	V	I _C = 10μA , I _E = 0
Collector cutoff current	I _{CBO}	—	—	1	μA	V _{CB} = 12V , I _E = 0
Collector cutoff current	I _{CEO}	—	—	1	mA	V _{CE} = 8V , R _{BE} = ∞
Emitter cutoff current	I _{EBO}	—	—	10	μA	V _{EB} = 1.5V , I _C = 0
DC current transfer ratio	h _{FE}	50	100	160	V	V _{CE} = 1V , I _C = 5mA
Collector output capacitance	Cob	—	0.55	0.85	pF	V _{CB} = 1V , I _E = 0 f = 1MHz
Gain bandwidth product	f _T	6	9	—	GHz	V _{CE} = 1V , I _C = 5mA
Power gain	PG	11	14	—	dB	V _{CE} = 1V , I _C = 5mA f = 900MHz
Noise figure	NF	—	1.1	2.0	dB	V _{CE} = 1V , I _C = 5mA f = 900MHz

Main Characteristics


Maximum Collector Dissipation Curve

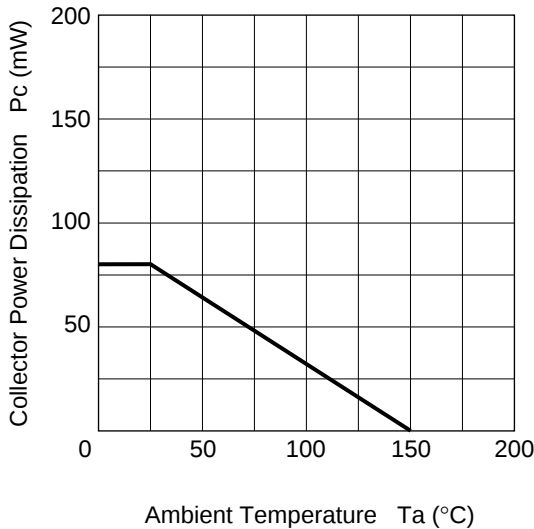


DC Current Transfer Ratio vs. Collector Current



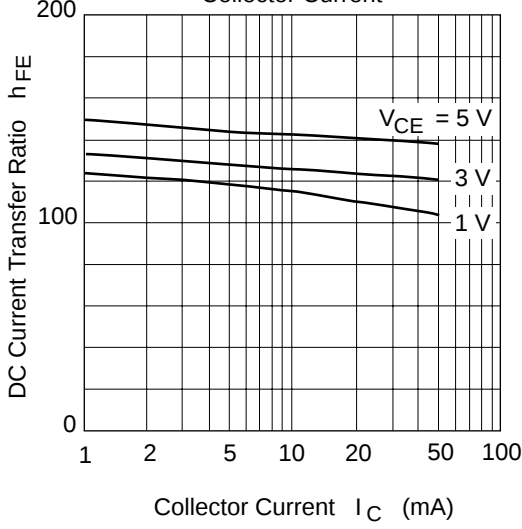


Collector Output Capacitance vs. Collector to Base Voltage

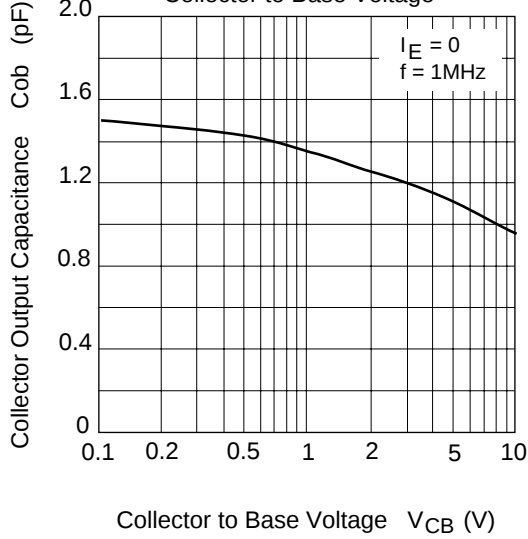


Gain Bandwidth Product vs. Collector Current

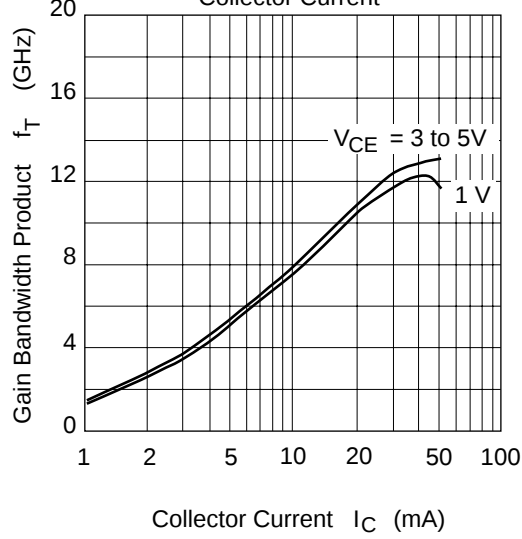

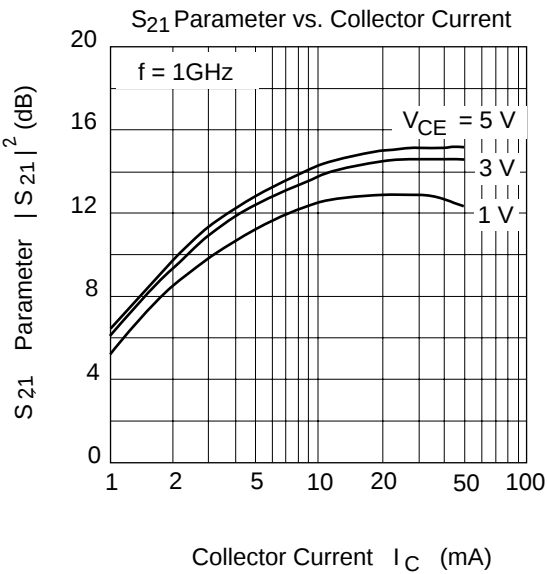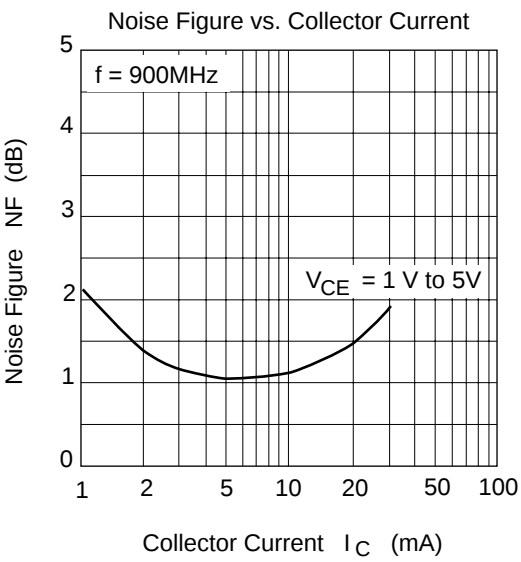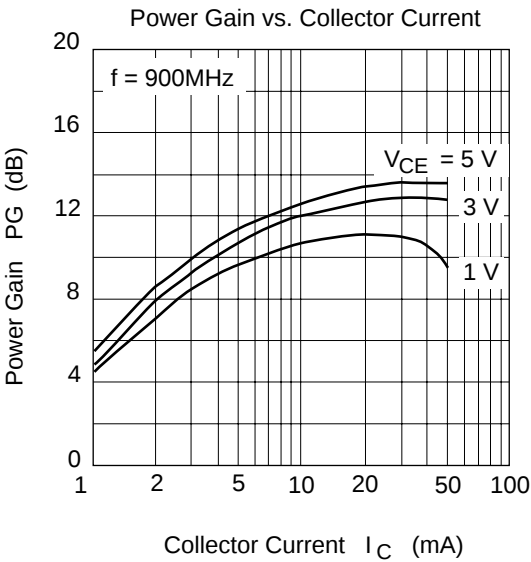

S11 Parameter vs. Frequency

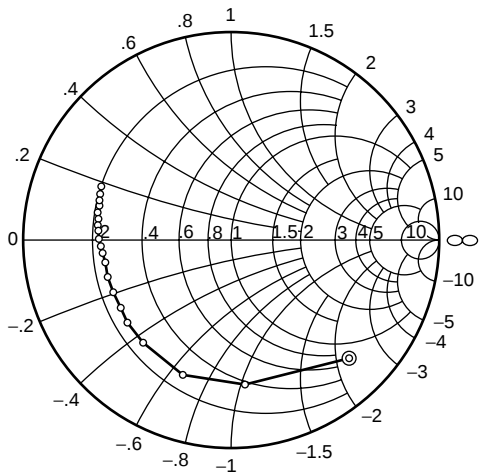


Condition : $V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)

⊙—○

S21 Parameter vs. Frequency

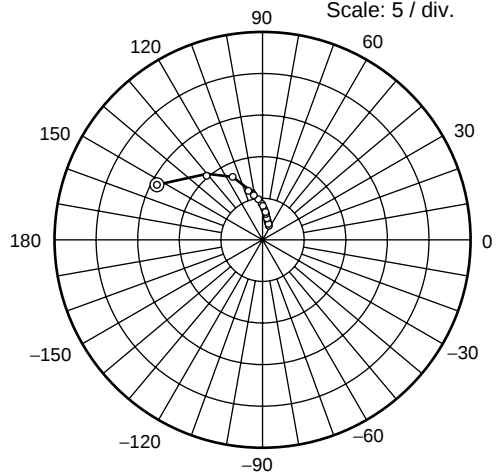


Scale: 5 / div.

Condition : $V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)

⊙—○

S12 Parameter vs. Frequency

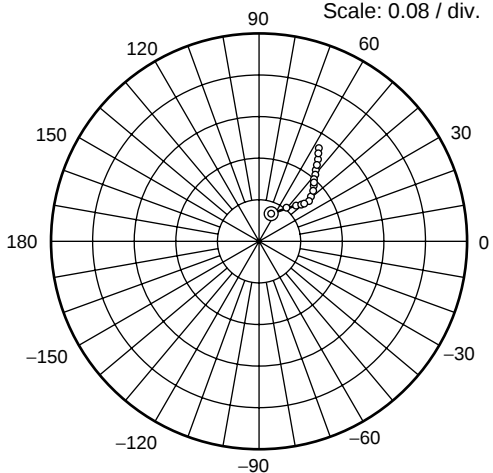


Scale: 0.08 / div.

Condition : $V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)

⊙—○

S22 Parameter vs. Frequency

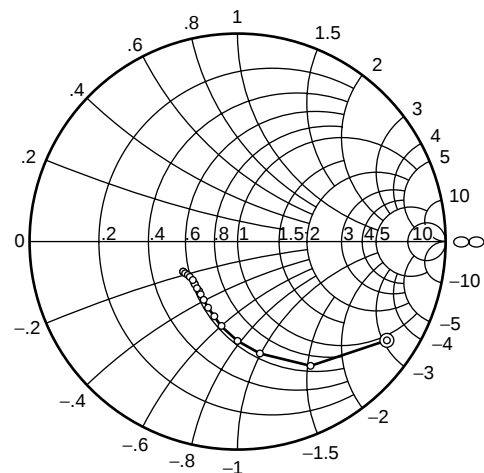


Condition : $V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)

⊙—○

S11 Parameter vs. Frequency

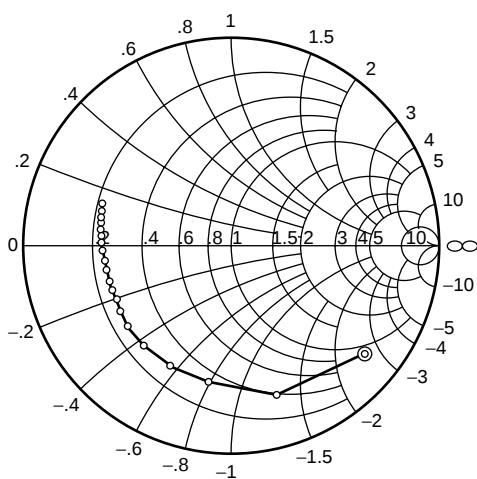


Condition : $V_{CE} = 3\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)



S21 Parameter vs. Frequency

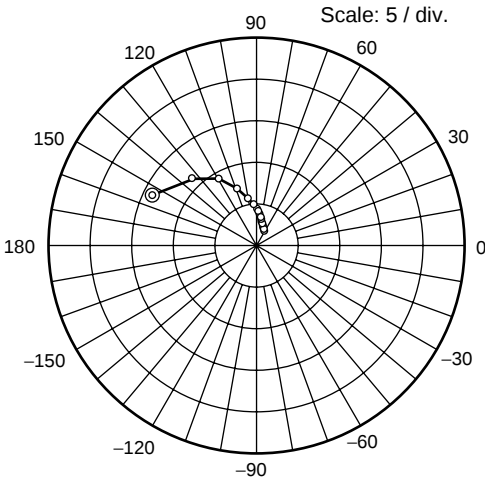


Condition : $V_{CE} = 3\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)



S12 Parameter vs. Frequency

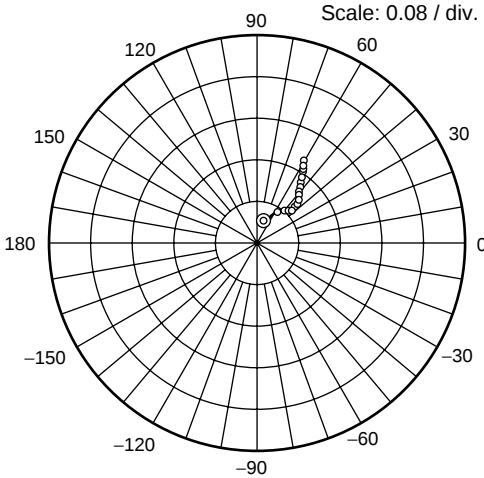


Condition : $V_{CE} = 3\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)



S22 Parameter vs. Frequency

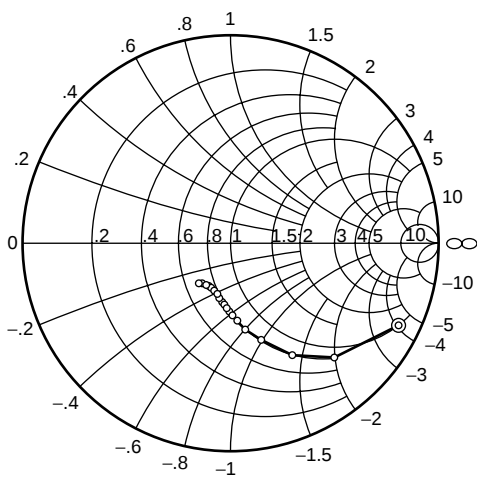

Condition : $V_{CE} = 3\text{ V}$, $I_C = 5\text{ mA}$

100 to 2000 MHz (100 MHz step)



Sparameter ($V_{CE} = 1\text{ V}$, $I_C = 5\text{ mA}$, $Z_o = 50\ \Omega$)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100	0.815	−46.1	13.63	152.2	0.0509	67.0	0.882	−32.5
200	0.734	−84.6	10.68	130.6	0.0834	51.0	0.695	−58.5
300	0.692	−111.2	8.23	116.8	0.0998	42.9	0.550	−76.0
400	0.665	−127.4	6.58	107.9	0.108	39.5	0.459	−88.5
500	0.650	−139.6	5.44	101.4	0.114	38.0	0.399	−98.1
600	0.644	−148.8	4.61	96.3	0.120	38.3	0.360	−105.7
700	0.640	−155.6	4.03	92.2	0.124	39.0	0.333	−112.2
800	0.641	−161.6	3.56	88.6	0.128	39.9	0.315	−117.8
900	0.638	−166.9	3.20	85.3	0.134	41.8	0.301	−122.4
1000	0.638	−171.6	2.90	82.2	0.138	43.5	0.292	−126.7
1100	0.643	−175.1	2.66	79.6	0.143	44.4	0.286	−130.2
1200	0.643	−178.5	2.46	77.2	0.149	46.2	0.280	−133.6
1300	0.648	178.5	2.28	74.9	0.154	47.8	0.279	−135.6
1400	0.651	175.4	2.15	72.8	0.161	49.1	0.278	−138.6
1500	0.658	173.2	2.03	70.5	0.168	50.9	0.277	−140.9
1600	0.663	170.0	1.92	68.5	0.174	51.8	0.279	−143.3
1700	0.667	167.2	1.82	66.7	0.182	53.2	0.281	−145.0
1800	0.669	165.0	1.74	64.4	0.189	54.6	0.282	−147.1
1900	0.673	163.1	1.67	63.2	0.196	55.5	0.286	−149.3
2000	0.682	161.0	1.60	61.4	0.204	56.4	0.289	−150.6


2SC5628

Sparameter (V_{CE} = 3 V, I_C = 5 mA, Z_o = 50 Ω)

f (MHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100	0.826	−39.3	14.04	155.5	0.0412	69.9	0.906	−25.8
200	0.746	−74.6	11.47	134.9	0.0700	54.9	0.738	−47.3
300	0.685	−100.5	9.14	121.1	0.0864	46.7	0.591	−61.9
400	0.646	−117.4	7.41	111.9	0.0950	43.0	0.490	−71.9
500	0.627	−130.7	6.19	104.8	0.101	41.3	0.419	−79.9
600	0.617	−141.0	5.27	99.6	0.107	41.3	0.369	−85.7
700	0.606	−149.0	4.61	95.0	0.111	41.6	0.333	−90.7
800	0.598	−155.4	4.09	91.6	0.115	42.5	0.307	−95.3
900	0.605	−161.3	3.67	87.7	0.120	44.3	0.287	−99.0
1000	0.604	−166.1	3.35	84.7	0.124	45.6	0.273	−102.6
1100	0.604	−170.6	3.06	81.8	0.129	46.8	0.262	−106.0
1200	0.607	−174.2	2.83	79.5	0.134	49.0	0.253	−108.8
1300	0.605	−178.2	2.62	77.1	0.139	50.4	0.249	−111.0
1400	0.608	178.9	2.47	74.9	0.145	51.9	0.245	−114.3
1500	0.618	175.5	2.32	72.7	0.152	53.4	0.242	−116.6
1600	0.622	172.4	2.19	70.7	0.157	54.8	0.241	−118.9
1700	0.627	170.0	2.08	68.9	0.164	56.2	0.241	−121.3
1800	0.629	166.9	1.99	66.7	0.171	57.6	0.242	−123.4
1900	0.633	164.3	1.90	65.2	0.177	58.7	0.243	−125.9
2000	0.641	162.3	1.82	63.4	0.186	59.5	0.245	−127.7

Package Dimensions

Unit: mm

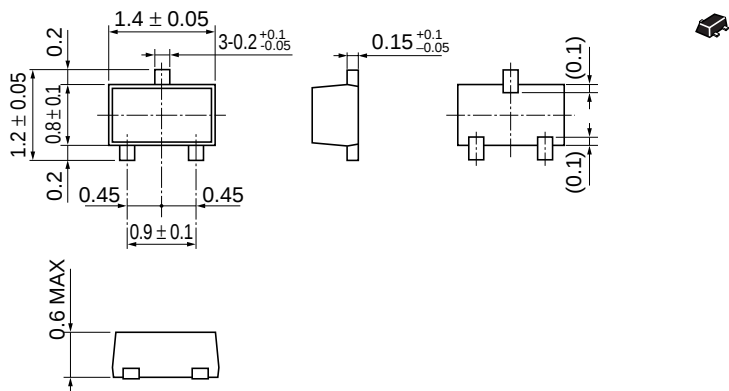

Hitachi Code	MFPAK
JEDEC	—
EIAJ	—
Mass (reference value)	0.0016 g

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: (03) 3270-2111 Fax: (03) 3270-5109

URL	North America	:	http://semiconductor.hitachi.com/
	Europe	:	http://www.hitachi-eu.com/hel/ecg
	Asia	:	http://sicapac.hitachi-asia.com
	Japan	:	http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1> (408) 433-0223	Hitachi Europe Ltd. Electronic Components Group Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 585200
	Hitachi Europe GmbH Electronic Components Group Dornacher StraÙe 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00

Hitachi Asia Ltd. Hitachi Tower 16 Collyer Quay #20-00 Singapore 049318 Tel: <65>-538-6533/538-8577 Fax: <65>-538-6933/538-3877 URL: http://www.hitachi.com.sg	Hitachi Asia Ltd. (Taipei Branch Office) 4/F, No. 167, Tun Hwa North Road Hung-Kuo Building Taipei (105), Taiwan Tel: <886>-(2)-2718-3666 Fax: <886>-(2)-2718-8180 Telex: 23222 HAS-TP URL: http://www.hitachi.com.tw
--	---

Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower World Finance Centre, Harbour City, Canton Road Tsim Sha Tsui, Kowloon Hong Kong Tel: <852>-(2)-735-9218 Fax: <852>-(2)-730-0281 URL: http://semiconductor.hitachi.com.hk
--

Copyright ' Hitachi, Ltd., 2001. All rights reserved. Printed in Japan.

Colophon 4.0