



## LOW-VOLTAGE 10-BIT BUS SWITCH

**IDT74CBTLVR3861**

### FEATURES:

- Isolation Under Power-Off Conditions
- Over-voltage tolerant
- Latch-up performance exceeds 100mA
- $V_{CC} = 2.3V - 3.6V$ , normal range
- ESD >2000V per MIL-STD-883, Method 3015; >200V using machine model ( $C = 200pF$ ,  $R = 0$ )
- Available in SSOP, QSOP, and TSSOP packages

### APPLICATIONS:

- 3.3V High Speed Bus Switching and Bus Isolation


### DESCRIPTION:

The CBTLVR3861 is a ten bit high-speed bus switch. It adds an internal series resistor with each switch to reduce reflection noise in high-speed applications. When closed, the switch acts as a source (series) termination for the driver connected to it.


The device is organized as one 10-bit bus switch. When output enable ( $\overline{OE}$ ) is low, the 10-bit bus switch is on and port A is connected to port B. When  $\overline{OE}$  is high, the switch is open and a high-impedance state exists between the two ports.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.


### FUNCTIONAL BLOCK DIAGRAM

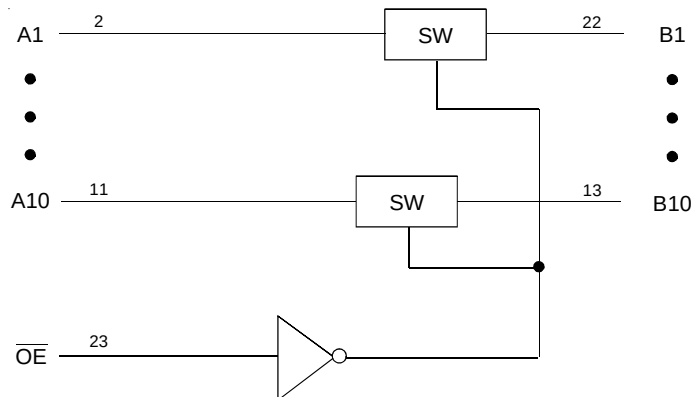

### SIMPLIFIED SCHEMATIC, EACH SWITCH

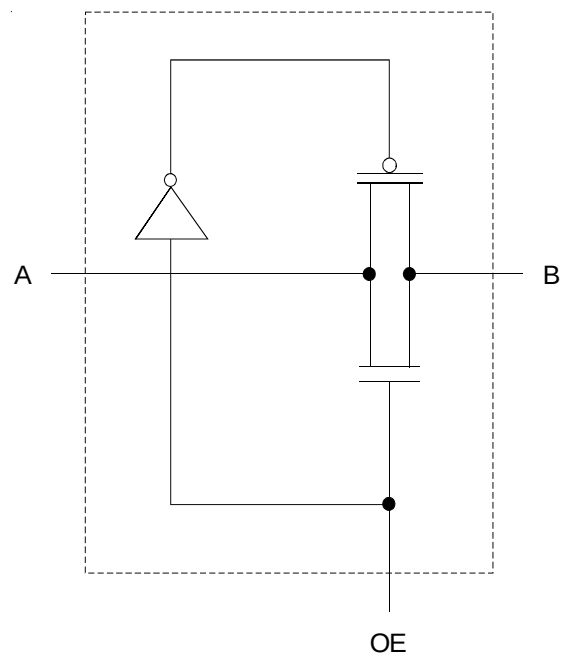

## PIN CONFIGURATION

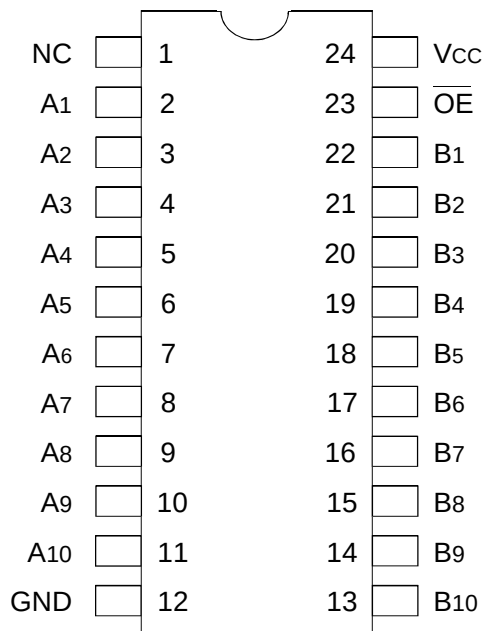

SSOP/ QSOP/ TSSOP  
TOP VIEW

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol           | Description                               | Max.        | Unit |
|------------------|-------------------------------------------|-------------|------|
| V <sub>CC</sub>  | Supply Voltage Range                      | −0.5 to 4.6 | V    |
| V <sub>I</sub>   | Input Voltage Range                       | −0.5 to 4.6 | V    |
|                  | Continuous Channel Current                | 128         | mA   |
| I <sub>IK</sub>  | Input Clamp Current, V <sub>I/O</sub> < 0 | −50         | mA   |
| T <sub>STG</sub> | Storage Temperature Range                 | −65 to +150 | °C   |

### NOTE:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## FUNCTION TABLE<sup>(1)</sup>

| Input           | Function        |
|-----------------|-----------------|
| $\overline{OE}$ |                 |
| L               | A Port = B Port |
| H               | Disconnect      |

### NOTE:

- H = HIGH Voltage Level  
L = LOW Voltage Level

## OPERATING CHARACTERISTICS<sup>(1)</sup>

| Symbol          | Parameter                        | Test Conditions                | Min. | Max. | Unit |
|-----------------|----------------------------------|--------------------------------|------|------|------|
| V <sub>CC</sub> | Supply Voltage                   |                                | 2.3  | 3.6  | V    |
| V <sub>IH</sub> | High-Level Control Input Voltage | V <sub>CC</sub> = 2.3V to 2.7V | 1.7  | —    | V    |
|                 |                                  | V <sub>CC</sub> = 2.7V to 3.6V | 2    | —    |      |
| V <sub>IL</sub> | Low-Level Control Input Voltage  | V <sub>CC</sub> = 2.3V to 2.7V | —    | 0.7  | V    |
|                 |                                  | V <sub>CC</sub> = 2.7V to 3.6V | —    | 0.8  |      |
| T <sub>A</sub>  | Operating Free-Air Temperature   |                                | −40  | +85  | °C   |

### NOTE:

- All unused control inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation.

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Operating Condition: TA = -40°C to +85°C

| Symbol                          | Parameter                                                | Test Conditions                                                                     |                       | Min. | Typ. <sup>(1)</sup> | Max. | Unit |
|---------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------|------|---------------------|------|------|
| V <sub>IK</sub>                 | Control Inputs, Data I/O                                 | V <sub>CC</sub> = 3V, I <sub>I</sub> = -18mA                                        |                       | —    | —                   | -1.2 | V    |
| I <sub>I</sub>                  | Control Inputs                                           | V <sub>CC</sub> = 3.6V, V <sub>I</sub> = V <sub>CC</sub> or GND                     |                       | —    | —                   | ±1   | μA   |
| I <sub>OZ</sub>                 | Data I/O                                                 | V <sub>CC</sub> = 3.6V, V <sub>O</sub> = 0V or 3.6V switch disabled                 |                       | —    | —                   | 5    | μA   |
| I <sub>OFF</sub>                |                                                          | V <sub>CC</sub> = 0V, V <sub>I</sub> or V <sub>O</sub> = 0V to 3.6V                 |                       | —    | —                   | 10   | μA   |
| I <sub>CC</sub>                 |                                                          | V <sub>CC</sub> = 3.6V, I <sub>O</sub> = 0, V <sub>I</sub> = V <sub>CC</sub> or GND |                       | —    | —                   | 10   | μA   |
| ΔI <sub>CC</sub> <sup>(2)</sup> | Control Inputs                                           | V <sub>CC</sub> = 3.6V, one input at 3V, other inputs at V <sub>CC</sub> or GND     |                       | —    | —                   | 300  | μA   |
| C <sub>I</sub>                  | Control Inputs                                           | V <sub>I</sub> = 3V or 0                                                            |                       | —    | 4                   | —    | pF   |
| C <sub>IO(OFF)</sub>            |                                                          | V <sub>O</sub> = 3V or 0, $\overline{OE}$ = V <sub>CC</sub>                         |                       | —    | 8                   | —    | pF   |
| R <sub>ON</sub> <sup>(3)</sup>  | V <sub>CC</sub> = 2.3V<br>Typ. at V <sub>CC</sub> = 2.5V | V <sub>I</sub> = 0                                                                  | I <sub>O</sub> = 64mA | —    | 30                  | 47   | Ω    |
|                                 |                                                          |                                                                                     | I <sub>O</sub> = 24mA | —    | 30                  | 47   |      |
|                                 |                                                          | V <sub>I</sub> = 1.7V                                                               | I <sub>O</sub> = 15mA | —    | 36                  | 80   |      |
|                                 | V <sub>CC</sub> = 3V                                     | V <sub>I</sub> = 0                                                                  | I <sub>O</sub> = 64mA | —    | 30                  | 42   |      |
|                                 |                                                          |                                                                                     | I <sub>O</sub> = 24mA | —    | 30                  | 42   |      |
|                                 |                                                          | V <sub>I</sub> = 2.4V                                                               | I <sub>O</sub> = 15mA | —    | 32                  | 47   |      |

### NOTES:

- Typical values are at 3.3V, +25°C ambient.
- The increase in supply current is attributable to each input that is at the specified voltage level rather than V<sub>CC</sub> or GND.
- This is measured by the voltage drop between the A and B terminals at the indicated current through the switch. On-state resistance is determined by the lower of the voltages of the two (A or B) terminals.

## SWITCHING CHARACTERISTICS

| Symbol                         | Parameter                                        | V <sub>CC</sub> = 2.5V ± 0.2V |      | V <sub>CC</sub> = 3.3V ± 0.3V |      | Unit |
|--------------------------------|--------------------------------------------------|-------------------------------|------|-------------------------------|------|------|
|                                |                                                  | Min.                          | Max. | Min.                          | Max. |      |
| t <sub>PD</sub> <sup>(1)</sup> | Propagation Delay<br>A to B or B to A            | —                             | 0.9  | —                             | 1.5  | ns   |
| t <sub>EN</sub>                | Output Enable Time<br>$\overline{OE}$ to A or B  | 1                             | 6    | 1                             | 5.3  | ns   |
| t <sub>DIS</sub>               | Output Disable Time<br>$\overline{OE}$ to A or B | 1                             | 5.5  | 1                             | 5.5  | ns   |



### NOTE:

- The propagation delay is the calculated RC time constant of the typical on-state resistance of the switch and the specified load capacitance when driven by an ideal voltage source (zero output impedance).

## TEST CIRCUITS AND WAVEFORMS

### TEST CONDITIONS

| Symbol     | $V_{CC}^{(1)} = 3.3V \pm 0.3V$ | $V_{CC}^{(2)} = 2.5V \pm 0.2V$ | Unit |
|------------|--------------------------------|--------------------------------|------|
| $V_{LOAD}$ | 6                              | $2 \times V_{CC}$              | V    |
| $V_{IH}$   | 3                              | $V_{CC}$                       | V    |
| $V_T$      | 1.5                            | $V_{CC} / 2$                   | V    |
| $V_{LZ}$   | 300                            | 150                            | mV   |
| $V_{HZ}$   | 300                            | 150                            | mV   |
| $C_L$      | 50                             | 30                             | pF   |

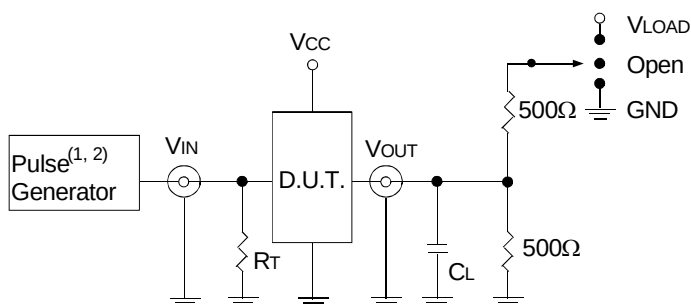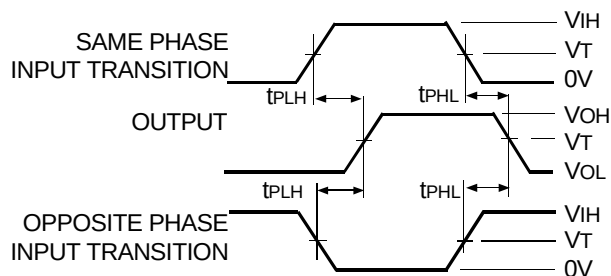

**Test Circuits for All Outputs**

#### DEFINITIONS:


$C_L$  = Load capacitance: includes jig and probe capacitance.

$R_T$  = Termination resistance: should be equal to  $Z_{out}$  of the Pulse Generator.

#### NOTES:

1. Pulse Generator for All Pulses: Rate  $\leq 10\text{MHz}$ ;  $t_r \leq 2.5\text{ns}$ ;  $t_f \leq 2.5\text{ns}$ .
2. Pulse Generator for All Pulses: Rate  $\leq 10\text{MHz}$ ;  $t_r \leq 2\text{ns}$ ;  $t_f \leq 2\text{ns}$ .

### Propagation Delay

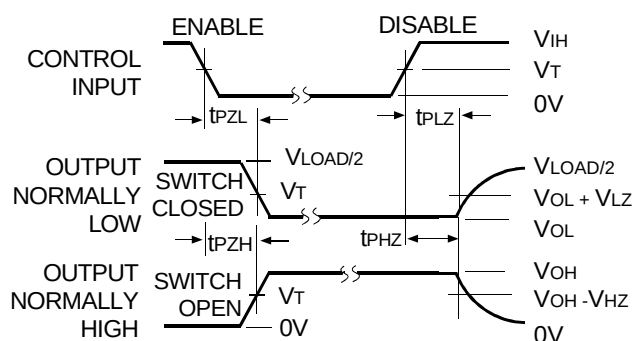

#### NOTE:

1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

### Enable and Disable Times

## SWITCH POSITION

| Test              | Switch     |
|-------------------|------------|
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |
| $t_{PD}$          | Open       |

## ORDERING INFORMATION

| IDT         | XX | CBTLV | X      | XXX         | XX      |                                                 |
|-------------|----|-------|--------|-------------|---------|-------------------------------------------------|
| Temp. Range |    |       | Family | Device Type | Package |                                                 |
|             |    |       |        |             |         |                                                 |
|             |    |       |        |             | PY      | Shrink Small Outline Package                    |
|             |    |       |        |             | Q       | Quarter-size Small Outline Package              |
|             |    |       |        |             | PG      | Thin Shrink Small Outline Package               |
|             |    |       |        |             | 3861    | Low-Voltage 10-Bit Bus Switch                   |
|             |    |       |        |             | R       | 25Ω series dampening resistors on A and B ports |
|             |    |       |        |             | 74      | −40°C to +85°C                                  |



**CORPORATE HEADQUARTERS**  
 2975 Stender Way  
 Santa Clara, CA 95054

**for SALES:**  
 800-345-7015 or 408-727-6116  
 fax: 408-492-8674  
[www.idt.com](http://www.idt.com)

**for Tech Support:**  
[logichelp@idt.com](mailto:logichelp@idt.com)  
 (408) 654-6459