

The RF Line

NPN Silicon


RF Power Transistor

Designed for 28 Volt microwave large-signal, common base, Class-C CW amplifier applications in the range 1600 – 1640 MHz.

- Specified 28 Volt, 1.6 GHz Class-C Characteristics
 - Output Power = 30 Watts
 - Minimum Gain = 7.5 dB, @ 30 Watts
 - Minimum Efficiency = 40% @ 30 Watts
- Characterized with Series Equivalent Large-Signal Parameters from 1500 MHz to 1700 MHz
- Silicon Nitride Passivated
- Gold Metallized, Emitter Ballasted for Long Life and Resistance to Metal Migration

MRF16030

**30 WATTS, 1.6 GHz
RF POWER TRANSISTOR
NPN SILICON**



CASE 395C-01, STYLE 2

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V _{CES}	60	Vdc
Emitter-Base Voltage	V _{EBO}	4.0	Vdc
Collector-Current	I _C	4.0	Adc
Total Device Dissipation @ T _C = 25°C Derate above 25°C	P _D	103 0.58	Watts °C/W
Storage Temperature Range	T _{stg}	-65 to +150	°C

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case (1) (2)	R _{θJC}	1.7	°C/W
---	------------------	-----	------

(1) Thermal measurement performed using CW RF operating condition.

(2) Thermal resistance is determined under specified RF operating conditions by infrared measurement techniques.

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS


Collector–Emitter Breakdown Voltage ($I_C = 100\text{ mAdc}$, $V_{BE} = 0$)	$V_{(BR)CES}$	55	—	—	Vdc
Collector–Base Breakdown Voltage ($I_C = 100\text{ mAdc}$, $I_E = 0$)	$V_{(BR)CBO}$	55	—	—	Vdc
Emitter–Base Breakdown Voltage ($I_E = 10\text{ mAdc}$, $I_C = 0$)	$V_{(BR)EBO}$	4.0	—	—	Vdc
Collector Cutoff Current ($V_{CE} = 28\text{ Vdc}$, $V_{BE} = 0$)	I_{CES}	—	—	10	mAdc

ON CHARACTERISTICS

DC Current Gain ($I_{CE} = 1.0\text{ Adc}$, $V_{CE} = 5.0\text{ Vdc}$)	h_{FE}	20	35	80	—
--	----------	----	----	----	---

FUNCTIONAL TESTS


Collector–Base Amplifier Power Gain ($V_{CC} = 28\text{ Vdc}$, $P_{out} = 30\text{ Watts}$, $f = 1600/1640\text{ MHz}$)	G_{pe}	7.5	7.7	—	dB
Collector Efficiency ($V_{CC} = 28\text{ Vdc}$, $P_{out} = 30\text{ Watts}$, $f = 1600/1640\text{ MHz}$)	η	40	45	—	%
Input Return Loss ($V_{CC} = 28\text{ Vdc}$, $P_{out} = 30\text{ Watts}$, $f = 1600/1640\text{ MHz}$)	I_{RL}	8.0	—	—	dB
Output Mismatch Stress $V_{CC} = 28\text{ Vdc}$, $P_{out} = 30\text{ Watts}$, $f = 1600\text{ MHz}$, Load $VSWR = 3:1$, All phase angles at frequency of test	Ψ	No Degradation in Output Power			

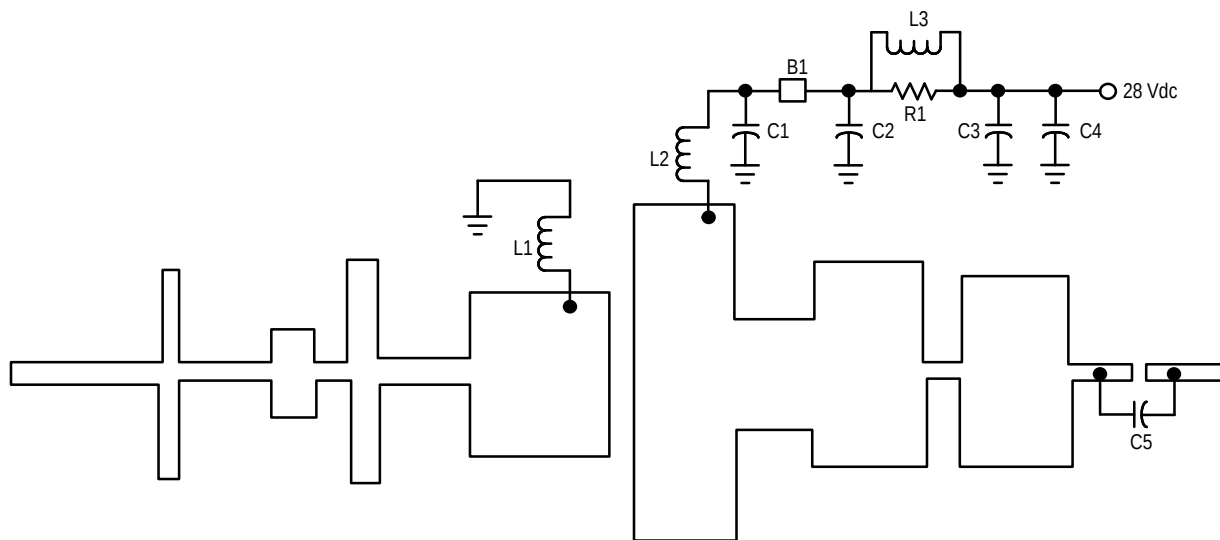

Board Material – Teflon® Glass Laminate Dielectric
Thickness = 0.30", $\epsilon_r = 2.55$ ", 2.0 oz. Copper

B1	Fair Rite Bead on #24 Wire	C4	47 μ F, 50 V, Electrolytic
C1, C5	100 pF, B Case, ATC Chip Cap	L1, L2	3 Turns, #18, 0.133" ID, 0.15" Long
C2	0.1 μ F, Dipped Mica Cap	L3	9 Turns, #24 Enamel
C3	0.1 μ F, Chip Cap	R1	82 Ω , 1.0 W, Carbon

Figure 1. MRF16030 Test Fixture Schematic

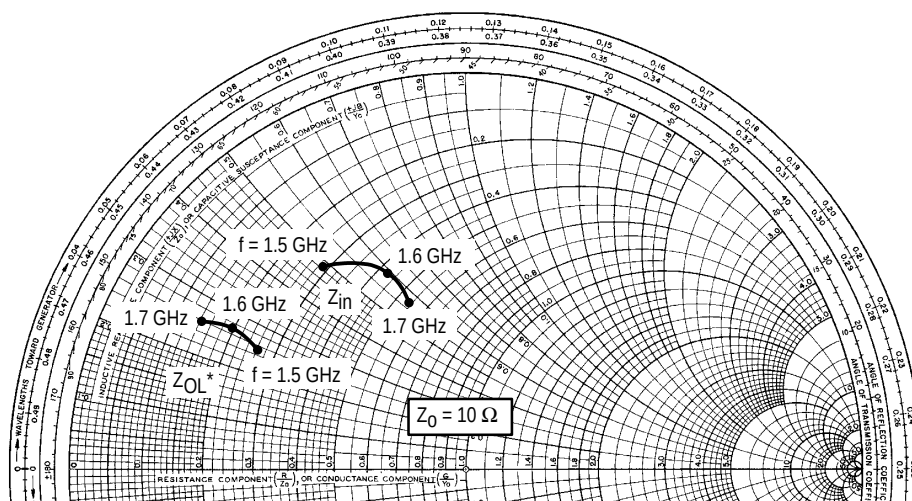

$V_{CC} = 28$ Vdc, $P_{out} = 30$ W

f MHz	Z_{in} Ohms	Z_{OL}^* Ohms
1500	$3.05 + j 4.88$	$2.66 + j 2.53$
1600	$4.32 + j 6.00$	$1.79 + j 2.80$
1700	$5.62 + j 5.79$	$1.51 + j 2.64$

Z_{OL}^* = Conjugate of the optimum load impedance into which the device output operates at a given output power, voltage and frequency.

Figure 2. Series Equivalent Input/Output Impedance


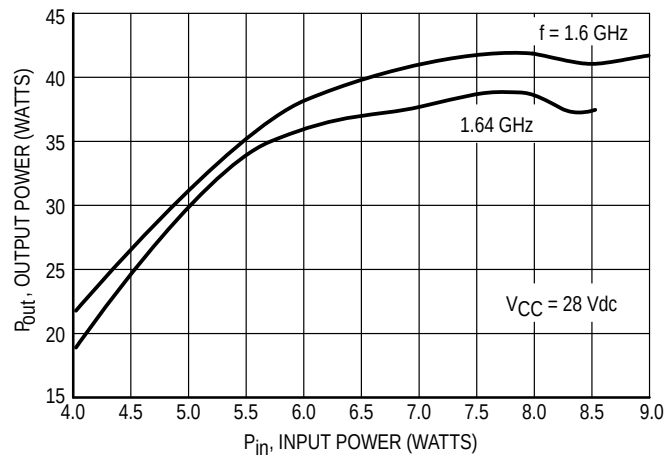


Figure 3. Output Power versus Input Power

PACKAGE DIMENSIONS

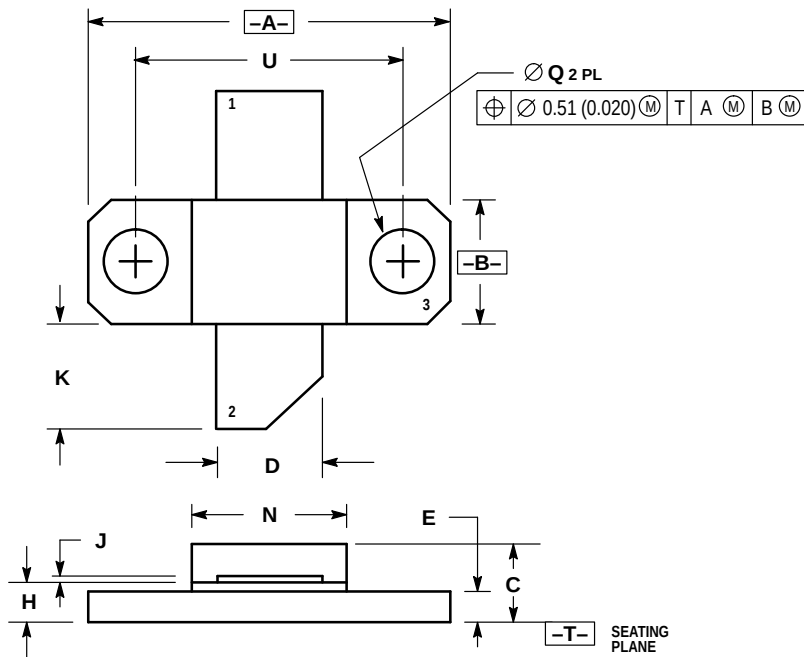

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.739	0.750	18.77	19.05
B	0.240	0.260	6.10	6.60
C	0.165	0.198	4.19	5.03
D	0.215	0.225	5.46	5.72
E	0.055	0.070	1.40	1.78
H	0.079	0.091	2.01	2.31
J	0.004	0.006	0.10	0.15
K	0.210	0.240	5.33	6.10
N	0.315	0.330	8.00	8.38
Q	0.125	0.135	3.18	3.42
U	0.560 BSC		14.23 BSC	

**CASE 395C-01
ISSUE A**

Specifications subject to change without notice.

■ **North America:** Tel. (800) 366-2266, Fax (800) 618-8883
 ■ **Asia/Pacific:** Tel.+81-44-844-8296, Fax +81-44-844-8298
 ■ **Europe:** Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.

REV 3

tyco / Electronics

MACOM