

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
 **$\mu$ POWER OPERATIONAL AMPLIFIERS**  
SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

- **2 $\times$  Bandwidth (2 MHz) of the TL06x and TL03x Operational Amplifiers**
- **Low Supply Current . . . 290  $\mu$ A/Ch Typ**
- **On-chip Offset Voltage Trimming for Improved DC Performance**
- **High Output Drive, Specified into 100- $\Omega$  Loads**
- **Lower Noise Floor Than Earlier Generations of Low-Power BiFETs**

## description

The TLE206x series of low-power JFET-input operational amplifiers doubles the bandwidth of the earlier generation TL06x and TL03x BiFET families without significantly increasing power consumption. Texas Instruments Excalibur process also delivers a lower noise floor than the TL06x and TL03x. On-chip zener trimming of offset voltage yields precision grades for dc-coupled applications. The TL206x devices are pin-compatible with other Texas Instruments BiFETs; they can be used to double the bandwidth of TL06x and TL03x circuits or to reduce power consumption of TL05x, TL07x, and TL08x circuits by nearly 90%.

BiFET operational amplifiers offer the inherently-higher input impedance of the JFET-input transistors, without sacrificing the output drive associated with bipolar amplifiers. This makes them better suited for interfacing with high-impedance sensors or low-level ac signals. They also feature inherently better ac response than bipolar or CMOS devices having comparable power consumption. The TLE206x family features a high-output-drive circuit capable of driving 100- $\Omega$  loads at supplies as low as  $\pm 5$  V. This makes them uniquely suited for driving transformer loads in modems and other applications requiring good ac characteristics, low power, and high output drive.

Because BiFET operational amplifiers are designed for use with dual power supplies, care must be taken to observe common-mode input voltage limits and output swing when operating from a single supply. DC biasing of the input signal is required and loads should be terminated to a virtual ground node at mid-supply. Texas Instruments TLE2426 integrated virtual ground generator is useful when operating BiFET amplifiers from single supplies.

The TLE206x are fully specified at  $\pm 15$  V and  $\pm 5$  V. For operation in low-voltage and/or single-supply systems, Texas Instruments LinCMOS families of operational amplifiers (TLC- and TLV-prefixes) are recommended. When moving from BiFET to CMOS amplifiers, particular attention should be paid to slew rate and bandwidth requirements and output loading. The Texas Instruments TLV2432 and TLV2442 CMOS operational amplifiers are excellent choices to consider.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

**PRODUCTION DATA** information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2004, Texas Instruments Incorporated

# TLE206x, TLE206xA, TLE206xB EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE μPOWER OPERATIONAL AMPLIFIERS

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

## TLE2061 AVAILABLE OPTIONS

| PACKAGED DEVICES |                                |                          |                         |                        |                       |                |                             |
|------------------|--------------------------------|--------------------------|-------------------------|------------------------|-----------------------|----------------|-----------------------------|
| T <sub>A</sub>   | V <sub>IO</sub> max<br>AT 25°C | SMALL<br>OUTLINE†<br>(D) | CHIP<br>CARRIER<br>(FK) | CERAMIC<br>DIP<br>(JG) | PLASTIC<br>DIP<br>(P) | TSSOP‡<br>(PW) | CERAMIC<br>FLAT PACK<br>(U) |
| 0°C to 70°C      | 500 μV                         | —                        | —                       | —                      | —                     | —              | —                           |
|                  | 1.5 mV                         | TLE2061ACD               | —                       | —                      | TLE2061ACP            | —              | —                           |
|                  | 3 mV                           | TLE2061CD                | —                       | —                      | TLE2061CP             | TLE2061CPWLE   | —                           |
| –40°C to 85°C    | 500 μV                         | —                        | —                       | —                      | —                     | —              | —                           |
|                  | 1.5 mV                         | TLE2061AID               | —                       | —                      | TLE2061AIP            | —              | —                           |
|                  | 3 mV                           | TLE2061ID                | —                       | —                      | TLE2061IP             | —              | —                           |
| –55°C to 125°C   | 500 μV                         | —                        | —                       | TLE2061BMJG            | —                     | —              | —                           |
|                  | 1.5 mV                         | TLE2061AMD               | TLE2061AMFK             | TLE2061AMJG            | —                     | —              | TLE2061AMU                  |
|                  | 3 mV                           | TLE2061MD                | TLE2061MFK              | TLE2061MJG             | —                     | —              | TLE2061MU                   |

† The D packages are available taped and reeled. Add R suffix to device type (e.g., TLE2061ACDR). Chips are tested at 25°C.

‡ The PW package is available left-end taped and reeled (indicated by the LE suffix on the device type (e.g., TLE2061CPWLE)).

## TLE2062 AVAILABLE OPTIONS

| PACKAGED DEVICES     |                                |                       |                      |                     |                    |                             |
|----------------------|--------------------------------|-----------------------|----------------------|---------------------|--------------------|-----------------------------|
| T <sub>A</sub>       | V <sub>IO</sub> max<br>AT 25°C | SMALL OUTLINE†<br>(D) | CHIP CARRIER<br>(FK) | CERAMIC DIP<br>(JG) | PLASTIC DIP<br>(P) | CERAMIC<br>FLAT PACK<br>(U) |
| 0°C<br>to<br>70°C    | 1 mV                           | TLE2062BCD            | —                    | —                   | TLE2062BCP         | —                           |
|                      | 2 mV                           | TLE2062ACD            | —                    | —                   | TLE2062ACP         | —                           |
|                      | 4 mV                           | TLE2062CD             | —                    | —                   | TLE2062CP          | —                           |
| –40°C<br>to<br>85°C  | 1 mV                           | TLE2062BID            | —                    | —                   | TLE2062BIP         | —                           |
|                      | 2 mV                           | TLE2062AID            | —                    | —                   | TLE2062AIP         | —                           |
|                      | 4 mV                           | TLE2062ID             | —                    | —                   | TLE2062IP          | —                           |
| –55°C<br>to<br>125°C | 1 mV                           | TLE2062BMD            | —                    | TLE2062BMJG         | —                  | —                           |
|                      | 2 mV                           | TLE2062AMD            | TLE2062AMFK          | TLE2062AMJG         | —                  | TLE2062AMU                  |
|                      | 4 mV                           | TLE2062MD             | TLE2062MFK           | TLE2062MJG          | —                  | TLE2062MU                   |

† The D packages are available taped and reeled. Add R suffix to device type (e.g., TLE2062ACDR).

## TLE2064 AVAILABLE OPTIONS

| PACKAGED DEVICES     |                                |                       |                      |                    |                    |                             |
|----------------------|--------------------------------|-----------------------|----------------------|--------------------|--------------------|-----------------------------|
| T <sub>A</sub>       | V <sub>IO</sub> max<br>AT 25°C | SMALL OUTLINE†<br>(D) | CHIP CARRIER<br>(FK) | CERAMIC DIP<br>(J) | PLASTIC DIP<br>(N) | CERAMIC<br>FLAT PACK<br>(W) |
| 0°C<br>to<br>70°C    | 2 mV                           | —                     | —                    | —                  | TLE2064BCN         | —                           |
|                      | 4 mV                           | TLE2064ACD            | —                    | —                  | TLE2064ACN         | —                           |
|                      | 6 mV                           | TLE2064CD             | —                    | —                  | TLE2064CN          | —                           |
| –40°C<br>to<br>85°C  | 2 mV                           | —                     | —                    | —                  | TLE2064BIN         | —                           |
|                      | 4 mV                           | TLE2064AID            | —                    | —                  | TLE2064AIN         | —                           |
|                      | 6 mV                           | TLE2064ID             | —                    | —                  | TLE2064IN          | —                           |
| –55°C<br>to<br>125°C | 2 mV                           | —                     | TLE2064BMFK          | TLE2064BMJ         | —                  | —                           |
|                      | 4 mV                           | TLE2064AMD            | TLE2064AMFK          | TLE2064AMJ         | —                  | TLE2064AMW                  |
|                      | 6 mV                           | TLE2064MD             | TLE2064MFK           | TLE2064MJ          | —                  | TLE2064MW                   |


† The D packages are available taped and reeled. Add R suffix to device type, (e.g., TLE2064ACDR).




# TLE206x, TLE206xA, TLE206xB EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE μPOWER OPERATIONAL AMPLIFIERS

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004


**TLE2061, TLE2061A, AND TLE2061B  
D, DB, JG, P, OR PW PACKAGE  
(TOP VIEW)**

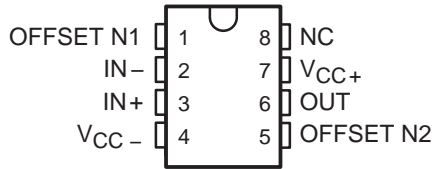


**TLE2062, TLE2062A, TLE2062B  
D, JG, OR P PACKAGE  
(TOP VIEW)**

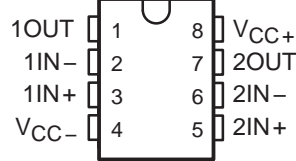


**TLE2064, TLE2064A, TLE2064B  
D, J, N, OR W PACKAGE  
(TOP VIEW)**

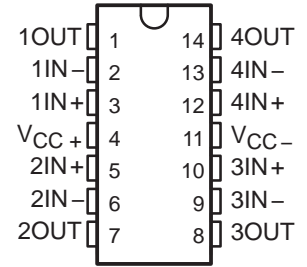


**TLE2061M, TLE2061AM, TLE2061BM  
FK PACKAGE  
(TOP VIEW)**

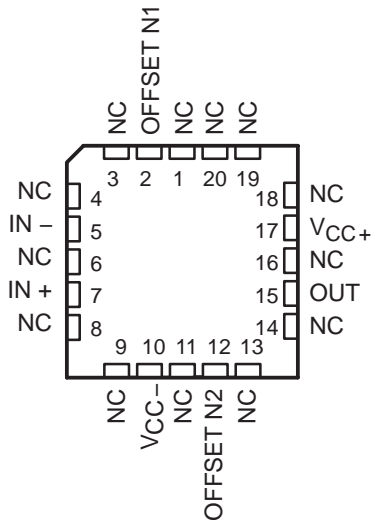


**TLE2062M, TLE2062AM, TLE2062BM  
FK PACKAGE  
(TOP VIEW)**

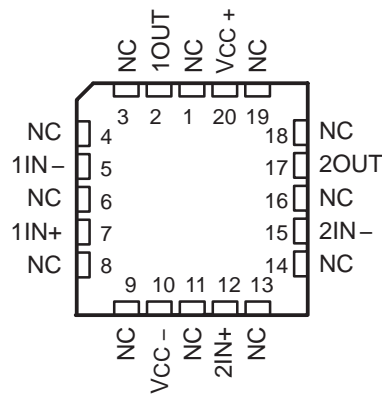

**TLE2064M, TLE2064AM, TLE2064BM  
FK PACKAGE  
(TOP VIEW)**

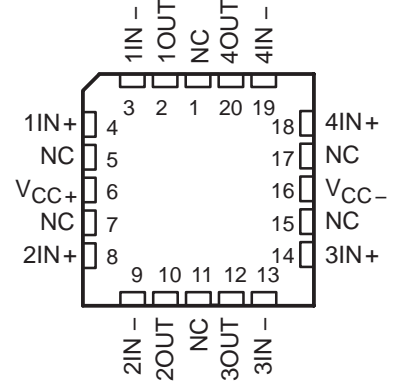

**TLE2061 AND TLE2061A  
U PACKAGE  
(TOP VIEW)**

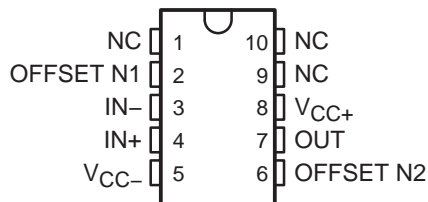

**TLE2062 AND TLE2062A  
U PACKAGE  
(TOP VIEW)**




NC – No internal connection

# TLE206x, TLE206xA, TLE206xB EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE POWER OPERATIONAL AMPLIFIERS

SLOS193B – FEBRUARY 1997 – REVISED APRIL 2004

equivalent schematic (each channel)

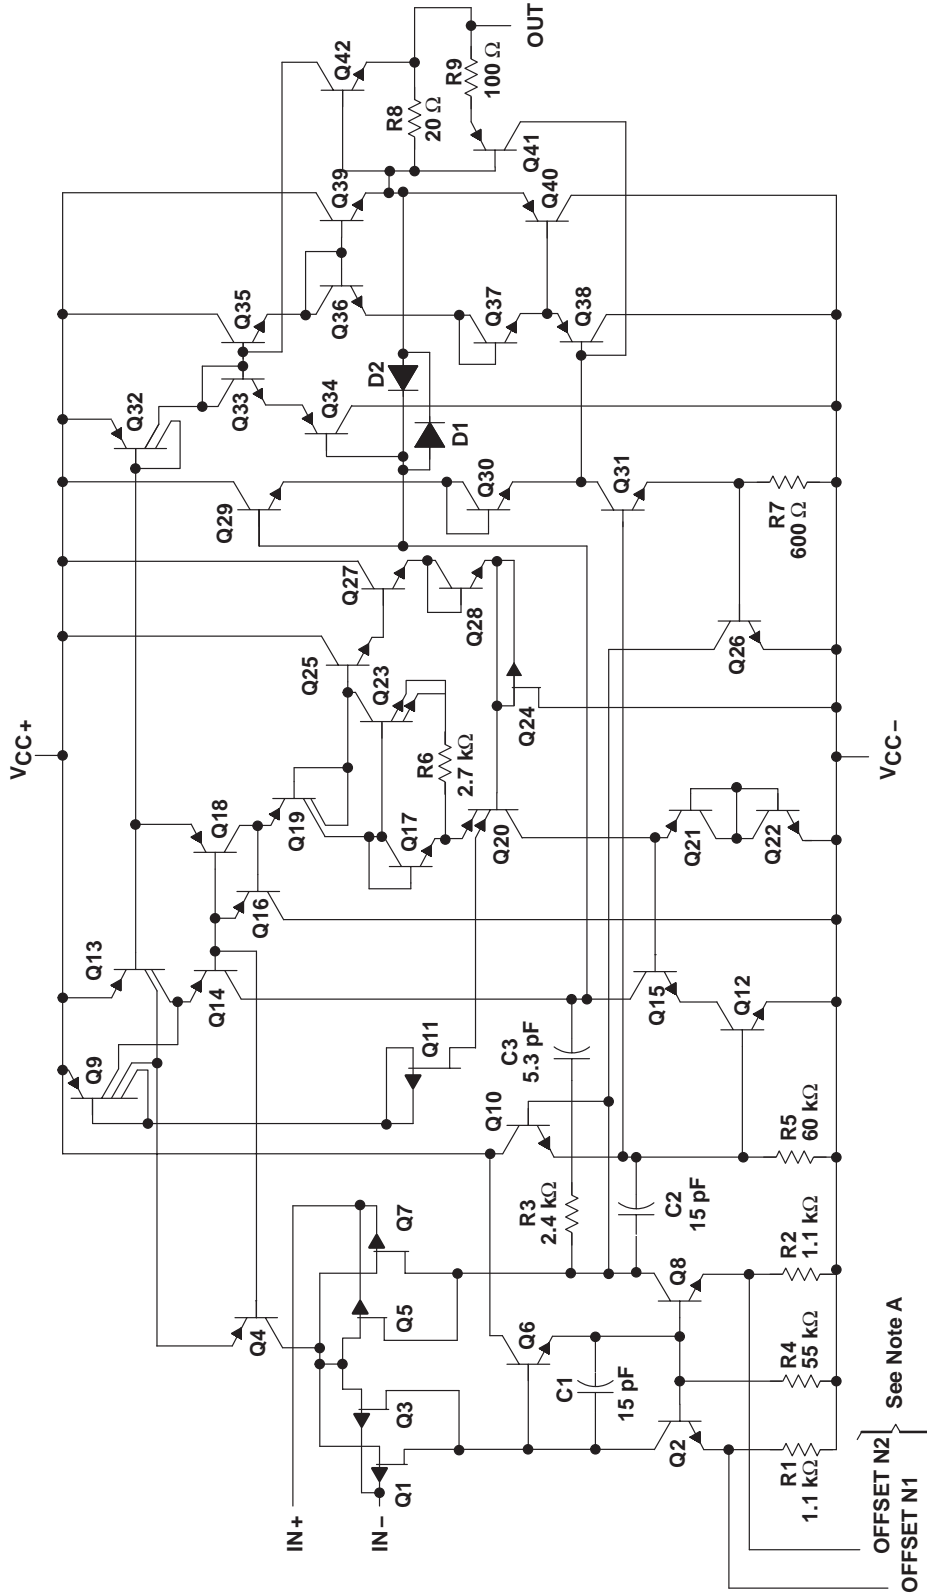

NOTES: A. OFFSET N1 AND OFFSET N2 are only available on the TLE2061x devices.  
B. Component values are nominal.

OFFSET N2 } See Note A  
OFFSET N1 }

| COMPONENT   | ACTUAL DEVICE COMPONENT COUNT |         |         |
|-------------|-------------------------------|---------|---------|
|             | TLE2061                       | TLE2062 | TLE2064 |
| Transistors | 43                            | 42      | 42      |
| Resistors   | 9                             | 9       | 9       |
| Diodes      | 1                             | 2       | 2       |
| Capacitors  | 3                             | 3       | 3       |

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†**

|   |                |
|---|----------------|
| Supply voltage, $V_{CC+}$ (see Note 1)  | 19 V           |
| Supply voltage, $V_{CC-}$   | –19 V          |
| Differential input voltage, $V_{ID}$ (see Note 2)                                 | ±38 V          |
| Input voltage range, $V_I$ (any input)  | ± $V_{CC}$     |
| Input current, $I_I$ (each input)   | ±1 mA          |
| Output current, $I_O$   | ±80 mA         |
| Total current into $V_{CC+}$  | 80 mA          |
| Total current out of $V_{CC-}$  | –80 mA         |
| Duration of short-circuit current at (or below) 25°C (see Note 3)                 | unlimited      |
| Package thermal impedance, $\theta_{JA}$ (see Notes 4 and 5): D package (8-pin)   | 97.1°C/W       |
| D package (14-pin)  | 86.2°C/W       |
| N package   | 79.7°C/W       |
| P package   | 84.6°C/W       |
| PW package  | 113°C/W        |
| Package thermal impedance, $\theta_{JC}$ (see Notes 4 and 5): FK package          | 5.6°C/W        |
| J package   | 15.1°C/W       |
| JG package  | 14.5°C/W       |
| U package   | 14.7°C/W       |
| W package   | 10°C/W         |
| Operating free-air temperature range, $T_A$ : C suffix                            | 0°C to 70°C    |
| I suffix  | –40°C to 85°C  |
| M suffix  | –55°C to 125°C |
| Storage temperature range   | –65°C to 150°C |
| Case temperature for 60 seconds: FK package                                       | 260°C          |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D, P, or PW package | 260°C          |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: JG, U, or W package | 300°C          |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .
  2. Differential voltages are at  $IN+$  with respect to  $IN-$ .
  3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.
  4. Maximum power dissipation is a function of  $T_J(max)$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(max) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.
  5. The package thermal impedance is calculated in accordance with JESD 51-7 (plastic) or MIL-STD-883 Method 1012 (ceramic).

**recommended operating conditions**

|                                       | C SUFFIX               |     | I SUFFIX |     | M SUFFIX |     | UNIT |
|---------------------------------------|------------------------|-----|----------|-----|----------|-----|------|
|                                       | MIN                    | MAX | MIN      | MAX | MIN      | MAX |      |
| Supply voltage, $V_{CC\pm}$           | ±3.5                   | ±18 | ±3.5     | ±18 | ±3.5     | ±18 | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{CC\pm} = \pm 5$ V  |     | –1.6     | 4   | –1.6     | 4   | V    |
|                                       | $V_{CC\pm} = \pm 15$ V |     | –11      | 13  | –11      | 13  |      |
| Operating free-air temperature, $T_A$ | 0                      | 70  | –40      | 85  | –55      | 125 | °C   |



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2061C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER   |  | TEST CONDITIONS                | $T_A$ †    | TLE2061C<br>TLE2061AC<br>TLE2061BC |          |     | UNIT                         |  |
|---|--|--------------------------------|------------|------------------------------------|----------|-----|------------------------------|--|
|   |  |                                |            | MIN                                | TYP      | MAX |                              |  |
| $V_{IO}$ Input offset voltage   | TLE2061C   | $V_{IC} = 0, R_S = 50\ \Omega$ | 25°C       | 0.8                                | 3.1      | mV  |                              |  |
|   |  |                                | Full range | 4                                  |          |     |                              |  |
|   | TLE2061AC  |                                | 25°C       | 0.6                                | 2.6      |     |                              |  |
|   |  |                                | Full range | 3.5                                |          |     |                              |  |
|   | TLE2061BC  |                                | 25°C       | 0.5                                | 1.9      |     |                              |  |
|   |  |                                | Full range | 2.4                                |          |     |                              |  |
|   | $\alpha_{VIO}$ Temperature coefficient of input offset voltage               |                                |            | Full range                         | 6        |     | $\mu\text{V}/^\circ\text{C}$ |  |
|   | Input offset voltage long-term drift (see Note 4)                            |                                |            | 25°C                               | 0.04     |     | $\mu\text{V}/\text{mo}$      |  |
| $I_{IO}$ Input offset current   |  | 25°C                           | 1          |                                    | pA       |     |                              |  |
|   |  | Full range                     | 0.8        |                                    | nA       |     |                              |  |
| $I_{IB}$ Input bias current   |  | 25°C                           | 3          |                                    | pA       |     |                              |  |
|   |  | Full range                     | 2          |                                    | nA       |     |                              |  |
| $V_{ICR}$ Common-mode input voltage range                                     |  | 25°C                           | -1.6 to 4  | -2 to 6                            | V        |     |                              |  |
|   |  | Full range                     | -1.6 to 4  |                                    | V        |     |                              |  |
| $V_{OM+}$ Maximum positive peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$   | 25°C                           | 3.5        | 3.7                                | V        |     |                              |  |
|   |  | Full range                     | 3.3        |                                    |          |     |                              |  |
|   | $R_L = 100\ \Omega$  | 25°C                           | 2.5        | 3.1                                |          |     |                              |  |
|   |  | Full range                     | 2          |                                    |          |     |                              |  |
| $V_{OM-}$ Maximum negative peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$   | 25°C                           | -3.7       | -3.9                               | V        |     |                              |  |
|   |  | Full range                     | -3.3       |                                    |          |     |                              |  |
|   | $R_L = 100\ \Omega$  | 25°C                           | -2.5       | -2.7                               |          |     |                              |  |
|   |  | Full range                     | -2         |                                    |          |     |                              |  |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 2.8\ \text{V}, R_L = 10\ \text{k}\Omega$                          | 25°C                           | 15         | 80                                 | V/mV     |     |                              |  |
|   |  | Full range                     | 2          |                                    |          |     |                              |  |
|   | $V_O = 0\ \text{to}\ 2\ \text{V}, R_L = 100\ \Omega$                         | 25°C                           | 0.75       | 45                                 |          |     |                              |  |
|   |  | Full range                     | 0.5        |                                    |          |     |                              |  |
|   | $V_O = 0\ \text{to}\ -2\ \text{V}, R_L = 100\ \Omega$                        | 25°C                           | 0.5        | 3                                  |          |     |                              |  |
|   |  | Full range                     | 0.25       |                                    |          |     |                              |  |
| $r_i$ Input resistance  |  | 25°C                           | $10^{12}$  |                                    | $\Omega$ |     |                              |  |
| $c_i$ Input capacitance   |  | 25°C                           | 4          |                                    | pF       |     |                              |  |
| $z_o$ Open-loop output impedance  | $I_O = 0$  | 25°C                           | 280        |                                    | $\Omega$ |     |                              |  |
| CMRR Common-mode rejection ratio  | $V_{IC} = V_{ICR\text{min}}, R_S = 50\ \Omega$                               | 25°C                           | 65         | 82                                 | dB       |     |                              |  |
|   |  | Full range                     | 65         |                                    |          |     |                              |  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}\ \text{to}\ \pm 15\ \text{V}, R_S = 50\ \Omega$ | 25°C                           | 75         | 93                                 | dB       |     |                              |  |
|   |  | Full range                     | 75         |                                    |          |     |                              |  |

† Full range is 0°C to 70°C.

NOTE 6: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2061C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS     | $T_A$ †    | TLE2061C<br>TLE2061AC<br>TLE2061BC |     |     | UNIT          |
|--|---------------------|------------|------------------------------------|-----|-----|---------------|
|  |                     |            | MIN                                | TYP | MAX |               |
| $I_{CC}$ Supply current  | $V_O = 0$ , No load | 25°C       |                                    | 280 | 325 | $\mu\text{A}$ |
|  |                     | Full range |                                    |     | 350 |               |
| $\Delta I_{CC}$ Supply-current change over operating temperature range |                     | Full range |                                    | 29  |     | $\mu\text{A}$ |

† Full range is 0°C to 70°C.

**TLE2061C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2061C<br>TLE2061AC<br>TLE2061BC |        |     | UNIT                         |
|---|--|------------|------------------------------------|--------|-----|------------------------------|
|   |  |            | MIN                                | TYP    | MAX |                              |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 2.2                                | 3.4    |     | $\text{V}/\mu\text{s}$       |
|   |  | Full range | 2.1                                |        |     |                              |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 25°C       |                                    | 59     | 100 | $\text{nV}/\sqrt{\text{Hz}}$ |
|   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  |            |                                    | 43     | 60  |                              |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz}$ to $10\text{ Hz}$  | 25°C       |                                    | 1.1    |     | $\mu\text{V}$                |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 25°C       |                                    | 1      |     | $\text{fA}/\sqrt{\text{Hz}}$ |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10\text{ kHz}$ ,<br>$V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ | 25°C       |                                    | 0.025% |     |                              |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 1.8    |     | MHz                          |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  |            |                                    | 1.3    |     |                              |
| $t_s$ Settling time                                     | 0.1%   | 25°C       |                                    | 5      |     | $\mu\text{s}$                |
|   | 0.01%  |            |                                    | 10     |     |                              |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 25°C       |                                    | 140    |     | kHz                          |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 58°    |     |                              |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  |            |                                    | 75°    |     |                              |

† Full range is 0°C to 70°C.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2061C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER   |   | TEST CONDITIONS                        | $T_A$ †    | TLE2061C<br>TLE2061AC<br>TLE2061BC |          |     | UNIT                         |                         |
|---|---|--|------------|------------------------------------|----------|-----|------------------------------|-------------------------|
|   |   |  |            | MIN                                | TYP      | MAX |                              |                         |
| $V_{IO}$ Input offset voltage   | TLE2061C  | $V_{IC} = 0, R_S = 50 \text{ k}\Omega$ | 25°C       | 0.6                                | 3        | mV  |                              |                         |
|   |   |  | Full range | 3.9                                |          |     |                              |                         |
|   |   |  | 25°C       | 0.5                                | 1.5      |     |                              |                         |
|   | TLE2061AC   |  | Full range | 2.5                                |          |     |                              |                         |
|   | TLE2061BC   |  | 25°C       | 0.3                                | 0.5      |     |                              |                         |
|   |   |  | Full range | 1                                  |          |     |                              |                         |
|   |   |  | Full range | 6                                  |          |     | $\mu\text{V}/^\circ\text{C}$ |                         |
|   | $\alpha V_{IO}$ Temperature coefficient of input offset voltage     |  |            | 25°C                               | 0.04     |     |                              | $\mu\text{V}/\text{mo}$ |
|   | Input offset voltage long-term drift (see Note 4)                   |  |            | 25°C                               | 2        |     |                              | pA                      |
| $I_{IO}$ Input offset current   |   | Full range                             | 1          |                                    | nA       |     |                              |                         |
| $I_{IB}$ Input bias current   |   | 25°C                                   | 4          |                                    | pA       |     |                              |                         |
|   |   | Full range                             | 3          |                                    | nA       |     |                              |                         |
| $V_{ICR}$ Common-mode input voltage range                                     |   | 25°C                                   | -11 to 13  | -12 to 16                          | V        |     |                              |                         |
|   |   | Full range                             | -11 to 13  |                                    | V        |     |                              |                         |
| $V_{OM+}$ Maximum positive peak output voltage swing                          | $R_L = 10 \text{ k}\Omega$  | 25°C                                   | 13.2       | 13.7                               | V        |     |                              |                         |
|   |   | Full range                             | 13         |                                    |          |     |                              |                         |
|   | $R_L = 600 \Omega$  | 25°C                                   | 12.5       | 13.2                               |          |     |                              |                         |
|   |   | Full range                             | 12         |                                    |          |     |                              |                         |
| $V_{OM-}$ Maximum negative peak output voltage swing                          | $R_L = 10 \text{ k}\Omega$  | 25°C                                   | -13.2      | -13.7                              | V        |     |                              |                         |
|   |   | Full range                             | -13        |                                    |          |     |                              |                         |
|   | $R_L = 600 \Omega$  | 25°C                                   | -12.5      | -13                                |          |     |                              |                         |
|   |   | Full range                             | -12        |                                    |          |     |                              |                         |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 10 \text{ V}, R_L = 10 \text{ k}\Omega$                  | 25°C                                   | 30         | 230                                | V/mV     |     |                              |                         |
|   |   | Full range                             | 20         |                                    |          |     |                              |                         |
|   | $V_O = 0 \text{ to } 8 \text{ V}, R_L = 600 \Omega$                 | 25°C                                   | 25         | 100                                |          |     |                              |                         |
|   |   | Full range                             | 10         |                                    |          |     |                              |                         |
|   | $V_O = 0 \text{ to } -8 \text{ V}, R_L = 600 \Omega$                | 25°C                                   | 3          | 25                                 |          |     |                              |                         |
|   |   | Full range                             | 1          |                                    |          |     |                              |                         |
| $r_i$ Input resistance  |   | 25°C                                   | $10^{12}$  |                                    | $\Omega$ |     |                              |                         |
| $c_i$ Input capacitance   |   | 25°C                                   | 4          |                                    | pF       |     |                              |                         |
| $z_o$ Open-loop output impedance  | $I_O = 0$   | 25°C                                   | 280        |                                    | $\Omega$ |     |                              |                         |
| CMRR Common-mode rejection ratio  | $V_{IC} = V_{ICRmin}, R_S = 50 \Omega$                              | 25°C                                   | 72         | 90                                 | dB       |     |                              |                         |
|   |   | Full range                             | 70         |                                    |          |     |                              |                         |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}, R_S = 50 \Omega$ | 25°C                                   | 75         | 93                                 | dB       |     |                              |                         |
|   |   | Full range                             | 75         |                                    |          |     |                              |                         |

† Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.





**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2061C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$  (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS     | $T_A$ †    | TLE2061C<br>TLE2061AC<br>TLE2061BC |     |     | UNIT |
|--|---------------------|------------|------------------------------------|-----|-----|------|
|  |                     |            | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current  | $V_O = 0$ , No load | 25°C       | 290                                | 350 | μA  |      |
|  |                     | Full range | 375                                |     |     |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range |                     | Full range | 34                                 |     | μA  |      |

† Full range is 0°C to 70°C.

**TLE2061C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2061C<br>TLE2061AC<br>TLE2061BC |     |        | UNIT |
|---|--|------------|------------------------------------|-----|--------|------|
|   |  |            | MIN                                | TYP | MAX    |      |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 2.6                                | 3.4 | V/μs   |      |
|   |  | Full range | 2.5                                |     |        |      |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 25°C       | 70                                 | 100 | nV/√Hz |      |
|   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  |            | 40                                 | 60  |        |      |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }10\text{ Hz}$  | 25°C       | 1.1                                |     | μV     |      |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 25°C       | 1.1                                |     | fA/√Hz |      |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10\text{ kHz}$ ,<br>$V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ | 25°C       | 0.025%                             |     |        |      |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 2                                  |     | MHz    |      |
|   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  |            | 1.5                                |     |        |      |
| $t_s$ Settling time                                     | 0.1%   | 25°C       | 5                                  |     | μs     |      |
|   | 0.01%  |            | 10                                 |     |        |      |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 25°C       | 40                                 |     | kHz    |      |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 60°                                |     |        |      |
|   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  |            | 70°                                |     |        |      |

† Full range is 0°C to 70°C.

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2061I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER       |   | TEST CONDITIONS   | $T_A$ †        | TLE2061I, TLE2061AI<br>TLE2061BI                  |            |               | UNIT |  |                              |
|-----------------|---|---|----------------|---|------------|---------------|------|--|------------------------------|
|                 |   |   |                | MIN   | TYP        | MAX           |      |  |                              |
| $V_{IO}$        | Input offset voltage  | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$                                       | 25°C           | 0.8   | 3.1        | mV            |      |  |                              |
|                 |   |   | Full range     |   | 4.4        |               |      |  |                              |
|                 |   |   | 25°C           | 0.6   | 2.6        |               |      |  |                              |
|                 |   |   | Full range     |   | 3.9        |               |      |  |                              |
|                 |   |   | 25°C           | 0.5   | 1.9        |               |      |  |                              |
|                 |   |   | Full range     |   | 2.7        |               |      |  |                              |
|                 |   |   | $\alpha_{VIO}$ | Temperature coefficient of input offset voltage   | Full range |               | 6    |  | $\mu\text{V}/^\circ\text{C}$ |
|                 |   |   |                | Input offset voltage long-term drift (see Note 4) | 25°C       |               | 0.04 |  | $\mu\text{V}/\text{mo}$      |
|                 |   |   |                |   | 25°C       |               | 1    |  | pA                           |
| $I_{IO}$        | Input offset current  | Full range  |                | 2   | nA         |               |      |  |                              |
| $I_{IB}$        | Input bias current  | 25°C  | 3              |   | pA         |               |      |  |                              |
|                 |   | Full range  |                | 4   | nA         |               |      |  |                              |
| $V_{ICR}$       | Common-mode input voltage range                                     |   | 25°C           | -1.6 to 4   | -2 to 6    | V             |      |  |                              |
|                 |   |   | Full range     | -1.6 to 4   |            | V             |      |  |                              |
| $V_{OM+}$       | Maximum positive peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$  | 25°C           | 3.5   | 3.7        | V             |      |  |                              |
|                 |   |   | Full range     | 3.1   |            |               |      |  |                              |
|                 |   |   | 25°C           | 2.5   | 3.1        |               |      |  |                              |
|                 |   |   | Full range     | 2   |            |               |      |  |                              |
| $V_{OM-}$       | Maximum negative peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$  | 25°C           | -3.7  | -3.9       | V             |      |  |                              |
|                 |   |   | Full range     | -3.1  |            |               |      |  |                              |
|                 |   |   | 25°C           | -2.5  | -2.7       |               |      |  |                              |
|                 |   |   | Full range     | -2  |            |               |      |  |                              |
| $A_{VD}$        | Large-signal differential voltage amplification                     | $V_O = \pm 2.8\ \text{V},$<br>$R_L = 10\ \text{k}\Omega$                  | 25°C           | 15  | 80         | V/mV          |      |  |                              |
|                 |   |   | Full range     | 2   |            |               |      |  |                              |
|                 |   |   | 25°C           | 0.75  | 45         |               |      |  |                              |
|                 |   |   | Full range     | 0.5   |            |               |      |  |                              |
|                 |   |   | 25°C           | 0.5   | 3          |               |      |  |                              |
|                 |   |   | Full range     | 0.25  |            |               |      |  |                              |
| $r_i$           | Input resistance  |   | 25°C           | $10^{12}$   |            | $\Omega$      |      |  |                              |
| $c_i$           | Input capacitance   |   | 25°C           | 4   |            | pF            |      |  |                              |
| $z_o$           | Open-loop output impedance  | $I_O = 0$   | 25°C           | 280   |            | $\Omega$      |      |  |                              |
| CMRR            | Common-mode rejection ratio   | $V_{IC} = V_{ICR\text{min}},$<br>$R_S = 50\ \Omega$                       | 25°C           | 65  | 82         | dB            |      |  |                              |
|                 |   |   | Full range     | 65  |            |               |      |  |                              |
| kSVR            | Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V to } \pm 15\ \text{V},$<br>$R_S = 50\ \Omega$ | 25°C           | 75  | 93         | dB            |      |  |                              |
|                 |   |   | Full range     | 65  |            |               |      |  |                              |
| $I_{CC}$        | Supply current  | $V_O = 0,$<br>No load   | 25°C           | 280   | 325        | $\mu\text{A}$ |      |  |                              |
|                 |   |   | Full range     |   | 350        |               |      |  |                              |
| $\Delta I_{CC}$ | Supply-current change over operating temperature range              |   | Full range     | 29  |            | $\mu\text{A}$ |      |  |                              |

† Full range is -40°C to 85°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE20611 operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE20611<br>TLE2061AI<br>TLE2061BI |     |                        | UNIT                   |
|---|--|------------|------------------------------------|-----|------------------------|------------------------|
|   |  |            | MIN                                | TYP | MAX                    |                        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 2.2                                | 3.4 |                        | V/ $\mu$ s             |
|   |  | Full range | 1.7                                |     |                        |                        |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 25°C       |                                    | 59  | 100                    | nV/ $\sqrt{\text{Hz}}$ |
|   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  |            |                                    | 43  | 60                     |                        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }10\text{ Hz}$  | 25°C       | 1.1                                |     | $\mu$ V                |                        |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 25°C       | 1                                  |     | fA/ $\sqrt{\text{Hz}}$ |                        |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10\text{ kHz}$ ,<br>$V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ | 25°C       | 0.025%                             |     |                        |                        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 1.8                                |     | MHz                    |                        |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  |            | 1.3                                |     |                        |                        |
| $t_s$ Settling time                                     | 0.1%   | 25°C       | 5                                  |     | $\mu$ s                |                        |
|   | 0.01%  |            | 10                                 |     |                        |                        |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 25°C       | 140                                |     | kHz                    |                        |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 58°                                |     |                        |                        |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  |            | 75°                                |     |                        |                        |

† Full range is –40°C to 85°C.

# TLE206x, TLE206xA, TLE206xB EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE μPOWER OPERATIONAL AMPLIFIERS

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

TLE2061I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$  (unless otherwise noted)

| PARAMETER       |   | TEST CONDITIONS   | $T_A$ †    | TLE2061I, TLE2061AI<br>TLE2061BI |       |                              | UNIT                    |
|-----------------|---|---|------------|----------------------------------|-------|------------------------------|-------------------------|
|                 |   |   |            | MIN                              | TYP   | MAX                          |                         |
| $V_{IO}$        | Input offset voltage  |   | 25°C       | TLE2061I                         |       | 0.6                          | 3                       |
|                 |   |   |            | Full range                       |       | 4.3                          |                         |
|                 |   |   |            | TLE2061AI                        |       | 0.5                          | 1.5                     |
|                 |   |   |            | Full range                       |       | 2.9                          |                         |
|                 |   |   |            | TLE2061BI                        |       | 0.3                          | 0.5                     |
|                 |   |   |            | Full range                       |       | 1.3                          |                         |
| $\alpha_{VIO}$  | Temperature coefficient of input offset voltage                     | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$   | Full range | 6                                |       | $\mu\text{V}/^\circ\text{C}$ |                         |
|                 | Input offset voltage long-term drift (see Note 4)                   |   |            | 25°C                             | 0.04  |                              | $\mu\text{V}/\text{mo}$ |
| $I_{IO}$        | Input offset current  |   |            | 25°C                             | 2     |                              | pA                      |
|                 |   |   |            | Full range                       | 3     |                              | nA                      |
| $I_{IB}$        | Input bias current  |   |            | 25°C                             | 4     |                              | pA                      |
|                 |   |   |            | Full range                       | 5     |                              | nA                      |
| $V_{ICR}$       | Common-mode input voltage range                                     | 25°C  | -11 to 13  | -12 to 16                        | V     |                              |                         |
|                 |   | Full range  | -11 to 13  |                                  | V     |                              |                         |
| $V_{OM+}$       | Maximum positive peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$  | 25°C       | 13.2                             | 13.7  | V                            |                         |
|                 |   |   | Full range | 13                               |       |                              |                         |
|                 |   | $R_L = 600\ \Omega$   | 25°C       | 12.5                             | 13.2  |                              |                         |
|                 |   |   | Full range | 12                               |       |                              |                         |
| $V_{OM-}$       | Maximum negative peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$  | 25°C       | -13.2                            | -13.7 | V                            |                         |
|                 |   |   | Full range | -13                              |       |                              |                         |
|                 |   | $R_L = 600\ \Omega$   | 25°C       | -12.5                            | -13   |                              |                         |
|                 |   |   | Full range | -12                              |       |                              |                         |
| $A_{VD}$        | Large-signal differential voltage amplification                     | $V_O = \pm 10\ \text{V},$<br>$R_L = 10\ \text{k}\Omega$                           | 25°C       | 30                               | 230   | V/mV                         |                         |
|                 |   |   | Full range | 20                               |       |                              |                         |
|                 |   | $V_O = 0\ \text{to}\ 8\ \text{V},$<br>$R_L = 600\ \Omega$                         | 25°C       | 25                               | 100   |                              |                         |
|                 |   |   | Full range | 10                               |       |                              |                         |
|                 |   | $V_O = 0\ \text{to}\ -8\ \text{V},$<br>$R_L = 600\ \Omega$                        | 25°C       | 3                                | 25    |                              |                         |
|                 |   |   | Full range | 01                               |       |                              |                         |
| $r_i$           | Input resistance  |   | 25°C       | $10^{12}$                        |       | $\Omega$                     |                         |
| $c_i$           | Input capacitance   |   | 25°C       | 4                                |       | pF                           |                         |
| $z_o$           | Open-loop output impedance  | $I_O = 0$   | 25°C       | 280                              |       | $\Omega$                     |                         |
| CMRR            | Common-mode rejection ratio   | $V_{IC} = V_{ICR\text{min}},$<br>$R_S = 50\ \Omega$                               | 25°C       | 72                               | 90    | dB                           |                         |
|                 |   |   | Full range | 65                               |       |                              |                         |
| $k_{SVR}$       | Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}\ \text{to}\ \pm 15\ \text{V},$<br>$R_S = 50\ \Omega$ | 25°C       | 75                               | 93    | dB                           |                         |
|                 |   |   | Full range | 65                               |       |                              |                         |
| $I_{CC}$        | Supply current  | $V_O = 0,$<br>No load   | 25°C       | 290                              | 350   | $\mu\text{A}$                |                         |
|                 |   |   | Full range | 375                              |       |                              |                         |
| $\Delta I_{CC}$ | Supply-current change over operating temperature range              |   | Full range | 34                               |       | $\mu\text{A}$                |                         |

† Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2061I operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2061I<br>TLE2061AI<br>TLE2061BI |        |     | UNIT                   |
|---|--|------------|------------------------------------|--------|-----|------------------------|
|   |  |            | MIN                                | TYP    | MAX |                        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 2.6                                | 3.4    |     | V/ $\mu$ s             |
|   |  | Full range | 2.1                                |        |     |                        |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 25°C       |                                    | 70     | 100 | nV/ $\sqrt{\text{Hz}}$ |
|   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  |            |                                    | 40     | 60  |                        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }10\text{ Hz}$  | 25°C       |                                    | 1.1    |     | $\mu$ V                |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 25°C       |                                    | 1.1    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10\text{ kHz}$ ,<br>$V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ | 25°C       |                                    | 0.025% |     |                        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 2      |     | MHz                    |
|   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  |            |                                    | 1.5    |     |                        |
| $t_s$ Settling time                                     | 0.1%   | 25°C       |                                    | 5      |     | $\mu$ s                |
|   | 0.01%  |            |                                    | 10     |     |                        |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 25°C       |                                    | 40     |     | kHz                    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 60°    |     |                        |
|   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  |            |                                    | 70°    |     |                        |

† Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2061M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER |   | TEST CONDITIONS                | $T_A$ †            | TLE2061M<br>TLE2061AM<br>TLE2061BM                  |   |      | UNIT |  |                              |
|-----------|---|--------------------------------|--------------------|---|---|------|------|--|------------------------------|
|           |   |                                |                    | MIN   | TYP   | MAX  |      |  |                              |
| $V_{IO}$  | Input offset voltage                            | $V_{IC} = 0, R_S = 50\ \Omega$ | 25°C               | 0.8   | 3.1   | mV   |      |  |                              |
|           |   |                                | Full range         | 6   |   |      |      |  |                              |
|           |   |                                | 25°C               | 0.6   | 2.6   |      |      |  |                              |
|           |   |                                | Full range         | 4.6   |   |      |      |  |                              |
|           |   |                                | 25°C               | 0.5   | 1.9   |      |      |  |                              |
|           |   |                                | Full range         | 3.1   |   |      |      |  |                              |
|           |   |                                | $\alpha_{VIO}$     | Temperature coefficient of input offset voltage     | Full range  |      | 6    |  | $\mu\text{V}/^\circ\text{C}$ |
|           |   |                                |                    | Input offset voltage long-term drift (see Note 4)   | 25°C  |      | 0.04 |  | $\mu\text{V}/\text{mo}$      |
|           |   |                                | $I_{IO}$           | Input offset current                                | 25°C  |      | 1    |  | pA                           |
|           |   | Full range                     | 15                 |   | nA  |      |      |  |                              |
| $I_{IB}$  | Input bias current                              | 25°C                           | 3                  |   | pA  |      |      |  |                              |
|           |   | Full range                     | 30                 |   | nA  |      |      |  |                              |
| $V_{ICR}$ | Common-mode input voltage range                 |                                | 25°C               | -1.6 to 4   | -2 to 6   | V    |      |  |                              |
|           |   |                                | Full range         | -1.6 to 4   |   | V    |      |  |                              |
| $V_{OM+}$ | Maximum positive peak output voltage swing      | $R_L = 10\ \text{k}\Omega$     | 25°C               | 3.5   | 3.7   | V    |      |  |                              |
|           |   |                                | Full range         | 3   |   |      |      |  |                              |
|           |   |                                | 25°C               | 2.5   | 3.6   |      |      |  |                              |
|           |   |                                | Full range         | 2   |   |      |      |  |                              |
|           |   |                                | 25°C               | 2.5   | 3.1   |      |      |  |                              |
|           |   |                                | Full range         | 2   |   |      |      |  |                              |
| $V_{OM-}$ | Maximum negative peak output voltage swing      | $R_L = 10\ \text{k}\Omega$     | 25°C               | -3.5  | -3.9  | V    |      |  |                              |
|           |   |                                | Full range         | -3  |   |      |      |  |                              |
|           |   |                                | FK and JG packages | 25°C  | -2.5  |      | -3.5 |  |                              |
|           |   |                                | Full range         | -2  |   |      |      |  |                              |
|           |   |                                | D and P packages   | 25°C  | -2.5  |      | -2.7 |  |                              |
|           |   |                                | Full range         | -2  |   |      |      |  |                              |
| $AVD$     | Large-signal differential voltage amplification |                                | 25°C               | $V_O = \pm 2.8\ \text{V}, R_L = 10\ \text{k}\Omega$ |   | V/mV |      |  |                              |
|           |   |                                |                    | Full range  |   |      | 2    |  |                              |
|           |   |                                | FK and JG packages | 25°C  | $V_O = 0\ \text{to}\ 2.5\ \text{V}, R_L = 600\ \Omega$  |      |      |  |                              |
|           |   |                                |                    |   | Full range  |      | 0.5  |  |                              |
|           |   |                                | FK and JG packages | 25°C  | $V_O = 0\ \text{to}\ -2.5\ \text{V}, R_L = 600\ \Omega$ |      |      |  |                              |
|           |   |                                |                    |   | Full range  |      | 0.5  |  |                              |
|           |   |                                | D and P packages   | 25°C  | $V_O = 0\ \text{to}\ 2\ \text{V}, R_L = 100\ \Omega$    |      |      |  |                              |
|           |   |                                |                    |   | Full range  |      | 0.5  |  |                              |
|           |   |                                | D and P packages   | 25°C  | $V_O = 0\ \text{to}\ -2\ \text{V}, R_L = 100\ \Omega$   |      |      |  |                              |
|           |   |                                |                    |   | Full range  |      | 0.25 |  |                              |

† Full range is -55°C to 125°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2061M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted) (continued)**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2061M<br>TLE2061AM<br>TLE2061BM |     |     | UNIT |
|---|--|------------|------------------------------------|-----|-----|------|
|   |  |            | MIN                                | TYP | MAX |      |
| $r_i$ Input resistance  |  | 25°C       | 10 <sup>12</sup>                   |     |     | Ω    |
| $c_i$ Input capacitance   |  | 25°C       | 4                                  |     |     | pF   |
| $z_o$ Open-loop output impedance  | $I_O = 0$  | 25°C       | 280                                |     |     | Ω    |
| CMRR Common-mode rejection ratio  | $V_{IC} = V_{ICRmin}$ ,<br>$R_S = 50\ \Omega$                            | 25°C       | 65                                 | 82  |     | dB   |
|   |  | Full range | 60                                 |     |     |      |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\text{ V to } \pm 15\text{ V}$ ,<br>$R_S = 50\ \Omega$ | 25°C       | 75                                 | 93  |     | dB   |
|   |  | Full range | 65                                 |     |     |      |
| $I_{CC}$ Supply current   | $V_O = 0$ , No load  | 25°C       | 280                                | 325 |     | μA   |
|   |  | Full range |                                    | 350 |     |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range        |  | Full range | 39                                 |     |     | μA   |

† Full range is –55°C to 125°C.

**TLE2061M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   | TEST CONDITIONS  | TLE2061M<br>TLE2061AM<br>TLE2061BM |     |     | UNIT                   |
|---|--|------------------------------------|-----|-----|------------------------|
|   |  | MIN                                | TYP | MAX |                        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 3.4                                |     |     | V/μs                   |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 59                                 |     |     | $nV/\sqrt{\text{Hz}}$  |
|   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  | 43                                 |     |     |                        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to } 10\text{ Hz}$   | 1.1                                |     |     | μV                     |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 1                                  |     |     | fA/ $\sqrt{\text{Hz}}$ |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10\text{ kHz}$ ,<br>$V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ | 0.025%                             |     |     |                        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 1.8                                |     |     | MHz                    |
|   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  | 1.3                                |     |     |                        |
| $t_s$ Settling time                                     | 0.1%   | 5                                  |     |     | μs                     |
|   | 0.01%  | 10                                 |     |     |                        |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 140                                |     |     | kHz                    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 58°                                |     |     |                        |
|   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  | 75°                                |     |     |                        |

# TLE206x, TLE206xA, TLE206xB EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE μPOWER OPERATIONAL AMPLIFIERS

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

TLE2061M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)

| PARAMETER      |   | TEST CONDITIONS   | $T_A$ †    | TLE2061M ,TLE2061AM<br>TLE2061BM |       |                  | UNIT |
|----------------|---|---|------------|----------------------------------|-------|------------------|------|
|                |   |   |            | MIN                              | TYP   | MAX              |      |
| $V_{IO}$       | Input offset voltage  |   | 25°C       | TLE2061M                         |       | 0.6              | 3    |
|                |   |   |            | Full range                       |       | 6                |      |
|                |   |   |            | TLE2061AM                        |       | 0.5              | 1.5  |
|                |   |   |            | Full range                       |       | 3.6              |      |
|                |   |   |            | TLE2061BM                        |       | 0.3              | 0.5  |
|                |   |   |            | Full range                       |       | 1.7              |      |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage                       | $V_{IC} = 0$ ,<br>$R_S = 50 \Omega$                       | Full range | 6                                |       | $\mu V/^\circ C$ |      |
|                | Input offset voltage long-term drift (see Note 4)                     |   | 25°C       | 0.04                             |       | $\mu V/mo$       |      |
| $I_{IO}$       | Input offset current  |   | 25°C       | 2                                |       | pA               |      |
|                |   |   | Full range | 20                               |       | nA               |      |
| $I_{IB}$       | Input bias current  |   | 25°C       | 4                                |       | pA               |      |
|                |   |   | Full range | 40                               |       | nA               |      |
| $V_{ICR}$      | Common-mode input voltage range                                       | 25°C  | -11 to 13  | -12 to 16                        | V     |                  |      |
|                |   | Full range  | -11 to 13  |                                  | V     |                  |      |
| $V_{OM+}$      | Maximum positive peak output voltage swing                            | $R_L = 10 k\Omega$  | 25°C       | 13                               | 13.7  | V                |      |
|                |   |   | Full range | 12.5                             |       |                  |      |
|                |   | $R_L = 600 \Omega$  | 25°C       | 12.5                             | 13.2  |                  |      |
|                |   |   | Full range | 12                               |       |                  |      |
| $V_{OM-}$      | Maximum negative peak output voltage swing                            | $R_L = 10 k\Omega$  | 25°C       | -13                              | -13.7 | V                |      |
|                |   |   | Full range | -12.5                            |       |                  |      |
|                |   | $R_L = 600 \Omega$  | 25°C       | -12.5                            | -13   |                  |      |
|                |   |   | Full range | -12                              |       |                  |      |
| $A_{VD}$       | Large-signal differential voltage amplification                       | $V_O = \pm 10$ V,<br>$R_L = 10 k\Omega$                   | 25°C       | 30                               | 230   | V/mV             |      |
|                |   |   | Full range | 20                               |       |                  |      |
|                |   | $V_O = 0$ to 8 V,<br>$R_L = 600 \Omega$                   | 25°C       | 25                               | 100   |                  |      |
|                |   |   | Full range | 7                                |       |                  |      |
|                |   | $V_O = 0$ to -8 V,<br>$R_L = 600 \Omega$                  | 25°C       | 3                                | 25    |                  |      |
|                |   |   | Full range | 1                                |       |                  |      |
| $r_i$          | Input resistance  |   | 25°C       | $10^{12}$                        |       | $\Omega$         |      |
| $c_i$          | Input capacitance   |   | 25°C       | 4                                |       | pF               |      |
| $z_o$          | Open-loop output impedance  | $I_O = 0$   | 25°C       | 280                              |       | $\Omega$         |      |
| CMRR           | Common-mode rejection ratio   | $V_{IC} = V_{ICRmin}$ ,<br>$R_S = 50 \Omega$              | 25°C       | 72                               | 90    | dB               |      |
|                |   |   | Full range | 65                               |       |                  |      |
| $k_{SVR}$      | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5$ V to $\pm 15$ V,<br>$R_S = 50 \Omega$ | 25°C       | 75                               | 93    | dB               |      |
|                |   |   | Full range | 65                               |       |                  |      |

† Full range is -55°C to 125°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ C$  extrapolated to  $T_A = 25^\circ C$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.





**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2061M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continue)**

| PARAMETER  | TEST CONDITIONS     | $T_A$ †    | TLE2061M ,TLE2061AM<br>TLE2061BM |     |     | UNIT |
|--|---------------------|------------|----------------------------------|-----|-----|------|
|  |                     |            | MIN                              | TYP | MAX |      |
| $I_{CC}$ Supply current  | $V_O = 0$ , No load | 25°C       |                                  | 290 | 350 | μA   |
|  |                     | Full range |                                  |     | 375 |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range |                     | Full range |                                  | 46  |     | μA   |

† Full range is –55°C to 125°C.

**TLE2061M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2061M<br>TLE2061AM<br>TLE2061BM |        |     | UNIT   |
|---|--|------------|------------------------------------|--------|-----|--------|
|   |  |            | MIN                                | TYP    | MAX |        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                    | 25°C       | 2                                  | 3.4    |     | V/μs   |
|   |  | Full range | 1.8                                |        |     |        |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10$ Hz, $R_S = 20$ Ω  | 25°C       |                                    | 70     |     | nV/√Hz |
|   | $f = 1$ kHz, $R_S = 20$ Ω  | 25°C       |                                    | 40     |     |        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1$ Hz to 10 Hz  | 25°C       |                                    | 1.1    |     | μV     |
| $I_n$ Equivalent input noise current                    | $f = 1$ kHz  | 25°C       |                                    | 1.1    |     | fA/√Hz |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10$ kHz,<br>$V_{O(PP)} = 2$ V, $R_L = 10$ kΩ | 25°C       |                                    | 0.025% |     |        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                    | 25°C       |                                    | 2      |     | MHz    |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                    | 25°C       |                                    | 1.5    |     |        |
| $t_s$ Settling time                                     | 0.1%   | 25°C       |                                    | 5      |     | μs     |
|   | 0.01%  | 25°C       |                                    | 10     |     |        |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10$ kΩ                                     | 25°C       |                                    | 40     |     | kHz    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10$ kΩ, $C_L = 100$ pF                                    | 25°C       |                                    | 60°    |     |        |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                    | 25°C       |                                    | 70°    |     |        |

† Full range is –55°C to 125°C.



# TLE206x, TLE206xA, TLE206xB EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE μPOWER OPERATIONAL AMPLIFIERS

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

## TLE2061Y electrical characteristics at $V_{CC\pm} = \pm 15\text{ V}$ , $T_A = 25^\circ\text{C}$ (unless otherwise noted)

| PARAMETER  | TEST CONDITIONS   | TLE2061Y        |                 |     | UNIT                    |
|--|---|-----------------|-----------------|-----|-------------------------|
|  |   | MIN             | TYP             | MAX |                         |
| $V_{IO}$ Input offset voltage  | $V_{IC} = 0$ , $R_S = 50\ \Omega$   |                 | 0.6             | 3   | mV                      |
| $\alpha V_{IO}$ Input offset voltage long-term drift (see Note 4)          |   |                 | 0.04            |     | $\mu\text{V}/\text{mo}$ |
| $I_{IO}$ Input offset current  |   |                 | 2               |     | pA                      |
| $I_{IB}$ Input bias current  |   |                 | 4               |     | pA                      |
| $V_{ICR}$ Common-mode input voltage range                                  |   | -11<br>to<br>13 | -12<br>to<br>16 |     | V                       |
| $V_{OM+}$ Maximum positive peak output voltage swing                       | $R_L = 10\ \text{k}\Omega$  | 13.2            | 13.7            |     | V                       |
|  | $R_L = 600\ \Omega$   | 12.5            | 13.2            |     |                         |
| $V_{OM-}$ Maximum negative peak output voltage swing                       | $R_L = 10\ \text{k}\Omega$  | -13.2           | -13.7           |     | V                       |
|  | $R_L = 600\ \Omega$   | -12.5           | -13             |     |                         |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_O = \pm 10\ \text{V}$ , $R_L = 10\ \text{k}\Omega$                       | 30              | 230             |     | V/mV                    |
|  | $V_O = 0$ to $8\ \text{V}$ , $R_L = 600\ \Omega$                            | 25              | 100             |     |                         |
|  | $V_O = 0$ to $-8\ \text{V}$ , $R_L = 600\ \Omega$                           | 3               | 25              |     |                         |
| $r_i$ Input resistance   |   |                 | $10^{12}$       |     | $\Omega$                |
| $c_i$ Input capacitance  |   |                 | 4               |     | pF                      |
| $z_o$ Open-loop output impedance   | $I_O = 0$   |                 | 280             |     | $\Omega$                |
| CMRR Common-mode rejection ratio   | $R_S = 50\ \Omega$ , $V_{IC} = V_{ICR\text{min}}$                           | 72              | 90              |     | dB                      |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}$ to $\pm 15\ \text{V}$ ,<br>$R_S = 50\ \Omega$ | 75              | 93              |     | dB                      |
| $I_{CC}$ Supply current  | $V_O = 0$ , No load   |                 | 290             | 350 | $\mu\text{A}$           |

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.

## TLE2061Y operating characteristics at $V_{CC\pm} = \pm 15\ \text{V}$ , $T_A = 25^\circ\text{C}$

| PARAMETER   | TEST CONDITIONS   | TLE2061Y |        |     | UNIT                   |
|---|---|----------|--------|-----|------------------------|
|   |   | MIN      | TYP    | MAX |                        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\ \text{k}\Omega$ , $C_L = 100\ \text{pF}$   | 2.6      | 3.4    |     | V/ $\mu\text{s}$       |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\ \text{Hz}$ , $R_S = 20\ \Omega$  |          | 70     |     | nV/ $\sqrt{\text{Hz}}$ |
|   | $f = 1\ \text{kHz}$ , $R_S = 20\ \Omega$  |          | 40     |     |                        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\ \text{Hz}$ to $10\ \text{Hz}$   |          | 1.1    |     | $\mu\text{V}$          |
| $I_n$ Equivalent input noise current                    | $f = 1\ \text{Hz}$  |          | 1.1    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10\ \text{kHz}$ ,<br>$V_{O(PP)} = 2\ \text{V}$ , $R_L = 10\ \text{k}\Omega$ |          | 0.025% |     |                        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\ \text{k}\Omega$ , $C_L = 100\ \text{pF}$   |          | 2      |     | MHz                    |
|   | $R_L = 600\ \Omega$ , $C_L = 100\ \text{pF}$  |          | 1.5    |     |                        |
| $t_s$ Settling time                                     | 0.1%  |          | 5      |     | $\mu\text{s}$          |
|   | 0.01%   |          | 10     |     |                        |
| BOM Maximum output-swing bandwidth                      | $A_{VD} = 1$ , $R_L = 10\ \text{k}\Omega$   |          | 40     |     | kHz                    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\ \text{k}\Omega$ , $C_L = 100\ \text{pF}$   |          | 60°    |     |                        |
|   | $R_L = 600\ \Omega$ , $C_L = 100\ \text{pF}$  |          | 70°    |     |                        |



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER      |   | TEST CONDITIONS   | $T_A^\dagger$ | TLE2062C<br>TLE2062AC<br>TLE2062BC |         |                              | UNIT |
|----------------|---|---|---------------|------------------------------------|---------|------------------------------|------|
|                |   |   |               | MIN                                | TYP     | MAX                          |      |
| $V_{IO}$       | Input offset voltage  | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$   | 25°C          | 1                                  | 5       | mV                           |      |
|                |   |   | Full range    | 5.9                                |         |                              |      |
|                |   |   | 25°C          | 0.9                                | 4       |                              |      |
|                |   |   | Full range    | 4.9                                |         |                              |      |
|                |   |   | 25°C          | 0.7                                | 3       |                              |      |
|                |   |   | Full range    | 3.9                                |         |                              |      |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage                     | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$   | Full range    | 6                                  |         | $\mu\text{V}/^\circ\text{C}$ |      |
|                | Input offset voltage long-term drift (see Note 4)                   |   | 25°C          | 0.04                               |         | $\mu\text{V}/\text{mo}$      |      |
| $I_{IO}$       | Input offset current  |   | 25°C          | 1                                  |         | pA                           |      |
|                |   |   | Full range    | 0.8                                |         | nA                           |      |
| $I_{IB}$       | Input bias current  |   | 25°C          | 3                                  |         | pA                           |      |
|                |   |   | Full range    | 2                                  |         | nA                           |      |
| $V_{ICR}$      | Common-mode input voltage range                                     |   | 25°C          | -1.6 to 4                          | -2 to 6 | V                            |      |
|                |   |   | Full range    | -1.6 to 4                          |         | V                            |      |
| $V_{OM+}$      | Maximum positive peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$  | 25°C          | 3.5                                | 3.7     | V                            |      |
|                |   |   | Full range    | 3.3                                |         |                              |      |
|                |   | $R_L = 100\ \Omega$   | 25°C          | 2.5                                | 3.1     |                              |      |
|                |   |   | Full range    | 2                                  |         |                              |      |
| $V_{OM-}$      | Maximum negative peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$  | 25°C          | -3.7                               | -3.9    | V                            |      |
|                |   |   | Full range    | -3.3                               |         |                              |      |
|                |   | $R_L = 100\ \Omega$   | 25°C          | -2.5                               | -2.7    |                              |      |
|                |   |   | Full range    | -2                                 |         |                              |      |
| $A_{VD}$       | Large-signal differential voltage amplification                     | $V_O = \pm 2.8\ \text{V},$<br>$R_L = 10\ \text{k}\Omega$                          | 25°C          | 15                                 | 80      | V/mV                         |      |
|                |   |   | Full range    | 2                                  |         |                              |      |
|                |   | $V_O = 0\ \text{to}\ 2\ \text{V},$<br>$R_L = 100\ \Omega$                         | 25°C          | 0.75                               | 45      |                              |      |
|                |   |   | Full range    | 0.5                                |         |                              |      |
|                |   | $V_O = 0\ \text{to}\ -2\ \text{V},$<br>$R_L = 100\ \Omega$                        | 25°C          | 0.5                                | 3       |                              |      |
|                |   |   | Full range    | 0.25                               |         |                              |      |
| $r_i$          | Input resistance  |   | 25°C          | $10^{12}$                          |         | $\Omega$                     |      |
| $c_i$          | Input capacitance   |   | 25°C          | 4                                  |         | pF                           |      |
| $z_o$          | Open-loop output impedance  | $I_O = 0$   | 25°C          | 560                                |         | $\Omega$                     |      |
| CMRR           | Common-mode rejection ratio   | $V_{IC} = V_{ICR\text{min}},$<br>$R_S = 50\ \Omega$                               | 25°C          | 65                                 | 82      | dB                           |      |
|                |   |   | Full range    | 65                                 |         |                              |      |
| $k_{SVR}$      | Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}\ \text{to}\ \pm 15\ \text{V},$<br>$R_S = 50\ \Omega$ | 25°C          | 75                                 | 93      | dB                           |      |
|                |   |   | Full range    | 75                                 |         |                              |      |

$^\dagger$  Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS     | $T_A$ †    | TLE2062C<br>TLE2062AC<br>TLE2062BC |     |     | UNIT |
|--|---------------------|------------|------------------------------------|-----|-----|------|
|  |                     |            | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current  | $V_O = 0$ , No load | 25°C       |                                    | 560 | 620 | μA   |
|  |                     | Full range |                                    |     | 635 |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range |                     | Full range |                                    | 26  |     | μA   |

† Full range is 0°C to 70°C.

**TLE2062C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2062C<br>TLE2062AC<br>TLE2062BC |        |     | UNIT   |
|---|--|------------|------------------------------------|--------|-----|--------|
|   |  |            | MIN                                | TYP    | MAX |        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 2.2                                | 3.4    |     | V/μs   |
|   |  | Full range | 2.1                                |        |     |        |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 25°C       |                                    | 59     | 100 | nV/√Hz |
|   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  | 25°C       |                                    | 43     | 60  |        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }10\text{ Hz}$  | 25°C       |                                    | 1.1    |     | μV     |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 25°C       |                                    | 1      |     | fA/√Hz |
| THD Total harmonic distortion                           | $V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ ,<br>$A_{VD} = 2$ , $f = 10\text{ kHz}$ | 25°C       |                                    | 0.025% |     |        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 1.8    |     | MHz    |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 1.3    |     |        |
| Settling time   | 0.1%   | 25°C       |                                    | 5      |     | μs     |
|   | 0.01%  | 25°C       |                                    | 10     |     |        |
| BOM Maximum output-swing bandwidth                      | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 25°C       |                                    | 140    |     | kHz    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 58°    |     |        |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 75°    |     |        |

† Full range is 0°C to 70°C.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$  (unless otherwise noted)**

| PARAMETER   |  | TEST CONDITIONS                      | $T_A$ †   | TLE2062C<br>TLE2062AC<br>TLE2062BC |       |           | UNIT |                              |   |
|---|--|--------------------------------------|---|------------------------------------|-------|-----------|------|------------------------------|---|
|   |  |                                      |   | MIN                                | TYP   | MAX       |      |                              |   |
| $V_{IO}$ Input offset voltage   | TLE2062C   | $V_{IC} = 0, \quad R_S = 50\ \Omega$ | 25°C  | 0.9                                |       | 4         | mV   |                              |   |
|   |  |                                      | Full range  |                                    |       | 4.9       |      |                              |   |
|   |  |                                      | 25°C  | 0.8                                |       | 2         |      |                              |   |
|   |  |                                      | Full range  |                                    |       | 2.9       |      |                              |   |
|   | TLE2062AC  |                                      | 25°C  | 0.5                                |       | 1         |      |                              |   |
|   |  |                                      | Full range  |                                    |       | 1.9       |      |                              |   |
|   | TLE2062BC  |                                      | 25°C  | 6                                  |       |           |      | $\mu\text{V}/^\circ\text{C}$ |   |
|   |  |                                      | Full range  |                                    |       | 0.04      |      | $\mu\text{V}/\text{mo}$      |   |
|   | $\alpha_{VIO}$ Temperature coefficient of input offset voltage                     |                                      | Input offset voltage long-term drift (see Note 4) |                                    | 25°C  | 2         |      | pA                           |   |
|   | $I_{IO}$ Input offset current  |                                      |   |                                    | 25°C  | 4         |      | pA                           |   |
|   | $I_{IB}$ Input bias current  |                                      |   |                                    | 25°C  | 3         |      | nA                           |   |
|   | $V_{ICR}$ Common-mode input voltage range  |                                      |   |                                    | 25°C  | -11 to 13 |      | -12 to 16                    | V |
|   |  |                                      | Full range  | -11 to 13                          |       | V         |      |                              |   |
| $V_{OM+}$ Maximum positive peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$   |                                      | 25°C  | 13.2                               | 13.7  | V         |      |                              |   |
|   |  |                                      | Full range  | 13                                 |       |           |      |                              |   |
|   | $R_L = 600\ \Omega$  |                                      | 25°C  | 12.5                               | 13.2  |           |      |                              |   |
|   |  |                                      | Full range  | 12                                 |       |           |      |                              |   |
| $V_{OM-}$ Maximum negative peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$   |                                      | 25°C  | -13.2                              | -13.7 | V         |      |                              |   |
|   |  |                                      | Full range  | -13                                |       |           |      |                              |   |
|   | $R_L = 600\ \Omega$  |                                      | 25°C  | -12.5                              | -13   |           |      |                              |   |
|   |  |                                      | Full range  | -12                                |       |           |      |                              |   |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 10\ \text{V}, \quad R_L = 10\ \text{k}\Omega$                           |                                      | 25°C  | 30                                 | 230   | V/mV      |      |                              |   |
|   |  |                                      | Full range  | 20                                 |       |           |      |                              |   |
|   | $V_O = 0\ \text{to}\ 8\ \text{V}, \quad R_L = 600\ \Omega$                         |                                      | 25°C  | 25                                 | 100   |           |      |                              |   |
|   |  |                                      | Full range  | 10                                 |       |           |      |                              |   |
|   | $V_O = 0\ \text{to}\ -8\ \text{V}, \quad R_L = 600\ \Omega$                        |                                      | 25°C  | 3                                  | 25    |           |      |                              |   |
|   |  |                                      | Full range  | 1                                  |       |           |      |                              |   |
| $r_i$ Input resistance  |  |                                      | 25°C  | $10^{12}$                          |       | $\Omega$  |      |                              |   |
| $c_i$ Input capacitance   |  |                                      | 25°C  | 4                                  |       | pF        |      |                              |   |
| $z_o$ Open-loop output impedance  | $I_O = 0$  |                                      | 25°C  | 560                                |       | $\Omega$  |      |                              |   |
| CMRR Common-mode rejection ratio  | $V_{IC} = V_{ICRmin}, \quad R_S = 50\ \Omega$                                      |                                      | 25°C  | 72                                 | 90    | dB        |      |                              |   |
|   |  |                                      | Full range  | 70                                 |       |           |      |                              |   |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}\ \text{to}\ \pm 15\ \text{V}, \quad R_S = 50\ \Omega$ |                                      | 25°C  | 75                                 | 93    | dB        |      |                              |   |
|   |  |                                      | Full range  | 75                                 |       |           |      |                              |   |

† Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS      | $T_A$ †    | TLE2062C<br>TLE2062AC<br>TLE2062BC |     |     | UNIT    |
|--|----------------------|------------|------------------------------------|-----|-----|---------|
|  |                      |            | MIN                                | TYP | MAX |         |
| $I_{CC}$ Supply current  | $V_O = 0$ V, No load | 25°C       |                                    | 625 | 690 | $\mu$ A |
|  |                      | Full range |                                    | 715 |     |         |
| $\Delta I_{CC}$ Supply-current change over operating temperature range |                      | Full range |                                    | 36  |     | $\mu$ A |

† Full range is 0°C to 70°C.

**TLE2062C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER   | TEST CONDITIONS   | $T_A$ †    | TLE2062C<br>TLE2062AC<br>TLE2062BC |     |     | UNIT                   |
|---|---|------------|------------------------------------|-----|-----|------------------------|
|   |   |            | MIN                                | TYP | MAX |                        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10$ k $\Omega$ , $C_L = 100$ pF                                    | 25°C       | 2.6                                | 3.4 |     | V/ $\mu$ s             |
|   |   | Full range | 2.5                                |     |     |                        |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10$ Hz, $R_S = 20$ $\Omega$  | 25°C       |                                    | 70  | 100 | nV/ $\sqrt{\text{Hz}}$ |
|   | $f = 1$ kHz, $R_S = 20$ $\Omega$  | 25°C       |                                    | 40  | 60  |                        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1$ Hz to 10 Hz   | 25°C       |                                    | 1.1 |     | $\mu$ V                |
| $I_n$ Equivalent input noise current                    | $f = 1$ kHz   | 25°C       |                                    | 1.1 |     | fA/ $\sqrt{\text{Hz}}$ |
| THD Total harmonic distortion                           | $V_{O(PP)} = 2$ V, $R_L = 10$ k $\Omega$ ,<br>$A_{VD} = 2$ , $f = 10$ kHz | 25°C       | 0.025%                             |     |     |                        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10$ k $\Omega$ , $C_L = 10$ pF                                     | 25°C       | 2                                  |     |     | MHz                    |
|   | $R_L = 600$ $\Omega$ , $C_L = 100$ pF                                     | 25°C       | 1.5                                |     |     |                        |
| Settling time   | 0.1%  | 25°C       | 5                                  |     |     | $\mu$ s                |
|   | 0.01%   | 25°C       | 10                                 |     |     |                        |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10$ k $\Omega$                                      | 25°C       | 40                                 |     |     | kHz                    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10$ k $\Omega$ , $C_L = 100$ pF                                    | 25°C       | 60°                                |     |     |                        |
|   | $R_L = 600$ $\Omega$ , $C_L = 100$ pF                                     | 25°C       | 70°                                |     |     |                        |

† Full range is 0°C to 70°C.

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER      |   | TEST CONDITIONS  | $T_A^\dagger$ | TLE2062I<br>TLE2062AI<br>TLE2062BI |      |                              | UNIT |
|----------------|---|--|---------------|------------------------------------|------|------------------------------|------|
|                |   |  |               | MIN                                | TYP  | MAX                          |      |
| $V_{IO}$       | Input offset voltage  | $V_{IC} = 0, R_S = 50\ \Omega$                                       | 25°C          | 1                                  | 5    | mV                           |      |
|                |   |  | Full range    | 6.3                                |      |                              |      |
|                |   |  | 25°C          | 0.9                                | 4    |                              |      |
|                |   |  | Full range    | 5.3                                |      |                              |      |
|                |   |  | 25°C          | 0.7                                | 3    |                              |      |
|                |   |  | Full range    | 4.3                                |      |                              |      |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage                     | $V_{IC} = 0, R_S = 50\ \Omega$                                       | Full range    | 6                                  |      | $\mu\text{V}/^\circ\text{C}$ |      |
|                | Input offset voltage long-term drift (see Note 4)                   |  | 25°C          | 0.04                               |      | $\mu\text{V}/\text{mo}$      |      |
| $I_{IO}$       | Input offset current  |  | 25°C          | 1                                  |      | pA                           |      |
|                |   |  | Full range    | 2                                  |      | nA                           |      |
| $I_{IB}$       | Input bias current  |  | 25°C          | 3                                  |      | pA                           |      |
|                |   |  | Full range    | 4                                  |      | nA                           |      |
| $V_{ICR}$      | Common-mode input voltage range                                     | 25°C   | -1.6 to 4     | -2 to 6                            | V    |                              |      |
|                |   | Full range   | -1.6 to 4     |                                    | V    |                              |      |
| $V_{OM+}$      | Maximum positive peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$   | 25°C          | 3.5                                | 3.7  | V                            |      |
|                |   |  | Full range    | 3.1                                |      |                              |      |
|                |   |  | 25°C          | 2.5                                | 3.1  |                              |      |
|                |   |  | Full range    | 2                                  |      |                              |      |
| $V_{OM-}$      | Maximum negative peak output voltage swing                          | $R_L = 10\ \text{k}\Omega$   | 25°C          | -3.7                               | -3.9 | V                            |      |
|                |   |  | Full range    | -3.1                               |      |                              |      |
|                |   |  | 25°C          | -2.5                               | -2.7 |                              |      |
|                |   |  | Full range    | -2                                 |      |                              |      |
| $A_{VD}$       | Large-signal differential voltage amplification                     | $V_O = \pm 2.8\ \text{V}, R_L = 10\ \text{k}\Omega$                  | 25°C          | 15                                 | 80   | V/mV                         |      |
|                |   |  | Full range    | 2                                  |      |                              |      |
|                |   |  | 25°C          | 0.75                               | 45   |                              |      |
|                |   |  | Full range    | 0.5                                |      |                              |      |
|                |   |  | 25°C          | 0.5                                | 3    |                              |      |
|                |   |  | Full range    | 0.25                               |      |                              |      |
| $r_i$          | Input resistance  |  | 25°C          | $10^{12}$                          |      | $\Omega$                     |      |
| $c_i$          | Input capacitance   |  | 25°C          | 4                                  |      | pF                           |      |
| $z_o$          | Open-loop output impedance  | $I_O = 0$  | 25°C          | 560                                |      | $\Omega$                     |      |
| CMRR           | Common-mode rejection ratio   | $V_{IC} = V_{ICRmin}, R_S = 50\ \Omega$                              | 25°C          | 65                                 | 82   | dB                           |      |
|                |   |  | Full range    | 65                                 |      |                              |      |
| $k_{SVR}$      | Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V to } \pm 15\ \text{V}, R_S = 50\ \Omega$ | 25°C          | 75                                 | 93   | dB                           |      |
|                |   |  | Full range    | 65                                 |      |                              |      |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS     | $T_A$ †    | TLE2062I<br>TLE2062AI<br>TLE2062BI |     |     | UNIT |
|--|---------------------|------------|------------------------------------|-----|-----|------|
|  |                     |            | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current  | $V_O = 0$ , No load | 25°C       |                                    | 560 | 620 | μA   |
|  |                     | Full range |                                    |     | 640 |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range |                     | Full range |                                    | 54  |     | μA   |

† Full range is –40°C to 85°C.

**TLE2062I operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2062I<br>TLE2062AI<br>TLE2062BI |        |     | UNIT                         |
|---|--|------------|------------------------------------|--------|-----|------------------------------|
|   |  |            | MIN                                | TYP    | MAX |                              |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 2.2                                | 3.4    |     | V/μs                         |
|   |  | Full range | 1.7                                |        |     |                              |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 25°C       |                                    | 59     | 100 | $\text{nV}/\sqrt{\text{Hz}}$ |
|   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  | 25°C       |                                    | 43     | 60  |                              |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }10\text{ Hz}$  | 25°C       |                                    | 1.1    |     | μV                           |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 25°C       |                                    | 1      |     | $\text{fA}/\sqrt{\text{Hz}}$ |
| THD Total harmonic distortion                           | $V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ ,<br>$A_{VD} = 2$ , $f = 10\text{ kHz}$ | 25°C       |                                    | 0.025% |     |                              |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 1.8    |     | MHz                          |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 1.3    |     |                              |
| Settling time   | 0.1%   | 25°C       |                                    | 5      |     | μs                           |
|   | 0.01%  | 25°C       |                                    | 10     |     |                              |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 25°C       |                                    | 140    |     | kHz                          |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 58°    |     |                              |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  | 25°C       |                                    | 75°    |     |                              |

† Full range is –40°C to 85°C.





**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER      |   | TEST CONDITIONS  | $T_A$ †            | TLE2062I<br>TLE2062AI<br>TLE2062BI |       |                  | UNIT |
|----------------|---|--|--------------------|------------------------------------|-------|------------------|------|
|                |   |  |                    | MIN                                | TYP   | MAX              |      |
| $V_{IO}$       | Input offset voltage  | $V_{IC} = 0, R_S = 50 \Omega$                          | 25°C               | 0.9                                | 4     | mV               |      |
|                |   |  | Full range         | 5.3                                |       |                  |      |
|                |   |  | 25°C               | 0.8                                | 2     |                  |      |
|                |   |  | Full range         | 3.3                                |       |                  |      |
|                |   |  | 25°C               | 0.5                                | 1     |                  |      |
|                |   |  | Full range         | 2.3                                |       |                  |      |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage                     | $V_{IC} = 0, R_S = 50 \Omega$                          | Full range         | 6                                  |       | $\mu V/^\circ C$ |      |
|                | Input offset voltage long-term drift (see Note 4)                   |  | 25°C               | 0.04                               |       | $\mu V/mo$       |      |
| $I_{IO}$       | Input offset current  |  | 25°C               | 2                                  |       | pA               |      |
|                |   |  | Full range         | 3                                  |       | nA               |      |
| $I_{IB}$       | Input bias current  |  | 25°C               | 4                                  |       | pA               |      |
|                |   |  | Full range         | 5                                  |       | nA               |      |
| $V_{ICR}$      | Common-mode input voltage range                                     | 25°C   | -11 to 13          | -12 to 16                          | V     |                  |      |
|                |   | Full range   | -11 to 13          |                                    | V     |                  |      |
| $V_{OM+}$      | Maximum positive peak output voltage swing                          | $R_L = 10 k\Omega$                                     | 25°C               | 13.2                               | 13.7  | V                |      |
|                |   |  | Full range         | 13                                 |       |                  |      |
|                |   |  | $R_L = 600 \Omega$ | 25°C                               | 12.5  |                  | 13.2 |
|                |   |  |                    | Full range                         | 12    |                  |      |
| $V_{OM-}$      | Maximum negative peak output voltage swing                          | $R_L = 10 k\Omega$                                     | 25°C               | -13.2                              | -13.7 | V                |      |
|                |   |  | Full range         | -13                                |       |                  |      |
|                |   |  | $R_L = 600 \Omega$ | 25°C                               | -12.5 |                  | -13  |
|                |   |  |                    | Full range                         | -12   |                  |      |
| $A_{VD}$       | Large-signal differential voltage amplification                     | $V_O = \pm 10$ V, $R_L = 10 k\Omega$                   | 25°C               | 30                                 | 230   | V/mV             |      |
|                |   |  | Full range         | 20                                 |       |                  |      |
|                |   | $V_O = 0$ to 8 V, $R_L = 600 \Omega$                   | 25°C               | 25                                 | 100   |                  |      |
|                |   |  | Full range         | 10                                 |       |                  |      |
|                |   | $V_O = 0$ to -8 V, $R_L = 600 \Omega$                  | 25°C               | 3                                  | 25    |                  |      |
|                |   |  | Full range         | 1                                  |       |                  |      |
| $r_i$          | Input resistance  |  | 25°C               | $10^{12}$                          |       | $\Omega$         |      |
| $c_i$          | Input capacitance   |  | 25°C               | 4                                  |       | pF               |      |
| $z_o$          | Open-loop output impedance  | $I_O = 0$  | 25°C               | 560                                |       | $\Omega$         |      |
| CMRR           | Common-mode rejection ratio   | $V_{IC} = V_{ICRmin}, R_S = 50 \Omega$                 | 25°C               | 72                                 | 90    | dB               |      |
|                |   |  | Full range         | 65                                 |       |                  |      |
| $k_{SVR}$      | Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5$ V to $\pm 15$ V, $R_S = 50 \Omega$ | 25°C               | 75                                 | 93    | dB               |      |
|                |   |  | Full range         | 65                                 |       |                  |      |

† Full range is -40°C to 85°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ C$  extrapolated to  $T_A = 25^\circ C$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS     | $T_A$ †    | TLE2062I<br>TLE2062AI<br>TLE2062BI |     |     | UNIT |
|--|---------------------|------------|------------------------------------|-----|-----|------|
|  |                     |            | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current  | $V_O = 0$ , No load | 25°C       |                                    | 625 | 690 | μA   |
|  |                     | Full range |                                    |     | 720 |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range |                     | Full range |                                    | 74  |     | μA   |

† Full range is –40°C to 85°C.

**TLE2062I operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER   | TEST CONDITIONS   | $T_A$ †    | TLE2062I<br>TLE2062AI<br>TLE2062BI |        |     | UNIT   |
|---|---|------------|------------------------------------|--------|-----|--------|
|   |   |            | MIN                                | TYP    | MAX |        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                 | 25°C       | 2.6                                | 3.4    |     | V/μs   |
|   |   | Full range | 2.1                                |        |     |        |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10$ Hz, $R_S = 20$ Ω                                     | 25°C       |                                    | 70     | 100 | nV/√Hz |
|   | $f = 1$ kHz, $R_S = 20$ Ω                                     | 25°C       |                                    | 40     | 60  |        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1$ Hz to 10 Hz   | 25°C       |                                    | 1.1    |     | μV     |
| $I_n$ Equivalent input noise current                    | $f = 1$ kHz   | 25°C       |                                    | 1.1    |     | fA/√Hz |
| THD Total harmonic distortion                           | $V_{O(PP)} = 2$ V, $R_L = 10$ kΩ, $A_{VD} = 2$ , $f = 10$ kHz | 25°C       |                                    | 0.025% |     |        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                 | 25°C       |                                    | 2      |     | MHz    |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                 | 25°C       |                                    | 1.5    |     |        |
| Settling time   | 0.1%  | 25°C       |                                    | 5      |     | μs     |
|   | 0.01%   | 25°C       |                                    | 10     |     |        |
| BOM Maximum output-swing bandwidth                      | $A_{VD} = 1$ , $R_L = 10$ kΩ                                  | 25°C       |                                    | 40     |     | kHz    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10$ kΩ, $C_L = 100$ pF                                 | 25°C       |                                    | 60°    |     |        |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                 | 25°C       |                                    | 70°    |     |        |

† Full range is –40°C to 85°C.

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$**

| PARAMETER |   | TEST CONDITIONS   | $T_A$ †   | TLE2062M<br>TLE2062AM<br>TLE2062BM |      |      | UNIT                         |
|-----------|---|---|---|------------------------------------|------|------|------------------------------|
|           |   |   |   | MIN                                | TYP  | MAX  |                              |
| $V_{IO}$  | Input offset voltage                            | $V_{IC} = 0, \quad R_S = 50\ \Omega$                      | 25°C  | 1                                  | 5    | mV   |                              |
|           |   |   | Full range  | 7                                  |      |      |                              |
|           |   |   | 25°C  | 0.9                                | 4    |      |                              |
|           | Full range                                      |   | 6   |                                    |      |      |                              |
|           | 25°C  |   | 0.7   | 3                                  |      |      |                              |
|           | Full range                                      |   | 5   |                                    |      |      |                              |
|           | $\alpha_{VIO}$                                  |   | Temperature coefficient of input offset voltage               | Full range                         | 6    |      | $\mu\text{V}/^\circ\text{C}$ |
|           |   |   | Input offset voltage long-term drift (see Note 4)             | 25°C                               | 0.04 |      | $\mu\text{V}/\text{mo}$      |
|           | $I_{IO}$  |   | Input offset current  | 25°C                               | 1    |      | pA                           |
| $I_{IB}$  | Input bias current                              | Full range  | 15  |                                    | nA   |      |                              |
|           |   | 25°C  | 3   |                                    | pA   |      |                              |
| $V_{ICR}$ | Common-mode input voltage range                 | 25°C  | -1.6 to 4   | -2 to 6                            | V    |      |                              |
|           |   | Full range  | -1.6 to 4   |                                    | V    |      |                              |
| $V_{OM+}$ | Maximum positive peak output voltage swing      | $R_L = 10\ \text{k}\Omega$                                | 25°C  | 3.5                                | 3.7  | V    |                              |
|           |   |   | Full range  | 3                                  |      |      |                              |
|           |   | FK and JG packages  | $R_L = 600\ \Omega$   | 25°C                               | 2.5  |      | 3.6                          |
|           |   |   |   | Full range                         | 2    |      |                              |
|           |   | D and P packages  | $R_L = 100\ \Omega$   | 25°C                               | 2.5  |      | 3.1                          |
|           |   |   |   | Full range                         | 2    |      |                              |
| $V_{OM-}$ | Maximum negative peak output voltage swing      | $R_L = 10\ \text{k}\Omega$                                | 25°C  | -3.5                               | -3.9 | V    |                              |
|           |   |   | Full range  | -3                                 |      |      |                              |
|           |   | FK and JG packages  | $R_L = 600\ \Omega$   | 25°C                               | -2.5 |      | -3.5                         |
|           |   |   |   | Full range                         | -2   |      |                              |
|           |   | D and P packages  | $R_L = 100\ \Omega$   | 25°C                               | -2.5 |      | -2.7                         |
|           |   |   |   | Full range                         | -2   |      |                              |
| $A_{VD}$  | Large-signal differential voltage amplification | $V_O = \pm 2.8\ \text{V}, \quad R_L = 10\ \text{k}\Omega$ | 25°C  | 15                                 | 80   | V/mV |                              |
|           |   |   | Full range  | 2                                  |      |      |                              |
|           |   | FK and JG packages  | $V_O = 0\ \text{to}\ 2.5\ \text{V}, \quad R_L = 600\ \Omega$  | 25°C                               | 1    |      | 65                           |
|           |   |   |   | Full range                         | 0.5  |      |                              |
|           |   |   | $V_O = 0\ \text{to}\ -2.5\ \text{V}, \quad R_L = 600\ \Omega$ | 25°C                               | 1    |      | 16                           |
|           |   |   |   | Full range                         | 0.5  |      |                              |
|           |   | D and P packages  | $V_O = 0\ \text{to}\ 2\ \text{V}, \quad R_L = 100\ \Omega$    | 25°C                               | 0.75 |      | 45                           |
|           |   |   |   | Full range                         | 0.5  |      |                              |
|           |   |   | $V_O = 0\ \text{to}\ -2\ \text{V}, \quad R_L = 100\ \Omega$   | 25°C                               | 0.5  |      | 3                            |
|           |   |   |   | Full range                         | 0.25 |      |                              |

† Full range is  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ .

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2062M<br>TLE2062AM<br>TLE2062BM |     |     | UNIT |
|---|--|------------|------------------------------------|-----|-----|------|
|   |  |            | MIN                                | TYP | MAX |      |
| $r_i$ Input resistance  |  | 25°C       | 10 <sup>12</sup>                   |     |     | Ω    |
| $c_i$ Input capacitance   |  | 25°C       | 4                                  |     |     | pF   |
| $z_o$ Open-loop output impedance  | $I_O = 0$  | 25°C       | 560                                |     |     | Ω    |
| CMRR Common-mode rejection ratio  | $V_{IC} = V_{ICRmin}$<br>$R_S = 50\ \Omega$                              | 25°C       | 65                                 | 82  |     | dB   |
|   |  | Full range | 60                                 |     |     |      |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ )           | $V_{CC\pm} = \pm 5\text{ V to } \pm 15\text{ V}$ ,<br>$R_S = 50\ \Omega$ | 25°C       | 75                                 | 93  |     | dB   |
|   |  | Full range | 65                                 |     |     |      |
| $I_{CC}$ Supply current (two amplifiers)  | $V_O = 0$ , No load  | 25°C       | 560                                | 620 |     | μA   |
|   |  | Full range |                                    | 650 |     |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range (two amplifiers) |  | Full range | 72                                 |     |     | μA   |

† Full range is -55°C to 125°C.

**TLE2062M operating characteristics at specified free-air temperature,  $T_A = 25^\circ\text{C}$ ,  $V_{CC\pm} = \pm 5\text{ V}$**

| PARAMETER   | TEST CONDITIONS  | TLE2062M<br>TLE2062AM<br>TLE2062BM |     |     | UNIT   |
|---|--|------------------------------------|-----|-----|--------|
|   |  | MIN                                | TYP | MAX |        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 3.4                                |     |     | V/μs   |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 59                                 |     |     | nV/√Hz |
|   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  | 43                                 |     |     |        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to } 10\text{ Hz}$   | 1.1                                |     |     | μV     |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 1                                  |     |     | fA/√Hz |
| THD Total harmonic distortion                           | $V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ ,<br>$A_{VD} = 2$ , $f = 10\text{ kHz}$ | 0.025%                             |     |     |        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 1.8                                |     |     | MHz    |
|   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  | 1.3                                |     |     |        |
| Settling time   | 0.1%   | 5                                  |     |     | μs     |
|   | 0.01%  | 10                                 |     |     |        |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 140                                |     |     | kHz    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 58°                                |     |     |        |
|   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  | 75°                                |     |     |        |



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$  (unless otherwise noted)**

| PARAMETER      |   | TEST CONDITIONS  | $T_A^\dagger$ | TLE2062M<br>TLE2062AM<br>TLE2062BM |       |                              | UNIT |
|----------------|---|--|---------------|------------------------------------|-------|------------------------------|------|
|                |   |  |               | MIN                                | TYP   | MAX                          |      |
| $V_{IO}$       | Input offset voltage  | $V_{IC} = 0, \quad R_S = 50\ \Omega$                                       | 25°C          | 0.9                                |       | 4                            | mV   |
|                |   |  | Full range    |                                    |       | 6                            |      |
|                |   |  | 25°C          | 0.8                                |       | 2                            |      |
|                |   |  | Full range    |                                    |       | 4                            |      |
|                |   |  | 25°C          | 0.5                                |       | 1                            |      |
|                |   |  | Full range    |                                    |       | 3                            |      |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage                       | $V_{IC} = 0, \quad R_S = 50\ \Omega$                                       | Full range    | 6                                  |       | $\mu\text{V}/^\circ\text{C}$ |      |
|                | Input offset voltage long-term drift (see Note 4)                     |  | 25°C          | 0.04                               |       | $\mu\text{V}/\text{mo}$      |      |
| $I_{IO}$       | Input offset current  |  | 25°C          | 2                                  |       | pA                           |      |
|                |   |  | Full range    |                                    |       | 20                           |      |
| $I_{IB}$       | Input bias current  |  | 25°C          | 4                                  |       | pA                           |      |
|                |   |  | Full range    |                                    |       | 40                           |      |
| $V_{ICR}$      | Common-mode input voltage range                                       | 25°C   | -11 to 13     | -12 to 16                          |       | V                            |      |
|                |   | Full range   | -11 to 13     |                                    |       | V                            |      |
| $V_{OM+}$      | Maximum positive peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$   | 25°C          | 13                                 | 13.7  | V                            |      |
|                |   |  | Full range    | 12.5                               |       |                              |      |
|                |   | $R_L = 600\ \Omega$  | 25°C          | 12.5                               | 13.2  |                              |      |
|                |   |  | Full range    | 11                                 |       |                              |      |
| $V_{OM-}$      | Maximum negative peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$   | 25°C          | -13                                | -13.7 | V                            |      |
|                |   |  | Full range    | -12.5                              |       |                              |      |
|                |   | $R_L = 600\ \Omega$  | 25°C          | -12.5                              | -13   |                              |      |
|                |   |  | Full range    | -11                                |       |                              |      |
| $A_{VD}$       | Large-signal differential voltage amplification                       | $V_O = \pm 10\ \text{V}, \quad R_L = 10\ \text{k}\Omega$                   | 25°C          | 30                                 | 230   | V/mV                         |      |
|                |   |  | Full range    | 20                                 |       |                              |      |
|                |   | $V_O = 0\ \text{to}\ 8\ \text{V}, \quad R_L = 600\ \Omega$                 | 25°C          | 25                                 | 100   |                              |      |
|                |   |  | Full range    | 7                                  |       |                              |      |
|                |   | $V_O = 0\ \text{to}\ -8\ \text{V}, \quad R_L = 600\ \Omega$                | 25°C          | 3                                  | 25    |                              |      |
|                |   |  | Full range    | 1                                  |       |                              |      |
| $r_i$          | Input resistance  |  | 25°C          | $10^{12}$                          |       | $\Omega$                     |      |
| $c_i$          | Input capacitance   |  | 25°C          | 4                                  |       | pF                           |      |
| $z_o$          | Open-loop output impedance  | $I_O = 0$  | 25°C          | 560                                |       | $\Omega$                     |      |
| CMRR           | Common-mode rejection ratio   | $V_{IC} = V_{ICR\text{min}}, \quad R_S = 50\ \Omega$                       | 25°C          | 72                                 | 90    | dB                           |      |
|                |   |  | Full range    | 65                                 |       |                              |      |
| $k_{SVR}$      | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V to } \pm 15\ \text{V}, \quad R_S = 50\ \Omega$ | 25°C          | 75                                 | 93    | dB                           |      |
|                |   |  | Full range    | 65                                 |       |                              |      |

$^\dagger$  Full range is  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ .

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER  | TEST CONDITIONS     | $T_A$ †    | TLE2062M<br>TLE2062AM<br>TLE2062BM |     |     | UNIT |
|--|---------------------|------------|------------------------------------|-----|-----|------|
|  |                     |            | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current  | $V_O = 0$ , No load | 25°C       |                                    | 625 | 690 | μA   |
|  |                     | Full range |                                    |     | 730 |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range |                     | Full range |                                    | 97  |     | μA   |

† Full range is –55°C to 125°C.

**TLE2062M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER   | TEST CONDITIONS   | $T_A$ †    | TLE2062M<br>TLE2062AM<br>TLE2062BM |        |     | UNIT   |
|---|---|------------|------------------------------------|--------|-----|--------|
|   |   |            | MIN                                | TYP    | MAX |        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                 | 25°C       | 2                                  | 3.4    |     | V/μs   |
|   |   | Full range | 1.8                                |        |     |        |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10$ Hz, $R_S = 20$ Ω                                     | 25°C       |                                    | 70     |     | nV/√Hz |
|   | $f = 1$ kHz, $R_S = 20$ Ω                                     | 25°C       |                                    | 40     |     |        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1$ Hz to 10 Hz   | 25°C       |                                    | 1.1    |     | μV     |
| $I_n$ Equivalent input noise current                    | $f = 1$ kHz   | 25°C       |                                    | 1.1    |     | fA/√Hz |
| THD Total harmonic distortion                           | $V_{O(PP)} = 2$ V, $R_L = 10$ kΩ, $A_{VD} = 2$ , $f = 10$ kHz | 25°C       |                                    | 0.025% |     |        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                 | 25°C       |                                    | 2      |     | MHz    |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                 | 25°C       |                                    | 1.5    |     |        |
| Settling time   | 0.1%  | 25°C       |                                    | 5      |     | μs     |
|   | 0.01%   | 25°C       |                                    | 10     |     |        |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10$ kΩ                                  | 25°C       |                                    | 40     |     | kHz    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10$ kΩ, $C_L = 100$ pF                                 | 25°C       |                                    | 60°    |     |        |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                 | 25°C       |                                    | 70°    |     |        |

† Full range is –55°C to 125°C.

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2062Y electrical characteristics at  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER  | TEST CONDITIONS   | TLE2062Y        |                 |     | UNIT                    |
|--|---|-----------------|-----------------|-----|-------------------------|
|  |   | MIN             | TYP             | MAX |                         |
| $V_{IO}$ Input offset voltage  | $V_{IC} = 0$ , $R_S = 50\ \Omega$   |                 | 0.9             | 4   | mV                      |
| $\alpha V_{IO}$ Input offset voltage long-term drift (see Note 4)          |   |                 | 0.04            |     | $\mu\text{V}/\text{mo}$ |
| $I_{IO}$ Input offset current  |   |                 | 2               |     | pA                      |
| $I_{IB}$ Input bias current  |   |                 | 4               |     | pA                      |
| $V_{ICR}$ Common-mode input voltage range                                  |   | -11<br>to<br>13 | -12<br>to<br>16 |     | V                       |
| $V_{OM+}$ Maximum positive peak output voltage swing                       | $R_L = 10\ \text{k}\Omega$  | 13.2            | 13.7            |     | V                       |
|  | $R_L = 600\ \Omega$   | 12.5            | 13.2            |     |                         |
| $V_{OM-}$ Maximum negative peak output voltage swing                       | $R_L = 10\ \text{k}\Omega$  | -13.2           | -13.7           |     | V                       |
|  | $R_L = 600\ \Omega$   | -12.5           | -13             |     |                         |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_O = \pm 10\ \text{V}$ , $R_L = 10\ \text{k}\Omega$                       | 30              | 230             |     | V/mV                    |
|  | $V_O = 0$ to $8\ \text{V}$ , $R_L = 600\ \Omega$                            | 25              | 100             |     |                         |
|  | $V_O = 0$ to $-8\ \text{V}$ , $R_L = 600\ \Omega$                           | 3               | 25              |     |                         |
| $r_i$ Input resistance   |   |                 | $10^{12}$       |     | $\Omega$                |
| $c_i$ Input capacitance  |   |                 | 4               |     | pF                      |
| $z_o$ Open-loop output impedance   | $I_O = 0$   |                 | 560             |     | $\Omega$                |
| CMRR Common-mode rejection ratio   | $V_{IC} = V_{ICR\text{min}}$ , $R_S = 50\ \Omega$                           | 72              | 90              |     | dB                      |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}$ to $\pm 15\ \text{V}$ ,<br>$R_S = 50\ \Omega$ | 75              | 93              |     | dB                      |
| $I_{CC}$ Supply current  | $V_O = 0$ , No load   |                 | 625             | 690 | $\mu\text{A}$           |

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.

**TLE2062Y operating characteristics at  $V_{CC\pm} = \pm 15\ \text{V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   | TEST CONDITIONS   | TLE2062Y |        |     | UNIT                         |
|---|---|----------|--------|-----|------------------------------|
|   |   | MIN      | TYP    | MAX |                              |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\ \text{k}\Omega$ , $C_L = 100\ \text{pF}$   | 2.6      | 3.4    | 4   | $\text{V}/\mu\text{s}$       |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\ \text{Hz}$ , $R_S = 20\ \Omega$  |          | 70     |     | $\text{nV}/\sqrt{\text{Hz}}$ |
|   | $f = 1\ \text{kHz}$ , $R_S = 20\ \Omega$  |          | 40     |     |                              |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\ \text{Hz}$ to $10\ \text{Hz}$   |          | 1.1    |     | $\mu\text{V}$                |
| $I_n$ Equivalent input noise current                    | $f = 1\ \text{Hz}$  |          | 1.1    |     | $\text{fA}/\sqrt{\text{Hz}}$ |
| THD Total harmonic distortion                           | $V_{O(PP)} = 2\ \text{V}$ , $R_L = 10\ \text{k}\Omega$ ,<br>$A_{VD} = 2$ , $f = 10\ \text{kHz}$ |          | 0.025% |     |                              |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\ \text{k}\Omega$ , $C_L = 100\ \text{pF}$   |          | 2      |     | MHz                          |
|   | $R_L = 600\ \Omega$ , $C_L = 100\ \text{pF}$  |          | 1.5    |     |                              |
| Settling time   | 0.1%  |          | 5      |     | $\mu\text{s}$                |
|   | 0.01%   |          | 10     |     |                              |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\ \text{k}\Omega$   |          | 40     |     | kHz                          |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\ \text{k}\Omega$ , $C_L = 100\ \text{pF}$   |          | 60°    |     |                              |
|   | $R_L = 600\ \Omega$ , $C_L = 100\ \text{pF}$  |          | 70°    |     |                              |



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER      |   | TEST CONDITIONS  | $T_A$ †    | TLE2064C<br>TLE2064AC<br>TLE2064BC |          |                              | UNIT |
|----------------|---|--|------------|------------------------------------|----------|------------------------------|------|
|                |   |  |            | MIN                                | TYP      | MAX                          |      |
| $V_{IO}$       | Input offset voltage  | $V_{IC} = 0, R_S = 50\ \Omega$   | 25°C       | 1.2                                | 7        | mV                           |      |
|                |   |  | Full range |                                    | 7.9      |                              |      |
|                |   |  | 25°C       | 1.2                                | 6        |                              |      |
|                |   |  | Full range |                                    | 6.9      |                              |      |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage                       | $V_{IC} = 0, R_S = 50\ \Omega$   | 25°C       | 6                                  |          | $\mu\text{V}/^\circ\text{C}$ |      |
|                |   |  | Full range | 0.04                               |          | $\mu\text{V}/\text{mo}$      |      |
| $I_{IO}$       | Input offset current  | $V_{IC} = 0, R_S = 50\ \Omega$   | 25°C       | 1                                  |          | pA                           |      |
|                |   |  | Full range |                                    | 0.8      | nA                           |      |
| $I_{IB}$       | Input bias current  | $V_{IC} = 0, R_S = 50\ \Omega$   | 25°C       | 3                                  |          | pA                           |      |
|                |   |  | Full range |                                    | 2        | nA                           |      |
| $V_{ICR}$      | Common-mode input voltage range                                       |  | 25°C       | -1.6 to 4                          | -2 to 6  | V                            |      |
|                |   |  | Full range | -1.6 to 4                          |          | V                            |      |
| $V_{OM+}$      | Maximum positive peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$   | 25°C       | 3.5                                | 3.7      | V                            |      |
|                |   |  | Full range | 3.3                                |          |                              |      |
|                |   | $R_L = 100\ \Omega$  | 25°C       | 2.5                                | 3.1      |                              |      |
|                |   |  | Full range | 2                                  |          |                              |      |
| $V_{OM-}$      | Maximum negative peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$   | 25°C       | -3.7                               | -3.9     | V                            |      |
|                |   |  | Full range | -3.3                               |          |                              |      |
|                |   | $R_L = 100\ \Omega$  | 25°C       | -2.5                               | -2.7     |                              |      |
|                |   |  | Full range | -2                                 |          |                              |      |
| $A_{VD}$       | Large-signal differential voltage amplification                       | $V_O = \pm 2.8\ \text{V}, R_L = 10\ \text{k}\Omega$                          | 25°C       | 15                                 | 80       | V/mV                         |      |
|                |   |  | Full range | 2                                  |          |                              |      |
|                |   | $V_O = 0\ \text{to}\ 2\ \text{V}, R_L = 100\ \Omega$                         | 25°C       | 0.75                               | 45       |                              |      |
|                |   |  | Full range | 0.5                                |          |                              |      |
|                |   | $V_O = 0\ \text{to}\ -2\ \text{V}, R_L = 100\ \Omega$                        | 25°C       | 0.5                                | 3        |                              |      |
|                |   |  | Full range | 0.15                               |          |                              |      |
| $r_i$          | Input resistance  |  | 25°C       | $10^{12}$                          | $\Omega$ |                              |      |
| $c_i$          | Input capacitance   |  | 25°C       | 4                                  | pF       |                              |      |
| $z_o$          | Open-loop output impedance  | $I_O = 0$  | 25°C       | 560                                | $\Omega$ |                              |      |
| CMRR           | Common-mode rejection ratio   | $V_{IC} = V_{ICRmin}, R_S = 50\ \Omega$                                      | 25°C       | 65                                 | 82       | dB                           |      |
|                |   |  | Full range | 65                                 |          |                              |      |
| $k_{SVR}$      | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}\ \text{to}\ \pm 15\ \text{V}, R_S = 50\ \Omega$ | 25°C       | 75                                 | 93       | dB                           |      |
|                |   |  | Full range | 75                                 |          |                              |      |

† Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.





**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS                      | $T_A$ †    | TLE2064C<br>TLE2064AC<br>TLE2064BC |     |     | UNIT |
|--|--------------------------------------|------------|------------------------------------|-----|-----|------|
|  |                                      |            | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current (four amplifiers)  | $V_O = 0$ , No load                  | 25°C       | 1.12                               | 1.3 |     | mA   |
|  |                                      | Full range |                                    | 1.3 |     |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range (four amplifiers) |                                      | Full range | 52                                 |     |     | μA   |
| $V_{O1}/V_{O2}$ Crosstalk attenuation  | $A_{VD} = 1000$ , $f = 1\text{ kHz}$ | 25°C       | 120                                |     |     | dB   |

† Full range is 0°C to 70°C.

**TLE2064C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2064C<br>TLE2064AC<br>TLE2064BC |     |     | UNIT   |
|---|--|------------|------------------------------------|-----|-----|--------|
|   |  |            | MIN                                | TYP | MAX |        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 2.2                                | 3.4 |     | V/μs   |
|   |  | Full range | 2.1                                |     |     |        |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 25°C       |                                    | 59  | 100 | nV/√Hz |
|   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  |            |                                    | 43  | 60  |        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }10\text{ Hz}$  | 25°C       | 1.1                                |     |     | μV     |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 25°C       | 1                                  |     |     | fA/√Hz |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10\text{ kHz}$ ,<br>$V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ | 25°C       | 0.025%                             |     |     |        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 1.8                                |     |     | MHz    |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  |            | 1.3                                |     |     |        |
| $t_s$ Settling time                                     | $\epsilon = 0.1\%$   | 25°C       | 5                                  |     |     | μs     |
|   | $\epsilon = 0.01\%$  |            | 10                                 |     |     |        |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 25°C       | 140                                |     |     | kHz    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C       | 58°                                |     |     |        |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  |            | 75°                                |     |     |        |

† Full range is 0°C to 70°C.

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$  (unless otherwise noted)**

| PARAMETER   |  | TEST CONDITIONS                | $T_A$ †    | TLE2064C<br>TLE2064AC<br>TLE2064BC |                              |     | UNIT |
|---|--|--------------------------------|------------|------------------------------------|------------------------------|-----|------|
|   |  |                                |            | MIN                                | TYP                          | MAX |      |
| $V_{IO}$ Input offset voltage   | TLE2064C   | $V_{IC} = 0, R_S = 50\ \Omega$ | 25°C       | 0.9                                | 6                            | mV  |      |
|   |  |                                | Full range | 6.9                                |                              |     |      |
|   | TLE2064AC  |                                | 25°C       | 0.9                                | 4                            |     |      |
|   |  |                                | Full range | 4.9                                |                              |     |      |
|   | TLE2064BC  |                                | 25°C       | 0.7                                | 2                            |     |      |
|   |  |                                | Full range | 4                                  |                              |     |      |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |  | 25°C                           | 6          |                                    | $\mu\text{V}/^\circ\text{C}$ |     |      |
| Input offset voltage long-term drift (see Note 4)                               |  | Full range                     | 0.04       |                                    | $\mu\text{V}/\text{mo}$      |     |      |
| $I_{IO}$ Input offset current   |  | 25°C                           | 2          |                                    | pA                           |     |      |
| $I_{IB}$ Input bias current   |  | Full range                     | 1          |                                    | nA                           |     |      |
|   |  | 25°C                           | 4          |                                    | pA                           |     |      |
| $V_{ICR}$ Common-mode input voltage range                                       |  | Full range                     | 3          |                                    | nA                           |     |      |
|   |  | 25°C                           | -11 to 13  | -12 to 16                          | V                            |     |      |
| $V_{OM+}$ Maximum positive peak output voltage swing                            |  | Full range                     | -11 to 13  |                                    | V                            |     |      |
|   | $R_L = 10\ \text{k}\Omega$   | 25°C                           | 13.2       | 13.7                               | V                            |     |      |
| $R_L = 600\ \Omega$   | Full range   | 13                             |            |                                    |                              |     |      |
|   | 25°C   | 12.5                           | 13.2       | V                                  |                              |     |      |
| Full range  | 12   |                                |            |                                    |                              |     |      |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$   | 25°C                           | -13.2      | -13.7                              | V                            |     |      |
|   |  | Full range                     | -13        |                                    |                              |     |      |
|   | $R_L = 600\ \Omega$  | 25°C                           | -12.5      | -13                                |                              |     |      |
|   |  | Full range                     | -12        |                                    |                              |     |      |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10\ \text{V}, R_L = 10\ \text{k}\Omega$                   | 25°C                           | 30         | 230                                | V/mV                         |     |      |
|   |  | Full range                     | 20         |                                    |                              |     |      |
|   | $V_O = 0\ \text{to}\ 8\ \text{V}, R_L = 600\ \Omega$                 | 25°C                           | 25         | 100                                |                              |     |      |
|   |  | Full range                     | 10         |                                    |                              |     |      |
|   | $V_O = 0\ \text{to}\ -8\ \text{V}, R_L = 600\ \Omega$                | 25°C                           | 3          | 25                                 |                              |     |      |
|   |  | Full range                     | 1          |                                    |                              |     |      |
| $r_i$ Input resistance  |  | 25°C                           | $10^{12}$  |                                    | $\Omega$                     |     |      |
| $c_i$ Input capacitance   |  | 25°C                           | 4          |                                    | pF                           |     |      |
| $z_o$ Open-loop output impedance  | $I_O = 0$  | 25°C                           | 560        |                                    | $\Omega$                     |     |      |
| CMRR Common-mode rejection ratio  | $V_{IC} = V_{ICRmin}, R_S = 50\ \Omega$                              | 25°C                           | 72         | 90                                 | dB                           |     |      |
|   |  | Full range                     | 70         |                                    |                              |     |      |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V to } \pm 15\ \text{V}, R_S = 50\ \Omega$ | 25°C                           | 75         | 93                                 | dB                           |     |      |
|   |  | Full range                     | 75         |                                    |                              |     |      |

† Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS                  | $T_A$ †    | TLE2064C<br>TLE2064AC<br>TLE2064BC |     |     | UNIT |
|--|----------------------------------|------------|------------------------------------|-----|-----|------|
|  |                                  |            | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current (four amplifiers)  | $V_O = 0$ ,<br>No load           | 25°C       | 1.25                               | 1.4 | mA  |      |
|  |                                  | Full range | 1.5                                |     |     |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range (four amplifiers) |                                  | Full range | 72                                 |     | μA  |      |
| $V_{O1}/V_{O2}$ Crosstalk attenuation  | $A_{VD} = 1000$ ,<br>$f = 1$ kHz | 25°C       | 120                                |     | dB  |      |

† Full range is 0°C to 70°C.

**TLE2064C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER   | TEST CONDITIONS   | $T_A$ †    | TLE2064C<br>TLE2064AC<br>TLE2064BC |     |                | UNIT |
|---|---|------------|------------------------------------|-----|----------------|------|
|   |   |            | MIN                                | TYP | MAX            |      |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                       | 25°C       | 2.6                                | 3.4 | V/μs           |      |
|   |   | Full range | 2.5                                |     |                |      |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10$ Hz, $R_S = 20$ Ω   | 25°C       | 70                                 | 100 | $nV/\sqrt{Hz}$ |      |
|   | $f = 1$ kHz, $R_S = 20$ Ω   |            | 40                                 | 60  |                |      |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1$ Hz to 10 Hz   | 25°C       | 1.1                                |     | μV             |      |
| $I_n$ Equivalent input noise current                    | $f = 1$ kHz   | 25°C       | 1                                  |     | fA/√Hz         |      |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $V_{O(PP)} = 2$ V,<br>$f = 10$ kHz,<br>$R_L = 10$ kΩ | 25°C       | 0.025%                             |     |                |      |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                       | 25°C       | 2                                  |     | MHz            |      |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                       |            | 1.5                                |     |                |      |
| $t_s$ Settling time                                     | $\epsilon = 0.1\%$  | 25°C       | 5                                  |     | μs             |      |
|   | $\epsilon = 0.01\%$   |            | 10                                 |     |                |      |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10$ kΩ  | 25°C       | 40                                 |     | kHz            |      |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10$ kΩ, $C_L = 100$ pF                                       | 25°C       | 50°                                |     |                |      |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                       |            | 70°                                |     |                |      |

† Full range is 0°C to 70°C.

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER   |   | TEST CONDITIONS   | $T_A$ †    | TLE2064I<br>TLE2064AI<br>TLE2064BI |               |                              | UNIT |
|---|---|---|------------|------------------------------------|---------------|------------------------------|------|
|   |   |   |            | MIN                                | TYP           | MAX                          |      |
| $V_{IO}$  | Input offset voltage  | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$   | 25°C       | 1.2                                | 7             | mV                           |      |
|   |   |   | Full range | 8.3                                |               |                              |      |
|   |   |   | 25°C       | 1.2                                | 6             |                              |      |
|   |   |   | Full range | 7.3                                |               |                              |      |
| $\alpha_{VIO}$                                    | Temperature coefficient of input offset voltage                       | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$   | 25°C       | 0.8                                | 3.5           | $\mu\text{V}/^\circ\text{C}$ |      |
|   |   |   | Full range | 4.8                                |               |                              |      |
| Input offset voltage long-term drift (see Note 4) |   | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$   | 25°C       | 6                                  |               | $\mu\text{V}/\text{mo}$      |      |
|   |   |   | Full range | 0.04                               |               |                              |      |
| $I_{IO}$  | Input offset current  | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$   | 25°C       | 1                                  |               | pA                           |      |
|   |   |   | Full range | 2                                  |               | nA                           |      |
| $I_{IB}$  | Input bias current  | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$   | 25°C       | 3                                  |               | pA                           |      |
|   |   |   | Full range | 4                                  |               | nA                           |      |
| $V_{ICR}$   | Common-mode input voltage range                                       |   | 25°C       | -1.6<br>to<br>4                    | -2<br>to<br>6 | V                            |      |
|   |   |   | Full range | -1.6<br>to<br>4                    |               | V                            |      |
| $V_{OM+}$   | Maximum positive peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$  | 25°C       | 3.5                                | 3.7           | V                            |      |
|   |   |   | Full range | 3.1                                |               |                              |      |
|   |   | $R_L = 100\ \Omega$   | 25°C       | 2.5                                | 3.1           |                              |      |
|   |   |   | Full range | 2                                  |               |                              |      |
| $V_{OM-}$   | Maximum negative peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$  | 25°C       | -3.7                               | -3.9          | V                            |      |
|   |   |   | Full range | -3.1                               |               |                              |      |
|   |   | $R_L = 100\ \Omega$   | 25°C       | -2.5                               | -2.7          |                              |      |
|   |   |   | Full range | -2                                 |               |                              |      |
| $A_{VD}$  | Large-signal differential voltage amplification                       | $V_O = \pm 2.8\ \text{V},$<br>$R_L = 10\ \text{k}\Omega$                          | 25°C       | 15                                 | 80            | V/mV                         |      |
|   |   |   | Full range | 2                                  |               |                              |      |
|   |   | $V_O = 0\ \text{to}\ 2\ \text{V},$<br>$R_L = 100\ \Omega$                         | 25°C       | 0.75                               | 45            |                              |      |
|   |   |   | Full range | 0.5                                |               |                              |      |
|   |   | $V_O = 0\ \text{to}\ -2\ \text{V},$<br>$R_L = 100\ \Omega$                        | 25°C       | 0.5                                | 3             |                              |      |
|   |   |   | Full range | 0.15                               |               |                              |      |
| $r_i$   | Input resistance  |   | 25°C       | $10^{12}$                          |               | $\Omega$                     |      |
| $c_i$   | Input capacitance   |   | 25°C       | 4                                  |               | pF                           |      |
| $z_o$   | Open-loop output impedance  | $I_O = 0$   | 25°C       | 560                                |               | $\Omega$                     |      |
| CMRR  | Common-mode rejection ratio   | $V_{IC} = V_{ICR\text{min}},$<br>$R_S = 50\ \Omega$                               | 25°C       | 65                                 | 82            | dB                           |      |
|   |   |   | Full range | 65                                 |               |                              |      |
| $k_{SVR}$   | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}\ \text{to}\ \pm 15\ \text{V},$<br>$R_S = 50\ \Omega$ | 25°C       | 75                                 | 93            | dB                           |      |
|   |   |   | Full range | 65                                 |               |                              |      |

† Full range is -40°C to 85°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS                      | $T_A^\dagger$ | TLE2064I<br>TLE2064AI<br>TLE2064BI |     |     | UNIT |
|--|--------------------------------------|---------------|------------------------------------|-----|-----|------|
|  |                                      |               | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current (four amplifiers)  | $V_O = 0$ , No load                  | 25°C          | 1.12                               | 1.3 | mA  |      |
|  |                                      | Full range    | 1.3                                |     |     |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range (four amplifiers) |                                      | Full range    | 108                                |     | μA  |      |
| $V_{O1}/V_{O2}$ Crosstalk attenuation  | $A_{VD} = 1000$ , $f = 1\text{ kHz}$ | 25°C          | 120                                |     | dB  |      |

† Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

**TLE2064I operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER   | TEST CONDITIONS  | $T_A^\dagger$ | TLE2064I<br>TLE2064AI<br>TLE2064BI |     |                              | UNIT |
|---|--|---------------|------------------------------------|-----|------------------------------|------|
|   |  |               | MIN                                | TYP | MAX                          |      |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C          | 2.2                                | 3.4 | V/μs                         |      |
|   |  | Full range    | 1.7                                |     |                              |      |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 25°C          | 59                                 | 100 | $\text{nV}/\sqrt{\text{Hz}}$ |      |
|   | $f = 1\text{ kHz}$ , $f = 1\text{ kHz}$  |               | 43                                 | 60  |                              |      |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz}$ to $10\text{ Hz}$  | 25°C          | 1.1                                |     | μV                           |      |
| $I_n$ Equivalent input noise current                    | $f = 1\text{ kHz}$   | 25°C          | 1                                  |     | $\text{fA}/\sqrt{\text{Hz}}$ |      |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10\text{ kHz}$ ,<br>$V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ | 25°C          | 0.025%                             |     |                              |      |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C          | 1.8                                |     | MHz                          |      |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  |               | 1.3                                |     |                              |      |
| $t_s$ Settling time                                     | $\epsilon = 0.1\%$   | 25°C          | 5                                  |     | μs                           |      |
|   | $\epsilon = 0.01\%$  |               | 10                                 |     |                              |      |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 25°C          | 140                                |     | kHz                          |      |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 25°C          | 58°                                |     |                              |      |
|   | $R_L = 100\ \Omega$ , $C_L = 100\text{ pF}$  |               | 75°                                |     |                              |      |

† Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$  (unless otherwise noted)**

| PARAMETER      |   | TEST CONDITIONS   | $T_A$ †    | TLE2064I<br>TLE2064AI<br>TLE2064BI |           |          | UNIT |                              |
|----------------|---|---|------------|------------------------------------|-----------|----------|------|------------------------------|
|                |   |   |            | MIN                                | TYP       | MAX      |      |                              |
| $V_{IO}$       | Input offset voltage  | $V_{IC} = 0,$<br>$R_S = 50\ \Omega$   | 25°C       | 0.9                                | 6         | mV       |      |                              |
|                |   |   | Full range | 7.3                                |           |          |      |                              |
|                |   |   | 25°C       | 0.9                                | 4         |          |      |                              |
|                |   |   | Full range | 5.3                                |           |          |      |                              |
|                |   |   | 25°C       | 0.7                                | 2         |          |      |                              |
|                |   |   | Full range | 3.3                                |           |          |      |                              |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage                       |   |            | 25°C                               | 6         |          |      | $\mu\text{V}/^\circ\text{C}$ |
|                | Input offset voltage long-term drift (see Note 4)                     |   |            | Full range                         | 0.04      |          |      | $\mu\text{V}/\text{mo}$      |
| $I_{IO}$       | Input offset current  |   | 25°C       | 2                                  |           | pA       |      |                              |
|                |   |   | Full range | 3                                  |           | nA       |      |                              |
| $I_{IB}$       | Input bias current  |   | 25°C       | 4                                  |           | pA       |      |                              |
|                |   |   | Full range | 5                                  |           | nA       |      |                              |
| $V_{ICR}$      | Common-mode input voltage range                                       |   | 25°C       | -11 to 13                          | -12 to 16 | V        |      |                              |
|                |   |   | Full range | -11 to 13                          |           | V        |      |                              |
| $V_{OM+}$      | Maximum positive peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$  | 25°C       | 13.2                               | 13.7      | V        |      |                              |
|                |   |   | Full range | 13                                 |           |          |      |                              |
|                |   |   | 25°C       | 12.5                               | 13.2      |          |      |                              |
|                |   |   | Full range | 12                                 |           |          |      |                              |
| $V_{OM-}$      | Maximum negative peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$  | 25°C       | -13.2                              | -13.7     | V        |      |                              |
|                |   |   | Full range | -13                                |           |          |      |                              |
|                |   |   | 25°C       | -12.5                              | -13       |          |      |                              |
|                |   |   | Full range | -12                                |           |          |      |                              |
| $A_{VD}$       | Large-signal differential voltage amplification                       | $V_O = \pm 10\ \text{V},$<br>$R_L = 10\ \text{k}\Omega$                           | 25°C       | 30                                 | 230       | V/mV     |      |                              |
|                |   |   | Full range | 20                                 |           |          |      |                              |
|                |   | $V_O = 0\ \text{to}\ 8\ \text{V},$<br>$R_L = 600\ \Omega$                         | 25°C       | 25                                 | 100       |          |      |                              |
|                |   |   | Full range | 10                                 |           |          |      |                              |
|                |   | $V_O = 0\ \text{to}\ -8\ \text{V},$<br>$R_L = 600\ \Omega$                        | 25°C       | 3                                  | 25        |          |      |                              |
|                |   |   | Full range | 1                                  |           |          |      |                              |
| $r_i$          | Input resistance  |   | 25°C       | $10^{12}$                          |           | $\Omega$ |      |                              |
| $c_i$          | Input capacitance   |   | 25°C       | 4                                  |           | pF       |      |                              |
| $z_o$          | Open-loop output impedance  | $I_O = 0$   | 25°C       | 560                                |           | $\Omega$ |      |                              |
| CMRR           | Common-mode rejection ratio   | $V_{IC} = V_{ICRmin},$<br>$R_S = 50\ \Omega$                                      | 25°C       | 72                                 | 90        | dB       |      |                              |
|                |   |   | Full range | 65                                 |           |          |      |                              |
| $k_{SVR}$      | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}\ \text{to}\ \pm 15\ \text{V},$<br>$R_S = 50\ \Omega$ | 25°C       | 75                                 | 93        | dB       |      |                              |
|                |   |   | Full range | 65                                 |           |          |      |                              |

† Full range is -40°C to 85°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS               | $T_A$ †    | TLE2064I<br>TLE2064AI<br>TLE2064BI |     |     | UNIT |
|--|-------------------------------|------------|------------------------------------|-----|-----|------|
|  |                               |            | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current (four amplifiers)  | $V_O = 0$ , No load           | 25°C       | 1.25                               | 1.4 | mA  |      |
|  |                               | Full range | 1.5                                |     |     |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range (four amplifiers) |                               | Full range | 148                                |     | μA  |      |
| $V_{O1}/V_{O2}$ Crosstalk attenuation  | $A_{VD} = 1000$ , $f = 1$ kHz | 25°C       | 120                                |     | dB  |      |

† Full range is – 40°C to 85°C.

**TLE2064I operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2064I<br>TLE2064AI<br>TLE2064BI |     |                | UNIT |
|---|--|------------|------------------------------------|-----|----------------|------|
|   |  |            | MIN                                | TYP | MAX            |      |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                    | 25°C       | 2.6                                | 3.4 | V/μs           |      |
|   |  | Full range | 2.1                                |     |                |      |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10$ Hz, $R_S = 20$ Ω,<br>$f = 1$ kHz, $R_S = 20$ Ω          | 25°C       | 70                                 | 100 | $nV/\sqrt{Hz}$ |      |
|   |  |            | 40                                 | 60  |                |      |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1$ Hz to 10 Hz  | 25°C       | 1.1                                |     | μV             |      |
| $I_n$ Equivalent input noise current                    | $f = 1$ kHz  | 25°C       | 1.1                                |     | $fA/\sqrt{Hz}$ |      |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10$ kHz,<br>$R_L = 10$ kΩ $V_{O(PP)} = 2$ V, | 25°C       | 0.025%                             |     |                |      |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                    | 25°C       | 2                                  |     | MHz            |      |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                    |            | 1.5                                |     |                |      |
| $t_s$ Settling time                                     | $\epsilon = 0.1\%$   | 25°C       | 5                                  |     | μs             |      |
|   | $\epsilon = 0.01\%$  |            | 10                                 |     |                |      |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10$ kΩ                                     | 25°C       | 40                                 |     | kHz            |      |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10$ kΩ, $C_L = 100$ pF                                    | 25°C       | 60°                                |     |                |      |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                    |            | 70°                                |     |                |      |

† Full range is – 40°C to 85°C.

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER      |   | TEST CONDITIONS                                     | $T_A$ †   | TLE2064M<br>TLE2064AM<br>TLE2064BM |         |                              | UNIT |
|----------------|---|---|---|------------------------------------|---------|------------------------------|------|
|                |   |   |   | MIN                                | TYP     | MAX                          |      |
| $V_{IO}$       | Input offset voltage                              | $V_{IC} = 0, R_S = 50\ \Omega$                      | 25°C  | 1.2                                | 7       | mV                           |      |
|                |   |   | Full range  |                                    | 9       |                              |      |
|                |   |   | 25°C  | 1.2                                | 6       |                              |      |
|                |   |   | Full range  |                                    | 8       |                              |      |
|                |   |   | 25°C  | 0.8                                | 3.5     |                              |      |
|                |   |   | Full range  |                                    | 5.5     |                              |      |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage   | $V_{IC} = 0, R_S = 50\ \Omega$                      | 25°C  | 6                                  |         | $\mu\text{V}/^\circ\text{C}$ |      |
|                | Input offset voltage long-term drift (see Note 4) |   | Full range  | 0.04                               |         | $\mu\text{V}/\text{mo}$      |      |
| $I_{IO}$       | Input offset current                              |   | 25°C  | 1                                  |         | pA                           |      |
|                |   |   | Full range  |                                    | 15      | nA                           |      |
| $I_{IB}$       | Input bias current                                |   | 25°C  | 3                                  |         | pA                           |      |
|                |   |   | Full range  |                                    | 30      | nA                           |      |
| $V_{ICR}$      | Common-mode input voltage range                   |   | 25°C  | -1.6 to 4                          | -2 to 6 | V                            |      |
|                |   |   | Full range  | -1.6 to 4                          |         | V                            |      |
| $V_{OM+}$      | Maximum positive peak output voltage swing        | $R_L = 10\ \text{k}\Omega$                          | 25°C  | 3.5                                | 3.7     | V                            |      |
|                |   |   | Full range  |                                    | 3       |                              |      |
|                |   | FK and J packages                                   | $R_L = 600\ \Omega$                                     | 25°C                               | 2.5     |                              | 3.6  |
|                |   |   |   | Full range                         |         |                              | 2    |
|                |   | D and N packages                                    | $R_L = 100\ \Omega$                                     | 25°C                               | 2.5     |                              | 3.1  |
|                |   |   |   | Full range                         |         |                              | 2    |
| $V_{OM-}$      | Maximum negative peak output voltage swing        | $R_L = 10\ \text{k}\Omega$                          | 25°C  | -3.5                               | -3.9    | V                            |      |
|                |   |   | Full range  |                                    | -3      |                              |      |
|                |   | FK and J packages                                   | $R_L = 600\ \Omega$                                     | 25°C                               | -2.5    |                              | -3.5 |
|                |   |   |   | Full range                         |         |                              | -2   |
|                |   | D and N packages                                    | $R_L = 100\ \Omega$                                     | 25°C                               | -2.5    |                              | -2.7 |
|                |   |   |   | Full range                         |         |                              | -2   |
| $A_{VD}$       | Large-signal differential voltage amplification   | $V_O = \pm 2.8\ \text{V}, R_L = 10\ \text{k}\Omega$ | 25°C  | 15                                 | 80      | V/mV                         |      |
|                |   |   | Full range  |                                    | 2       |                              |      |
|                |   | FK and J packages                                   | $V_O = 0\ \text{to}\ 2.5\ \text{V}, R_L = 600\ \Omega$  | 25°C                               | 1       |                              | 65   |
|                |   |   |   | Full range                         |         |                              | 0.5  |
|                |   |   | $V_O = 0\ \text{to}\ -2.5\ \text{V}, R_L = 600\ \Omega$ | 25°C                               | 1       |                              | 16   |
|                |   |   |   | Full range                         |         |                              | 0.5  |

† Full range is -55°C to 125°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.





**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted) continued)**

| PARAMETER       |  | TEST CONDITIONS   | $T_A^\dagger$                                   | TLE2064M<br>TLE2064AM<br>TLE2064BM |      |               | UNIT |
|-----------------|--|---|---|------------------------------------|------|---------------|------|
|                 |  |   |   | MIN                                | TYP  | MAX           |      |
| $A_{VD}$        | Large-signal differential voltage amplification                          | D and N packages  | $V_O = 0$ to $2\text{ V}$ , $R_L = 100\ \Omega$ | 25°C                               | 0.75 | 45            | V/mV |
|                 |  |   |   | Full range                         | 0.25 |               |      |
|                 |  | $V_O = 0$ to $-2\text{ V}$ , $R_L = 100\ \Omega$                          | 25°C  | 0.4                                | 3    |               |      |
|                 |  |   | Full range                                      | 0.15                               |      |               |      |
| $r_i$           | Input resistance   |   | 25°C  | 10 <sup>12</sup>                   |      | $\Omega$      |      |
| $c_i$           | Input capacitance  |   | 25°C  | 4                                  |      | pF            |      |
| $z_o$           | Open-loop output impedance   | $I_O = 0$   | 25°C  | 560                                |      | $\Omega$      |      |
| CMRR            | Common-mode rejection ratio  | $V_{IC} = V_{ICRmin}$ , $R_S = 50\ \Omega$                                | 25°C  | 65                                 | 82   | dB            |      |
|                 |  |   | Full range                                      | 60                                 |      |               |      |
| $k_{SVR}$       | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ )    | $V_{CC\pm} = \pm 5\text{ V}$ to $\pm 15\text{ V}$ ,<br>$R_S = 50\ \Omega$ | 25°C  | 75                                 | 93   | dB            |      |
|                 |  |   | Full range                                      | 65                                 |      |               |      |
| $I_{CC}$        | Supply current (four amplifiers)   | $V_O = 0$ , No load   | 25°C  | 1.12                               | 1.3  | mA            |      |
|                 |  |   | Full range                                      | 1.3                                |      |               |      |
| $\Delta I_{CC}$ | Supply-current change over operating temperature range (four amplifiers) |   | Full range                                      | 144                                |      | $\mu\text{A}$ |      |
|                 |  |   |   |                                    |      |               |      |
| $V_{O1}/V_{O2}$ | Crosstalk attenuation  | $A_{VD} = 1000$ , $f = 1\text{ kHz}$                                      | 25°C  | 120                                |      | dB            |      |

$^\dagger$  Full range is  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ .

**TLE2064M operating characteristics,  $V_{CC\pm} = \pm 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER   |   | TEST CONDITIONS  | TLE2064M<br>TLE2064AM<br>TLE2064BM |     |     | UNIT                   |
|-------------|---|--|------------------------------------|-----|-----|------------------------|
|             |   |  | MIN                                | TYP | MAX |                        |
| SR          | Slew rate at unity gain (see Figure 1)        | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 3.4                                |     |     | V/ $\mu\text{s}$       |
| $V_n$       | Equivalent input noise voltage (see Figure 2) | $f = 10\text{ Hz}$ , $R_S = 20\ \Omega$  | 59                                 |     |     | nV/ $\sqrt{\text{Hz}}$ |
|             |   | $f = 1\text{ kHz}$ , $R_S = 20\ \Omega$  | 43                                 |     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage   | $f = 0.1\text{ Hz}$ to $10\text{ Hz}$  | 1.1                                |     |     | $\mu\text{V}$          |
| $I_n$       | Equivalent input noise current                | $f = 1\text{ kHz}$   | 1                                  |     |     | fA/ $\sqrt{\text{Hz}}$ |
| THD         | Total harmonic distortion                     | $A_{VD} = 2$ , $f = 10\text{ kHz}$ ,<br>$V_{O(PP)} = 2\text{ V}$ , $R_L = 10\text{ k}\Omega$ | 0.025%                             |     |     |                        |
| $B_1$       | Unity-gain bandwidth (see Figure 3)           | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 1.8                                |     |     | MHz                    |
|             |   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  | 1.3                                |     |     |                        |
| $t_s$       | Settling time                                 | $\epsilon = 0.1\%$   | 5                                  |     |     | $\mu\text{s}$          |
|             |   | $\epsilon = 0.01\%$  | 10                                 |     |     |                        |
| $B_{OM}$    | Maximum output-swing bandwidth                | $A_{VD} = 1$ , $R_L = 10\text{ k}\Omega$   | 140                                |     |     | kHz                    |
| $\phi_m$    | Phase margin at unity gain (see Figure 3)     | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  | 58°                                |     |     |                        |
|             |   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  | 75°                                |     |     |                        |



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15\text{ V}$  (unless otherwise noted)**

| PARAMETER      |   | TEST CONDITIONS  | $T_A$ †    | TLE2064M<br>TLE2064AM<br>TLE2064BM |           |                              | UNIT |
|----------------|---|--|------------|------------------------------------|-----------|------------------------------|------|
|                |   |  |            | MIN                                | TYP       | MAX                          |      |
| $V_{IO}$       | Input offset voltage  | $V_{IC} = 0, R_S = 50\ \Omega$                                       | 25°C       | 0.9                                | 6         | mV                           |      |
|                |   |  | Full range |                                    | 8         |                              |      |
|                |   |  | 25°C       | 0.9                                | 4         |                              |      |
|                |   |  | Full range |                                    | 6         |                              |      |
|                |   |  | 25°C       | 0.7                                | 2         |                              |      |
|                |   |  | Full range |                                    | 4         |                              |      |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage                       | $V_{IC} = 0, R_S = 50\ \Omega$                                       | 25°C       | 6                                  |           | $\mu\text{V}/^\circ\text{C}$ |      |
|                | Input offset voltage long-term drift (see Note 4)                     |  | Full range | 0.04                               |           | $\mu\text{V}/\text{mo}$      |      |
| $I_{IO}$       | Input offset current  |  | 25°C       | 2                                  |           | pA                           |      |
|                |   |  | Full range |                                    | 20        | nA                           |      |
| $I_{IB}$       | Input bias current  |  | 25°C       | 4                                  |           | pA                           |      |
|                |   |  | Full range |                                    | 40        | nA                           |      |
| $V_{ICR}$      | Common-mode input voltage range                                       |  | 25°C       | -11 to 13                          | -12 to 16 | V                            |      |
|                |   |  | Full range | -11 to 13                          |           | V                            |      |
| $V_{OM+}$      | Maximum positive peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$   | 25°C       | 13                                 | 13.7      | V                            |      |
|                |   |  | Full range | 12.5                               |           |                              |      |
|                |   | $R_L = 600\ \Omega$  | 25°C       | 12.5                               | 13.2      |                              |      |
|                |   |  | Full range | 12                                 |           |                              |      |
| $V_{OM-}$      | Maximum negative peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$   | 25°C       | -13                                | -13.7     | V                            |      |
|                |   |  | Full range | -12.5                              |           |                              |      |
|                |   | $R_L = 600\ \Omega$  | 25°C       | -13                                | -13       |                              |      |
|                |   |  | Full range | -12.5                              |           |                              |      |
| $A_{VD}$       | Large-signal differential voltage amplification                       | $V_O = \pm 10\ \text{V}, R_L = 10\ \text{k}\Omega$                   | 25°C       | 30                                 | 230       | V/mV                         |      |
|                |   |  | Full range | 20                                 |           |                              |      |
|                |   | $V_O = 0\ \text{to}\ 8\ \text{V}, R_L = 600\ \Omega$                 | 25°C       | 25                                 | 100       |                              |      |
|                |   |  | Full range | 7                                  |           |                              |      |
|                |   | $V_O = 0\ \text{to}\ -8\ \text{V}, R_L = 600\ \Omega$                | 25°C       | 3                                  | 25        |                              |      |
|                |   |  | Full range | 1                                  |           |                              |      |
| $r_i$          | Input resistance  |  | 25°C       | $10^{12}$                          | $\Omega$  |                              |      |
| $c_i$          | Input capacitance   |  | 25°C       | 4                                  | pF        |                              |      |
| $z_o$          | Open-loop output impedance  | $I_O = 0$  | 25°C       | 560                                | $\Omega$  |                              |      |
| CMRR           | Common-mode rejection ratio   | $V_{IC} = V_{ICRmin}, R_S = 50\ \Omega$                              | 25°C       | 72                                 | 90        | dB                           |      |
|                |   |  | Full range | 65                                 |           |                              |      |
| $k_{SVR}$      | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V to } \pm 15\ \text{V}, R_S = 50\ \Omega$ | 25°C       | 75                                 | 93        | dB                           |      |
|                |   |  | Full range | 65                                 |           |                              |      |

† Full range is -55°C to 125°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TLE2064M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER  | TEST CONDITIONS               | $T_A$ †    | TLE2064M<br>TLE2064AM<br>TLE2064BM |     |     | UNIT |
|--|-------------------------------|------------|------------------------------------|-----|-----|------|
|  |                               |            | MIN                                | TYP | MAX |      |
| $I_{CC}$ Supply current (four amplifiers)  | $V_O = 0$ , No load           | 25°C       | 1.25                               | 1.4 | mA  |      |
|  |                               | Full range | 1.5                                |     |     |      |
| $\Delta I_{CC}$ Supply-current change over operating temperature range (four amplifiers) |                               | Full range | 194                                | μA  |     |      |
| $V_{O1}/V_{O2}$ Crosstalk attenuation  | $A_{VD} = 1000$ , $f = 1$ kHz | 25°C       | 120                                |     | dB  |      |

† Full range is – 55°C to 125°C.

**TLE2064M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER   | TEST CONDITIONS  | $T_A$ †    | TLE2064M<br>TLE2064AM<br>TLE2064BM |     |        | UNIT |
|---|--|------------|------------------------------------|-----|--------|------|
|   |  |            | MIN                                | TYP | MAX    |      |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                    | 25°C       | 2.6                                | 3.4 | V/μs   |      |
|   |  | Full range | 1.8                                |     |        |      |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10$ Hz, $R_S = 20$ Ω  | 25°C       | 70                                 |     | nV/√Hz |      |
|   | $f = 1$ kHz, $R_S = 20$ Ω  |            | 40                                 |     |        |      |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1$ Hz to 10 Hz  | 25°C       | 1.1                                |     | μV     |      |
| $I_n$ Equivalent input noise current                    | $f = 1$ kHz  | 25°C       | 1.1                                |     | fA/√Hz |      |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10$ kHz,<br>$V_{O(PP)} = 2$ V, $R_L = 10$ kΩ | 25°C       | 0.025%                             |     |        |      |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10$ kΩ, $C_L = 100$ pF                                    | 25°C       | 2                                  |     | MHz    |      |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                    |            | 1.5                                |     |        |      |
| $t_s$ Settling time                                     | $\epsilon = 0.1\%$   | 25°C       | 5                                  |     | μs     |      |
|   | $\epsilon = 0.01\%$  |            | 10                                 |     |        |      |
| $B_{OM}$ Maximum output-swing bandwidth                 | $A_{VD} = 1$ , $R_L = 10$ kΩ                                     | 25°C       | 40                                 |     | kHz    |      |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10$ kΩ, $C_L = 100$ pF                                    | 25°C       | 60°                                |     |        |      |
|   | $R_L = 600$ Ω, $C_L = 100$ pF                                    |            | 70°                                |     |        |      |

† Full range is – 55°C to 125°C.

# TLE206x, TLE206xA, TLE206xB EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE μPOWER OPERATIONAL AMPLIFIERS

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

## TLE2064Y electrical characteristics at $V_{CC\pm} = \pm 15\text{ V}$ , $T_A = 25^\circ\text{C}$ (unless otherwise noted)

| PARAMETER   | TEST CONDITIONS  | TLE2064Y        |                 |     | UNIT                    |
|---|--|-----------------|-----------------|-----|-------------------------|
|   |  | MIN             | TYP             | MAX |                         |
| $V_{IO}$ Input offset voltage   | $V_{IC} = 0$ , $R_S = 50\ \Omega$  |                 | 0.9             | 6   | mV                      |
| $\infty V_{IO}$ Input offset voltage long-term drift (see Note 4)               |  |                 | 0.04            |     | $\mu\text{V}/\text{mo}$ |
| $I_{IO}$ Input offset current   |  |                 | 2               |     | pA                      |
| $I_{IB}$ Input bias current   |  |                 | 4               |     | pA                      |
| $V_{ICR}$ Common-mode input voltage range                                       |  | -11<br>to<br>13 | -12<br>to<br>16 |     | V                       |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$   | 13.2            | 13.7            |     | V                       |
|   | $R_L = 600\ \Omega$  | 12.5            | 13.2            |     |                         |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $R_L = 10\ \text{k}\Omega$   | -13.2           | -13.7           |     | V                       |
|   | $R_L = 600\ \Omega$  | 12.5            | 13              |     | V                       |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10\ \text{V}$ , $R_L = 10\ \text{k}\Omega$                              | 30              | 230             |     | V/mV                    |
|   | $V_O = 0\ \text{to}\ 8\ \text{V}$ , $R_L = 600\ \Omega$                            | 25              | 100             |     |                         |
|   | $V_O = 0\ \text{to}\ -8\ \text{V}$ , $R_L = 600\ \Omega$                           | 3               | 25              |     |                         |
| $r_i$ Input resistance  |  |                 | $10^{12}$       |     | $\Omega$                |
| $c_i$ Input capacitance   |  |                 | 4               |     | pF                      |
| $z_o$ Open-loop output impedance  | $I_O = 0$  |                 | 560             |     | $\Omega$                |
| CMRR Common-mode rejection ratio  | $R_S = 50\ \Omega$ ,<br>$V_{IC} = V_{ICR\text{min}}$                               | 72              | 90              |     | dB                      |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}\ \text{to}\ \pm 15\ \text{V}$ ,<br>$R_S = 50\ \Omega$ | 75              | 93              |     | dB                      |
| $I_{CC}$ Supply current   | $V_O = 0$ , No load  |                 | 1.25            | 1.4 | mA                      |
| $V_{O1}/V_{O2}$ Crosstalk attenuation   | $A_{VD} = 1000$ , $f = 1\ \text{kHz}$  |                 | 120             |     | dB                      |


NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.

## TLE2064Y operating characteristics at $V_{CC\pm} = \pm 15\ \text{V}$ , $T_A = 25^\circ\text{C}$

| PARAMETER   | TEST CONDITIONS   | TLE2064Y |        |     | UNIT                   |
|---|---|----------|--------|-----|------------------------|
|   |   | MIN      | TYP    | MAX |                        |
| SR Slew rate at unity gain (see Figure 1)               | $R_L = 10\ \text{k}\Omega$ , $C_L = 100\ \text{pF}$   | 2.6      | 3.4    |     | V/ $\mu\text{s}$       |
| $V_n$ Equivalent input noise voltage (see Figure 2)     | $f = 10\ \text{Hz}$ , $R_S = 20\ \Omega$  |          | 70     |     | nV/ $\sqrt{\text{Hz}}$ |
|   | $f = 1\ \text{kHz}$ , $R_S = 20\ \Omega$  |          | 40     |     |                        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\ \text{Hz}\ \text{to}\ 10\ \text{Hz}$  |          | 1.1    |     | $\mu\text{V}$          |
| $I_n$ Equivalent input noise current                    | $f = 1\ \text{kHz}$   |          | 1.1    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD Total harmonic distortion                           | $A_{VD} = 2$ , $f = 10\ \text{kHz}$ ,<br>$V_{O(PP)} = 2\ \text{V}$ , $R_L = 10\ \text{k}\Omega$ |          | 0.025% |     |                        |
| $B_1$ Unity-gain bandwidth (see Figure 3)               | $R_L = 10\ \text{k}\Omega$ , $C_L = 100\ \text{pF}$   |          | 2      |     | MHz                    |
|   | $R_L = 600\ \Omega$ , $C_L = 100\ \text{pF}$  |          | 1.5    |     |                        |
| $t_s$ Settling time                                     | $\epsilon = 0.1\%$  |          | 5      |     | $\mu\text{s}$          |
|   | $\epsilon = 0.01\%$   |          | 10     |     |                        |
| BOM Maximum output-swing bandwidth                      | $A_{VD} = 1$ , $R_L = 10\ \text{k}\Omega$   |          | 40     |     | kHz                    |
| $\phi_m$ Phase margin at unity gain (see Figure 3)      | $R_L = 10\ \text{k}\Omega$ , $C_L = 100\ \text{pF}$   |          | 60°    |     |                        |
|   | $R_L = 600\ \Omega$ , $C_L = 100\ \text{pF}$  |          | 70°    |     |                        |




**PARAMETER MEASUREMENT INFORMATION**

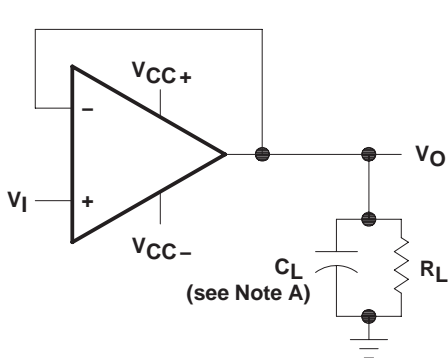


NOTE A:  $C_L$  includes fixture capacitance.

**Figure 1. Slew-Rate Test Circuit**

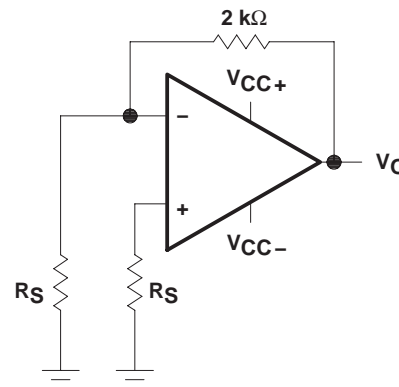

**Figure 2. Noise-Voltage Test Circuit**

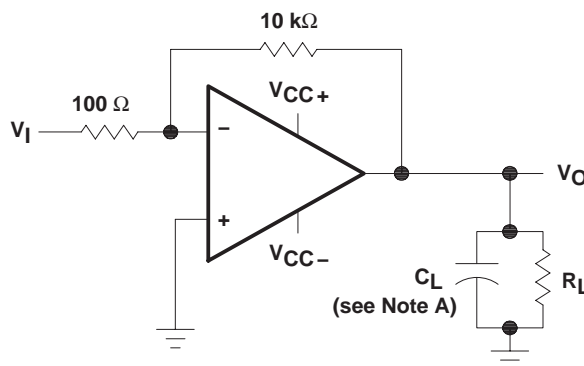

NOTE A:  $C_L$  includes fixture capacitance.

**Figure 3. Unity-Gain Bandwidth and Phase-Margin Test Circuit**

**typical values**

Typical values presented in this data sheet represent the median (50% point) of device parametric performance.

**input bias and offset current**

At the picoampere bias current level typical of the TLE206x, TLE2064xA, and TLE206xB, accurate measurement of the bias current becomes difficult. Not only does this measurement require a picoammeter, but test socket leakages can easily exceed the actual device bias currents. To accurately measure these small currents, Texas Instruments uses a two-step process. The socket leakage is measured using picoammeters with bias voltages applied but with no device in the socket. The device is then inserted into the socket and a second test that measures both the socket leakage and the device input bias current is performed. The two measurements are then subtracted algebraically to determine the bias current of the device.

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

**TYPICAL CHARACTERISTICS**

**Table of Graphs**

|             |   | <b>FIGURE</b>                |            |
|-------------|---|------------------------------|------------|
| $V_{IO}$    | Input offset voltage                            | Distribution                 | 4, 5, 6    |
| $I_{IB}$    | Input bias current                              | vs Common-mode input voltage | 7          |
|             |   | vs Free-air temperature      | 8          |
| $I_{IO}$    | Input offset current                            | vs Free-air temperature      | 8          |
| $V_{ICR}$   | Common-mode input voltage                       | vs Free-air temperature      | 9          |
| $V_{OM}$    | Maximum peak output voltage                     | vs Output current            | 10, 11     |
|             |   | vs Supply voltage            | 12, 13, 14 |
| $V_{O(PP)}$ | Maximum peak-to-peak output voltage             | vs Frequency                 | 15, 16     |
|             |   | vs Load resistance           | 17         |
| $A_{VD}$    | Large-signal differential voltage amplification | vs Frequency                 | 18         |
|             |   | vs Free-air temperature      | 19         |
| $I_{OS}$    | Short-circuit output current                    | vs Elapsed time              | 20         |
|             |   | vs Free-air temperature      | 21         |
| $Z_o$       | Output impedance                                | vs Frequency                 | 22, 23     |
| $CMRR$      | Common-mode rejection ratio                     | vs Frequency                 | 24         |
| $I_{CC}$    | Supply current                                  | vs Supply voltage            | 25, 26, 27 |
|             |   | vs Free-air temperature      | 28, 29, 30 |
|             | Voltage-follower small-signal pulse response    | vs Time                      | 31, 32     |
|             | Voltage-follower large-signal pulse response    | vs Time                      | 33, 34     |
|             | Noise voltage (referred to input)               | 0.1 to 10 Hz                 | 35         |
| $V_n$       | Equivalent input noise voltage                  | vs Frequency                 | 36         |
| $THD$       | Total harmonic distortion                       | vs Frequency                 | 37, 38     |
| $B_1$       | Unity-gain bandwidth                            | vs Supply voltage            | 39         |
|             |   | vs Free-air temperature      | 40         |
| $\phi_m$    | Phase margin                                    | vs Supply voltage            | 41         |
|             |   | vs Load capacitance          | 42         |
|             |   | vs Free-air temperature      | 43         |
|             | Phase shift                                     | vs Frequency                 | 18         |



TYPICAL CHARACTERISTICS

TLE2061  
 DISTRIBUTION OF  
 INPUT OFFSET VOLTAGE

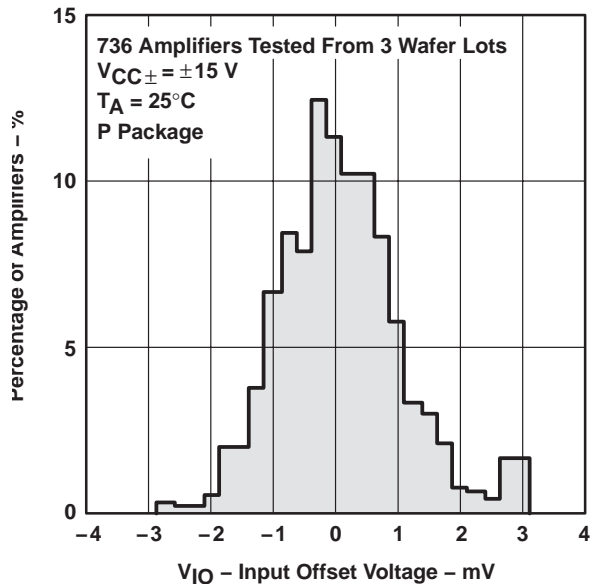


Figure 4

TLE2062  
 DISTRIBUTION OF  
 INPUT OFFSET VOLTAGE



Figure 5

TLE2064  
 DISTRIBUTION OF  
 INPUT OFFSET VOLTAGE

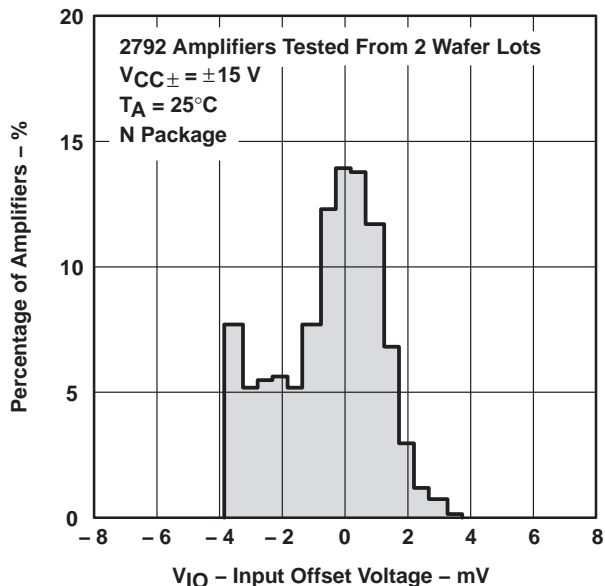


Figure 6

INPUT BIAS CURRENT  
 vs  
 COMMON-MODE INPUT VOLTAGE

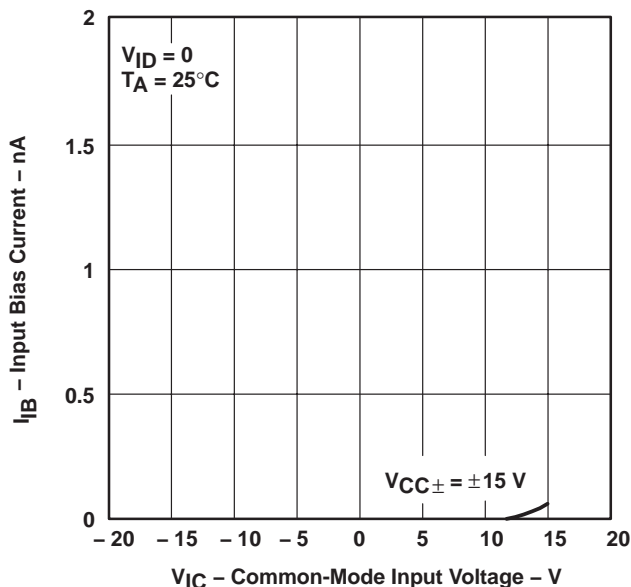



Figure 7

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004


**TYPICAL CHARACTERISTICS†**

**INPUT BIAS CURRENT  
 AND INPUT OFFSET CURRENT  
 vs  
 FREE-AIR TEMPERATURE**

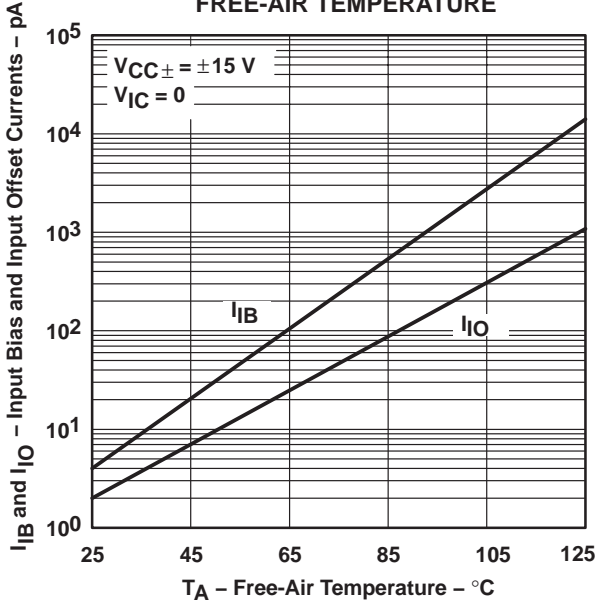


**Figure 8**

**COMMON-MODE INPUT VOLTAGE  
 vs  
 FREE-AIR TEMPERATURE**

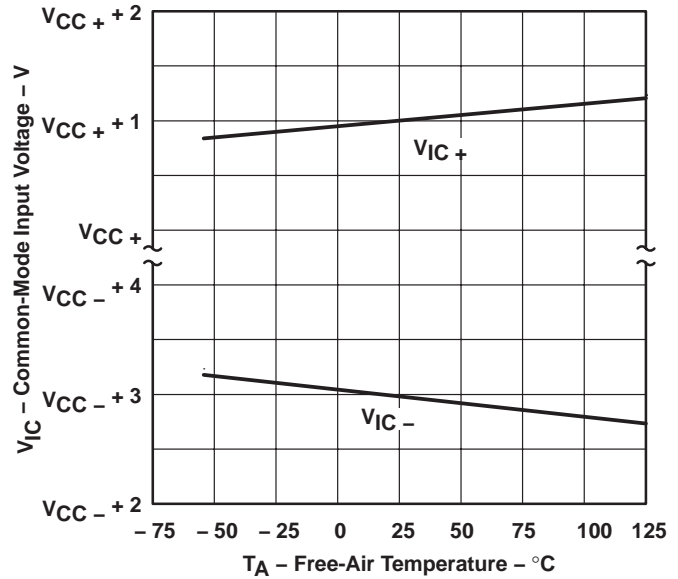


**Figure 9**

**MAXIMUM POSITIVE PEAK  
 OUTPUT VOLTAGE  
 vs  
 OUTPUT CURRENT**

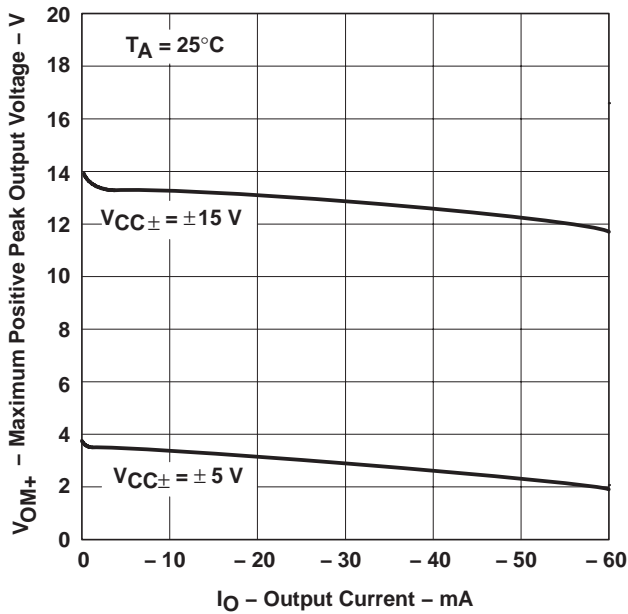

**Figure 10**

**MAXIMUM NEGATIVE PEAK  
 OUTPUT VOLTAGE  
 vs  
 OUTPUT CURRENT**

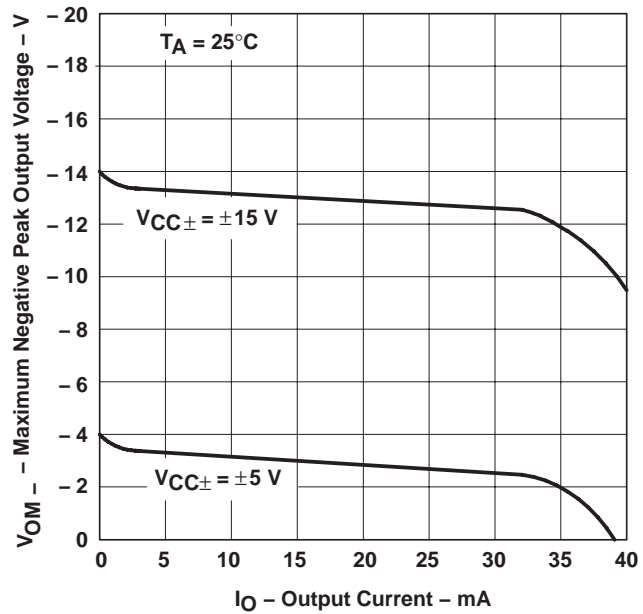

**Figure 11**

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.





TYPICAL CHARACTERISTICS

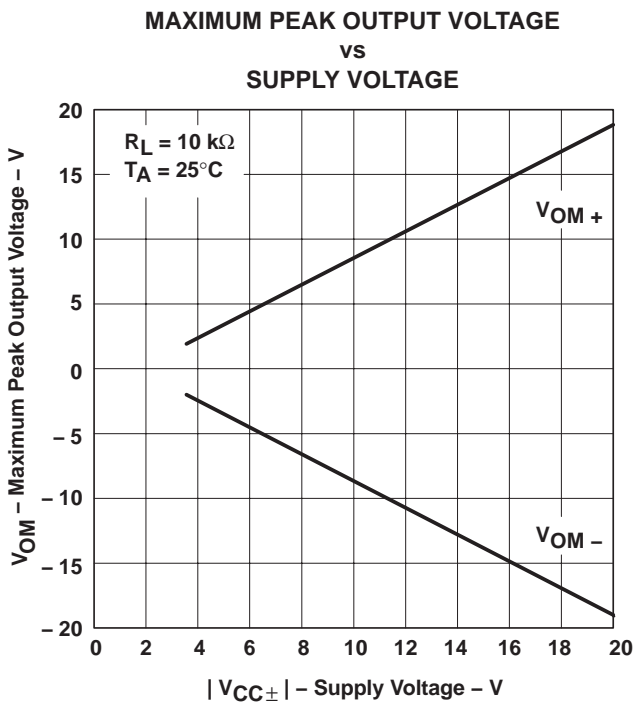


Figure 12

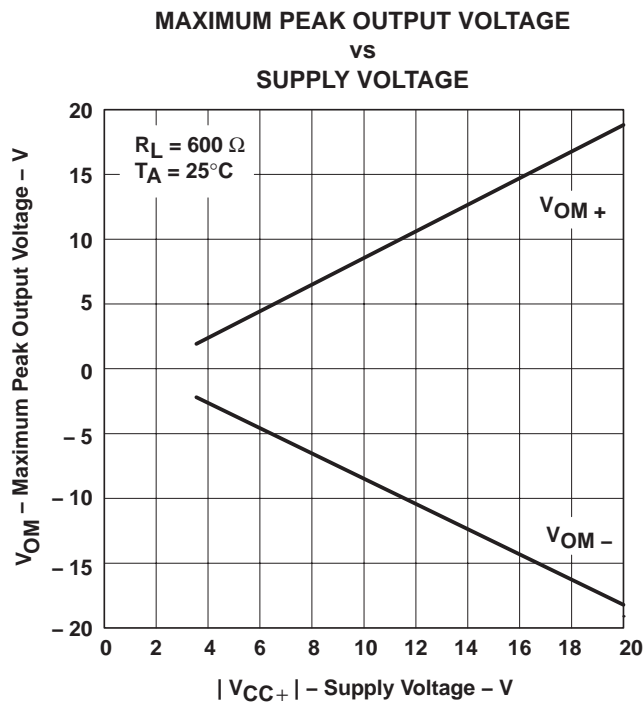


Figure 13



Figure 14

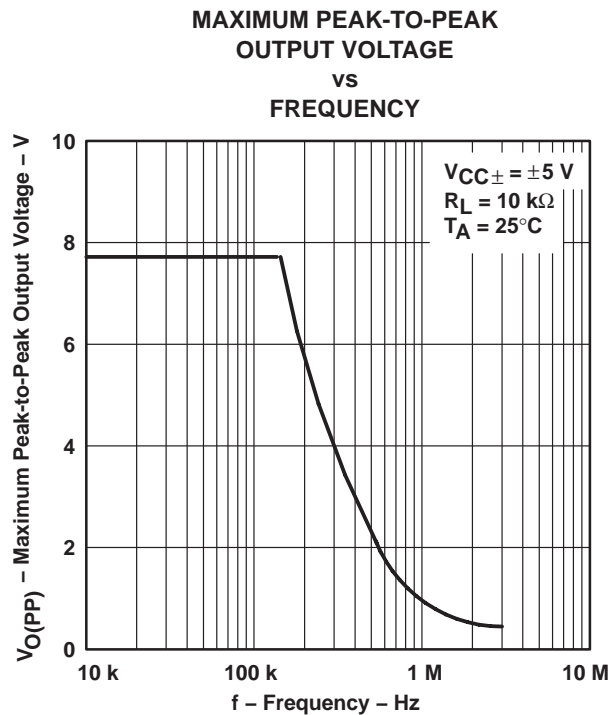



Figure 15

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004


**TYPICAL CHARACTERISTICS†**

**MAXIMUM PEAK-TO-PEAK  
 OUTPUT VOLTAGE  
 vs  
 FREQUENCY**

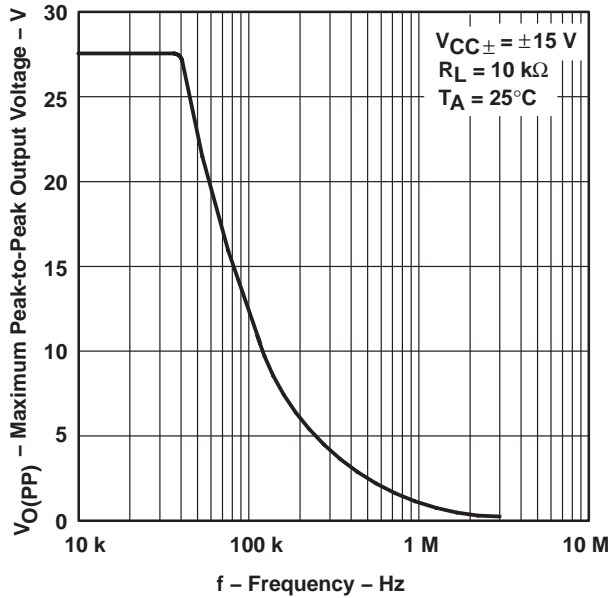


**Figure 16**

**MAXIMUM PEAK-TO-PEAK  
 OUTPUT VOLTAGE  
 vs  
 LOAD RESISTANCE**

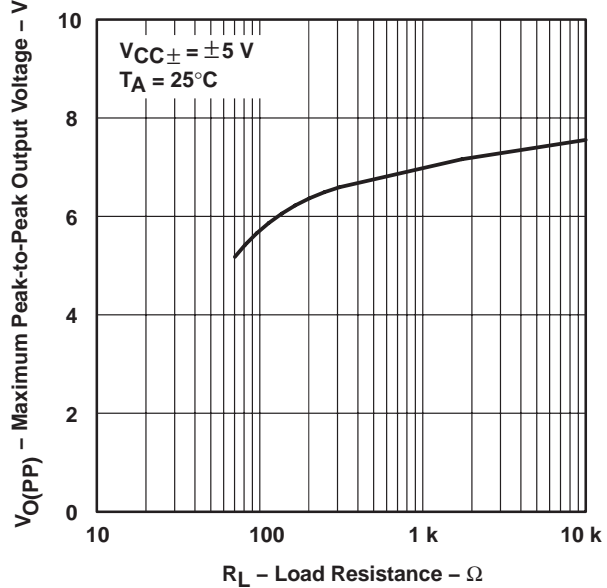


**Figure 17**

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE  
 AMPLIFICATION AND PHASE SHIFT  
 vs  
 FREQUENCY**

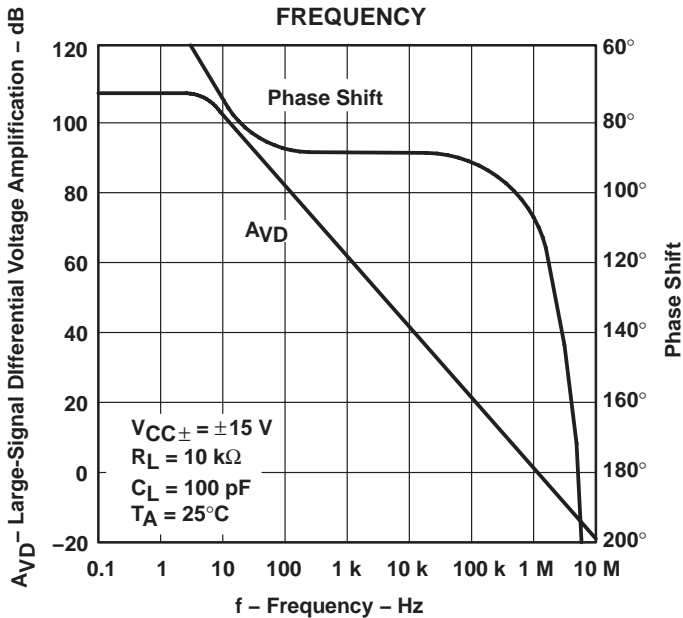

**Figure 18**

**LARGE-SIGNAL VOLTAGE AMPLIFICATION  
 vs  
 FREE-AIR TEMPERATURE**

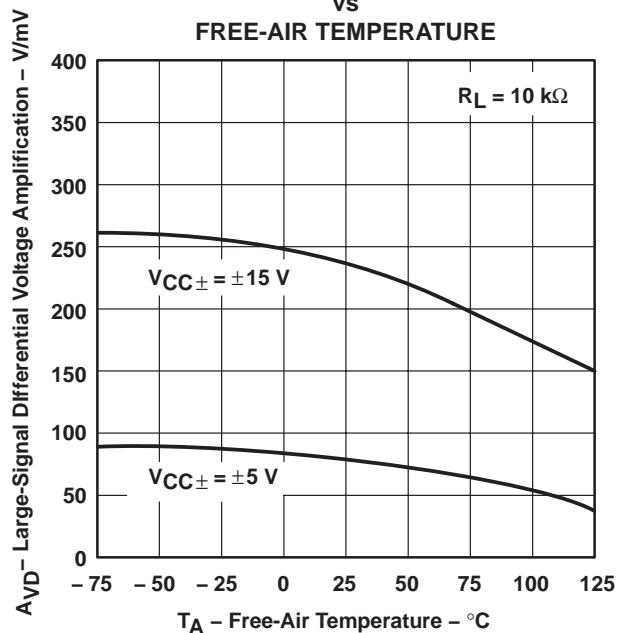

**Figure 19**

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.



TYPICAL CHARACTERISTICS†



Figure 20



Figure 21

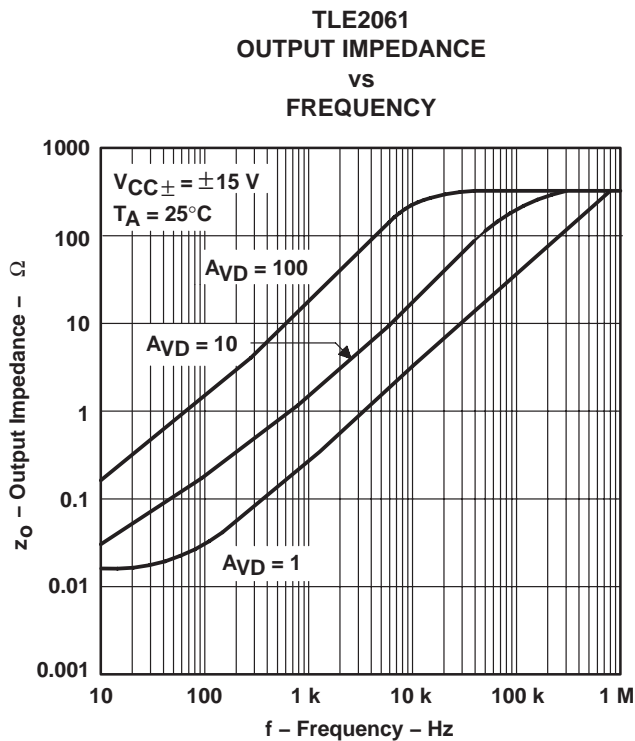


Figure 22

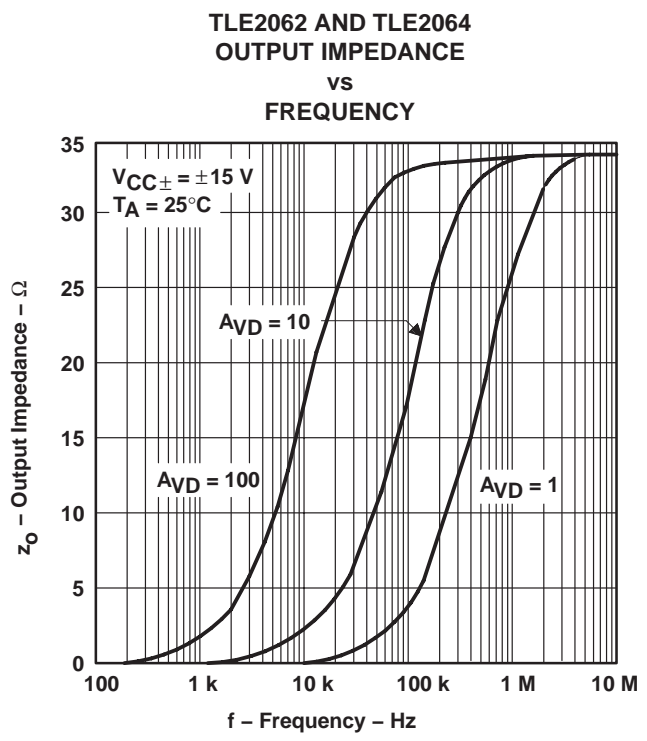



Figure 23

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.


**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004


**TYPICAL CHARACTERISTICS†**

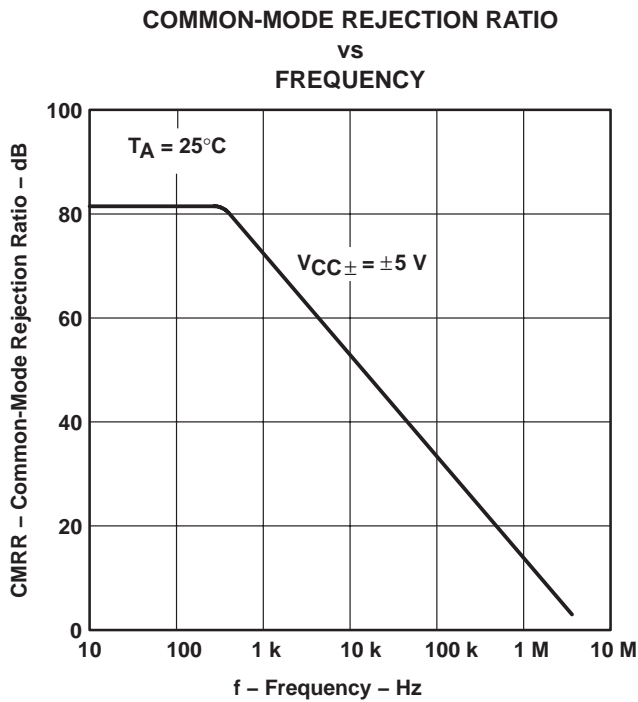


**Figure 24**

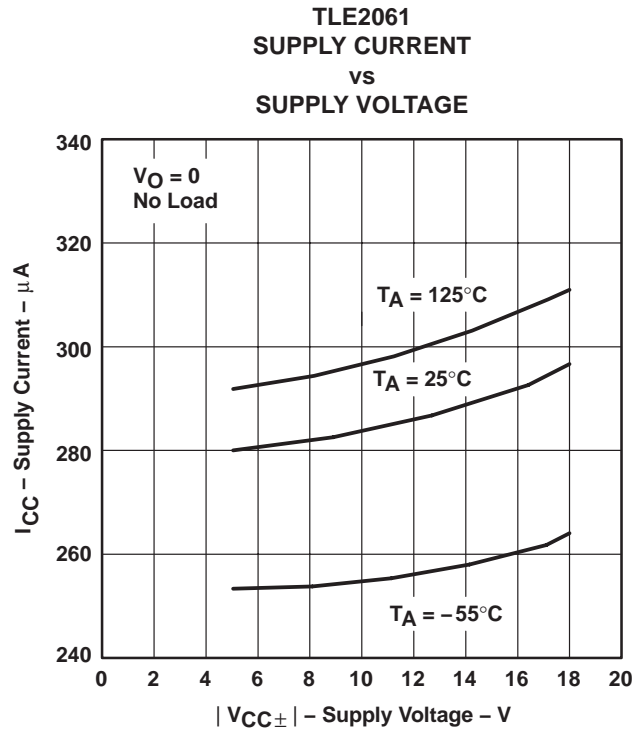

**Figure 25**

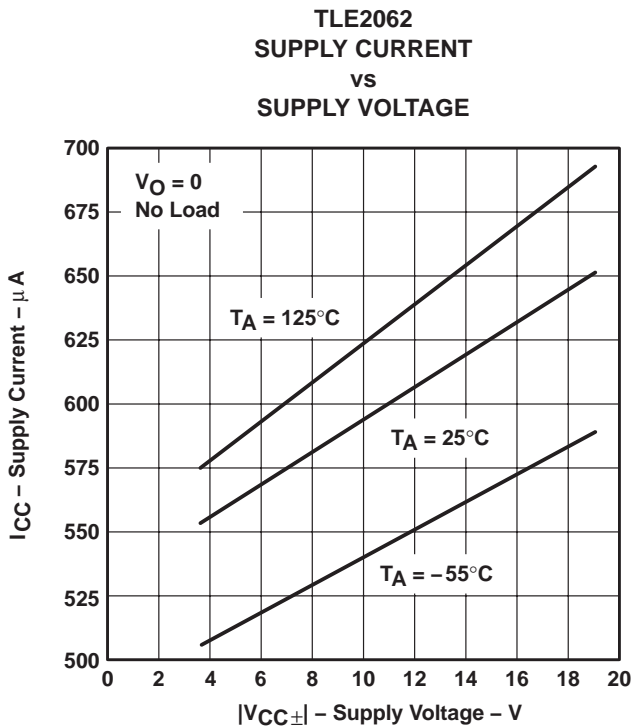

**Figure 26**




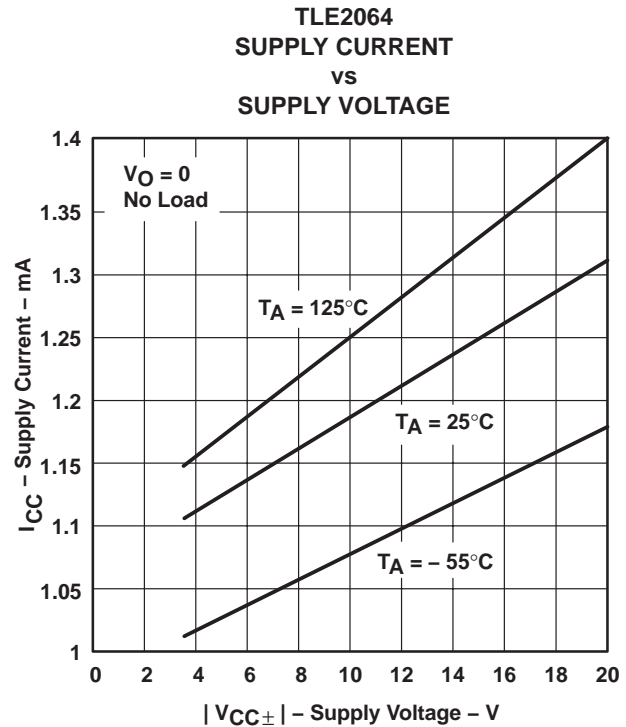


**Figure 27**

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.



**TYPICAL CHARACTERISTICS†**

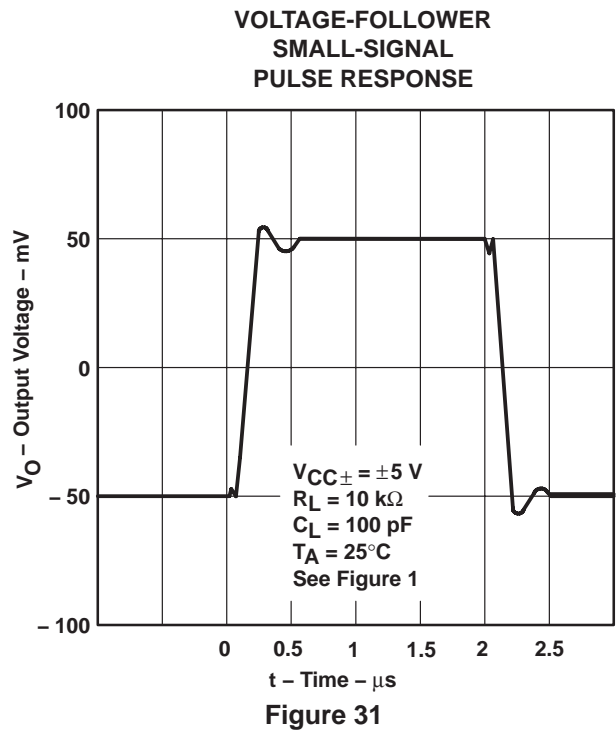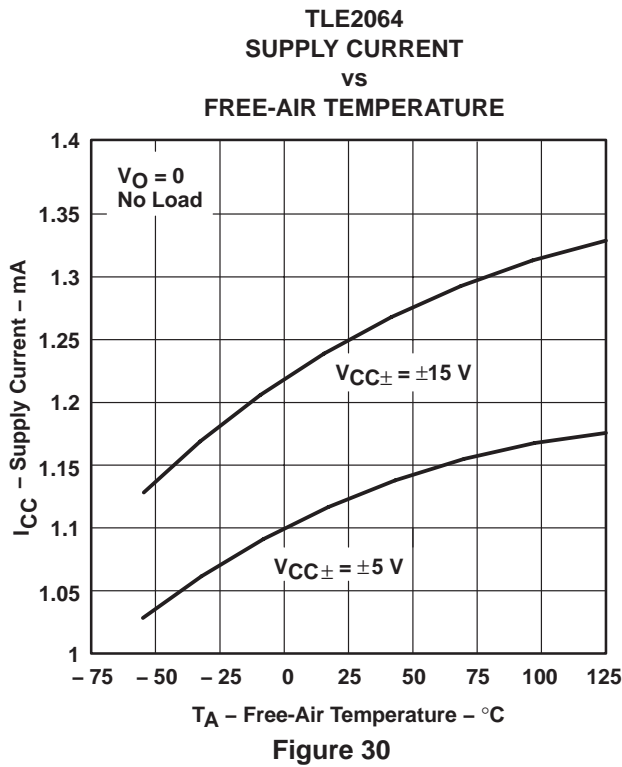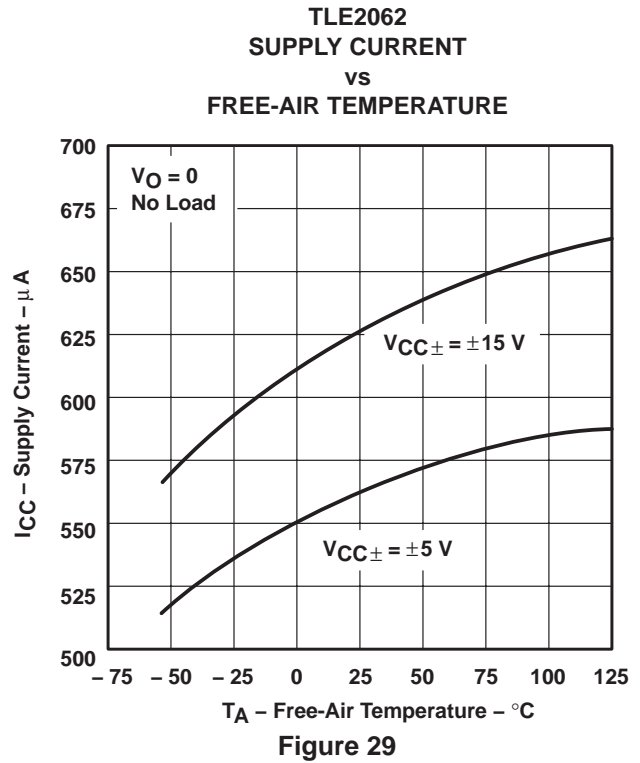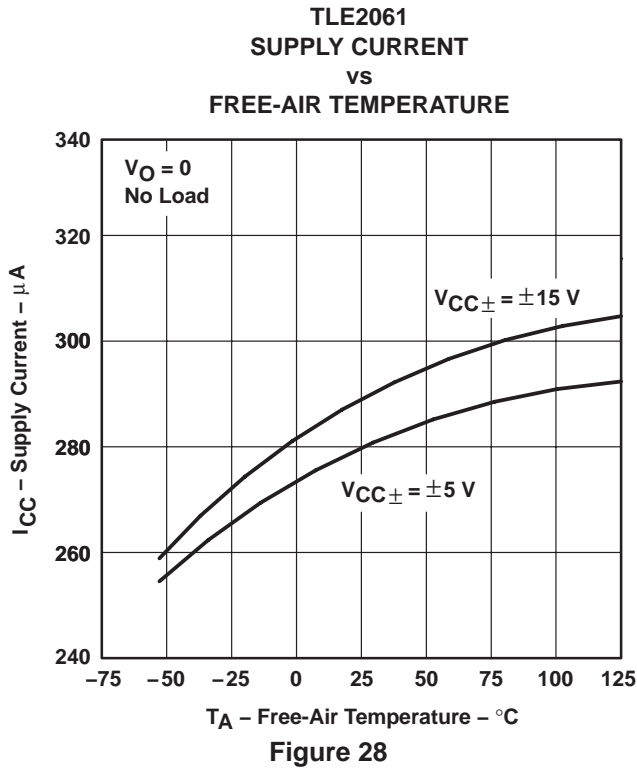

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS**

**VOLTAGE-FOLLOWER  
 SMALL-SIGNAL  
 PULSE RESPONSE**



**Figure 32**

**VOLTAGE-FOLLOWER  
 LARGE-SIGNAL  
 PULSE RESPONSE**




**Figure 33**

**VOLTAGE-FOLLOWER  
 LARGE-SIGNAL  
 PULSE RESPONSE**



**Figure 34**

**NOISE VOLTAGE  
 (REFERRED TO INPUT)  
 0.1 TO 10 Hz**

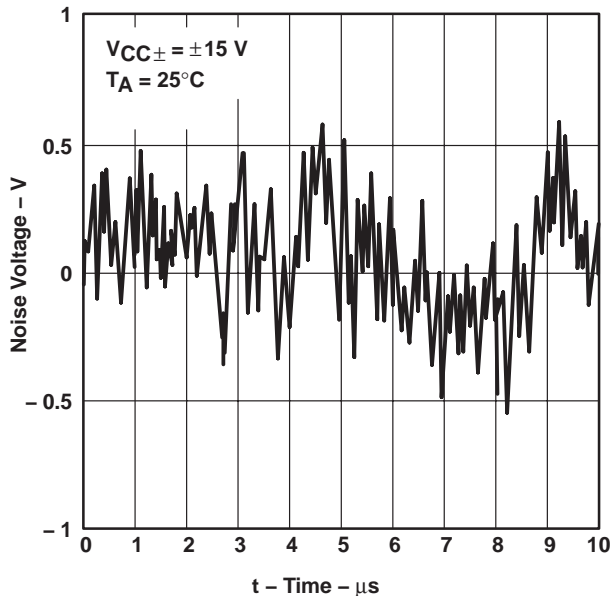

**Figure 35**

TYPICAL CHARACTERISTICS

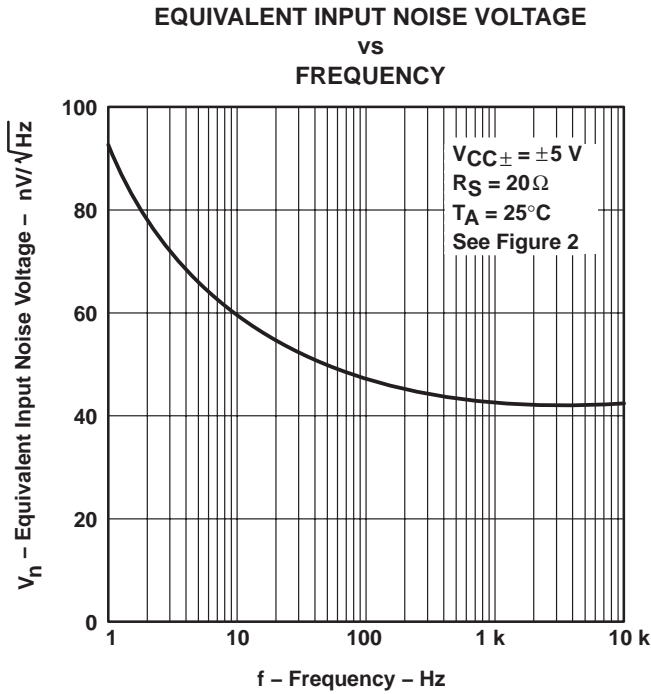


Figure 36

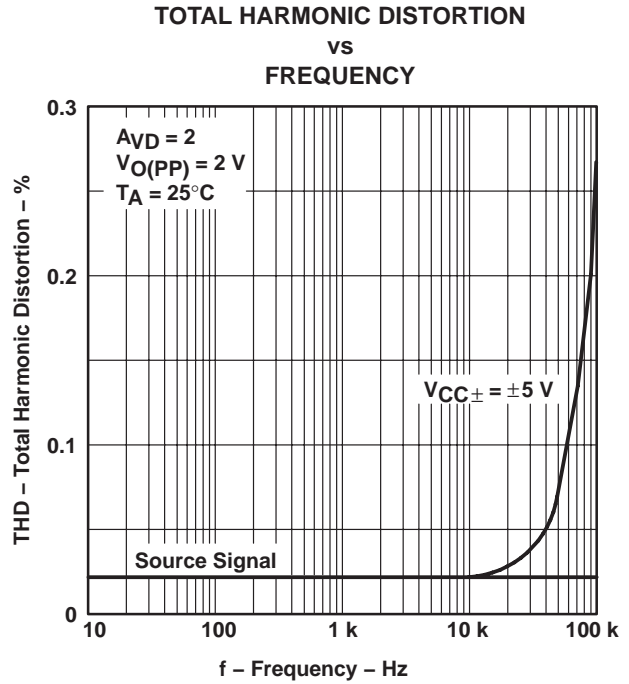


Figure 37

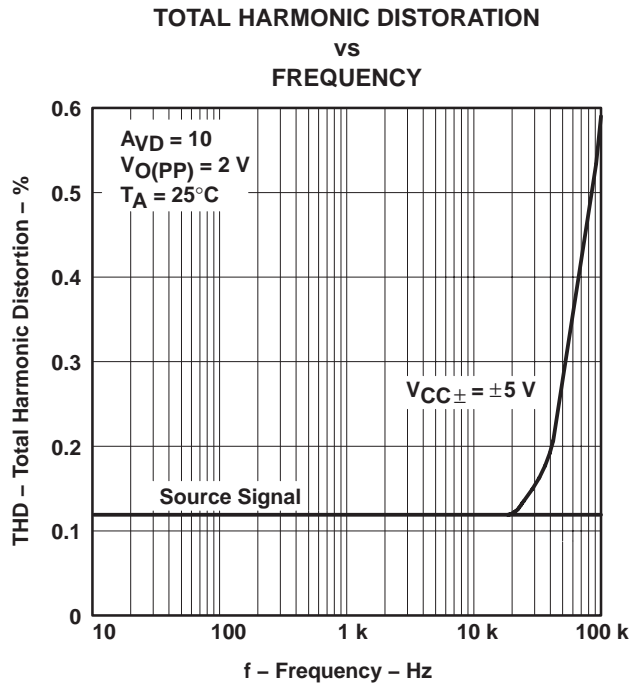


Figure 38

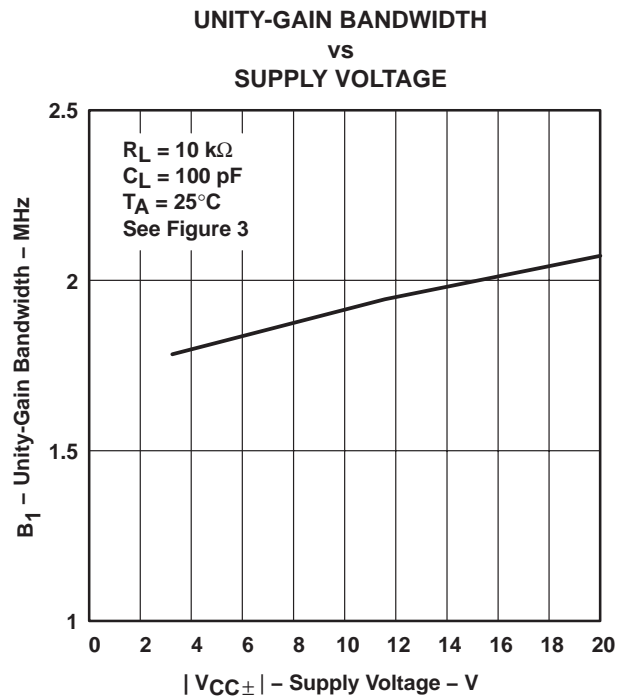



Figure 39

**TLE206x, TLE206xA, TLE206xB**  
**EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE**  
**μPOWER OPERATIONAL AMPLIFIERS**

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004


**TYPICAL CHARACTERISTICS†**

**UNITY-GAIN BANDWIDTH**  
**vs**  
**FREE-AIR TEMPERATURE**

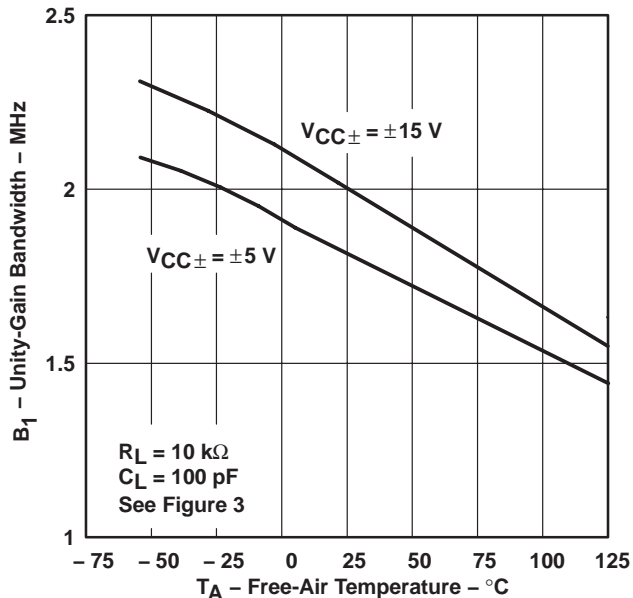


**Figure 40**

**PHASE MARGIN**  
**vs**  
**SUPPLY VOLTAGE**

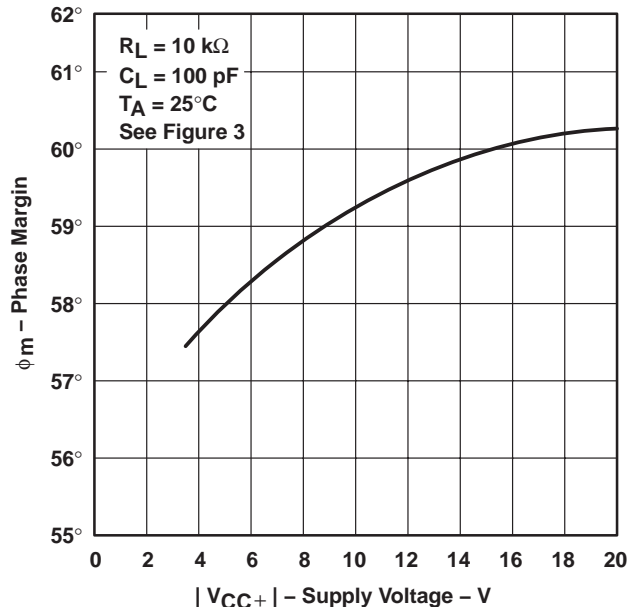


**Figure 41**

**PHASE MARGIN**  
**vs**  
**LOAD CAPACITANCE**

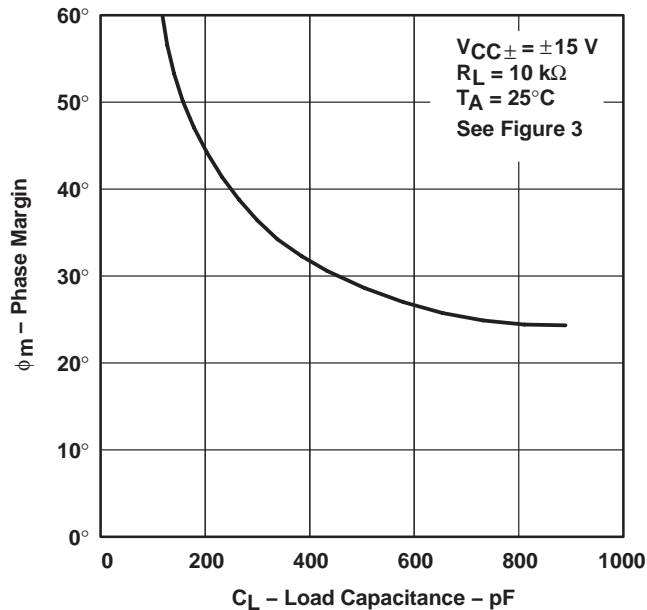

**Figure 42**

**PHASE MARGIN**  
**vs**  
**FREE-AIR TEMPERATURE**

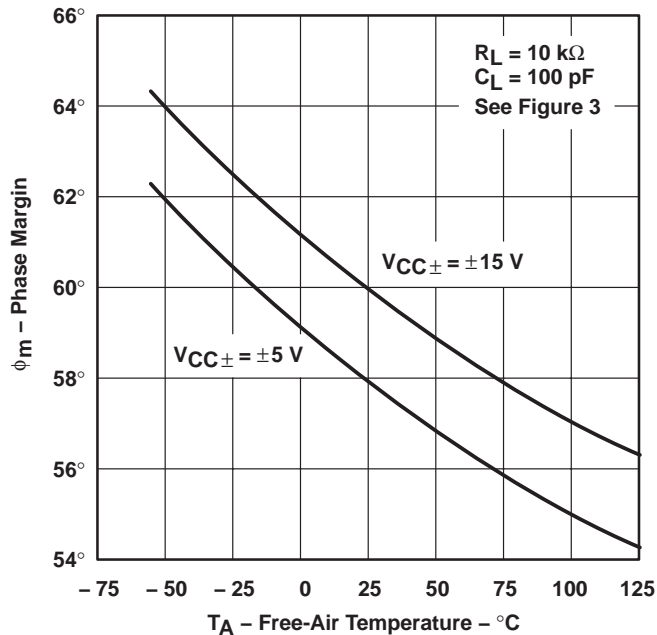

**Figure 43**

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.





**APPLICATION INFORMATION**

**input characteristics**


The TLE206x, TLE206xA, and TLE206xB are specified with a minimum and a maximum input voltage that if exceeded at either input could cause the device to malfunction. Because of the extremely high input impedance and resulting low bias current requirements, the TLE206x, TLE206xA, and TLE206xB are well suited for low-level signal processing. However, leakage currents on printed-circuit boards and sockets can easily exceed bias current requirements and cause degradation in system performance. It is good practice to include guard rings around inputs (see Figure 44). These guards should be driven from a low-impedance source at the same voltage level as the common-mode input.



**Figure 44. Use of Guard Rings**

**TLE2061 input offset voltage nulling**

The TLE2061 series offers external null pins that can be used to further reduce the input offset voltage. The circuit of Figure 45 can be connected as shown if the feature is desired. When external nulling is not needed, the null pins may be left unconnected.

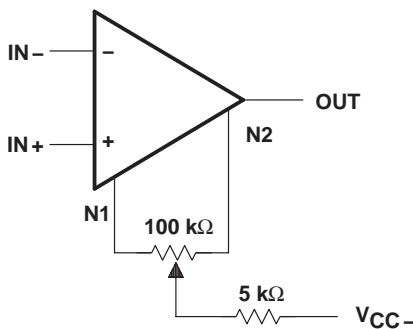

**Figure 45. Input Offset Voltage Nulling**

# TLE206x, TLE206xA, TLE206xB EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE $\mu$ POWER OPERATIONAL AMPLIFIERS

SLOS193B – FEBRUARY 1997 – REVISED MAY 2004

## APPLICATION INFORMATION

### macromodel information

Macromodel information provided was derived using Microsim *Parts*<sup>™</sup>, the model generation software used with Microsim *PSpice*<sup>™</sup>. The Boyle macromodel (see Note 5) and the subcircuit in Figure 46 were generated using the TLE206x typical electrical and operating characteristics at 25°C. Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases).

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

NOTE 5: G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers", *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

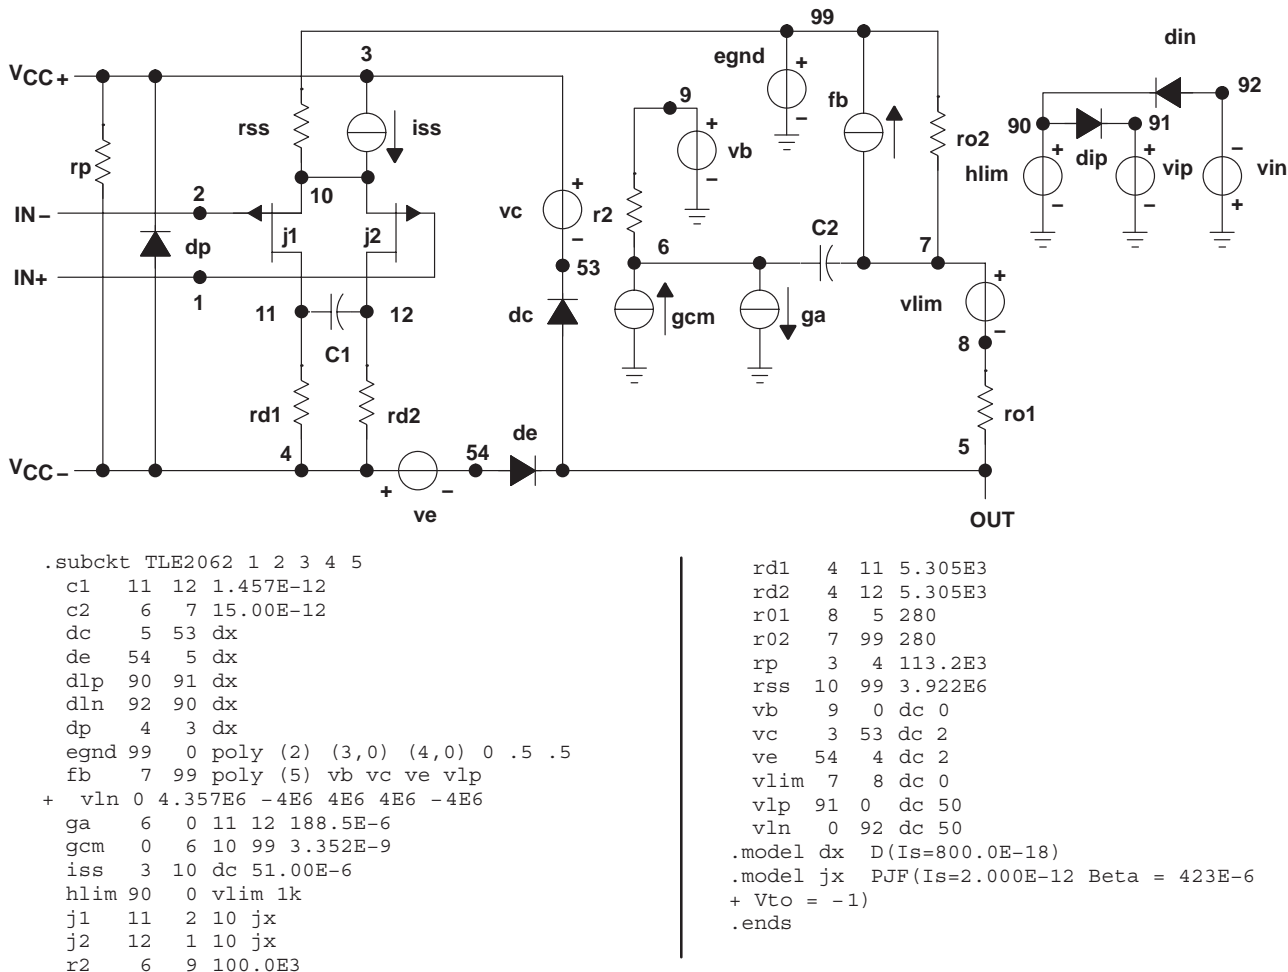


Figure 46. Boyle Macromodel and Subcircuit

*PSpice* and *Parts* are trademarks of MicroSim Corporation.



**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup>              |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|---|
| 5962-9080701M2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| 5962-9080701MHA  | ACTIVE                | CFP          | U               | 10   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080701MPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080702Q2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| 5962-9080702QHA  | ACTIVE                | CFP          | U               | 10   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080702QPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080703QPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080801M2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| 5962-9080801MHA  | ACTIVE                | CFP          | U               | 10   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080801MPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080802Q2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| 5962-9080802QHA  | ACTIVE                | CFP          | U               | 10   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080802QPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080803QPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080901M2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| 5962-9080901MCA  | ACTIVE                | CDIP         | J               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080901MDA  | ACTIVE                | CFP          | W               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080902M2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| 5962-9080902MCA  | ACTIVE                | CDIP         | J               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080902MDA  | ACTIVE                | CFP          | W               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| 5962-9080903Q2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| 5962-9080903QCA  | ACTIVE                | CDIP         | J               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2061ACD       | ACTIVE                | SOIC         | D               | 8    | 75          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2061ACDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2061ACP       | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                            |
| TLE2061AID       | ACTIVE                | SOIC         | D               | 8    | 75          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2061AIP       | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                            |
| TLE2061AMFKB     | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| TLE2061AMJG      | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2061AMJGB     | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2061AMP       | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2061AMUB      | ACTIVE                | CFP          | U               | 10   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2061BCP       | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2061BIP       | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2061BMJGB     | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2061CD        | ACTIVE                | SOIC         | D               | 8    | 75          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2061CDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup>              |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|---|
| TLE2061CP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                            |
| TLE2061CPSR      | OBSOLETE              | SO           | PS              | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2061ID        | ACTIVE                | SOIC         | D               | 8    | 75          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2061IDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2061IP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                            |
| TLE2061MD        | ACTIVE                | SOIC         | D               | 8    | 75          | None                    | CU NIPDAU        | Level-1-220C-UNLIM                        |
| TLE2061MFKB      | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| TLE2061MJGB      | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2061MP        | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2061MUB       | ACTIVE                | CFP          | U               | 10   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2062ACD       | ACTIVE                | SOIC         | D               | 8    | 75          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2062ACDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2062ACP       | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2062AID       | ACTIVE                | SOIC         | D               | 8    | 75          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2062AIDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2062AIP       | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2062AMD       | ACTIVE                | SOIC         | D               | 8    | 75          | None                    | CU NIPDAU        | Level-1-220C-UNLIM                        |
| TLE2062AMFKB     | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| TLE2062AMJG      | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2062AMJGB     | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2062AMP       | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2062AMUB      | ACTIVE                | CFP          | U               | 10   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2062BCD       | OBSOLETE              | SOIC         | D               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2062BCDR      | OBSOLETE              | SOIC         | D               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2062BCP       | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2062BIP       | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2062BMFKB     | OBSOLETE              | LCCC         | FK              | 20   |             | None                    | Call TI          | Call TI                                   |
| TLE2062BMJG      | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2062BMJGB     | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2062CD        | ACTIVE                | SOIC         | D               | 8    | 75          | None                    | CU NIPDAU        | Level-1-220C-UNLIM                        |
| TLE2062CDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | None                    | CU NIPDAU        | Level-1-220C-UNLIM                        |
| TLE2062CP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                            |
| TLE2062CPSR      | OBSOLETE              | SO           | PS              | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2062ID        | ACTIVE                | SOIC         | D               | 8    | 75          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2062IDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2062IP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free                 | CU NIPDAU        | Level-NC-NC-NC                            |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup>              |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|---|
| (RoHS)           |                       |              |                 |      |             |                         |                  |   |
| TLE2062MD        | ACTIVE                | SOIC         | D               | 8    | 75          | None                    | CU NIPDAU        | Level-1-220C-UNLIM                        |
| TLE2062MFKB      | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| TLE2062MJG       | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2062MJGB      | ACTIVE                | CDIP         | JG              | 8    | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2062MP        | OBSOLETE              | PDIP         | P               | 8    |             | None                    | Call TI          | Call TI                                   |
| TLE2062MUB       | ACTIVE                | CFP          | U               | 10   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2064ACD       | ACTIVE                | SOIC         | D               | 14   | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2064ACDR      | ACTIVE                | SOIC         | D               | 14   | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2064ACN       | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                            |
| TLE2064AID       | ACTIVE                | SOIC         | D               | 14   | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2064AIDR      | ACTIVE                | SOIC         | D               | 14   | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2064AIN       | OBSOLETE              | PDIP         | N               | 14   |             | None                    | Call TI          | Call TI                                   |
| TLE2064AMD       | ACTIVE                | SOIC         | D               | 14   | 50          | None                    | CU NIPDAU        | Level-1-220C-UNLIM                        |
| TLE2064AMDR      | ACTIVE                | SOIC         | D               | 14   | 2500        | None                    | CU NIPDAU        | Level-1-220C-UNLIM                        |
| TLE2064AMFKB     | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| TLE2064AMJ       | ACTIVE                | CDIP         | J               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2064AMJB      | ACTIVE                | CDIP         | J               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2064AMN       | OBSOLETE              | PDIP         | N               | 14   |             | None                    | Call TI          | Call TI                                   |
| TLE2064AMWB      | ACTIVE                | CFP          | W               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2064BCN       | OBSOLETE              | PDIP         | N               | 14   |             | None                    | Call TI          | Call TI                                   |
| TLE2064BIN       | OBSOLETE              | PDIP         | N               | 14   |             | None                    | Call TI          | Call TI                                   |
| TLE2064BMFKB     | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |
| TLE2064BMJ       | ACTIVE                | CDIP         | J               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2064BMJB      | ACTIVE                | CDIP         | J               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC                            |
| TLE2064BMN       | OBSOLETE              | PDIP         | N               | 14   |             | None                    | Call TI          | Call TI                                   |
| TLE2064CD        | ACTIVE                | SOIC         | D               | 14   | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2064CDR       | ACTIVE                | SOIC         | D               | 14   | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2064CN        | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                            |
| TLE2064CNSR      | OBSOLETE              | SO           | NS              | 14   |             | None                    | Call TI          | Call TI                                   |
| TLE2064ID        | ACTIVE                | SOIC         | D               | 14   | 50          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2064IDR       | ACTIVE                | SOIC         | D               | 14   | 2500        | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-260C-1YEAR/<br>Level-1-220C-UNLIM |
| TLE2064IN        | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | Level-NC-NC-NC                            |
| TLE2064MD        | ACTIVE                | SOIC         | D               | 14   | 50          | None                    | CU NIPDAU        | Level-1-220C-UNLIM                        |
| TLE2064MDR       | ACTIVE                | SOIC         | D               | 14   | 2500        | None                    | CU NIPDAU        | Level-1-220C-UNLIM                        |
| TLE2064MFKB      | ACTIVE                | LCCC         | FK              | 20   | 1           | None                    | POST-PLATE       | Level-NC-NC-NC                            |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TLE2064MJ        | ACTIVE                | CDIP         | J               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC               |
| TLE2064MJB       | ACTIVE                | CDIP         | J               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC               |
| TLE2064MN        | OBSOLETE              | PDIP         | N               | 14   |             | None                    | Call TI          | Call TI                      |
| TLE2064MWB       | ACTIVE                | CFP          | W               | 14   | 1           | None                    | A42 SNPB         | Level-NC-NC-NC               |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - May not be currently available - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**None:** Not yet available Lead (Pb-Free).

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean "Pb-Free" and in addition, uses package materials that do not contain halogens, including bromine (Br) or antimony (Sb) above 0.1% of total product weight.

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>  |  | <b>Applications</b> |  |
|------------------|--|---------------------|--|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |  | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |  | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |  | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265