


## QUAD BILATERAL SWITCH

- HIGH SPEED:  
 $t_{PD} = 13\text{ns}$  (TYP.) at  $V_{CC} = 6\text{V}$
- LOW POWER DISSIPATION:  
 $I_{CC} = 1\mu\text{A}$  (MAX.) at  $V_{CC} = 5\text{V}$
- LOW "ON" RESISTANCE:  
 $120\Omega$  TYP. ( $V_{CC} - V_{EE} = 2\text{V}$ )  
 $50\Omega$  TYP. ( $V_{CC} - V_{EE} = 4.5\text{V}$ )  
 $35\Omega$  TYP. ( $V_{CC} - V_{EE} = 9\text{V}$ )
- WIDE ANALOG INPUT VOLTAGE RANGE  $\pm 6\text{V}$
- LOW CROSSTALK BETWEEN SWITCHES
- FAST SWITCHING
- SINE WAVE DISTORTION:  
 $0.020$  at  $V_{CC} - V_{EE} = 9\text{V}$
- HIGH NOISE IMMUNITY:  
 $V_{NIH} = V_{NIL} = 28\% V_{CC}$  (MIN.)
- PIN AND FUNCTION COMPATIBLE WITH 74 SERIES 4316

### DESCRIPTION

The M74HC4316 is an high speed CMOS QUAD BILATERAL SWITCH fabricated with silicon gate C<sup>2</sup>MOS technology.

This device has four independent analogue switches. Each switch has two input/output terminals (nI/O, nO/I) and an active high select input (nC).

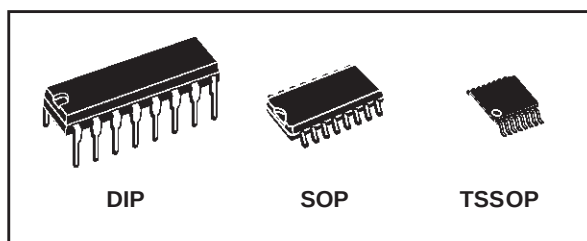


### ORDER CODES

| PACKAGE | TUBE         | T & R           |
|---------|--------------|-----------------|
| DIP     | M74HC4316B1R |                 |
| SOP     | M74HC4316M1R | M74HC4316RM13TR |
| TSSOP   |              | M74HC4316TTR    |


When the enable input is high, all four analog switches are off. The supply voltage for the digital signals applied to  $V_{CC}$  and GND must be within the range 0 to 6 V. The voltage swing on the analogue Inputs/Outputs can be between  $V_{CC}$  (positive limit) and  $V_{EE}$  (negative limit). The voltage between  $V_{CC}$  and  $V_{EE}$  must not exceed 12V.

All inputs are equipped with protection circuits against static discharge and transient excess voltage.

### PIN CONNECTION AND IEC LOGIC SYMBOLS

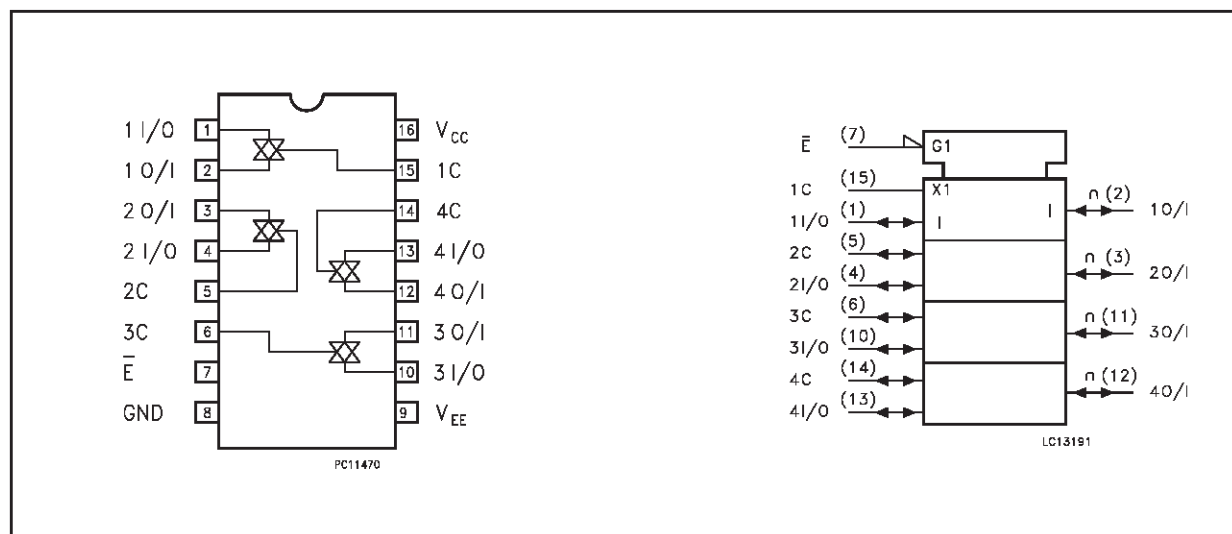

## LOGIC DIAGRAM

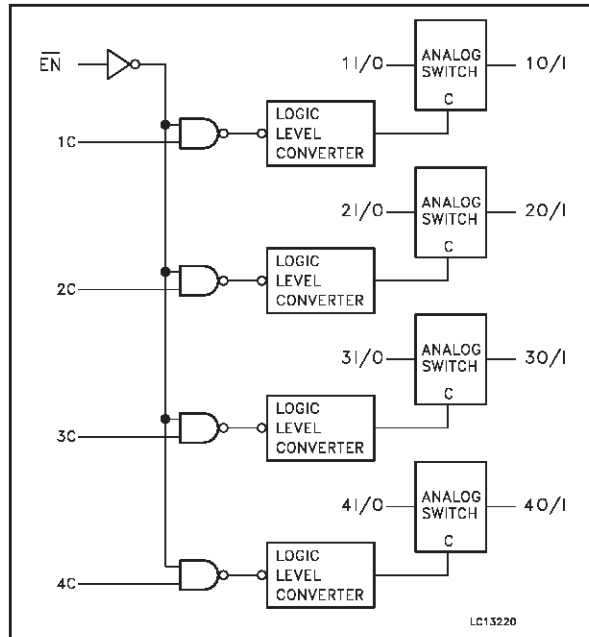

## PIN DESCRIPTION

| PIN No       | SYMBOL         | NAME AND FUNCTION           |
|--------------|----------------|-----------------------------|
| 1, 4, 10, 13 | 1 to 4 I/O     | Independent Inputs/Outputs  |
| 2, 3, 11, 12 | 1 to 4 O/I     | Independent Outputs/Inputs  |
| 7            | $\overline{E}$ | Enable Inputs (Active LOW)  |
| 15, 5, 6, 14 | 1C to 4C       | Enable Inputs (Active High) |
| 9            | $V_{EE}$       | Negative Supply Voltage     |
| 8            | GND            | Ground (0V)                 |
| 16           | $V_{CC}$       | Positive Supply Voltage     |

## TRUTH TABLE

| $\overline{E}$ | C | SWITCH FUNCTION |
|----------------|---|-----------------|
| L              | H | ON              |
| L              | L | OFF             |
| H              | X | OFF             |

## ABSOLUTE MAXIMUM RATINGS

| Symbol                | Parameter                                    | Value                            | Unit |
|-----------------------|----------------------------------------------|----------------------------------|------|
| $V_{CC}$              | Supply Voltage                               | -0.5 to +7                       | V    |
| $V_{CC} - V_{EE}$     | Supply Voltage                               | -0.5 to +13                      | V    |
| $V_I$                 | Control Input Voltage                        | -0.5 to $V_{CC} + 0.5$           | V    |
| $V_{I/O}$             | Switch Input/Output Voltage                  | $V_{EE} - 0.5$ to $V_{CC} + 0.5$ | V    |
| $I_{IK}$              | DC Input Diode Current                       | $\pm 20$                         | mA   |
| $I_{OK}$              | DC Output Diode Current                      | $\pm 20$                         | mA   |
| $I_O$                 | DC Output Source Sink Current Per Output Pin | $\pm 25$                         | mA   |
| $I_{CC}$ or $I_{GND}$ | DC $V_{CC}$ or Ground Current                | $\pm 50$                         | mA   |
| $P_D$                 | Power Dissipation                            | 500(*)                           | mW   |
| $T_{stg}$             | Storage Temperature                          | -65 to +150                      | °C   |
| $T_L$                 | Lead Temperature (10 sec)                    | 300                              | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

(\*) 500mW at 65 °C; derate to 300mW by 10mW/°C from 65°C to 85°C

## RECOMMENDED OPERATING CONDITIONS

| Symbol                            | Parameter                |                        | Value                | Unit |
|-----------------------------------|--------------------------|------------------------|----------------------|------|
| V <sub>CC</sub>                   | Supply Voltage           |                        | 2 to 12              | V    |
| V <sub>EE</sub>                   | Supply Voltage           |                        | -6 to 0              | V    |
| V <sub>CC</sub> - V <sub>EE</sub> | Supply Voltage           |                        | 2 to 12              | V    |
| V <sub>I</sub>                    | Input Voltage            |                        | 0 to V <sub>CC</sub> | V    |
| V <sub>I/O</sub>                  | Switch I/O Voltage       |                        | 0 to V <sub>CC</sub> | V    |
| T <sub>op</sub>                   | Operating Temperature    |                        | -55 to 125           | °C   |
| t <sub>r</sub> , t <sub>f</sub>   | Input Rise and Fall Time | V <sub>CC</sub> = 2.0V | 0 to 1000            | ns   |
|                                   |                          | V <sub>CC</sub> = 4.5V | 0 to 500             |      |
|                                   |                          | V <sub>CC</sub> = 6.0V | 0 to 400             |      |

## DC SPECIFICATIONS

| Symbol           | Parameter                                             | Test Condition         |                                         |                                                                                                                        | Value                 |                  |       |             |       |              | Unit |      |  |
|------------------|-------------------------------------------------------|------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------|-------|-------------|-------|--------------|------|------|--|
|                  |                                                       | V <sub>CC</sub><br>(V) | V <sub>EE</sub><br>(V)                  |                                                                                                                        | T <sub>A</sub> = 25°C |                  |       | -40 to 85°C |       | -55 to 125°C |      |      |  |
|                  |                                                       |                        |                                         |                                                                                                                        | Min.                  | Typ.             | Max.  | Min.        | Max.  | Min.         |      | Max. |  |
| V <sub>IHC</sub> | High Level Control Input Voltage                      | 2.0                    |                                         |                                                                                                                        | 1.5                   |                  |       | 1.5         |       | 1.5          |      | V    |  |
|                  |                                                       | 4.5                    |                                         |                                                                                                                        | 3.15                  |                  |       | 3.15        |       | 3.15         |      |      |  |
|                  |                                                       | 6.0                    |                                         |                                                                                                                        | 4.2                   |                  |       | 4.2         |       | 4.2          |      |      |  |
| V <sub>ILC</sub> | Low Level Control Input Voltage                       | 2.0                    |                                         |                                                                                                                        |                       |                  | 0.5   |             | 0.5   |              | 0.5  | V    |  |
|                  |                                                       | 4.5                    |                                         |                                                                                                                        |                       |                  | 1.35  |             | 1.35  |              | 1.35 |      |  |
|                  |                                                       | 6.0                    |                                         |                                                                                                                        |                       |                  | 1.8   |             | 1.8   |              | 1.8  |      |  |
| R <sub>ON</sub>  | ON Resistance                                         | 4.5                    | GND                                     | V <sub>I</sub> = V <sub>IHC</sub><br>V <sub>I/O</sub> = V <sub>CC</sub> to V <sub>EE</sub><br>I <sub>I/O</sub> = 0.1mA |                       | 70               | 170   |             | 200   |              |      | Ω    |  |
|                  |                                                       | 4.5                    | -4.5                                    |                                                                                                                        |                       | 50               | 85    |             | 105   |              |      |      |  |
|                  |                                                       | 6.0                    | -6.0                                    |                                                                                                                        |                       | 30               | 70    |             | 85    |              |      |      |  |
|                  |                                                       | 2.0                    | GND                                     | V <sub>I</sub> = V <sub>IHC</sub><br>V <sub>I/O</sub> = V <sub>CC</sub> or V <sub>EE</sub><br>I <sub>I/O</sub> = 0.1mA |                       | 120              | 180   |             | 215   |              |      |      |  |
|                  |                                                       | 4.5                    | GND                                     |                                                                                                                        |                       | 50               | 80    |             | 100   |              |      |      |  |
|                  |                                                       | 4.5                    | -4.5                                    |                                                                                                                        |                       | 35               | 60    |             | 75    |              |      |      |  |
|                  |                                                       | 6.0                    | -6.0                                    |                                                                                                                        |                       | 20               | 40    |             | 60    |              |      |      |  |
| ΔR <sub>ON</sub> | Difference of ON Resistance between switches          | 4.5                    | GND                                     | V <sub>IN</sub> = V <sub>IHC</sub> or V <sub>ILC</sub>                                                                 |                       | 10               | 15    |             | 20    |              |      | Ω    |  |
|                  |                                                       | 4.5                    | -4.5                                    | V <sub>I/O</sub> = V <sub>CC</sub> to V <sub>EE</sub>                                                                  |                       | 5                | 10    |             | 15    |              |      |      |  |
|                  |                                                       | 6.0                    | -6.0                                    | I <sub>I/O</sub> = 0.1mA                                                                                               |                       | 5                | 10    |             | 15    |              |      |      |  |
| I <sub>OFF</sub> | Input/Output Leakage Current (SWITCH OFF)             | 6.0                    | GND                                     | V <sub>OS</sub> = V <sub>CC</sub> or GND                                                                               |                       |                  | ±0.06 |             | ± 0.6 |              | ± 2  | μA   |  |
|                  |                                                       | 6.0                    | -6.0                                    | V <sub>IS</sub> = V <sub>CC</sub> or GND<br>V <sub>IN</sub> = V <sub>IHC</sub> or V <sub>ILC</sub>                     |                       |                  | ± 0.1 |             | ± 1   |              | ± 2  |      |  |
| I <sub>IZ</sub>  | Switch Input Leakage Current (SWITCH ON, OUTPUT OPEN) | 6.0                    | GND                                     | V <sub>OS</sub> = V <sub>CC</sub> or GND                                                                               |                       |                  | ±0.06 |             | ± 0.6 |              | ± 2  | μA   |  |
|                  |                                                       | 6.0                    | -6.0                                    | V <sub>IN</sub> = V <sub>IHC</sub> or V <sub>ILC</sub>                                                                 |                       |                  | ± 0.1 |             | ± 1   |              | ± 2  |      |  |
| I <sub>IN</sub>  | Control Input Current                                 | 6.0                    | V <sub>I</sub> = V <sub>CC</sub> or GND |                                                                                                                        |                       | 10 <sup>-5</sup> | ± 0.1 |             | ± 1   |              | ± 1  | μA   |  |

AC ELECTRICAL CHARACTERISTICS ( $C_L = 50 \text{ pF}$ , Input  $t_r = t_f = 6 \text{ ns}$ )

| Symbol                               | Parameter                                       | Test Condition         |                        |                                                                                          | Value                 |      |      |             |      |              | Unit |      |
|--------------------------------------|-------------------------------------------------|------------------------|------------------------|------------------------------------------------------------------------------------------|-----------------------|------|------|-------------|------|--------------|------|------|
|                                      |                                                 | V <sub>CC</sub><br>(V) | V <sub>EE</sub><br>(V) |                                                                                          | T <sub>A</sub> = 25°C |      |      | -40 to 85°C |      | -55 to 125°C |      |      |
|                                      |                                                 |                        |                        |                                                                                          | Min.                  | Typ. | Max. | Min.        | Max. | Min.         |      | Max. |
| Φ <sub>I/O</sub>                     | Phase Difference<br>Between Input<br>and Output | 2.0                    | GND                    |                                                                                          |                       | 12   | 30   |             | 40   |              |      | ns   |
|                                      |                                                 | 4.5                    | GND                    |                                                                                          |                       | 3    | 6    |             | 8    |              |      |      |
|                                      |                                                 | 6.0                    | GND                    |                                                                                          |                       | 3    | 5    |             | 7    |              |      |      |
|                                      |                                                 | 4.5                    | -4.5                   |                                                                                          |                       | 2    | 4    |             | 5    |              |      |      |
|                                      |                                                 | 6.0                    | -6.0                   |                                                                                          |                       | 2    | 4    |             | 5    |              |      |      |
| t <sub>PZL</sub><br>t <sub>PZH</sub> | Output Enable<br>Time<br>(E, C - OUT)           | 2.0                    | GND                    | R <sub>L</sub> = 1KΩ                                                                     |                       | 56   | 115  |             | 145  |              |      | ns   |
|                                      |                                                 | 4.5                    | GND                    |                                                                                          |                       | 14   | 23   |             | 29   |              |      |      |
|                                      |                                                 | 6.0                    | GND                    |                                                                                          |                       | 12   | 20   |             | 25   |              |      |      |
|                                      |                                                 | 4.5                    | -4.5                   |                                                                                          |                       | 13   | 21   |             | 26   |              |      |      |
|                                      |                                                 | 6.0                    | -6.0                   |                                                                                          |                       | 11   | 18   |             | 23   |              |      |      |
| t <sub>PLZ</sub><br>t <sub>PHZ</sub> | Output Disable<br>Time<br>(E, C - OUT)          | 2.0                    | GND                    | R <sub>L</sub> = 1KΩ                                                                     |                       | 112  | 205  |             | 255  |              |      | ns   |
|                                      |                                                 | 4.5                    | GND                    |                                                                                          |                       | 28   | 41   |             | 51   |              |      |      |
|                                      |                                                 | 6.0                    | GND                    |                                                                                          |                       | 24   | 35   |             | 43   |              |      |      |
|                                      |                                                 | 4.5                    | -4.5                   |                                                                                          |                       | 24   | 34   |             | 43   |              |      |      |
|                                      |                                                 | 6.0                    | -6.0                   |                                                                                          |                       | 21   | 29   |             | 36   |              |      |      |
| f <sub>MAX</sub>                     | Maximum Control<br>Input Frequency              | 2.0                    | GND                    | R <sub>L</sub> = 1KΩ<br>C <sub>L</sub> = 15 pF<br>V <sub>OUT</sub> = 1/2 V <sub>CC</sub> |                       | 2    |      |             |      |              |      | MHz  |
|                                      |                                                 | 4.5                    | GND                    |                                                                                          |                       | 9    |      |             |      |              |      |      |
|                                      |                                                 | 6.0                    | GND                    |                                                                                          |                       | 11   |      |             |      |              |      |      |

## CAPACITIVE CHARACTERISTICS

| Symbol           | Parameter                              | Test Condition         |      | Value                 |      |      |             |      |              | Unit |      |
|------------------|----------------------------------------|------------------------|------|-----------------------|------|------|-------------|------|--------------|------|------|
|                  |                                        | V <sub>CC</sub><br>(V) |      | T <sub>A</sub> = 25°C |      |      | -40 to 85°C |      | -55 to 125°C |      |      |
|                  |                                        |                        |      | Min.                  | Typ. | Max. | Min.        | Max. | Min.         |      | Max. |
| C <sub>IN</sub>  | Input Capacitance                      |                        |      |                       | 5    | 10   |             | 10   |              | 10   | pF   |
| C <sub>I/O</sub> | Switch Terminal Capacitance            | 4.5                    | -4.5 |                       | 5    |      |             |      |              |      | pF   |
| C <sub>IOS</sub> | Feed Through Capacitance               | 4.5                    | -4.5 |                       | 1    |      |             |      |              |      | pF   |
| C <sub>PD</sub>  | Power Dissipation Capacitance (note 1) | 5.0                    | GND  |                       | 16   |      |             |      |              |      | pF   |


1)  $C_{PD}$  is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation.  $I_{CC(oper)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}$

ANALOG SWITCH CHARACTERISTICS (GND = 0V;  $T_A = 25^\circ\text{C}$ )


| Symbol    | Parameter                                  | Test Condition                                                             |                 |                                                                                                                                                                                              | Value | Unit |
|-----------|--------------------------------------------|----------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|
|           |                                            | $V_{CC}$<br>(V)                                                            | $V_{EE}$<br>(V) | $V_{IN}$<br>(V <sub>p-p</sub> )                                                                                                                                                              | Typ.  |      |
|           | Sine Wave Distortion (THD)                 | 2.25                                                                       | 2.25            | 4                                                                                                                                                                                            | 0.025 | %    |
|           |                                            | 4.5                                                                        | 4.5             | 8                                                                                                                                                                                            | 0.020 |      |
|           |                                            | 6.0                                                                        | 6.0             | 11                                                                                                                                                                                           | 0.018 |      |
|           |                                            | $f_{IN} = 1\text{ KHz}$ , $R_L = 10\text{ K}\Omega$ , $C_L = 50\text{ pF}$ |                 |                                                                                                                                                                                              |       |      |
| $f_{MAX}$ | Frequency Response (Switch ON)             | 2.25                                                                       | 2.25            | Adjust $f_{IN}$ voltage to obtain 0 dBm at $V_{OS}$ .<br>Increase $f_{IN}$ Frequency until dB meter reads -3dB<br>$R_L = 50\Omega$ , $C_L = 10\text{ pF}$ , $f_{IN} = 1\text{MHz}$ sine wave | 28    | MHz  |
|           |                                            | 4.5                                                                        | 4.5             |                                                                                                                                                                                              | 42    |      |
|           |                                            | 6.0                                                                        | 6.0             |                                                                                                                                                                                              | 43    |      |
|           | Feed through Attenuation (Switch OFF)      | 2.25                                                                       | 2.25            | $V_{IN}$ is centered at $V_{CC}/2$ . Adjust input for 0 dBm<br>$R_L = 600\Omega$ , $C_L = 50\text{ pF}$ , $f_{IN} = 1\text{MHz}$ sine wave                                                   | -50   | dB   |
|           |                                            | 4.5                                                                        | 4.5             |                                                                                                                                                                                              | -50   |      |
|           |                                            | 6.0                                                                        | 6.0             |                                                                                                                                                                                              | -50   |      |
|           | Crosstalk (Control Input to Signal Output) | 2.25                                                                       | 2.25            | $R_L = 600\Omega$ , $C_L = 50\text{ pF}$ , $f_{IN} = 1\text{MHz}$ square wave ( $t_r = t_f = 6\text{ns}$ )                                                                                   |       | mV   |
|           |                                            | 4.5                                                                        | 4.5             |                                                                                                                                                                                              | 5     |      |
|           |                                            | 6.0                                                                        | 6.0             |                                                                                                                                                                                              |       |      |
|           | Crosstalk (Between Any Switches)           | 2.25                                                                       | 2.25            | Adjust $V_{IN}$ to Obtain 0 dBm at input<br>$R_L = 600\Omega$ , $C_L = 50\text{ pF}$ , $f_{IN} = 1\text{MHz}$ sine wave                                                                      | -50   | dB   |
|           |                                            | 4.5                                                                        | 4.5             |                                                                                                                                                                                              | -50   |      |
|           |                                            | 6.0                                                                        | 6.0             |                                                                                                                                                                                              | -50   |      |

## SWITCHING CHARACTERISTICS TEST CIRCUIT


## CONTROL

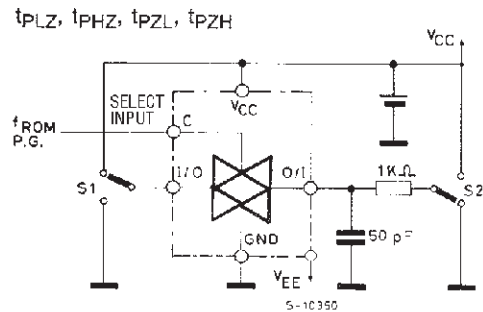


## ENABLE

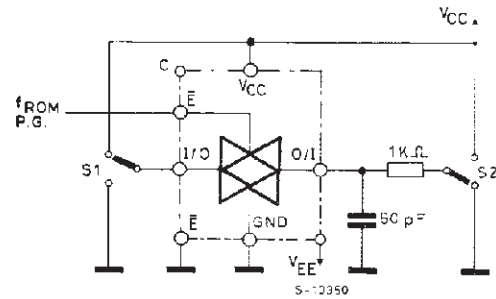


## CROSSTALK (control to output)

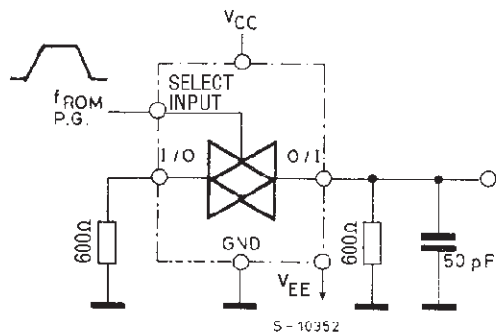



## CROSSTALK BETWEEN ANY TWO SWITCHES


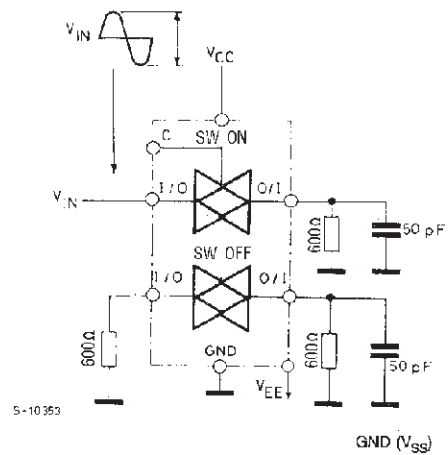


## BANDWIDTH AND FEEDTHROUGH ATTENUATION

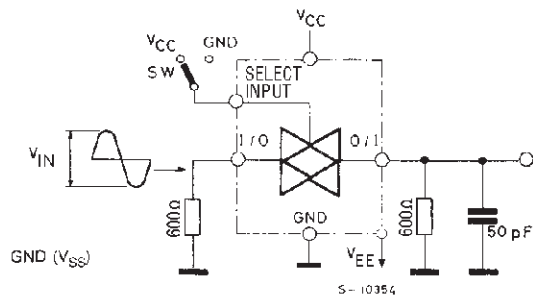


## MAXIMUM CONTROL FREQUENCY

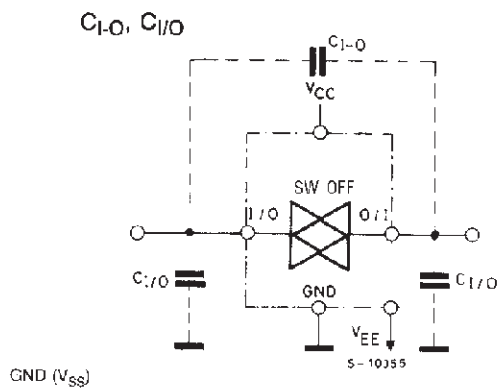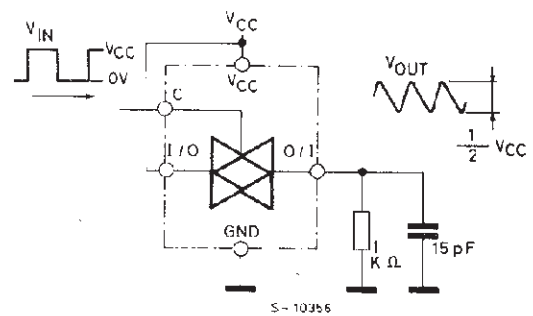

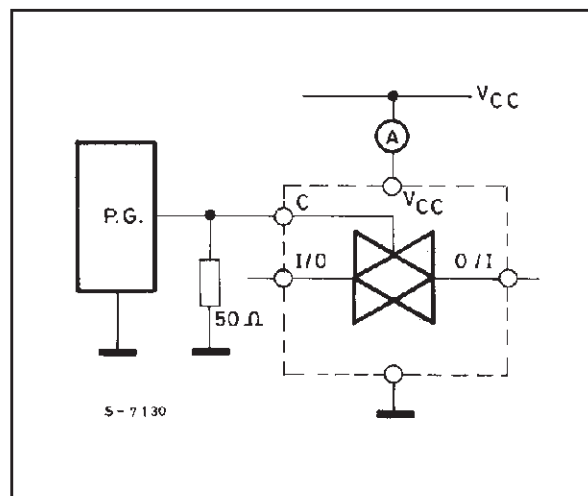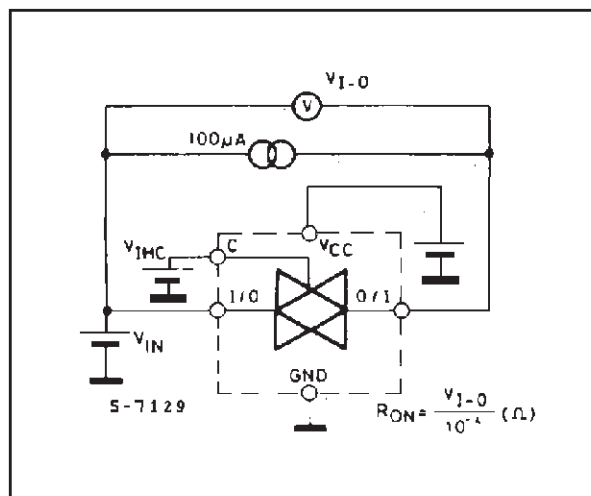$I_{CC} \text{ (Opr.)}$ 

## Plastic DIP-16 (0.25) MECHANICAL DATA


| DIM. | mm.  |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP   | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.51 |       |      | 0.020 |       |       |
| B    | 0.77 |       | 1.65 | 0.030 |       | 0.065 |
| b    |      | 0.5   |      |       | 0.020 |       |
| b1   |      | 0.25  |      |       | 0.010 |       |
| D    |      |       | 20   |       |       | 0.787 |
| E    |      | 8.5   |      |       | 0.335 |       |
| e    |      | 2.54  |      |       | 0.100 |       |
| e3   |      | 17.78 |      |       | 0.700 |       |
| F    |      |       | 7.1  |       |       | 0.280 |
| I    |      |       | 5.1  |       |       | 0.201 |
| L    |      | 3.3   |      |       | 0.130 |       |
| Z    |      |       | 1.27 |       |       | 0.050 |

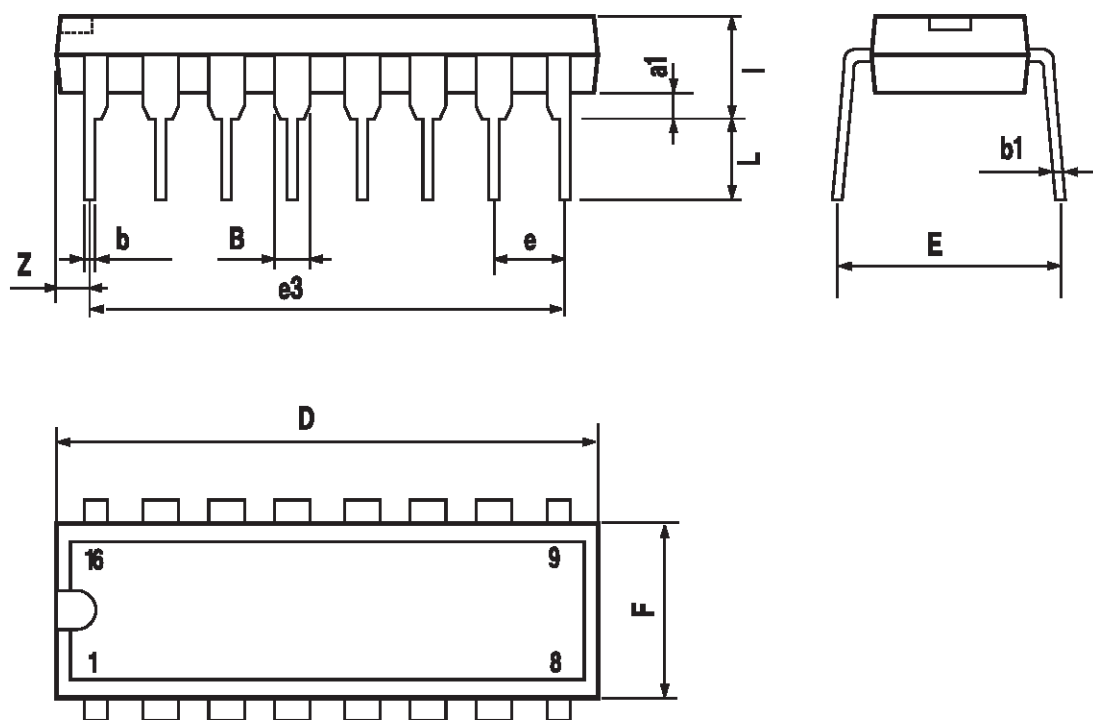

P001C

## SO-16 MECHANICAL DATA


| DIM. | mm.        |      |      | inch  |       |       |
|------|------------|------|------|-------|-------|-------|
|      | MIN.       | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |            |      | 1.75 |       |       | 0.068 |
| a1   | 0.1        |      | 0.2  | 0.003 |       | 0.007 |
| a2   |            |      | 1.65 |       |       | 0.064 |
| b    | 0.35       |      | 0.46 | 0.013 |       | 0.018 |
| b1   | 0.19       |      | 0.25 | 0.007 |       | 0.010 |
| C    |            | 0.5  |      |       | 0.019 |       |
| c1   | 45° (typ.) |      |      |       |       |       |
| D    | 9.8        |      | 10   | 0.385 |       | 0.393 |
| E    | 5.8        |      | 6.2  | 0.228 |       | 0.244 |
| e    |            | 1.27 |      |       | 0.050 |       |
| e3   |            | 8.89 |      |       | 0.350 |       |
| F    | 3.8        |      | 4.0  | 0.149 |       | 0.157 |
| G    | 4.6        |      | 5.3  | 0.181 |       | 0.208 |
| L    | 0.5        |      | 1.27 | 0.019 |       | 0.050 |
| M    |            |      | 0.62 |       |       | 0.024 |
| S    | 8° (max.)  |      |      |       |       |       |

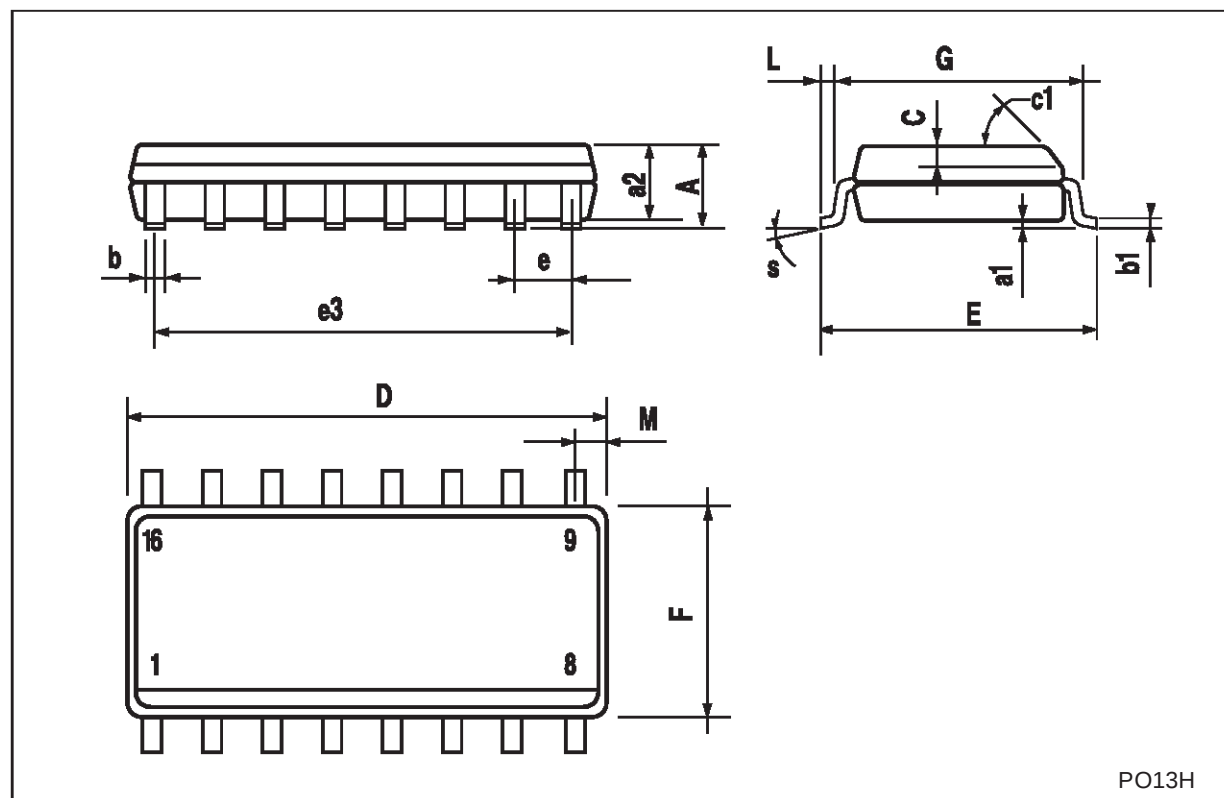

PO13H

## TSSOP16 MECHANICAL DATA

| DIM. | mm.  |          |      | inch  |            |        |
|------|------|----------|------|-------|------------|--------|
|      | MIN. | TYP      | MAX. | MIN.  | TYP.       | MAX.   |
| A    |      |          | 1.2  |       |            | 0.047  |
| A1   | 0.05 |          | 0.15 | 0.002 | 0.004      | 0.006  |
| A2   | 0.8  | 1        | 1.05 | 0.031 | 0.039      | 0.041  |
| b    | 0.19 |          | 0.30 | 0.007 |            | 0.012  |
| c    | 0.09 |          | 0.20 | 0.004 |            | 0.0089 |
| D    | 4.9  | 5        | 5.1  | 0.193 | 0.197      | 0.201  |
| E    | 6.2  | 6.4      | 6.6  | 0.244 | 0.252      | 0.260  |
| E1   | 4.3  | 4.4      | 4.48 | 0.169 | 0.173      | 0.176  |
| e    |      | 0.65 BSC |      |       | 0.0256 BSC |        |
| K    | 0°   |          | 8°   | 0°    |            | 8°     |
| L    | 0.45 | 0.60     | 0.75 | 0.018 | 0.024      | 0.030  |

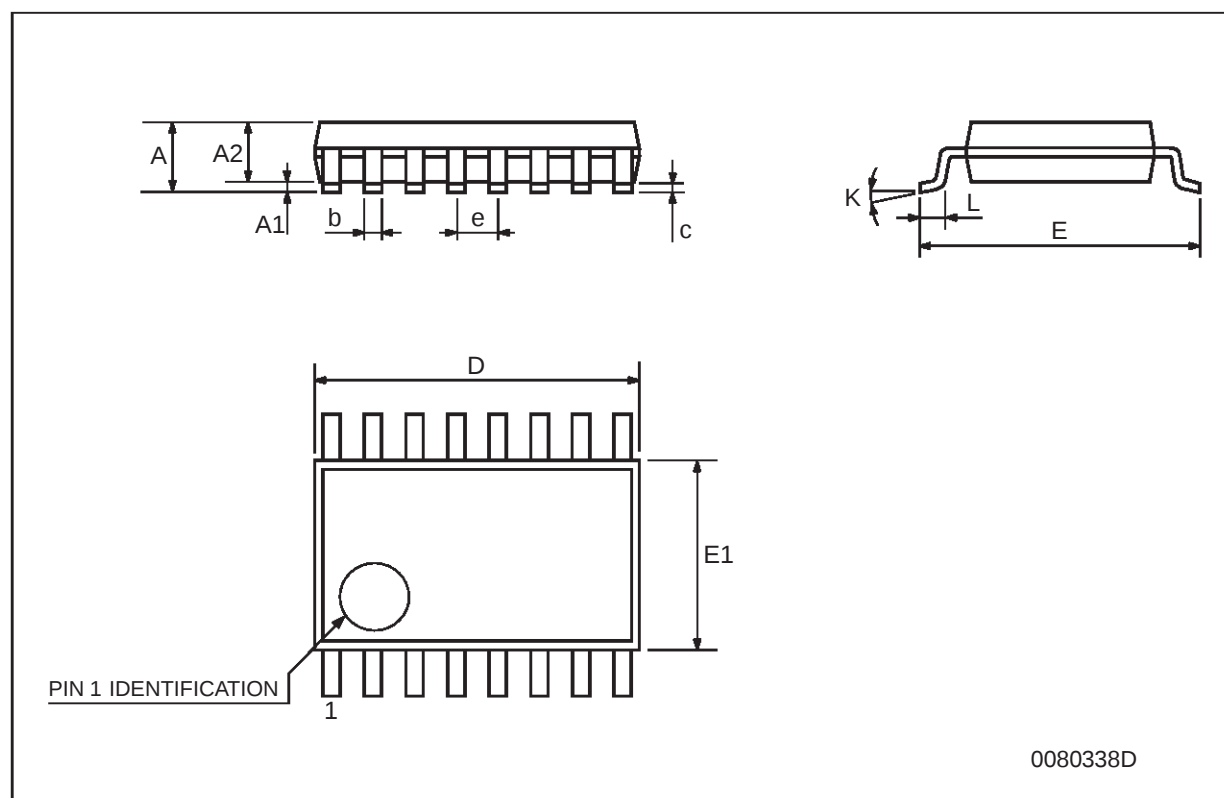

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>

