



SBOS161A - JANUARY 1989 - REVISED JULY 2003

Precision Dual *Difet* ® Operational Amplifier

FEATURES

● Very Low Noise: 8nV/√Hz at 10kHz

Low V_{os}: 1mV max
 Low Drift: 10µV/°C max
 Low I_n: 10pA max

● Fast Settling Time: 2µs to 0.01%

Unity-Gain Stable

APPLICATIONS


- Data Acquisition
- DAC Output Amplifiers
- Optoelectronics
- High-Impedance Sensor Amps
- High-Performance Audio Circuitry
- Medical Equipment, CT Scanners

DESCRIPTION

The OPA2107 dual operational amplifier provides precision **Difet** performance with the cost and space savings of a dual op amp. It is useful in a wide range of precision and low-noise analog circuitry and can be used to upgrade the performance of designs currently using BIFET® type amplifiers.

The OPA2107 is fabricated on a proprietary dielectrically isolated (*Difet*) process. This holds input bias currents to very low levels without sacrificing other important parameters, such as input offset voltage, drift and noise. Laser-trimmed input circuitry yields excellent dc performance. Superior dynamic performance is achieved, yet quiescent current is held to under 2.5mA per amplifier. The OPA2107 is unity-gain stable.

The OPA2107 is available in DIP-8 and SO-8 packages.





Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.



ABSOLUTE MAXIMUM RATINGS(1)

Supply Voltage±18	3V
Input Voltage Range ±V _S ±2	2V
Differential Input Voltage Total V _S ±4	4V
Operating Temperature	
P and U Packages –25°C to + 85°	°C
Storage Temperature	
P and U Packages –40°C to +125°	°C
Output Short Circuit to Ground (T _A = +25°C)	us
Junction Temperature+175°	°C
Lead Temperature	
P Package (soldering, 10s)+300°	°C
U Package, SOIC (3s)+260	°C
i	


NOTE: Stresses above these ratings may cause permanent damage.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

PIN CONFIGURATION

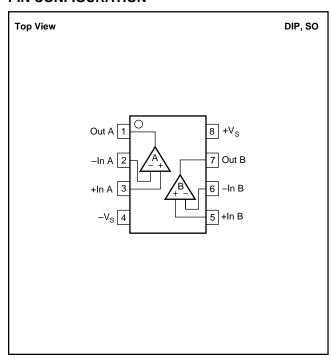

PACKAGE/ORDERING INFORMATION

PRODUCT	PACKAGE-LEAD	PACKAGE DESIGNATOR ⁽¹⁾	SPECIFIED TEMPERATURE RANGE	PACKAGE MARKING	ORDERING NUMBER	TRANSPORT MEDIA, QUANTITY
OPA2107	DIP-8	Р	−25°C to +85°C	OPA2107AP	OPA2107AP	Tube, 50
OPA2107	SO-8 "	D "	−25°C to +85°C	OPA2107AU "	OPA2107AU OPA2107AU/2K5	Tube, 100 Tape and Reel, 2500

NOTE: (1) For the most current specifications and package information, refer to our web site at www.ti.com.

ELECTRICAL CHARACTERISTICS


At T_A = +25°C, V_S = ±15V, unless otherwise noted.


			OPA2107AP, AU			
PARAMETER	CONDITION	MIN	TYP	MAX	UNITS	
OFFSET VOLTAGE ⁽¹⁾ Input Offset Voltage Over Specified Temperature Average Drift Over Specified Temperature	V _{CM} = 0V		0.1 0.5 3	1 2 10	mV mV μV/°C	
Power Supply Rejection	$V_S = \pm 10 \text{ to } \pm 18V$	80	96		dB	
INPUT BIAS CURRENT ⁽¹⁾ Input Bias Current Over Specified Temperature Input Offset Current Over Specified Temperature	$V_{CM} = 0V$ $V_{CM} = 0V$		4 0.25 1	10 1.5 8 1	pA nA pA nA	
INPUT NOISE Voltage: f = 10Hz	R _S = 0		30 12 9 8 1.2 0.85 1.2 23	·	nV/√Hz nV/√Hz nV/√Hz nV/√Hz μVp-p μVrms fA/√Hz fAp-p	
INPUT IMPEDANCE Differential Common-Mode			10 ¹³ 2 10 ¹⁴ 4		$\Omega \parallel pF$ $\Omega \parallel pF$	
INPUT VOLTAGE RANGE Common-Mode Input Range Over Specified Temperature Common-Mode Rejection	V _{CM} = ±10V	±10.5 ±10.2 80	±11 ±10.5 94		V V dB	
OPEN-LOOP GAIN Open-Loop Voltage Gain Over Specified Temperature	$V_O = \pm 10V$, $R_L = 2k\Omega$	82 80	96 94		dB dB	
DYNAMIC RESPONSE Slew Rate Settling Time: 0.1% 0.01% Gain Bandwidth Product THD + Noise Channel Separation	$G = +1$ $G = -1, 10V Step$ $G = 100$ $G = +1, f = 1kHz$ $f = 100Hz, R_L = 2k\Omega$	13	18 1.5 2 4.5 0.001 120		V/µs µs µs MHz % dB	
POWER SUPPLY Specified Operating Voltage Operating Voltage Range Current		±4.5	±15 ±4.5		V V mA	
OUTPUT Voltage Output Over Specified Temperature Short Circuit Current Output Resistance, Open-Loop Capacitive Load Stability	R _L = 2kΩ 1MHz G = +1	±11 ±10.5 ±10	±12 ±11.5 ±40 70 1000		V V mA Ω pF	
TEMPERATURE RANGE Specification Operating Storage Thermal Resistance $(\theta_{\text{J-A}})$		-25 -25 -40		+85 +85 +125	°C °C	
DIP-8 SO-8			90 175		°C/W	


NOTE: (1) Specified with devices fully warmed up.


TYPICAL CHARACTERISTICS


 $T_A = +25^{\circ}C$, $V_S = \pm 15V$ unless otherwise noted.

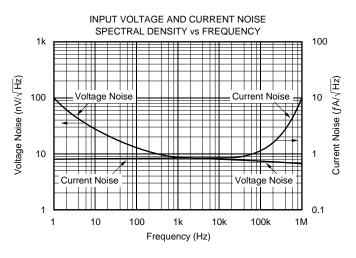




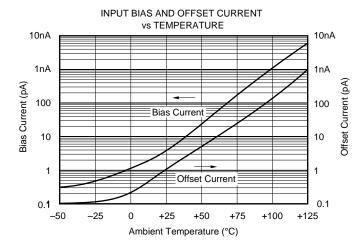




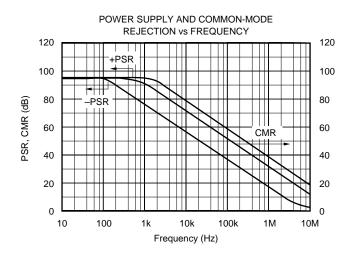






TYPICAL CHARACTERISTICS (Cont.)


 $T_A = +25$ °C, $V_S = \pm 15$ V unless otherwise noted.

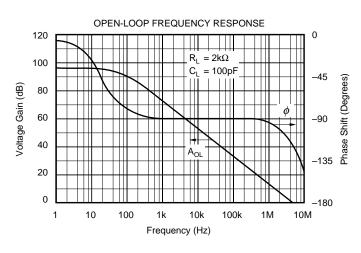
















TYPICAL CHARACTERISTICS (Cont.)


 $T_A = +25$ °C, $V_S = \pm 15$ V unless otherwise noted.














APPLICATIONS INFORMATION AND CIRCUITS

The OPA2107 is unity-gain stable and has an excellent phase margin. This makes it easy to use in a wide variety of applications.

Power-supply connections should be bypassed with capacitors positioned close to the amplifier pins. In most cases, $0.1\mu F$ ceramic capacitors are adequate. Applications with larger load currents and fast transient signals may need up to $1\mu F$ tantalum bypass capacitors.

INPUT BIAS CURRENT

The OPA2107 **Difet** input stages have very low input bias current—an order of magnitude lower than BIFET op amps. Circuit-board leakage paths can significantly degrade performance. This is especially evident with the SO-8 surface-mount package where pin-to-pin dimensions are particularly small. Residual soldering flux, dirt, and oils, which conduct leakage current, can be removed by proper cleaning. In most instances, a two-step cleaning process is adequate using a clean organic solvent rinse followed by deionized water. Each rinse should be followed by a 30-minute bake at 85°C.

A circuit-board guard pattern effectively reduces errors due to circuit-board leakage (Figure 1). By encircling critical high-impedance nodes with a low-impedance connection at the same circuit potential, any leakage currents will flow harmlessly to the low-impedance node. Guard traces should be placed on all levels of a multiple-layer circuit board.




FIGURE 1. Connection of Input Guard.




FIGURE 2. FET Input Instrumentation Amplifier.

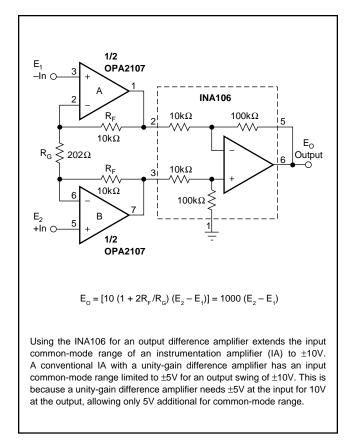


FIGURE 3. Precision Instrumentation Amplifier.



PACKAGE OPTION ADDENDUM

22-Feb-2005

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
OPA2107AP	ACTIVE	PDIP	Р	8	50	Pb-Free (RoHS)	Call TI	Level-NC-NC-NC
OPA2107AU	ACTIVE	SOIC	D	8	100	None	CU SNPB	Level-3-220C-168 HR
OPA2107AU/2K5	ACTIVE	SOIC	D	8	2500	None	CU SNPB	Level-3-220C-168 HR

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - May not be currently available - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

None: Not yet available Lead (Pb-Free).

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean "Pb-Free" and in addition, uses package materials that do not contain halogens, including bromine (Br) or antimony (Sb) above 0.1% of total product weight.


(3) MSL. Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDECindustry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE

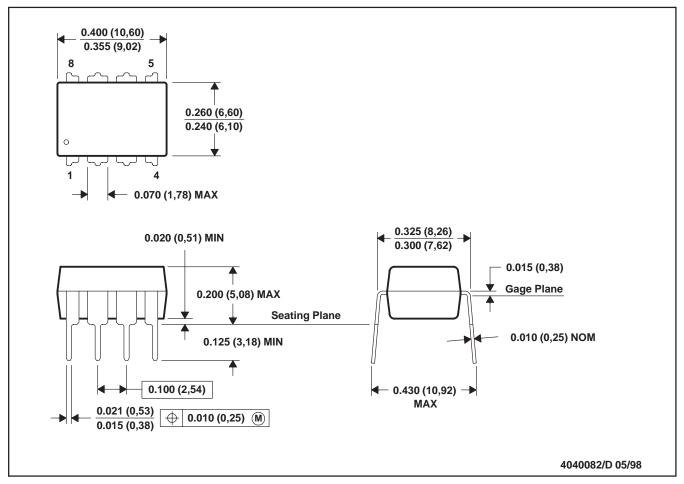


NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. Falls within JEDEC MS-001

For the latest package information, go to http://www.ti.com/sc/docs/package/pkg_info.htm

D (R-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE

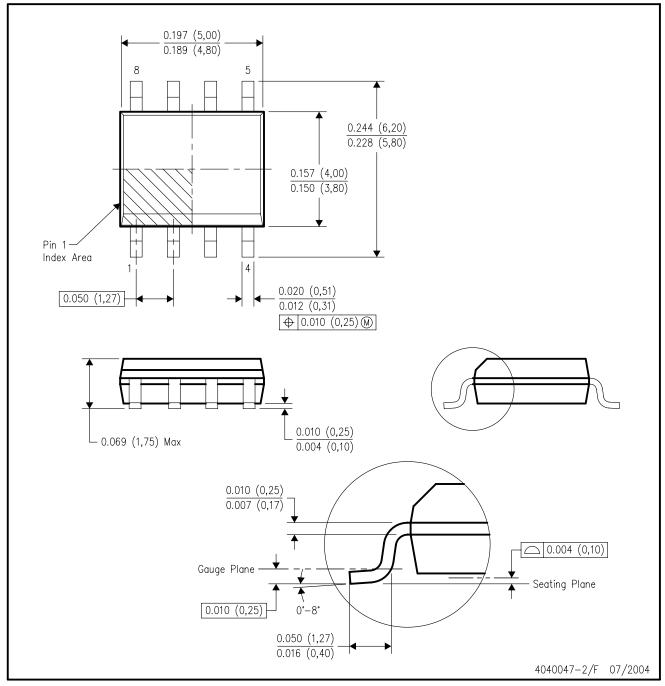

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-012 variation AA.



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments

Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated