



TLC251, TLC251A, TLC251B, TLC251Y LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

- **Wide Range of Supply Voltages**
1.4-V to 16-V
- **True Single-Supply Operation**
- **Common-Mode Input Voltage Range**
Includes the Negative Rail
- **Low Noise . . . 30 nV/ $\sqrt{\text{Hz}}$ Typ at 1-kHz**
(High Bias)
- **ESD Protection Exceeds 2000 V Per**
MIL-STD-883C, Method 3015.1

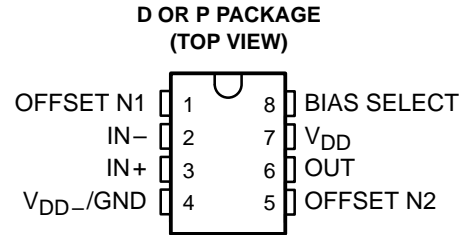

symbol

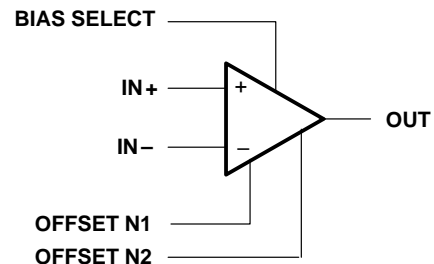

description

The TLC251C, TLC251AC, and TLC251BC are low-cost, low-power programmable operational amplifiers designed to operate with single or dual supplies. Unlike traditional metal-gate CMOS operational amplifiers, these devices utilize Texas Instruments silicon-gate LinCMOS™ process, giving them stable input offset voltages without sacrificing the advantages of metal-gate CMOS.

This series of parts is available in selected grades of input offset voltage and can be nulled with one external potentiometer. Because the input common-mode range extends to the negative rail and the power consumption is extremely low, this family is ideally suited for battery-powered or energy-conserving applications. A bias-select pin can be used to program one of three ac performance and power-dissipation levels to suit the application. The series features operation down to a 1.4-V supply and is stable at unity gain.

These devices have internal electrostatic-discharge (ESD) protection circuits that prevent catastrophic failures at voltages up to 2000 V as tested under MIL-STD-883C, Method 3015.1. However, care should be exercised in handling these devices as exposure to ESD may result in a degradation of the device parametric performance.

Because of the extremely high input impedance and low input bias and offset currents, applications for the TLC251C series include many areas that have previously been limited to BIFET and NFET product types. Any circuit using high-impedance elements and requiring small offset errors is a good candidate for cost-effective use of these devices. Many features associated with bipolar technology are available with LinCMOS™ operational amplifiers without the power penalties of traditional bipolar devices. Remote and inaccessible equipment applications are possible using the low-voltage and low-power capabilities of the TLC251C series.

In addition, by driving the bias-select input with a logic signal from a microprocessor, these operational amplifiers can have software-controlled performance and power consumption. The TLC251C series is well suited to solve the difficult problems associated with single battery and solar cell-powered applications.

The TLC251C series is characterized for operation from 0°C to 70°C.

AVAILABLE OPTIONS

| T _A | V _{IOmax} AT 25°C | PACKAGED DEVICES | | CHIP FORM (Y) |
|----------------|-------------------------------|----------------------|--------------------|------------------|
| | | SMALL OUTLINE (D) | PLASTIC DIP (P) | |
| 0°C to 70°C | 10 mV | TLC251CD | TLC251CP | TLC251Y |
| | 5 mV | TLC251ACD | TLC251ACP | — |
| | 2 mV | TLC251BCD | TLC251BCP | — |

The D package is available taped and reeled. Add the suffix R to the device type (e.g., TLC251CDR). Chips are tested at 25°C.

LinCMOS is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


Copyright © 2001, Texas Instruments Incorporated

TLC251, TLC251A, TLC251B, TLC251Y

LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

schematic

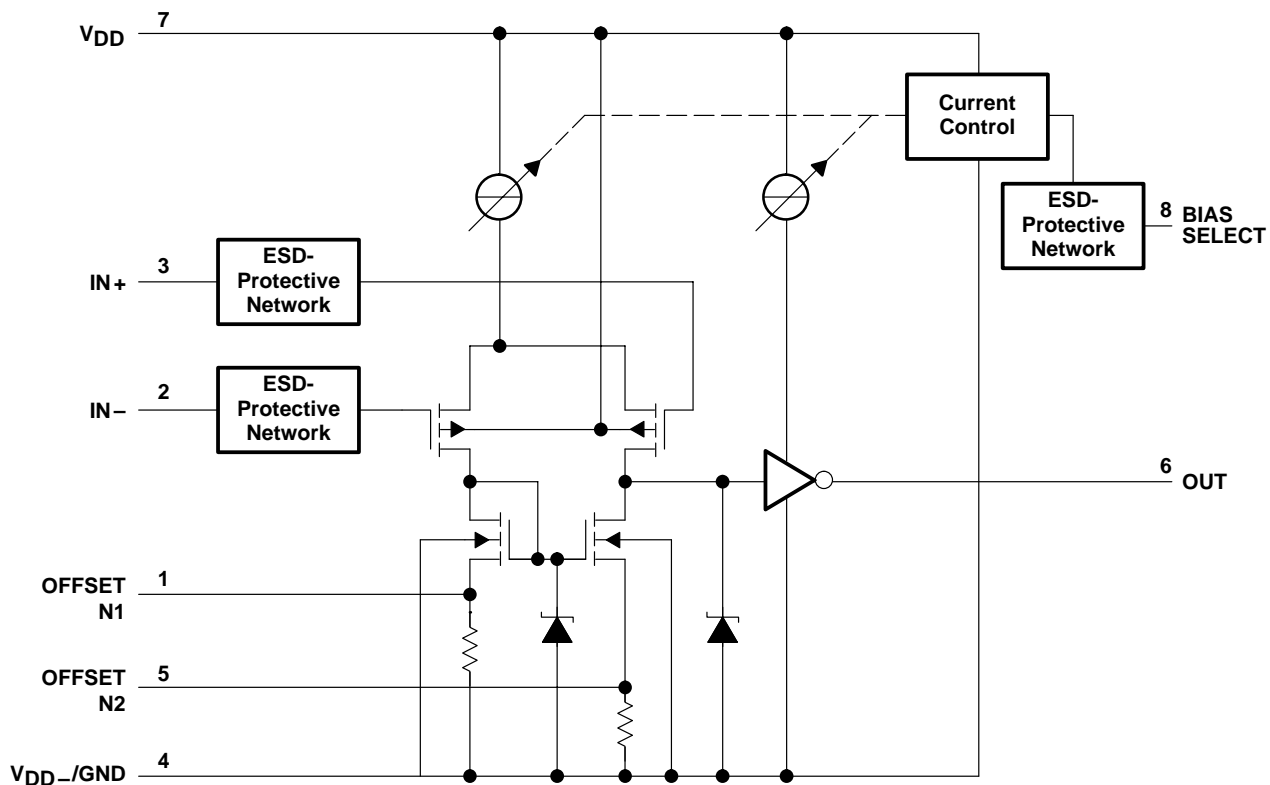


TLC251, TLC251A, TLC251B, TLC251Y
**LinCMOS™ PROGRAMMABLE
 LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001F – JULY 1983 – REVISED MARCH 2001

TLC251Y chip information

These chips, properly assembled, display characteristics similar to the TLC251C. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

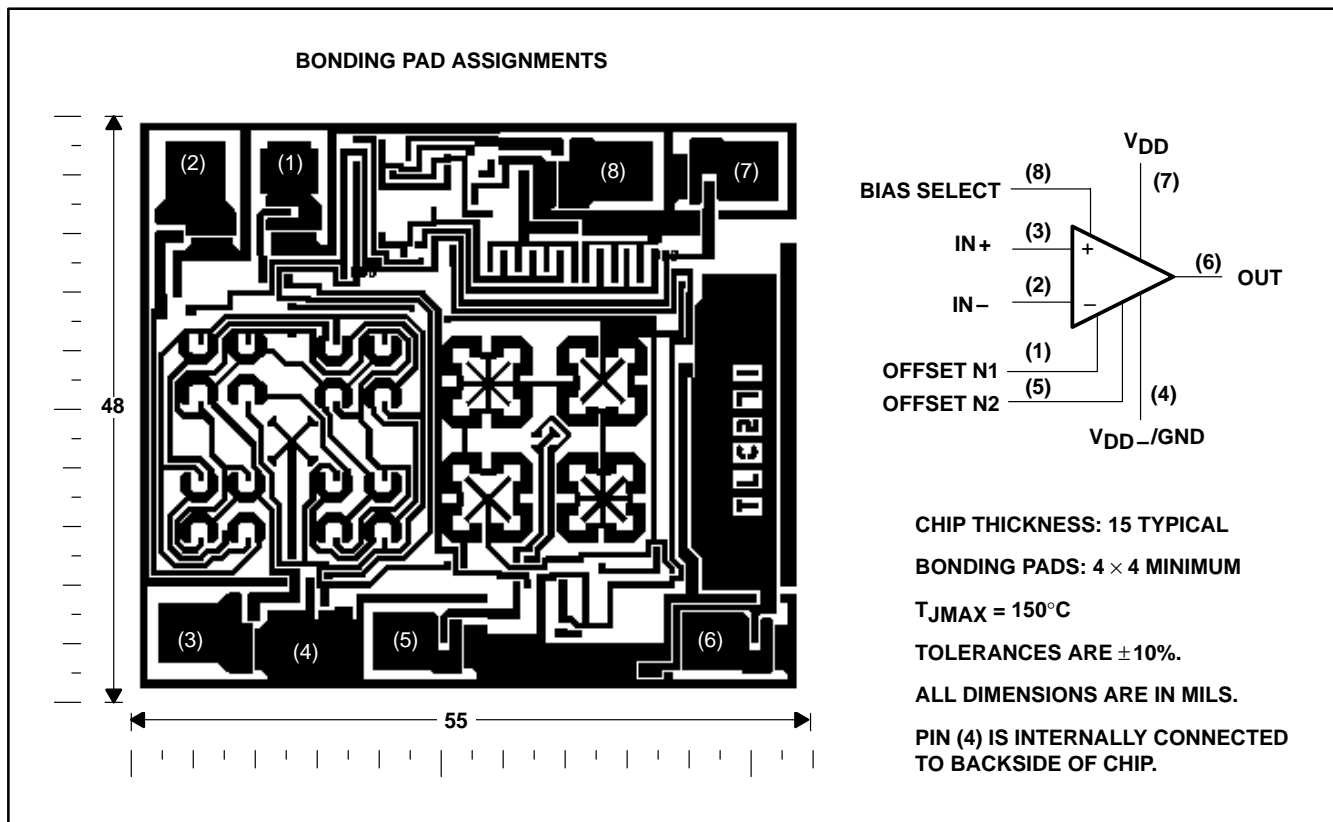

TLC251, TLC251A, TLC251B, TLC251Y
LinCMOS™ PROGRAMMABLE
LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

| | |
|--|------------------------------|
| Supply voltage, V_{DD} (see Note 1) | 18 V |
| Differential input voltage, V_{ID} (see Note 2) | ± 18 V |
| Input voltage range, V_I (any input) | -0.3 V to 18 V |
| Duration of short circuit at (or below) 25°C free-air temperature (see Note 3) | unlimited |
| Continuous total dissipation | See Dissipation Rating Table |
| Operating free-air temperature range, T_A | 0°C to 70°C |
| Storage temperature range | -65°C to 150°C |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to V_{DD-}/GND .
 2. Differential voltages are at $IN+$ with respect to $IN-$.
 3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure the maximum dissipation rating is not exceeded.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$ POWER RATING | DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$ POWER RATING |
|---------|---|---|--|
| D | 725 mW | 5.8 mW/°C | 464 mW |
| P | 1000 mW | 8.0 mW/°C | 640 mW |

recommended operating conditions

| | | MIN | MAX | UNIT |
|---------------------------------------|------------------|-----------------------------|-----|------|
| Supply voltage, V_{DD} | | 1.4 | 16 | V |
| Common-mode input voltage, V_{IC} | $V_{DD} = 1.4$ V | 0 | 0.2 | V |
| | $V_{DD} = 5$ V | -0.2 | 4 | |
| | $V_{DD} = 10$ V | -0.2 | 9 | |
| | $V_{DD} = 16$ V | -0.2 | 14 | |
| Operating free-air temperature, T_A | | 0 | 70 | °C |
| Bias-select voltage | | See Application Information | | |



TLC251, TLC251A, TLC251B, TLC251Y
LinCMOS™ PROGRAMMABLE
LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

HIGH-BIAS MODE

electrical characteristics at specified free-air temperature

| PARAMETER | | TEST CONDITIONS | T _A † | TLC251C, TLC251AC, TLC251BC | | | | | | UNIT |
|---------------------|--|--|---|-----------------------------|-------------|-------------|------------------------|-------|-----|------|
| | | | | V _{DD} = 5 V | | | V _{DD} = 10 V | | | |
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V _{IO} | Input offset voltage | TLC251C TLC251AC TLC251BC | V _O = 1.4 V, V _{IC} = 0 V, R _S = 50 Ω, R _L = 10 kΩ | 25°C | 1.1 10 | | 1.1 10 | | mV | |
| | | | | Full range | 12 | | 12 | | | |
| | | | | 25°C | 0.9 5 | | 0.9 5 | | | |
| | | | | Full range | 6.5 | | 6.5 | | | |
| | | | | 25°C | 0.34 2 | | 0.39 2 | | | |
| | | | | Full range | 3 | | 3 | | | |
| α _{VIO} | Average temperature coefficient of input offset voltage | | 25°C to 70°C | 1.8 | | 2 | | μV/°C | | |
| I _{IO} | Input offset current (see Note 4) | V _O = V _{DD} /2, V _{IC} = V _{DD} /2 | 25°C | 0.1 60 | | 0.1 60 | | pA | | |
| | | | 70°C | 7 300 | | 7 300 | | | | |
| I _{IB} | Input bias current (see Note 4) | V _O = V _{DD} /2, V _{IC} = V _{DD} /2 | 25°C | 0.6 60 | | 0.7 60 | | pA | | |
| | | | 70°C | 40 600 | | 50 600 | | | | |
| V _{ICR} | Common-mode input voltage range (see Note 5) | | 25°C | -0.2 to 4 | -0.3 to 4.2 | -0.2 to 9 | -0.3 to 9.2 | V | | |
| | | | Full range | -0.2 to 3.5 | | -0.2 to 8.5 | | V | | |
| V _{OH} | High-level output voltage | V _{ID} = 100 mV, R _L = 10 kΩ | 25°C | 3.2 | 3.8 | 8 | 8.5 | V | | |
| | | | 0°C | 3 | 3.8 | 7.8 | 8.5 | | | |
| | | | 70°C | 3 | 3.8 | 7.8 | 8.4 | | | |
| V _{OL} | Low-level output voltage | V _{ID} = -100 mV, I _{OL} = 0 | 25°C | 0 50 | | 0 50 | | mV | | |
| | | | 0°C | 0 50 | | 0 50 | | | | |
| | | | 70°C | 0 50 | | 0 50 | | | | |
| A _{VD} | Large-signal differential voltage amplification | R _L = 10 kΩ, See Note 6 | 25°C | 5 | 23 | 10 | 36 | V/mV | | |
| | | | 0°C | 4 | 27 | 7.5 | 42 | | | |
| | | | 70°C | 4 | 20 | 7.5 | 32 | | | |
| CMRR | Common-mode rejection ratio | V _{IC} = V _{ICRmin} | 25°C | 65 | 80 | 65 | 85 | dB | | |
| | | | 0°C | 60 | 84 | 60 | 88 | | | |
| | | | 70°C | 60 | 85 | 60 | 88 | | | |
| k _{SVR} | Supply-voltage rejection ratio (ΔV _{DD} /ΔV _{IO}) | V _{DD} = 5 V to 10 V, V _O = 1.4 V | 25°C | 65 | 95 | 65 | 95 | dB | | |
| | | | 0°C | 60 | 94 | 60 | 94 | | | |
| | | | 70°C | 60 | 96 | 60 | 96 | | | |
| I _{I(SEL)} | Input current (BIAS SELECT) | V _{I(SEL)} = 0 | 25°C | -1.4 | | -1.9 | | μA | | |
| I _{DD} | Supply current | V _O = V _{DD} /2, V _{IC} = V _{DD} /2, No load | 25°C | 675 | 1600 | 950 | 2000 | μA | | |
| | | | 0°C | 775 | 1800 | 1125 | 2200 | | | |
| | | | 70°C | 575 | 1300 | 750 | 1700 | | | |

† Full range is 0°C to 70°C.

- NOTES:
4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.
 5. This range also applies to each input individually.
 6. At V_{DD} = 5 V, V_O = 0.25 V to 2 V; at V_{DD} = 10 V, V_O = 1 V to 6 V.



TLC251, TLC251A, TLC251B, TLC251Y
LinCMOS™ PROGRAMMABLE
LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

HIGH-BIAS MODE

operating characteristics, $V_{DD} = 5\text{ V}$

| PARAMETER | TEST CONDITIONS | T_A | TLC251C, TLC251AC, TLC251BC | | | UNIT |
|---|---|----------------------------|-----------------------------|-----|------------------------|------------|
| | | | MIN | TYP | MAX | |
| SR Slew rate at unity gain | $R_L = 10\text{ k}\Omega$, $C_L = 20\text{ pF}$ | $V_{I(PP)} = 1\text{ V}$ | 25°C | 3.6 | | V/ μ s |
| | | | 0°C | 4 | | |
| | | | 70°C | 3 | | |
| | | $V_{I(PP)} = 2.5\text{ V}$ | 25°C | 2.9 | | |
| | | | 0°C | 3.1 | | |
| | | | 70°C | 2.5 | | |
| V_n Equivalent input noise voltage | $f = 1\text{ kHz}$, $R_S = 20\ \Omega$ | 25°C | 25 | | nV/ $\sqrt{\text{Hz}}$ | |
| B_{OM} Maximum output-swing bandwidth | $V_O = V_{OH}$, $C_L = 20\text{ pF}$, $R_L = 10\text{ k}\Omega$ | 25°C | 320 | | kHz | |
| | | 0°C | 340 | | | |
| | | 70°C | 260 | | | |
| B_1 Unity-gain bandwidth | $V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$ | 25°C | 1.7 | | MHz | |
| | | 0°C | 2 | | | |
| | | 70°C | 1.3 | | | |
| ϕ_m Phase margin | $V_I = 10\text{ mV}$, $f = B_1$, $C_L = 20\text{ pF}$ | 25°C | 46° | | | |
| | | 0°C | 47° | | | |
| | | 70°C | 44° | | | |

operating characteristics, $V_{DD} = 10\text{ V}$

| PARAMETER | TEST CONDITIONS | T_A | TLC251C, TLC251AC, TLC251BC | | | UNIT |
|---|---|----------------------------|-----------------------------|-----|------------------------|------------|
| | | | MIN | TYP | MAX | |
| SR Slew rate at unity gain | $R_L = 10\text{ k}\Omega$, $C_L = 20\text{ pF}$ | $V_{I(PP)} = 1\text{ V}$ | 25°C | 5.3 | | V/ μ s |
| | | | 0°C | 5.9 | | |
| | | | 70°C | 4.3 | | |
| | | $V_{I(PP)} = 5.5\text{ V}$ | 25°C | 4.6 | | |
| | | | 0°C | 5.1 | | |
| | | | 70°C | 3.8 | | |
| V_n Equivalent input noise voltage | $f = 1\text{ kHz}$, $R_S = 20\ \Omega$ | 25°C | 25 | | nV/ $\sqrt{\text{Hz}}$ | |
| B_{OM} Maximum output-swing bandwidth | $V_O = V_{OH}$, $C_L = 20\text{ pF}$, $R_L = 10\text{ k}\Omega$ | 25°C | 200 | | kHz | |
| | | 0°C | 220 | | | |
| | | 70°C | 140 | | | |
| B_1 Unity-gain bandwidth | $V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$ | 25°C | 2.2 | | MHz | |
| | | 0°C | 2.5 | | | |
| | | 70°C | 1.8 | | | |
| ϕ_m Phase margin | $V_I = 10\text{ mV}$, $f = B_1$, $C_L = 20\text{ pF}$ | 25°C | 49° | | | |
| | | 0°C | 50° | | | |
| | | 70°C | 46° | | | |



TLC251, TLC251A, TLC251B, TLC251Y
LinCMOS™ PROGRAMMABLE
LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

MEDIUM-BIAS MODE

electrical characteristics at specified free-air temperature

| PARAMETER | | TEST CONDITIONS | T _A † | TLC251C, TLC251AC, TLC251BC | | | | | | UNIT |
|---------------------|--|--|---|-----------------------------|-------------|-------------|------------------------|-------|-----|------|
| | | | | V _{DD} = 5 V | | | V _{DD} = 10 V | | | |
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V _{IO} | Input offset voltage | TLC251C TLC251AC TLC251BC | V _O = 1.4 V, V _{IC} = 0 V, R _S = 50 Ω, R _L = 10 kΩ | 25°C | 1.1 10 | | 1.1 10 | | mV | |
| | | | | Full range | 12 | | 12 | | | |
| | | | | 25°C | 0.9 5 | | 0.9 5 | | | |
| | | | | Full range | 6.5 | | 6.5 | | | |
| | | | | 25°C | 0.34 2 | | 0.39 2 | | | |
| | | | | Full range | 3 | | 3 | | | |
| α _{VIO} | Average temperature coefficient of input offset voltage | | 25°C to 70°C | 1.7 | | 2.1 | | μV/°C | | |
| I _{IO} | Input offset current (see Note 4) | V _O = V _{DD} /2, V _{IC} = V _{DD} /2 | 25°C | 0.1 60 | | 0.1 60 | | pA | | |
| | | | 70°C | 7 300 | | 7 300 | | | | |
| I _{IB} | Input bias current (see Note 4) | V _O = V _{DD} /2, V _{IC} = V _{DD} /2 | 25°C | 0.6 60 | | 0.7 60 | | pA | | |
| | | | 70°C | 40 600 | | 50 600 | | | | |
| V _{ICR} | Common-mode input voltage range (see Note 5) | | 25°C | -0.2 to 4 | -0.3 to 4.2 | -0.2 to 9 | -0.3 to 9.2 | V | | |
| | | | Full range | -0.2 to 3.5 | | -0.2 to 8.5 | | V | | |
| V _{OH} | High-level output voltage | V _{ID} = 100 mV, R _L = 10 kΩ | 25°C | 3.2 | 3.9 | 8 | 8.7 | V | | |
| | | | 0°C | 3 | 3.9 | 7.8 | 8.7 | | | |
| | | | 70°C | 3 | 4 | 7.8 | 8.7 | | | |
| V _{OL} | Low-level output voltage | V _{ID} = -100 mV, I _{OL} = 0 | 25°C | 0 50 | | 0 50 | | mV | | |
| | | | 0°C | 0 50 | | 0 50 | | | | |
| | | | 70°C | 0 50 | | 0 50 | | | | |
| A _{VD} | Large-signal differential voltage amplification | R _L = 10 kΩ, See Note 6 | 25°C | 25 | 170 | 25 | 275 | V/mV | | |
| | | | 0°C | 15 | 200 | 15 | 320 | | | |
| | | | 70°C | 15 | 140 | 15 | 230 | | | |
| CMRR | Common-mode rejection ratio | V _{IC} = V _{ICRmin} | 25°C | 65 | 91 | 65 | 94 | dB | | |
| | | | 0°C | 60 | 91 | 60 | 94 | | | |
| | | | 70°C | 60 | 92 | 60 | 94 | | | |
| k _{SVR} | Supply-voltage rejection ratio (ΔV _{DD} /ΔV _{IO}) | V _{DD} = 5 V to 10 V, V _O = 1.4 V | 25°C | 70 | 93 | 70 | 93 | dB | | |
| | | | 0°C | 60 | 92 | 60 | 92 | | | |
| | | | 70°C | 60 | 94 | 60 | 94 | | | |
| I _{I(SEL)} | Input current (BIAS SELECT) | V _{I(SEL)} = V _{DD} /2 | 25°C | -130 | | -160 | | nA | | |
| I _{DD} | Supply current | V _O = V _{DD} /2, V _{IC} = V _{DD} /2, No load | 25°C | 105 | 280 | 143 | 300 | μA | | |
| | | | 0°C | 125 | 320 | 173 | 400 | | | |
| | | | 70°C | 85 | 220 | 110 | 280 | | | |

† Full range is 0°C to 70°C.

- NOTES:
4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.
 5. This range also applies to each input individually.
 6. At V_{DD} = 5 V, V_O = 0.25 V to 2 V; at V_{DD} = 10 V, V_O = 1 V to 6 V.



TLC251, TLC251A, TLC251B, TLC251Y
LinCMOS™ PROGRAMMABLE
LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

MEDIUM-BIAS MODE

operating characteristics, $V_{DD} = 5\text{ V}$

| PARAMETER | TEST CONDITIONS | T_A | TLC251C, TLC251AC, TLC251BC | | | UNIT |
|---|--|----------------------------|-----------------------------|------|------------------------|------------------|
| | | | MIN | TYP | MAX | |
| SR Slew rate at unity gain | $R_L = 100\text{ k}\Omega$, $C_L = 20\text{ pF}$ | $V_{I(PP)} = 1\text{ V}$ | 25°C | 0.43 | | V/ μs |
| | | | 0°C | 0.46 | | |
| | | | 70°C | 0.36 | | |
| | | $V_{I(PP)} = 2.5\text{ V}$ | 25°C | 0.40 | | |
| | | | 0°C | 0.43 | | |
| | | | 70°C | 0.34 | | |
| V_n Equivalent input noise voltage | $f = 1\text{ kHz}$, $R_S = 20\ \Omega$ | 25°C | 32 | | nV/ $\sqrt{\text{Hz}}$ | |
| B_{OM} Maximum output-swing bandwidth | $V_O = V_{OH}$, $C_L = 20\text{ pF}$, $R_L = 100\text{ k}\Omega$ | 25°C | 55 | | kHz | |
| | | 0°C | 60 | | | |
| | | 70°C | 50 | | | |
| B_1 Unity-gain bandwidth | $V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$ | 25°C | 525 | | kHz | |
| | | 0°C | 600 | | | |
| | | 70°C | 400 | | | |
| ϕ_m Phase margin | $V_I = 10\text{ mV}$, $f = B_1$, $C_L = 20\text{ pF}$ | 25°C | 40° | | | |
| | | 0°C | 41° | | | |
| | | 70°C | 39° | | | |

operating characteristics, $V_{DD} = 10\text{ V}$

| PARAMETER | TEST CONDITIONS | T_A | TLC251C, TLC251AC, TLC251BC | | | UNIT |
|---|--|----------------------------|-----------------------------|------|------------------------|------------------|
| | | | MIN | TYP | MAX | |
| SR Slew rate at unity gain | $R_L = 100\text{ k}\Omega$, $C_L = 20\text{ pF}$ | $V_{I(PP)} = 1\text{ V}$ | 25°C | 0.62 | | V/ μs |
| | | | 0°C | 0.67 | | |
| | | | 70°C | 0.51 | | |
| | | $V_{I(PP)} = 5.5\text{ V}$ | 25°C | 0.56 | | |
| | | | 0°C | 0.61 | | |
| | | | 70°C | 0.46 | | |
| V_n Equivalent input noise voltage | $f = 1\text{ kHz}$, $R_S = 20\ \Omega$ | 25°C | 32 | | nV/ $\sqrt{\text{Hz}}$ | |
| B_{OM} Maximum output-swing bandwidth | $V_O = V_{OH}$, $C_L = 20\text{ pF}$, $R_L = 100\text{ k}\Omega$ | 25°C | 35 | | kHz | |
| | | 0°C | 40 | | | |
| | | 70°C | 30 | | | |
| B_1 Unity-gain bandwidth | $V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$ | 25°C | 635 | | kHz | |
| | | 0°C | 710 | | | |
| | | 70°C | 510 | | | |
| ϕ_m Phase margin | $V_I = 10\text{ mV}$, $f = B_1$, $C_L = 20\text{ pF}$ | 25°C | 43° | | | |
| | | 0°C | 44° | | | |
| | | 70°C | 42° | | | |



TLC251, TLC251A, TLC251B, TLC251Y
LinCMOS™ PROGRAMMABLE
LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

LOW-BIAS MODE

electrical characteristics at specified free-air temperature

| PARAMETER | | TEST CONDITIONS | T _A † | TLC251C, TLC251AC, TLC251BC | | | | | | UNIT |
|---------------------|--|--|---|-----------------------------|-------------|-------------|------------------------|-------|-----|------|
| | | | | V _{DD} = 5 V | | | V _{DD} = 10 V | | | |
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V _{IO} | Input offset voltage | TLC251C TLC251AC TLC251BC | V _O = 1.4 V, V _{IC} = 0 V, R _S = 50 Ω, R _L = 10 MΩ | 25°C | 1.1 10 | | 1.1 10 | | mV | |
| | | | | Full range | 12 | | 12 | | | |
| | | | | 25°C | 0.9 5 | | 0.9 5 | | | |
| | | | | Full range | 6.5 | | 6.5 | | | |
| | | | | 25°C | 0.24 2 | | 0.26 2 | | | |
| | | | | Full range | 3 | | 3 | | | |
| α _{VIO} | Average temperature coefficient of input offset voltage | | 25°C to 70°C | 1.1 | | 1 | | μV/°C | | |
| I _{IO} | Input offset current (see Note 4) | V _O = V _{DD} /2, V _{IC} = V _{DD} /2 | 25°C | 0.1 60 | | 0.1 60 | | pA | | |
| | | | 70°C | 7 300 | | 7 300 | | | | |
| I _{IB} | Input bias current (see Note 4) | V _O = V _{DD} /2, V _{IC} = V _{DD} /2 | 25°C | 0.6 60 | | 0.7 60 | | pA | | |
| | | | 70°C | 40 600 | | 50 600 | | | | |
| V _{ICR} | Common-mode input voltage range (see Note 5) | | 25°C | -0.2 to 4 | -0.3 to 4.2 | -0.2 to 9 | -0.3 to 9.2 | V | | |
| | | | Full range | -0.2 to 3.5 | | -0.2 to 8.5 | | V | | |
| V _{OH} | High-level output voltage | V _{ID} = 100 mV, R _L = 1 MΩ | 25°C | 3.2 4.1 | | 8 8.9 | | V | | |
| | | | 0°C | 3 4.1 | | 7.8 8.9 | | | | |
| | | | 70°C | 3 4.2 | | 7.8 8.9 | | | | |
| V _{OL} | Low-level output voltage | V _{ID} = -100 mV, I _{OL} = 0 | 25°C | 0 50 | | 0 50 | | mV | | |
| | | | 0°C | 0 50 | | 0 50 | | | | |
| | | | 70°C | 0 50 | | 0 50 | | | | |
| A _{VD} | Large-signal differential voltage amplification | R _L = 1 MΩ, See Note 6 | 25°C | 50 520 | | 50 870 | | V/mV | | |
| | | | 0°C | 50 700 | | 50 1030 | | | | |
| | | | 70°C | 50 380 | | 50 660 | | | | |
| CMRR | Common-mode rejection ratio | V _{IC} = V _{ICRmin} | 25°C | 65 94 | | 65 97 | | dB | | |
| | | | 0°C | 60 95 | | 60 97 | | | | |
| | | | 70°C | 60 95 | | 60 97 | | | | |
| k _{SVR} | Supply-voltage rejection ratio (ΔV _{DD} /ΔV _{IO}) | V _{DD} = 5 V to 10 V, V _O = 1.4 V | 25°C | 70 97 | | 70 97 | | dB | | |
| | | | 0°C | 60 97 | | 60 97 | | | | |
| | | | 70°C | 60 98 | | 60 98 | | | | |
| I _{I(SEL)} | Input current (BIAS SELECT) | V _{I(SEL)} = V _{DD} | 25°C | 65 | | 95 | | nA | | |
| I _{DD} | Supply current | V _O = V _{DD} /2, V _{IC} = V _{DD} /2, No load | 25°C | 10 17 | | 14 23 | | μA | | |
| | | | 0°C | 12 21 | | 18 33 | | | | |
| | | | 70°C | 8 14 | | 11 20 | | | | |

† Full range is 0°C to 70°C.

- NOTES:
4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.
 5. This range also applies to each input individually.
 6. At V_{DD} = 5 V, V_O = 0.25 V to 2 V; at V_{DD} = 10 V, V_O = 1 V to 6 V.



TLC251, TLC251A, TLC251B, TLC251Y
LinCMOS™ PROGRAMMABLE
LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

LOW-BIAS MODE

operating characteristics, $V_{DD} = 5\text{ V}$

| PARAMETER | TEST CONDITIONS | T_A | TLC251C, TLC251AC, TLC251BC | | | UNIT |
|---|--|----------------------------|-----------------------------|------|------------------------|------------------|
| | | | MIN | TYP | MAX | |
| SR Slew rate at unity gain | $R_L = 1\text{ M}\Omega$, $C_L = 20\text{ pF}$ | $V_{I(PP)} = 1\text{ V}$ | 25°C | 0.03 | | V/ μs |
| | | | 0°C | 0.04 | | |
| | | | 70°C | 0.03 | | |
| | | $V_{I(PP)} = 2.5\text{ V}$ | 25°C | 0.03 | | |
| | | | 0°C | 0.03 | | |
| | | | 70°C | 0.02 | | |
| V_n Equivalent input noise voltage | $f = 1\text{ kHz}$, $R_S = 20\ \Omega$ | 25°C | 68 | | nV/ $\sqrt{\text{Hz}}$ | |
| B_{OM} Maximum output-swing bandwidth | $V_O = V_{OH}$, $C_L = 20\text{ pF}$, $R_L = 1\text{ M}\Omega$ | 25°C | 5 | | kHz | |
| | | 0°C | 6 | | | |
| | | 70°C | 4.5 | | | |
| B_1 Unity-gain bandwidth | $V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$ | 25°C | 85 | | kHz | |
| | | 0°C | 100 | | | |
| | | 70°C | 65 | | | |
| ϕ_m Phase margin | $V_I = 10\text{ mV}$, $f = B_1$, $C_L = 20\text{ pF}$ | 25°C | 34° | | | |
| | | 0°C | 36° | | | |
| | | 70°C | 30° | | | |

operating characteristics, $V_{DD} = 10\text{ V}$

| PARAMETER | TEST CONDITIONS | T_A | TLC251C, TLC251AC, TLC251BC | | | UNIT |
|---|--|----------------------------|-----------------------------|------|------------------------|------------------|
| | | | MIN | TYP | MAX | |
| SR Slew rate at unity gain | $R_L = 1\text{ M}\Omega$, $C_L = 20\text{ pF}$ | $V_{I(PP)} = 1\text{ V}$ | 25°C | 0.05 | | V/ μs |
| | | | 0°C | 0.05 | | |
| | | | 70°C | 0.04 | | |
| | | $V_{I(PP)} = 5.5\text{ V}$ | 25°C | 0.04 | | |
| | | | 0°C | 0.05 | | |
| | | | 70°C | 0.04 | | |
| V_n Equivalent input noise voltage | $f = 1\text{ kHz}$, $R_S = 20\ \Omega$ | 25°C | 68 | | nV/ $\sqrt{\text{Hz}}$ | |
| B_{OM} Maximum output-swing bandwidth | $V_O = V_{OH}$, $C_L = 20\text{ pF}$, $R_L = 1\text{ M}\Omega$ | 25°C | 1 | | kHz | |
| | | 0°C | 1.3 | | | |
| | | 70°C | 0.9 | | | |
| B_1 Unity-gain bandwidth | $V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$ | 25°C | 110 | | kHz | |
| | | 0°C | 125 | | | |
| | | 70°C | 90 | | | |
| ϕ_m Phase margin | $V_I = 10\text{ mV}$, $f = B_1$, $C_L = 20\text{ pF}$ | 25°C | 38° | | | |
| | | 0°C | 40° | | | |
| | | 70°C | 34° | | | |



TLC251, TLC251A, TLC251B, TLC251Y
LinCMOS™ PROGRAMMABLE
LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

electrical characteristics at specified free-air temperature, $V_{DD} = 1.4\text{ V}$

| PARAMETER | | TEST CONDITIONS† | T_A ‡ | BIAS | TLC251C, TLC251AC, TLC251BC | | | UNIT |
|-------------------|---|---|--------------|------|-----------------------------|-----|------------------------------|------|
| | | | | | MIN | TYP | MAX | |
| V_{IO} | Input offset voltage | $V_O = 0.2\text{ V}$, $R_S = 50\ \Omega$ | 25°C | Any | 10 | | | mV |
| | | | | | Full range | | | |
| | | | 25°C | Any | 5 | | | |
| | | | | | Full range | | | |
| | | | 25°C | Any | 2 | | | |
| | | | | | Full range | | | |
| $\alpha_{V_{IO}}$ | Average temperature coefficient of input offset voltage | | 25°C to 70°C | Any | 1 | | $\mu\text{V}/^\circ\text{C}$ | |
| I_{IO} | Input offset current | $V_O = 0.2\text{ V}$ | 25°C | Any | 1 | | pA | |
| | | | Full range | | | 300 | | |
| I_{IB} | Input bias current | $V_O = 0.2\text{ V}$ | 25°C | Any | 1 | | pA | |
| | | | Full range | | | 600 | | |
| V_{ICR} | Common-mode input voltage range | | 25°C | Any | 0 to 0.2 | | V | |
| V_{OM} | Peak output voltage swing§ | $V_{ID} = 100\text{ mV}$ | 25°C | Any | 450 | 700 | mV | |
| A_{VD} | Large-signal differential voltage amplification | $V_O = 100\text{ to }300\text{ mV}$, $R_S = 50\ \Omega$ | 25°C | Low | 20 | | | |
| | | | | High | 10 | | | |
| $CMRR$ | Common-mode rejection ratio | $R_S = 50\ \Omega$, $V_{IC} = V_{ICRmin}$ | 25°C | Any | 60 | 77 | dB | |
| I_{DD} | Supply current | $V_O = 0.2\text{ V}$, No load | 25°C | Low | 5 | | μA | |
| | | | | High | 150 | | | |

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Unless otherwise noted, an output load resistor is connected from the output to ground and has the following values: for low bias, $R_L = 1\text{ M}\Omega$, for medium bias, $R_L = 100\text{ k}\Omega$, and for high bias, $R_L = 10\text{ k}\Omega$.

‡ Full range is 0°C to 70°C.

§ The output swings to the potential of V_{DD-}/GND .

operating characteristics, $V_{DD} = 1.4\text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | BIAS | TLC251C, TLC251AC, TLC251BC | | | UNIT |
|-----------|-------------------------|-----------------------|------|-----------------------------|-----|-----|------------------------|
| | | | | MIN | TYP | MAX | |
| B_1 | Unity-gain bandwidth | $C_L = 100\text{ pF}$ | Low | 12 | | | kHz |
| | | | High | 12 | | | |
| SR | Slew rate at unity gain | See Figure 1 | Low | 0.001 | | | $\text{V}/\mu\text{s}$ |
| | | | High | 0.1 | | | |
| | Overshoot factor | See Figure 1 | Low | 35% | | | |
| | | | High | 30% | | | |



TLC251, TLC251A, TLC251B, TLC251Y
LinCMOS™ PROGRAMMABLE
LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001F – JULY 1983 – REVISED MARCH 2001

electrical characteristics, $V_{DD} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | TEST CONDITIONS | TLC251Y | | | | | | | | | UNIT |
|--|---|-----------------|-------------------|------|------------------|-------------------|-------|-----------------|-------------------|-----|------------------------------|
| | | HIGH-BIAS MODE | | | MEDIUM-BIAS MODE | | | LOW-BIAS MODE | | | |
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{IO} Input offset voltage | $V_O = 1.4\text{ V}$, $V_{IC} = 0\text{ V}$, $R_S = 50\ \Omega$, R_L^\dagger | | 1.1 | 10 | | 1.1 | 10 | | 1.1 | 10 | mV |
| α_{VIO} Average temperature coefficient of input offset voltage | | | 1.8 | | 1.7 | | 1.1 | | | | $\mu\text{V}/^\circ\text{C}$ |
| I_{IO} Input offset current (see Note 4) | $V_O = V_{DD}/2$, $V_{IC} = V_{DD}/2$ | | 0.1 | 60 | | 0.1 | 60 | | 0.1 | 60 | pA |
| I_{IB} Input bias current (see Note 4) | $V_O = V_{DD}/2$, $V_{IC} = V_{DD}/2$ | | 0.6 | 60 | | 0.6 | 60 | | 0.6 | 60 | pA |
| V_{ICR} Common-mode input voltage range (see Note 5) | | -0.2 to 4 | -0.3 to 4.2 | | -0.2 to 4 | -0.3 to 4.2 | | -0.2 to 4 | -0.3 to 4.2 | | V |
| V_{OH} High-level output voltage | $V_{ID} = 100\text{ mV}$, R_L^\dagger | 3.2 | 3.8 | | 3.2 | 3.9 | | 3.2 | 4.1 | | V |
| V_{OL} Low-level output voltage | $V_{ID} = -100\text{ mV}$, $I_{OL} = 0$ | | 0 | 50 | | 0 | 50 | | 0 | 50 | mV |
| A_{VD} Large-signal differential voltage amplification | $V_O = 0.25\text{ V}$, R_L^\dagger | 5 | 23 | | 25 | 170 | | 50 | 480 | | V/mV |
| CMRR Common-mode rejection ratio | $V_{IC} = V_{ICRmin}$ | 65 | 80 | | 65 | 91 | | 65 | 94 | | dB |
| k_{SVR} Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$) | $V_{DD} = 5\text{ V to }10\text{ V}$, $V_O = 1.4\text{ V}$ | 65 | 95 | | 70 | 93 | | 70 | 97 | | dB |
| $I_{I(SEL)}$ Input current (BIAS SELECT) | $V_{I(SEL)} = V_{DD}/2$ | | -1.4 | | -0.13 | | 0.065 | | | | μA |
| I_{DD} Supply current | $V_O = V_{DD}/2$, $V_{IC} = V_{DD}/2$, No load | | 675 | 1600 | | 105 | 280 | | 10 | 17 | μA |

† For high-bias mode, $R_L = 10\text{ k}\Omega$; for medium-bias mode, $R_L = 100\text{ k}\Omega$; and for low-bias mode, $R_L = 1\text{ M}\Omega$.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.



operating characteristics, $V_{DD} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | TEST CONDITIONS | TLC251Y | | | | | | | | | UNIT | | | |
|-----------------|---|---------------------------------|-----|-----|------------------|-----|-----|---------------|-----|-----|------|--|--|------------------------|
| | | HIGH-BIAS MODE | | | MEDIUM-BIAS MODE | | | LOW-BIAS MODE | | | | | | |
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | | | | |
| SR | Slew rate at unity gain R_L^\dagger , $C_L = 20\text{ pF}$ | $V_I(\text{PP}) = 1\text{ V}$ | | | 3.6 | | | 0.43 | | | 0.03 | | | V/ μs |
| | | $V_I(\text{PP}) = 2.5\text{ V}$ | | | 2.9 | | | 0.40 | | | 0.03 | | | |
| V_n | Equivalent input noise voltage $f = 1\text{ kHz}$, $R_S = 20\ \Omega$ | | | | 25 | | | 32 | | | 68 | | | nV/ $\sqrt{\text{Hz}}$ |
| B _{OM} | Maximum output swing bandwidth $V_O = V_{OH}$, $R_L = 10\text{ k}\Omega$ | $C_L = 20\text{ pF}$ | | | 320 | | | 55 | | | 4.5 | | | kHz |
| B ₁ | Unity-gain bandwidth $V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$ | | | | 1700 | | | 525 | | | 65 | | | kHz |
| ϕ_m | Phase margin $f = B_1$, $C_L = 20\text{ pF}$ | $V_I = 10\text{ mV}$ | | | 46° | | | 40° | | | 34° | | | |

† For high-bias mode, $R_L = 10\text{ k}\Omega$; for medium-bias mode, $R_L = 100\text{ k}\Omega$; and for low-bias mode, $R_L = 1\text{ M}\Omega$.

PARAMETER MEASUREMENT INFORMATION

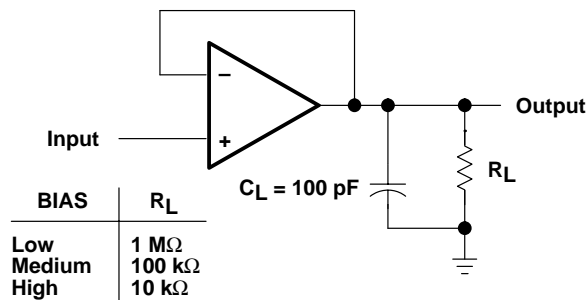


Figure 1. Unity-Gain Amplifier

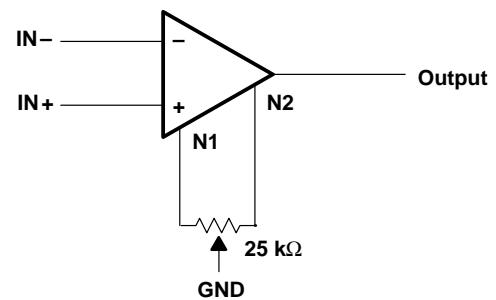


Figure 2. Input Offset Voltage Null Circuit

TYPICAL CHARACTERISTICS

Table of Graphs

| | | | FIGURE |
|----------|---|--------------------------|--------|
| I_{DD} | Supply current | vs Bias-select voltage | 3 |
| | | vs Supply voltage | 4 |
| | | vs Free-air temperature | 5 |
| A_{VD} | Large-signal differential voltage amplification | Low bias vs Frequency | 6 |
| | | Medium bias vs Frequency | 7 |
| | | High bias vs Frequency | 8 |
| | Phase shift | Low bias vs Frequency | 6 |
| | | Medium bias vs Frequency | 7 |
| | | High bias vs Frequency | 8 |

TYPICAL CHARACTERISTICS

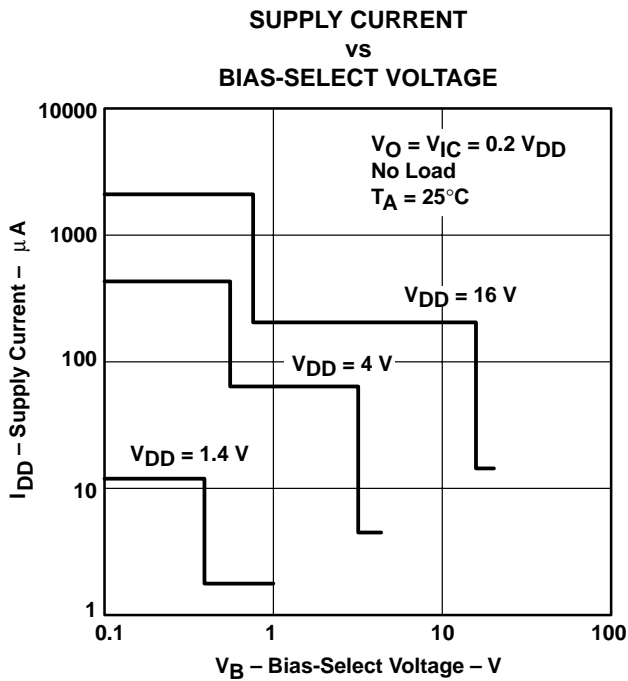


Figure 3

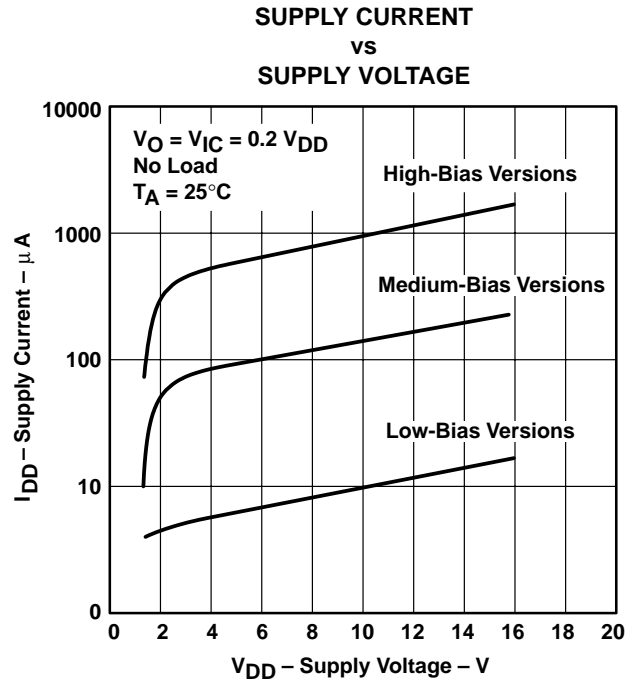


Figure 4

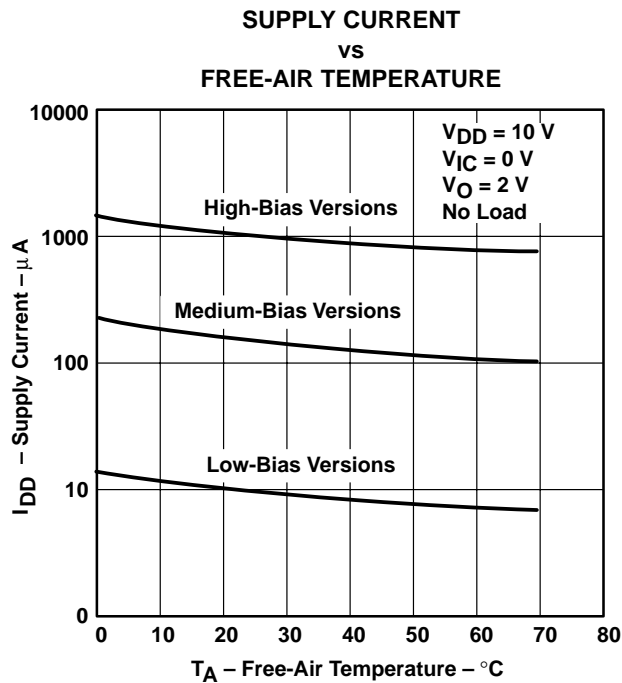


Figure 5

TYPICAL CHARACTERISTICS

**LOW-BIAS LARGE-SIGNAL
 DIFFERENTIAL VOLTAGE AMPLIFICATION
 AND PHASE SHIFT
 vs
 FREQUENCY**

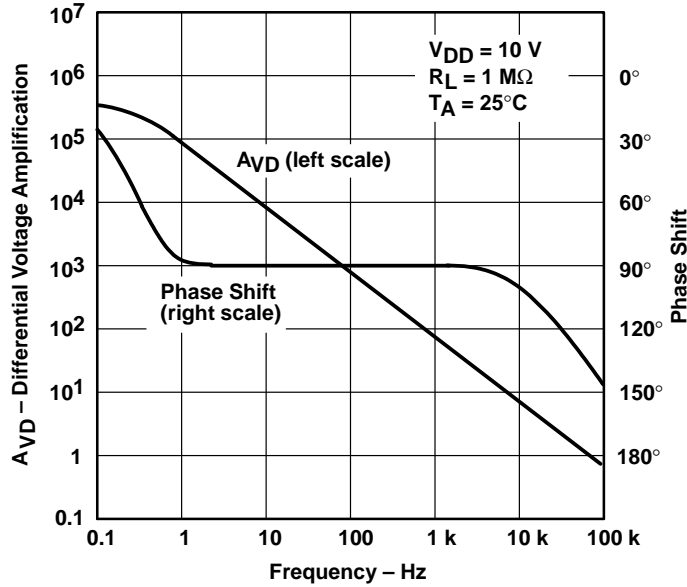


Figure 6

**MEDIUM-BIAS LARGE-SIGNAL
 DIFFERENTIAL VOLTAGE AMPLIFICATION
 AND PHASE SHIFT
 vs
 FREQUENCY**

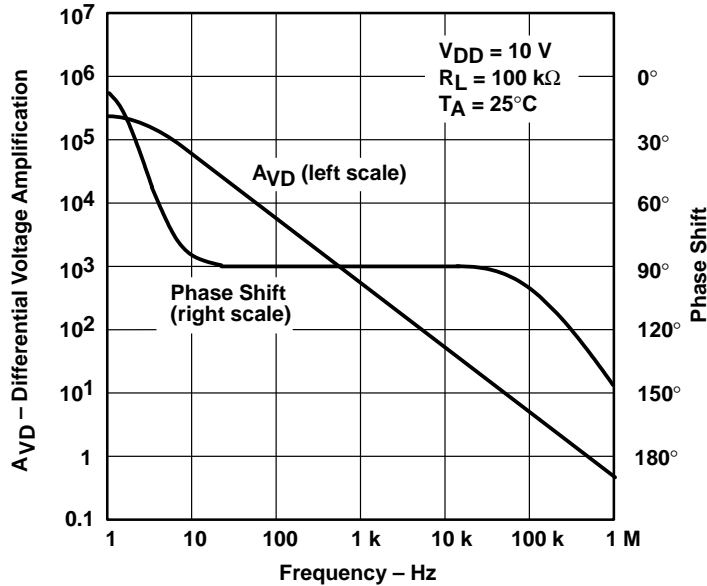


Figure 7

TYPICAL CHARACTERISTICS

HIGH-BIAS LARGE-SIGNAL
DIFFERENTIAL VOLTAGE AMPLIFICATION
AND PHASE SHIFT
vs
FREQUENCY

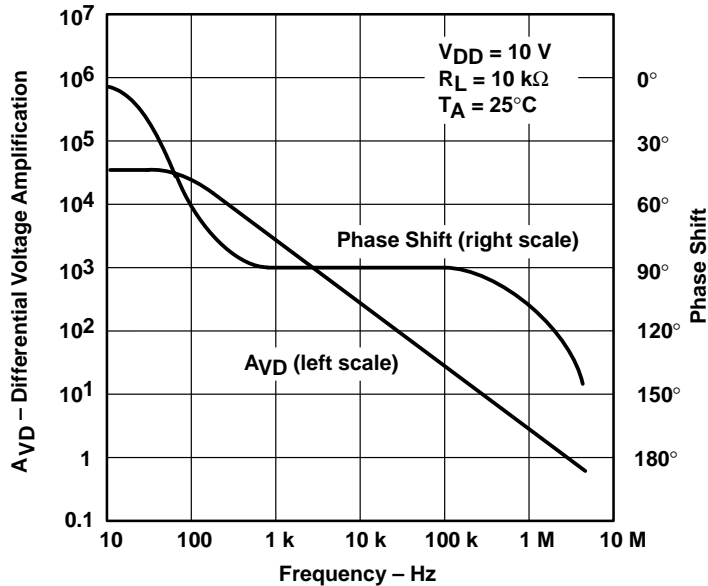


Figure 8

APPLICATION INFORMATION

latch-up avoidance

Junction-isolated CMOS circuits have an inherent parasitic PNP structure that can function as an SCR. Under certain conditions, this SCR may be triggered into a low-impedance state, resulting in excessive supply current. To avoid such conditions, no voltage greater than 0.3 V beyond the supply rails should be applied to any pin. In general, the operational amplifier supplies should be applied simultaneously with, or before, application of any input signals.

APPLICATION INFORMATION

using BIAS SELECT

The TLC251 has a terminal called BIAS SELECT that allows the selection of one of three I_{DD} conditions (10, 150, and 1000 μA typical). This allows the user to trade-off power and ac performance. As shown in the typical supply current (I_{DD}) versus supply voltage (V_{DD}) curves (Figure 4), the I_{DD} varies only slightly from 4 V to 16 V. Below 4 V, the I_{DD} varies more significantly. Note that the I_{DD} values in the medium- and low-bias modes at $V_{DD} = 1.4$ V are typically 2 μA , and in the high mode are typically 12 μA . The following table shows the recommended BIAS SELECT connections at $V_{DD} = 10$ V.

| BIAS MODE | AC PERFORMANCE | BIAS SELECT CONNECTION† | TYPICAL $I_{DD}‡$ |
|-----------|----------------|-------------------------|--------------------|
| Low | Low | V_{DD} | 10 μA |
| Medium | Medium | 0.8 V to 9.2 V | 150 μA |
| High | High | Ground pin | 1000 μA |

† Bias selection may also be controlled by external circuitry to conserve power, etc. For information regarding BIAS SELECT, see Figure 3 in the typical characteristics curves.

‡ For I_{DD} characteristics at voltages other than 10 V, see Figure 4 in the typical characteristics curves.

output stage considerations

The amplifier's output stage consists of a source-follower-connected pullup transistor and an open-drain pulldown transistor. The high-level output voltage (V_{OH}) is virtually independent of the I_{DD} selection and increases with higher values of V_{DD} and reduced output loading. The low-level output voltage (V_{OL}) decreases with reduced output current and higher input common-mode voltage. With no load, V_{OL} is essentially equal to the potential of V_{DD-}/GND .

input offset nulling

The TLC251C series offers external offset null control. Nulling may be achieved by adjusting a 25-k Ω potentiometer connected between the offset null terminals with the wiper connected to the device V_{DD-}/GND pin as shown in Figure 2. The amount of nulling range varies with the bias selection. At an I_{DD} setting of 1000 μA (high bias), the nulling range allows the maximum offset specified to be trimmed to zero. In low or medium bias or when the amplifier is used below 4 V, total nulling may not be possible for all units.

supply configurations

Even though the TLC251C series is characterized for single-supply operation, it can be used effectively in a split-supply configuration when the input common-mode voltage (V_{ICR}), output swing (V_{OL} and V_{OH}), and supply voltage limits are not exceeded.

circuit layout precautions

The user is cautioned that whenever extremely high circuit impedances are used, care must be exercised in layout, construction, board cleanliness, and supply filtering to avoid hum and noise pickup, as well as excessive dc leakages.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, license, warranty or endorsement thereof.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations and notices. Representation or reproduction of this information with alteration voids all warranties provided for an associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Resale of TI's products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Also see: [Standard Terms and Conditions of Sale for Semiconductor Products](http://www.ti.com/sc/docs/stdterms.htm). www.ti.com/sc/docs/stdterms.htm

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265