

FEATURES

- **SO Package with Standard Pinout**
- **Supply Current per Amplifier: 17 μ A Max**
- **Offset Voltage: 70 μ V Max**
- Offset Current: 250pA Max
- Input Bias Current: 5nA Max
- Voltage Noise: 0.9 μ V_{p-p}, 0.1Hz to 10Hz
- Current Noise: 1.5pA_{p-p}, 0.1Hz to 10Hz
- Offset Voltage Drift: 0.5 μ V/ $^{\circ}$ C
- Gain Bandwidth Product: 85kHz
- Slew Rate: 0.04V/ μ s
- Single Supply Operation
 - Input Voltage Range Includes Ground
 - Output Swings to Ground while Sinking Current
 - No Pull-Down Resistors Needed
- Output Sources and Sinks 5mA Load Current

APPLICATIONS

- Battery- or Solar-Powered Systems
 - Portable Instrumentation
 - Remote Sensor Amplifier
 - Satellite Circuitry
- Micropower Sample-and-Hold
- Thermocouple Amplifier
- Micropower Filters

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

DESCRIPTION

The LT[®]2178 is a micropower dual op amp in a surface mount standard 8-pin configuration, the LT2179 is a micropower quad op amp offered in a surface mount 14-pin package. Both devices are optimized for single supply operation at 5V. Specifications are also provided at ± 15 V supply.


The extremely low supply current is combined with true precision specifications: offset voltage is 30 μ V and offset current is 50pA. Both offset parameters have low drift with temperature. The 1.5pA_{p-p} current noise and picoampere offset current permit the use the megohm level source resistors without introducing serious errors. Voltage noise, at 0.9 μ V_{p-p}, is remarkably low considering the low supply current.

The LT2178/LT2179 can be operated from a single supply (as low as one lithium-cell or two NiCd batteries). The input range goes below ground. The all-NPN output stage swings to within a few millivolts of ground while sinking current. No power consuming pull down resistors are needed.


For surface mount applications where three times higher supply current is acceptable, the micropower LT1077 single, LT2078 dual and LT2079 quad are recommended. The LT1077/LT2078/LT2079 have significantly higher bandwidth, slew rate, lower voltage noise and better output drive capability. For applications requiring DIP packages refer to the LT1178/LT1179.

TYPICAL APPLICATION

Self-Buffered, Dual Output, Micropower Reference

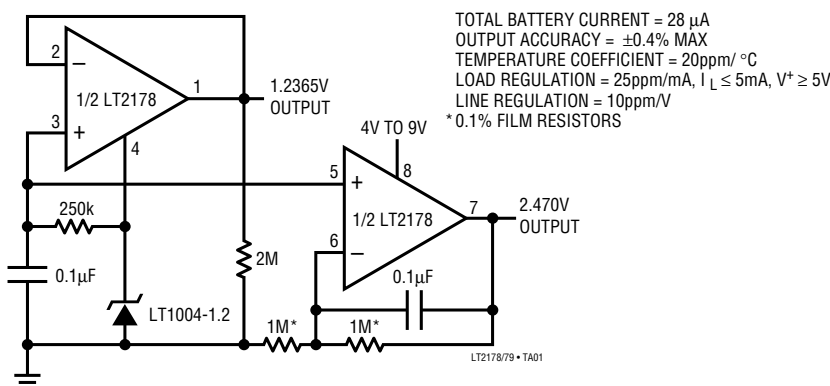

Supply Current vs Temperature

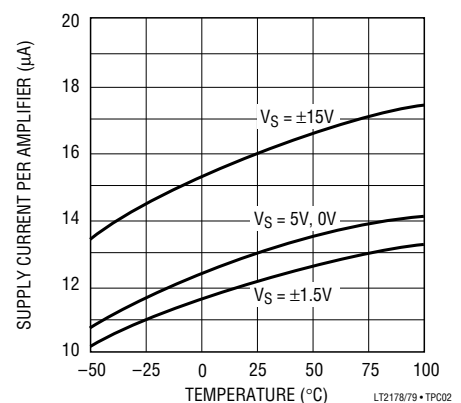



LT2178/LT2179

ABSOLUTE MAXIMUM RATINGS

Supply Voltage $\pm 22V$
 Differential Input Voltage $\pm 30V$
 Input Voltage Equal to Positive Supply Voltage
 5V Below Negative Supply Voltage
 Output Short-Circuit Duration Indefinite

Specified Temperature Range
 Commercial $0^{\circ}C$ to $70^{\circ}C$
 Industrial $-40^{\circ}C$ to $85^{\circ}C$
 Storage Temperature Range $-65^{\circ}C$ to $150^{\circ}C$
 Lead Temperature (Soldering, 10 sec) $300^{\circ}C$

PACKAGE/ORDER INFORMATION
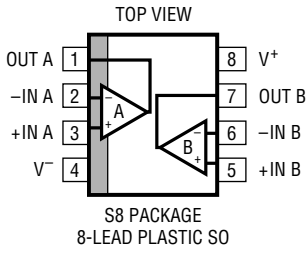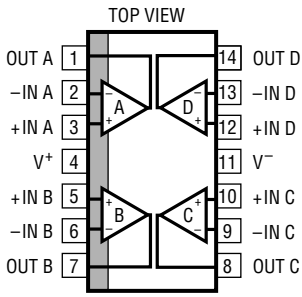
| | | | |
|---|--|--|--|
|  <p>S8 PACKAGE 8-LEAD PLASTIC SO</p> <p>$T_{JMAX} = 150^{\circ}C, \theta_{JA} = 190^{\circ}C/W$</p> | ORDER PART NUMBER |  <p>S PACKAGE 14-LEAD PLASTIC SO</p> <p>$T_{JMAX} = 150^{\circ}C, \theta_{JA} = 150^{\circ}C/W$</p> | ORDER PART NUMBER |
| | LT2178ACS8 LT2178AIS8 LT2178CS8 LT2178IS8 | | LT2179ACS LT2179AIS LT2179CS LT2179IS |
| | PART MARKING | | |
| | 2178A 2178 2178AI 2178I | | |

Consult factory for Military grade parts.

ELECTRICAL CHARACTERISTICS

$V_S = 5V, 0V, V_{CM} = 0.1V, V_O = 1.4V, T_A = 25^{\circ}C$, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS (NOTE 1) | LT2178AC/LT2178AI LT2179AC/LT2179AI | | | LT2178C/LT2178I LT2179C/LT2179I | | | UNITS |
|-------------------------------------|--|--|--|--------------|-----------|------------------------------------|-------------|--------------------------------|-------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | LT2178 LT2179 | | 30 35 | 70 100 | 40 40 | 120 150 | μV μV | |
| $\frac{\Delta V_{OS}}{\Delta Time}$ | Long Term Input Offset Voltage Stability | | | 0.5 | | 0.6 | | $\mu V/Mo$ | |
| I_{OS} | Input Offset Current | | | 0.05 | 0.25 | 0.05 | 0.35 | nA | |
| I_B | Input Bias Current | | | 3 | 5 | 3 | 6 | nA | |
| e_n | Input Noise Voltage | 0.1Hz to 10Hz (Note 2) | | 0.9 | 2.0 | 0.9 | | μV_{p-p} | |
| | Input Noise Voltage Density | $f_0 = 10Hz$ (Note 2) $f_0 = 1000Hz$ (Note 2) | | 50 49 | 75 65 | 50 49 | | $nV\sqrt{Hz}$ $nV\sqrt{Hz}$ | |
| i_n | Input Noise Current | 0.1Hz to 10Hz (Note 2) | | 1.5 | 2.5 | 1.5 | | pA_{p-p} | |
| | Input Noise Current Density | $f_0 = 10Hz$ (Note 2) $f_0 = 1000Hz$ | | 0.03 0.01 | 0.07 | 0.03 0.01 | | $pA\sqrt{Hz}$ $pA\sqrt{Hz}$ | |
| | Input Resistance Differential Mode Common Mode | (Note 3) | 0.8 | 2.0 12 | | 0.6 | 2.0 12 | $G\Omega$ $G\Omega$ | |
| | Input Voltage Range | | 3.5 0 | 3.9 -0.3 | | 3.5 0 | 3.9 -0.3 | V V | |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = 0V$ to $3.5V$ | 93 | 103 | | 90 | 102 | dB | |
| PSRR | Power Supply Rejection Ratio | $V_S = 2.2V$ to $12V$ | 94 | 104 | | 92 | 104 | dB | |

ELECTRICAL CHARACTERISTICS $V_S = 5V, 0V, V_{CM} = 0.1V, V_O = 1.4V, T_A = 25^\circ C$, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS (NOTE 1) | LT2178AC/LT2178AI LT2179AC/LT2179AI | | | LT2178C/LT2178I LT2179C/LT2179I | | | UNITS |
|-----------|------------------------------|---|--|------------|------------|------------------------------------|------------|------------|--------------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = 0.03V$ to 4V, No Load (Note 3) $V_O = 0.03V$ to 3.5V, $R_L = 50k$ | 140 80 | 700 200 | | 110 70 | 700 200 | | V/mV V/mV |
| | Maximum Output Voltage Swing | Output Low, No Load | | 6.5 | 9 | | 6.5 | 9 | mV |
| | | Output Low, 2k to GND Output Low, $I_{SINK} = 100\mu A$ | | 0.2 120 | 0.6 160 | | 0.2 120 | 0.6 160 | mV mV |
| | | Output High, No Load Output High, 2k to GND | 4.2 3.5 | 4.4 3.8 | | 4.2 3.5 | 4.4 3.8 | | V V |
| SR | Slew Rate | $A_V = 1, C_L = 10pF$ (Note 3) | 0.013 | 0.025 | | 0.013 | 0.025 | | V/ μs |
| GBW | Gain Bandwidth Product | $f_0 \leq 5kHz$ | | 60 | | | 60 | | kHz |
| I_S | Supply Current per Amplifier | $V_S = \pm 1.5V, V_O = 0V$ | | 13 12 | 18 17 | | 14 13 | 21 20 | μA μA |
| | Channel Separation | $\Delta V_{IN} = 3V, R_L = 10k$ | | 110 | | | 110 | | dB |
| | Minimum Supply Voltage | (Note 4) | | 2.0 | 2.2 | | 2.0 | 2.2 | V |

$V_S = 5V, 0V, V_{CM} = 0.1V, V_O = 1.4V, -40^\circ C \leq T_A \leq 85^\circ C$ for I grades, unless otherwise noted. (Note 6)

| SYMBOL | PARAMETER | CONDITIONS | | LT2178AI/LT2179AI | | | LT2178I/LT2179I | | | UNITS |
|----------------------------------|------------------------------|---|--------|-------------------|------------|-----------|-----------------|------------|--------------------------------------|----------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | LT2178 LT2179 | ● ● | 70 80 | 270 300 | | 95 100 | 370 400 | μV μV | |
| $\frac{\Delta V_{OS}}{\Delta T}$ | Input Offset Voltage Drift | LT2178 (Note 5) LT2179 | ● | 0.4 0.5 | 1.8 3.0 | | 0.5 0.6 | 2.5 3.5 | $\mu V/^\circ C$ $\mu V/^\circ C$ | |
| I_{OS} | Input Offset Current | | ● | 0.07 | 0.70 | | 0.1 | 1.0 | nA | |
| I_B | Input Bias Current | | ● | 3 | 7 | | 4 | 8 | nA | |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = 0.05V$ to 3.2V | ● | 86 | 100 | | 84 | 98 | dB | |
| PSRR | Power Supply Rejection Ratio | $V_S = 3V$ to 12V | ● | 88 | 100 | | 86 | 100 | dB | |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = 0.05V$ to 4V, No Load (Note 3) $V_O = 0.05V$ to 3.5V, $R_L = 50k$ | ● ● | 75 40 | 350 130 | | 50 30 | 350 130 | V/mV V/mV | |
| | Maximum Output Voltage Swing | Output Low, No Load Output Low, $I_{SINK} = 100\mu A$ | ● ● | | 9 160 | 13 220 | | 9 160 | 13 220 | mV mV |
| | | Output High, No Load Output High, 2k to GND | ● ● | 3.9 3.0 | 4.2 3.7 | | 3.9 3.0 | 4.2 3.7 | | V V |
| I_S | Supply Current per Amplifier | | ● | 15 | 24 | | 15 | 27 | μA | |

$V_S = 5V, 0V, V_{CM} = 0.1V, V_O = 1.4V, 0^\circ C \leq T_A \leq 70^\circ C$, unless otherwise noted. (Note 7)

| SYMBOL | PARAMETER | CONDITIONS | | LT2178AC/LT2179AC | | | LT2178C/LT2179C | | | UNITS |
|----------------------------------|------------------------------|---------------------------|--------|-------------------|------------|-----|-----------------|------------|--------------------------------------|-------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | LT2178 LT2179 | ● ● | 50 60 | 170 200 | | 65 70 | 250 290 | μV μV | |
| $\frac{\Delta V_{OS}}{\Delta T}$ | Input Offset Voltage Drift | LT2178 (Note 5) LT2179 | ● | 0.4 0.5 | 1.8 3.0 | | 0.5 0.6 | 2.5 3.5 | $\mu V/^\circ C$ $\mu V/^\circ C$ | |
| I_{OS} | Input Offset Current | | ● | 0.06 | 0.35 | | 0.06 | 0.50 | nA | |
| I_B | Input Bias Current | | ● | 3 | 6 | | 3 | 7 | nA | |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = 0V$ to 3.4V | ● | 90 | 101 | | 86 | 100 | dB | |
| PSRR | Power Supply Rejection Ratio | $V_S = 2.5V$ to 12V | ● | 90 | 102 | | 88 | 102 | dB | |

ELECTRICAL CHARACTERISTICS $V_S = 5V, 0V, V_{CM} = 0.1V, V_O = 1.4V, 0^\circ C \leq T_A \leq 70^\circ C$, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | | LT2178AC/LT2179AC | | | LT2178C/LT2179C | | | UNITS |
|-----------|------------------------------|--|---|-------------------|-----|-----|-----------------|-----|---------|-------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = 0.05V$ to $4V$, No Load (Note 3) $V_O = 0.05V$ to $3.5V, R_L = 50k$ | ● | 150 | 500 | | 80 | 500 | | V/mV |
| | | | ● | 55 | 160 | | 45 | 160 | | V/mV |
| | Maximum Output Voltage Swing | Output Low, No Load Output Low, $I_{SINK} = 100\mu A$ | ● | | 8 | 11 | | 8 | 11 | mV |
| | | | ● | | 140 | 190 | | 140 | 190 | mV |
| | | Output High, No Load Output High, $2k$ to GND | ● | 4.1 | 4.3 | | 4.1 | 4.3 | | V |
| | | | ● | 3.3 | 3.8 | | 3.3 | 3.8 | | V |
| I_S | Supply Current per Amplifier | | | 14 | 21 | | 15 | 24 | μA | |

$V_S = \pm 15V, T_A = 25^\circ C$, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | | LT2178AC/LT2178AI LT2179AC/LT2179AI | | | LT2178C/LT2178I LT2179C/LT2179I | | | UNITS |
|-----------|------------------------------|---|--|--|---------------|-----|------------------------------------|---------------|------------|---------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | LT2178 LT2179 | | | 70 | 300 | | 90 | 400 | μV |
| | | | | | 80 | 350 | | 100 | 450 | μV |
| I_{OS} | Input Offset Current | | | 0.05 | 0.25 | | 0.05 | 0.35 | nA | |
| I_B | Input Bias Current | | | 3 | 5 | | 3 | 6 | nA | |
| | Input Voltage Range | | | 13.5 -15.0 | 13.9 -15.3 | | 13.5 -15.0 | 13.9 -15.3 | V V | |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = 13.5V$ to $-15V$ | | 96 | 106 | | 93 | 106 | dB | |
| PSRR | Power Supply Rejection Ratio | $V_S = 5V, 0V$ to $\pm 18V$ | | 96 | 112 | | 94 | 112 | dB | |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = \pm 10V, R_L = 50k$ $V_O = \pm 10V$, No Load | | 300 | 1200 | | 250 | 1000 | | V/mV |
| | | | | 600 | 2500 | | 400 | 2500 | | V/mV |
| V_{OUT} | Maximum Output Voltage Swing | $R_L = 50k$ $R_L = 2k$ | | ± 13.0 | ± 14.2 | | ± 13.0 | ± 14.2 | | V |
| | | | | ± 11.0 | ± 12.7 | | ± 11.0 | ± 12.7 | | V |
| SR | Slew Rate | $A_V = 1$ | | 0.02 | 0.04 | | 0.02 | 0.04 | V/ μs | |
| GBW | Gain Bandwidth Product | $f_0 \leq 5kHz$ | | | 85 | | | 85 | kHz | |
| I_S | Supply Current per Amplifier | | | 16 | 21 | | 17 | 25 | μA | |

$V_S = \pm 15V, -40^\circ C \leq T_A \leq 85^\circ C$ for I grades, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | | LT2178AI/LT2179AI | | | LT2178I/LT2179I | | | UNITS |
|----------------------------------|------------------------------|-----------------------------|---|-------------------|------------|------|-----------------|------------|-----|------------------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | LT2178 LT2179 | ● | | 100 | 650 | | 130 | 740 | μV |
| | | | ● | | 100 | 650 | | 130 | 740 | μV |
| $\frac{\Delta V_{OS}}{\Delta T}$ | Input Offset Voltage Drift | LT2178 (Note 5) LT2179 | ● | | 0.6 | 1.8 | | 0.7 | 2.5 | $\mu V/^\circ C$ |
| | | | | | 0.7 | 3.0 | | 0.9 | 4.0 | $\mu V/^\circ C$ |
| I_{OS} | Input Offset Current | | ● | | 0.07 | 0.70 | | 0.1 | 1.0 | nA |
| I_B | Input Bias Current | | ● | | 3 | 7 | | 4 | 8 | nA |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = \pm 10V, R_L = 50k$ | ● | 150 | 500 | | 100 | 500 | | V/mV |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = 13V, -14.9V$ | ● | 90 | 105 | | 88 | 103 | | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = 0V, 5V$ to $\pm 18V$ | ● | 92 | 110 | | 88 | 109 | | dB |
| | Maximum Output Voltage Swing | $R_L = 5k$ | ● | ± 11.0 | ± 13.5 | | ± 11.0 | ± 13.5 | | V |
| I_S | Supply Current per Amplifier | | ● | | 18 | 28 | | 19 | 30 | μA |

ELECTRICAL CHARACTERISTICS

$V_S = \pm 15V, 0^\circ C \leq T_A \leq 70^\circ C$, unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | LT2178AC/LT2179AC | | | LT2178C/LT2179C | | | UNITS |
|----------------------------------|------------------------------|-----------------------------|-------------------|------------|------------|-----------------|------------|--------------------------------------|-------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{OS} | Input Offset Voltage | LT2178 LT2179 | ● ● | 100 120 | 480 550 | 130 150 | 660 750 | μV μV | |
| $\frac{\Delta V_{OS}}{\Delta T}$ | Input Offset Voltage Drift | LT2178 (Note 5) LT2179 | ● | 0.6 0.7 | 1.8 3.0 | 0.7 0.9 | 2.5 4.0 | $\mu V/^\circ C$ $\mu V/^\circ C$ | |
| I_{OS} | Input Offset Current | | ● | 0.06 | 0.35 | 0.06 | 0.35 | nA | |
| I_B | Input Bias Current | | ● | 3 | 6 | 3 | 7 | nA | |
| A_{VOL} | Large-Signal Voltage Gain | $V_O = \pm 10V, R_L = 50k$ | ● | 200 | 800 | 150 | 750 | V/mV | |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = 13V, -15V$ | ● | 94 | 104 | 91 | 104 | dB | |
| PSRR | Power Supply Rejection Ratio | $V_S = 5V, 0V$ to $\pm 18V$ | ● | 93 | 110 | 91 | 110 | dB | |
| | Maximum Output Voltage Swing | $R_L = 5k$ | ● | ± 11.0 | ± 13.6 | ± 11.0 | ± 13.6 | V | |
| I_S | Supply Current per Amplifier | | ● | 17 | 24 | 18 | 28 | μA | |

The ● denotes specifications which apply over the full operating temperature range.

Note 1: Typical parameters are defined as the 60% yield of parameter distributions of individual amplifiers, i.e., out of 100 LT2179s (or 100 LT2178s) typically 240 op amps (or 120) will be better than the indicated specification.

Note 2: This parameter is tested on a sample basis only. All noise parameters are tested with $V_S = \pm 2.5V, V_O = 0V$.

Note 3: This parameter is guaranteed by design and is not tested.

Note 4: Power supply rejection ratio is measured at the minimum supply voltage. The op amps actually work at 1.7V supply but with a typical offset skew of $-300\mu V$.


Note 5: This parameter is not 100% tested.

Note 6: During testing at $-40^\circ C$, the 5V power supply turn-on time is less than 0.5s.

Note 7: The LT2178C/LT2179C are designed, characterized and expected to meet the industrial temperature limits, but are not tested at $-40^\circ C$ and $85^\circ C$. I-grade parts are guaranteed.


TYPICAL PERFORMANCE CHARACTERISTICS

Distribution of Input Offset Voltage

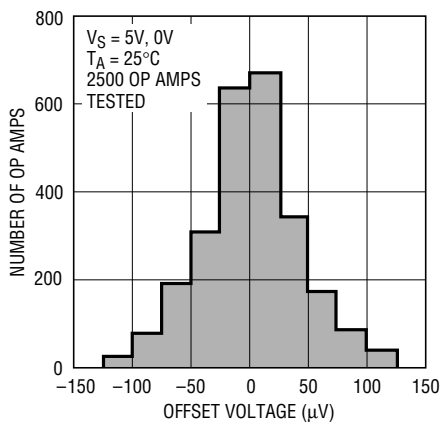


LT2178/79 • TPC01

Minimum Supply Voltage

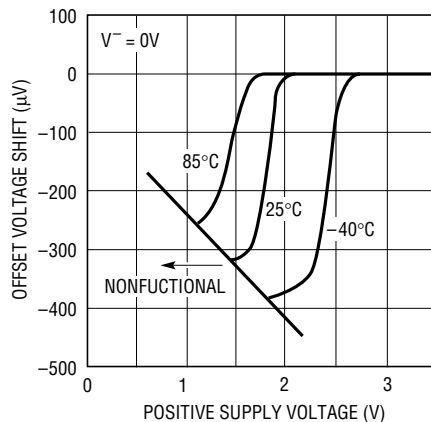

LT2178/79 • TPC02


Input Bias and Offset Currents vs Temperature

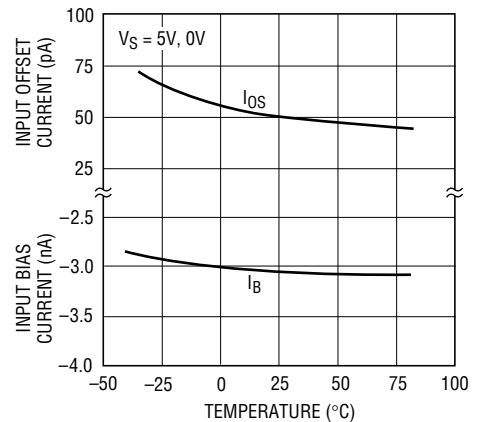

LT2178/79 • TPC03


TYPICAL PERFORMANCE CHARACTERISTICS

Output Saturation vs Temperature vs Sink Current

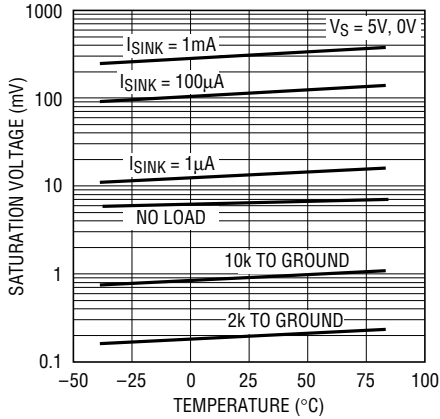


LT2178/79 • TPC04

Short-Circuit Current

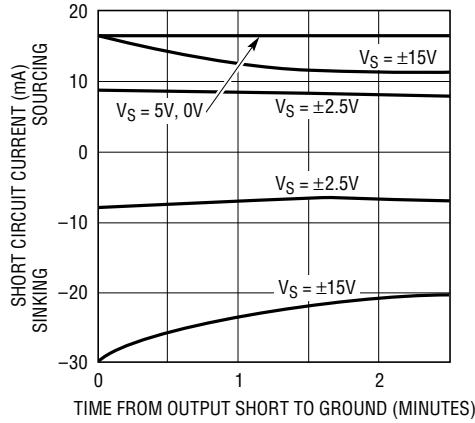


LT2178/79 • TPC05

0.1Hz to 10Hz Noise

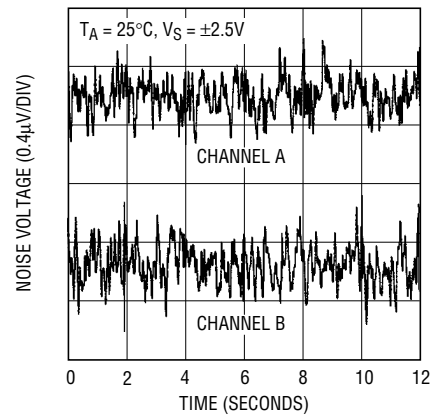


LT2178/79 • TPC06

0.01Hz to 10Hz Noise

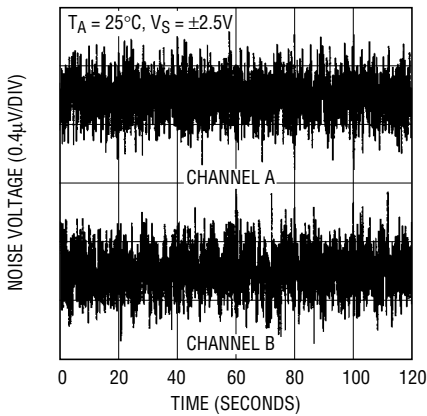


LT2178/79 • TPC07

Noise Spectrum

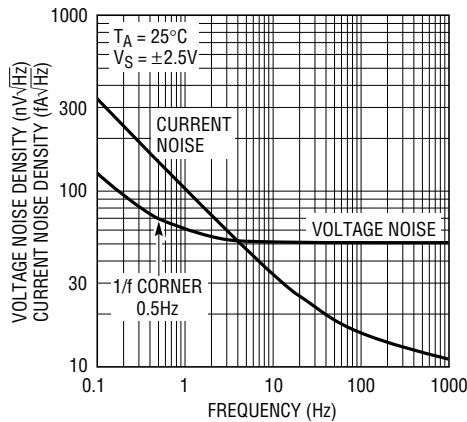


LT2178/79 • TPC08

Voltage Gain vs Frequency

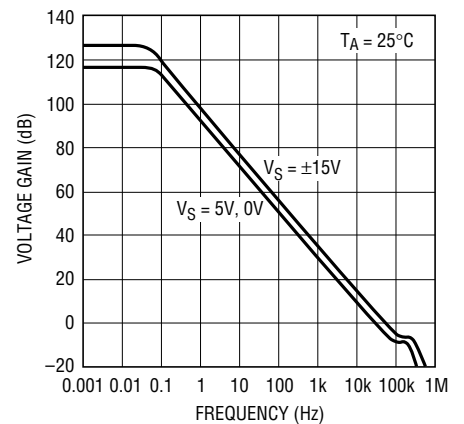


LT2178/79 • TPC09

Gain, Phase vs Frequency

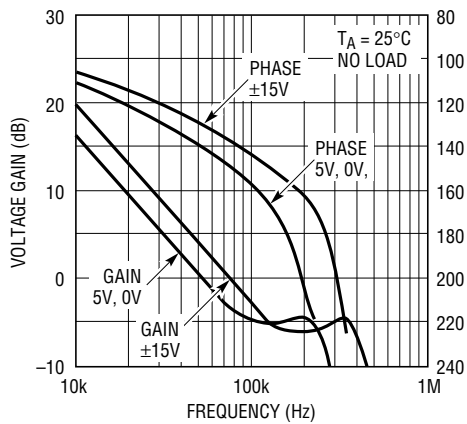


LT2178/79 • TPC10

Voltage Gain vs Load Resistance

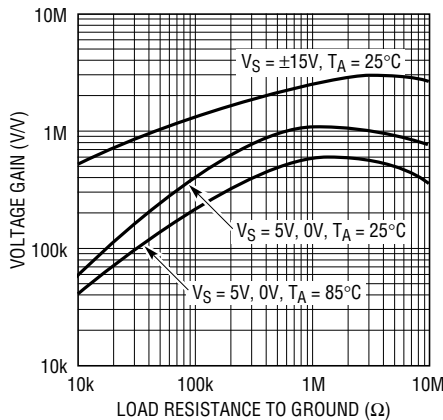

LT2178/79 • TPC11


Capacitive Load Handling

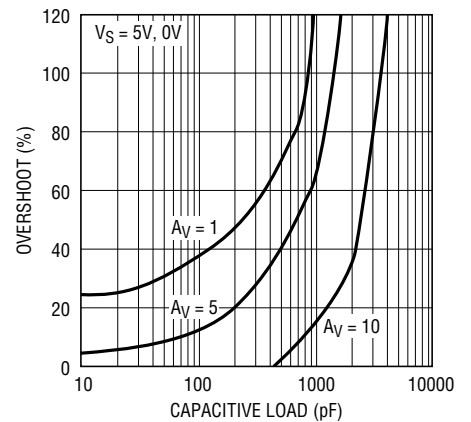

LT2078/79 • TPC12

TYPICAL PERFORMANCE CHARACTERISTICS

Large-Signal Transient Response
 $V_S = \pm 15V$

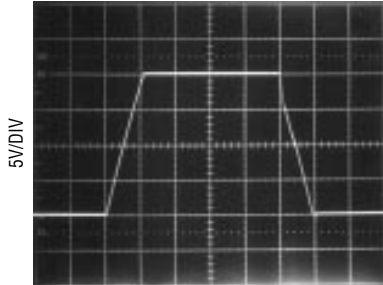


$A_V = 1$ 500µs/DIV
 $C_L = 12pF$ LT2178/79 • TPC13

Large-Signal Transient Response
 $V_S = 5V, 0V$




$A_V = 1$ 100µs/DIV
 $C_L = 12pF$
 INPUT PULSE = 0V TO 3.8V LT2178/79 • TPC14

Small-Signal Transient Response
 $V_S = \pm 2.5V$

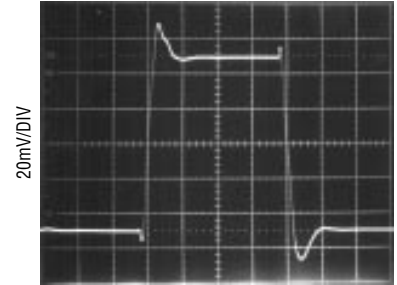


$A_V = 1$ 20µs/DIV
 $C_L = 12pF$ LT2178/79 • TPC15

Small-Signal Transient Response
 $V_S = \pm 15V$

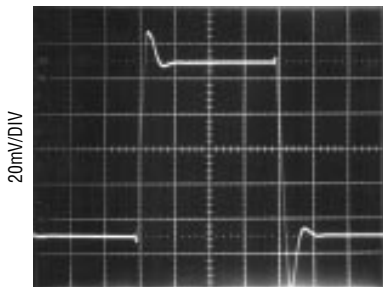


$A_V = 1$ 20µs/DIV
 $C_L = 12pF$ LT2178/79 • TPC16

Small-Signal Transient Response
 $V_S = 5V, 0V$

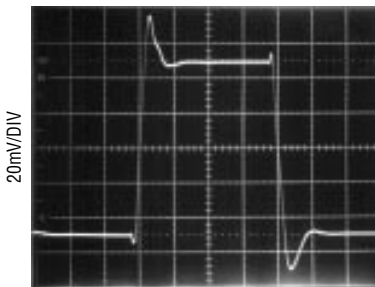


$A_V = 1$ 20µs/DIV
 $C_L = 12pF$
 INPUT PULSE = 50mV TO 150mV LT2178/79 • TPC17

Common Mode Rejection Ratio vs Frequency

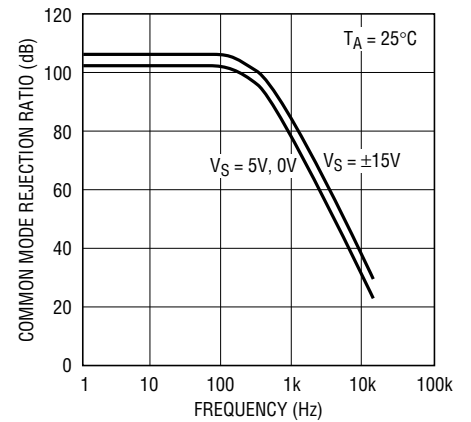


LT2178/79 • TPC18

Power Supply Rejection Ratio vs Frequency

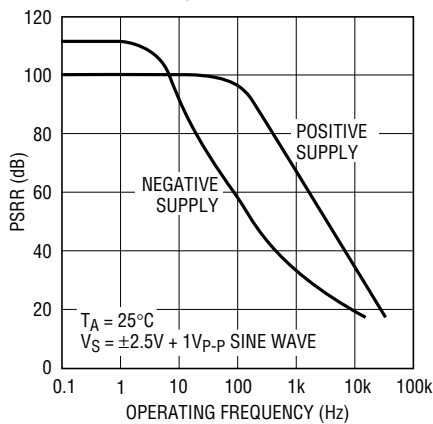

LT2178/79 • TPC19


Closed Loop Output Impedance

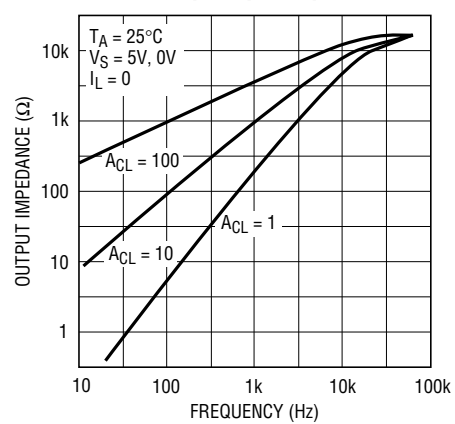

LT2178/79 • TPC20

SIMPLIFIED SCHEMATIC

1/2 LT2178
1/4 LT2179

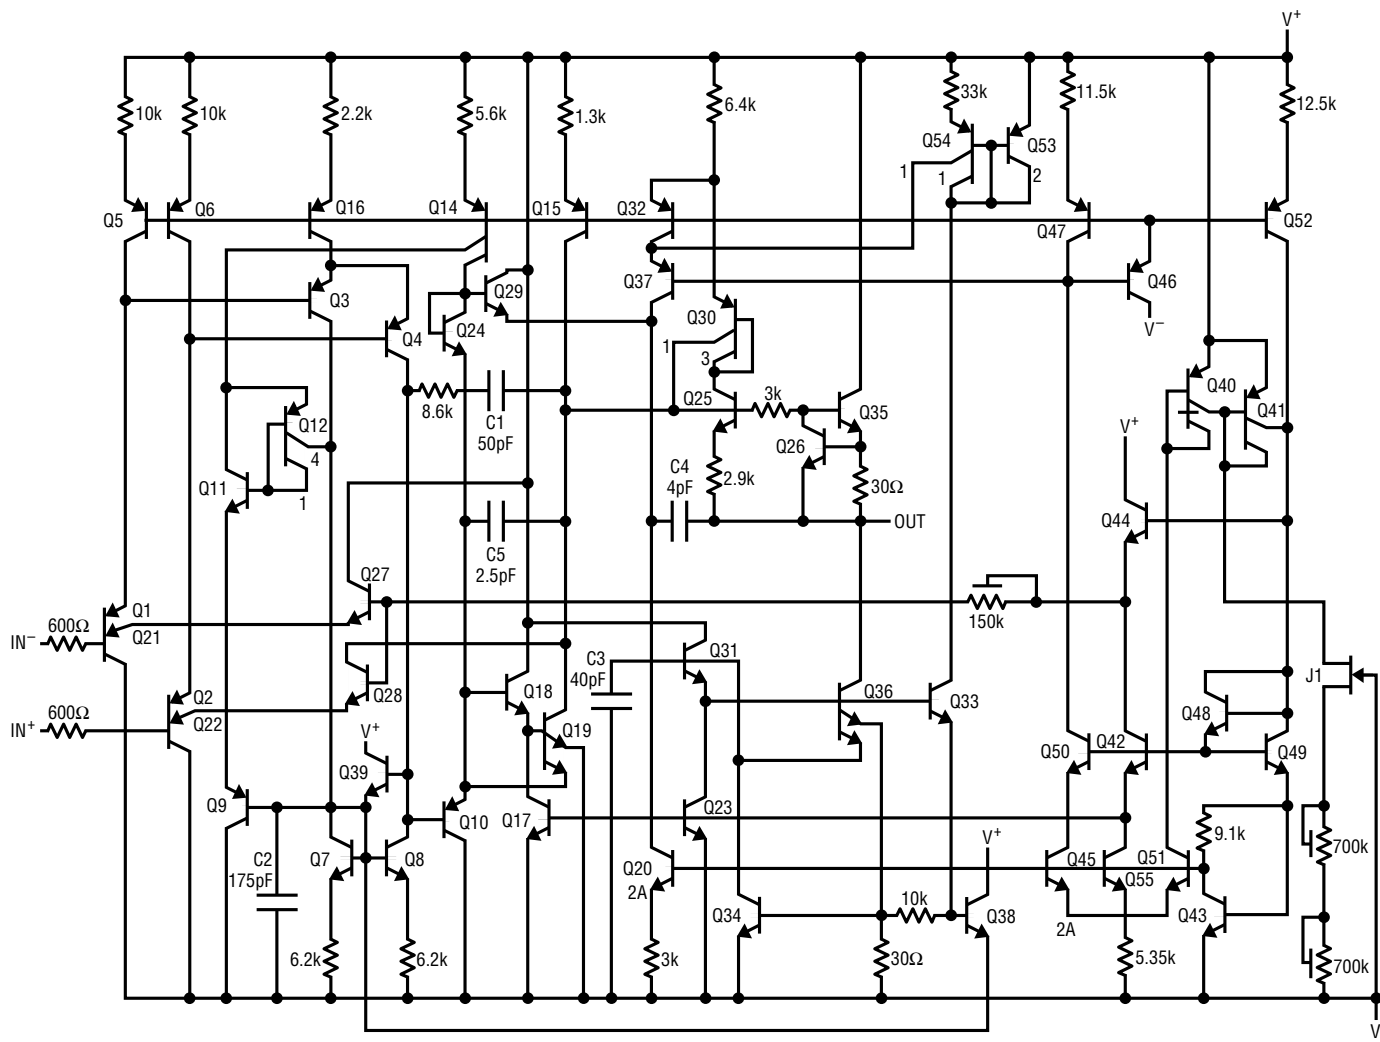


LT2178/79 • SIMPLIFIED SCHEM

APPLICATIONS INFORMATION

Please see the LT2078/LT2079 data sheet for applications information. All comments relating to specifications, single




supply operation and phase reversal protection are directly applicable to the LT2178/LT2179.

Micropower 100Hz to 1MHz V-to-F Converter

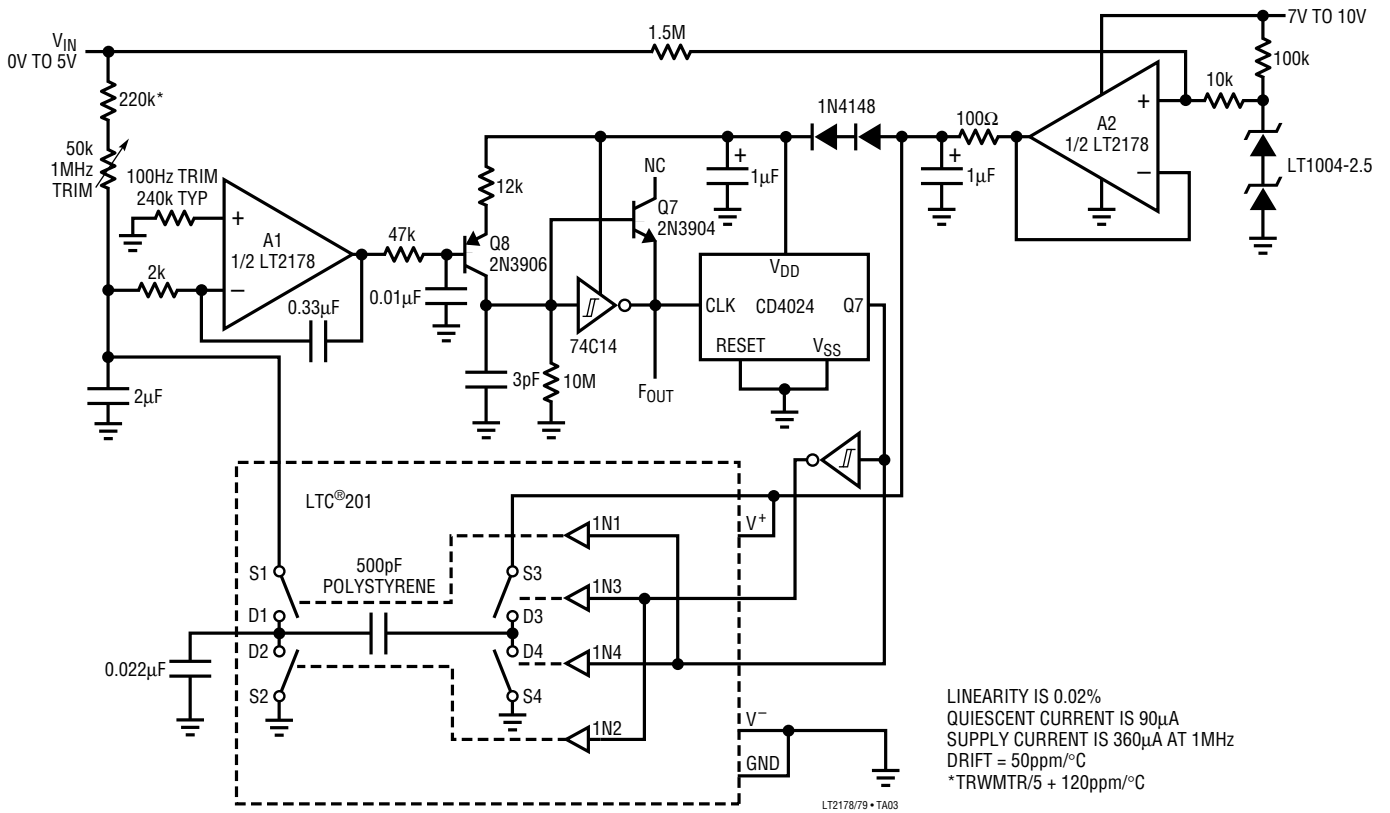

PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

S8 Package
8-Lead Plastic Small Outline (Narrow 0.150)
 (LTC DWG # 05-08-1610)

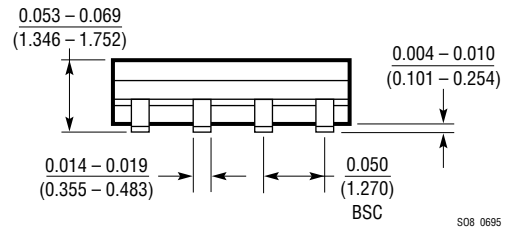
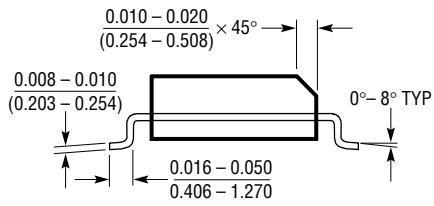
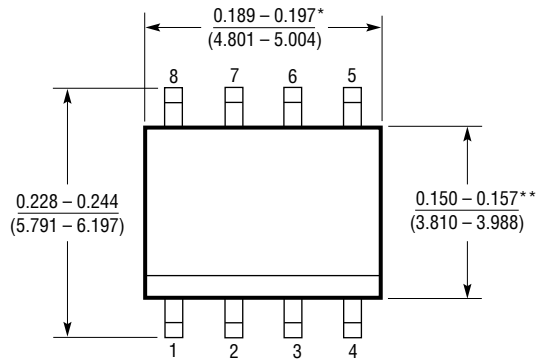


*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE
 **DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

S08 0695

PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

S Package
14-Lead Plastic Small Outline (Narrow 0.150)
 (LTC DWG # 05-08-1610)

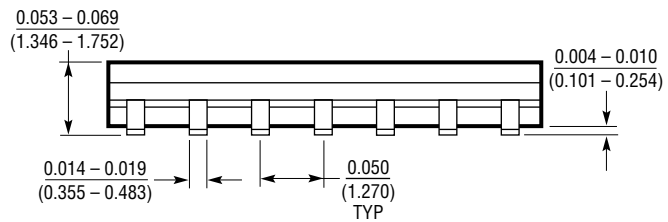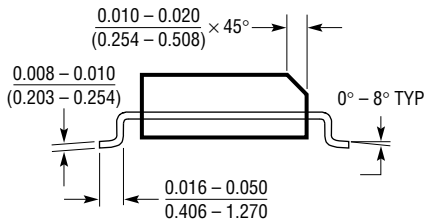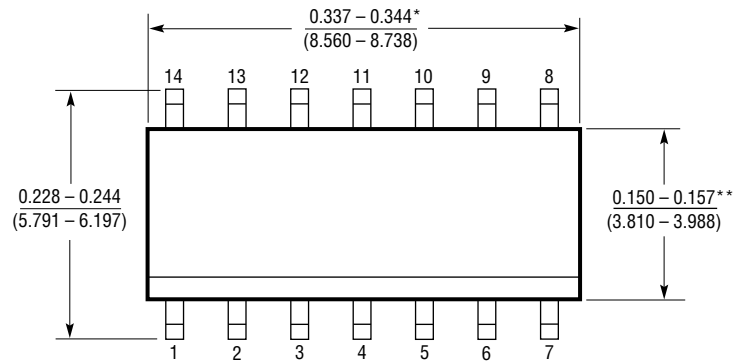


* DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE
 ** DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

S14 0695

TYPICAL APPLICATION

Single Supply, 1kHz, 4th Order Butterworth Lowpass Filter

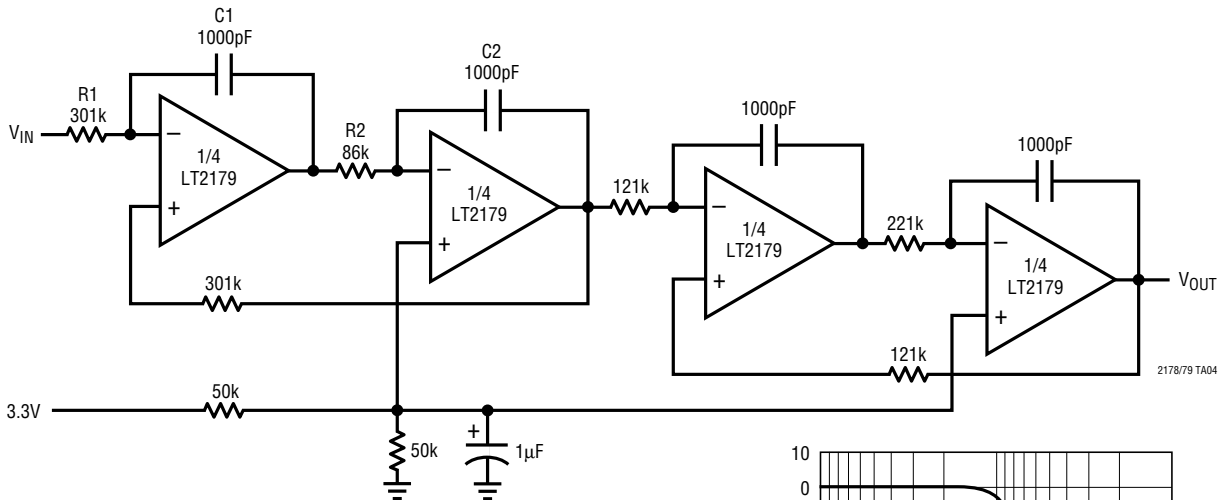


12-BIT ACCURATE SIGNAL RANGE FROM 6mV TO 1.8V ON 3.3V SINGLE SUPPLY.
MAXIMUM OUTPUT OFFSET ERROR IS 448µV.

FOR EACH 2ND ORDER SECTION:

$$W_0^2 = \frac{1}{C1C2R1R2}$$

$$R1 = \frac{1}{W_0QC1}$$

$$R2 = \frac{Q}{W_0C2}$$

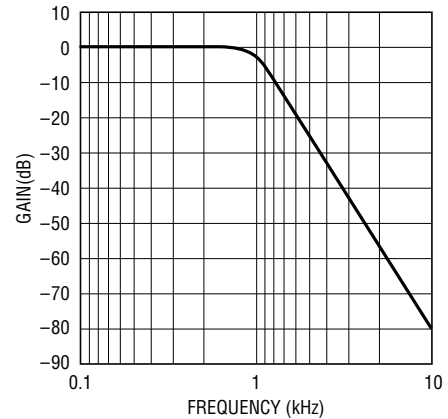

LT2178/79 • TA05

RELATED PARTS

| PART NUMBER | DESCRIPTION | COMMENTS |
|---------------|---|---|
| LT1078/LT1079 | Dual/Quad 55µA Max, Single Supply Precision Op Amps | 70µV V _{OS} Max and 2.5µV/°C Drift Max, 200kHz BBW, 0.07V/µs Slew Rate, Input/Output Common Mode Includes Ground |
| LT1211/LT1212 | 14MHz, 7V/µs Single Supply Dual and Quad Precision Op Amps | 275µV V _{OS} Max, 6µV/°C Drift Max Input Voltage Range Includes Ground |
| LT1490/LT1491 | Dual/ Quad Micropower Rail-to-Rail Input and Output Op Amps | Single Supply Input Range: -0.4V to 44V, Micropower 50µA Amplifier, Rail-to-Rail Input and Output, 200kHz GBW |
| LT2078/LT2079 | Dual/Quad 55µA Max, Single Supply Precision Op Amps | 70µV V _{OS} Max and 2.5µV/°C Drift Max, 200kHz BBW, 0.07V/µs Slew Rate, Input/Output Common Mode Includes Ground Surface Mount Standard Pinout |