



SPX2940

1A Low Dropout Voltage Regulators (PRELIMINARY INFORMATION)

FEATURES

- Output Current 1A
- Internal Short Circuit Current Limit
- Dropout Voltage 0.5V at 1A Output
- Extremely Tight Load and Line Regulation
- Very Low Temperature Coefficient
- Mirror Image Insertion protection
- Unregulated DC Input Can Withstand -20V Reverse Battery
- and +60V Positive Transients
- Direct Replacement For LM2940 Socket

APPLICATIONS

- Battery powered Systems
- Cordless Telephones
- Automotive Electronics
- Portable / Palm Top / Notebook Computers
- Portable Consumer Equipment
- Portable Instrumentation
- SMPS Post-Regulator
- Voltage Reference


PRODUCT DESCRIPTION

The SPX2940 is a low powered positive voltage regulator. The SPX2940 offers 1A output current with dropout voltage of only 0.5V and over temperature dropout is up to 1V. The quiescent current is 30mA at differential output of 5V and output current of 1A. The higher quiescent current can exist when the device is in dropout mode ($V_{IN} - V_{OUT} \leq 3V$).

Other key additional features of this device includes higher output current, positive transient protection up to 60V (load dump), and ability to survive an unregulated input voltage transient of -20V below ground (reverse battery). The regulator will automatically shut down to protect both the internal circuits and the load. This device also features short circuit and thermal overload protection.

The SPX2940 is offered in a 3-pin TO-220 and TO-263 package compatible with other 5V regulators. This device offers a variety of output voltages: 3.3V, 5V and 12V. SPX2940 is direct replacement to LM2940.

PIN CONNECTIONS

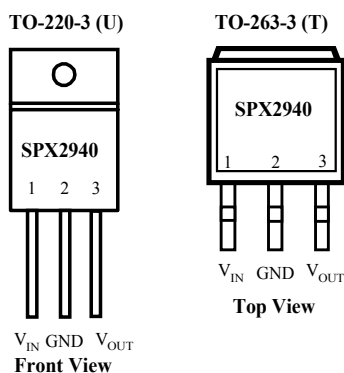

ABSOLUTE MAXIMUM RATINGS

Power Dissipation (Note 1) Internally Limited
 Lead Temperature (Soldering, 5 seconds).....260°C
 Storage Temperature Range -65°C to +150°C
 Operating Junction Temperature Range -40°C to +125°C
 TO-220 θ_{JC} 2 °C/W
 TO-263 θ_{JC} 2 °C/W

Input Supply voltage -26V to +60V
 Operating Input Supply voltage +2V to 12V
 Shutdown Input Voltage -0.3V to +30V
 Error Comparator Output Voltage -0.3 to +30V

ELECTRICAL CHARACTERISTICS $V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22 \mu F$, unless otherwise specified. **Boldface applies over the entire operating temperature range of the indicated device.** All other specifications apply for $T_A = T_J = 25^\circ C$.

Output Voltage (V_O)		5V			Units
Parameter	Conditions	Typ	SPX2940 Limit (Note 5)	SPX2940 Limit (Note 6)	
Output Voltage	$5 \text{ mA} \leq I_O \leq 1A$	6.25V $\leq V_{IN} \leq 26V$			
		5.00	4.85/ 4.75 5.15/ 5.25	4.85/ 4.75 5.15/ 5.25	V V
Line Regulation	$V_O + 2V \leq V_{IN} \leq 26V$, $I_O = 5 \text{ mA}$	20	50	40/ 50	mV
Load Regulation	$50 \text{ mA} \leq I_O \leq 1A$	35	50/ 80	50/ 100	mV
Output Impedance	100 mADC and 20 mArms, $f_O = 120 \text{ Hz}$	35		1000/ 1000	m Ω
Quiescent Current	$V_O + 2V \leq V_{IN} \leq 26V$, $I_O = 5 \text{ mA}$	10	15/ 20	15/ 20	mA
	$V_{IN} = V_O + 5V$ $I_O = 1A$	30	45/ 60	50/ 60	mA
Output Noise Voltage	10 Hz - 100 kHz, $I_O = 5 \text{ mA}$	150		700/ 700	μV_{RMS}
Ripple Rejection	$f_O = 120 \text{ Hz}$, 1 V_{RMS} , $I_O = 100 \text{ ma}$	72	60/ 54		dB _{MIN}
	$f_O = 1 \text{ kHz}$, 1 V_{RMS} , $I_O = 5 \text{ mA}$			60/ 50	dB _{MIN}
Long Term Stability		20			mV/ 1000 Hr
Dropout Voltage	$I_O = 1A$	0.5	0.8/ 1.0	0.7/ 1.0	V_{MAX}
	$I_O = 100 \text{ mA}$	110	150/ 200	150/ 200	mV _{MAX}

ELECTRICAL CHARACTERISTICS $V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22 \mu F$, unless otherwise specified. **Boldface limits apply over the entire operating temperature range of the indicated device.** All other specifications apply for $T_A = T_J = 25^\circ C$.
(Continued)

Output Voltage (V_O)		5V			Units
Parameter	Conditions	Typ	SPX2940 Limit (Note 5)	SPX2940 Limit (Note 6)	
Short Circuit Current	(Note 7)	$6.25V \leq V_{IN} \leq 26V$			
		1.9	1.6	1.5/ 1.3	A
Maximum Line Transient	$R_O = 100\Omega$, $T \leq 100 \text{ ms}$	75	60/ 60		V
Reverse Polarity DC Input Voltage	$R_O = 100\Omega$, $T \leq 20 \text{ ms}$	-30	-15/ -15	-15/ -15	V
Reverse Polarity Transient Input Voltage	$R_O = 100\Omega$, $T \leq 100 \text{ ms}$	-75	-50/ -50		V







ELECTRICAL CHARACTERISTICS $V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22 \mu F$, unless otherwise specified. **Boldface limits apply over the entire operating temperature range of the indicated device.** All other specifications apply for $T_A = T_J = 25^\circ C$.
(Continued)

Output Voltage (V_O)		12V			Units
Parameter	Conditions	Typ	SPX2940 Limit (Note 5)	SPX2940/883 Limit (Note 6)	
Output Voltage	$5 \text{ mA} \leq I_O \leq 1A$	12.00	$13.6V \leq V_{IN} \leq 26V$		
			11.64/ 11.40 12.36/ 12.60	11.64/ 11.40 12.36/ 12.60	V V
Line Regulation	$V_O + 2V \leq V_{IN} \leq 26V$, $I_O = 5 \text{ mA}$	20	120	75/ 120	mV
Load Regulation	$50 \text{ mA} \leq I_O \leq 1A$	55	120/ 200	120/ 190	mV








ELECTRICAL CHARACTERISTICS $V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22 \mu F$, unless otherwise specified. **Boldface limits apply over the entire operating temperature range of the indicated device.** All other specifications apply for $T_A = T_J = 25^\circ C$.
(Continued)

Output Voltage (V_O)		12V			Units
Parameter	Conditions	Typ	SPX2940 Limit (Note 5)	SPX2940/833 Limit (Note 6)	
Output Impedance	100 mADC and 20 mArms, $f_O = 120 \text{ Hz}$	$13.6V \leq V_{IN} \leq 26V$			m Ω
		80		1000/ 1000	
Quiescent Current	$V_O + 2V \leq V_{IN} \leq 26V$, $I_O = 5 \text{ mA}$	10	15/ 20	15/ 20	mA
	$V_{IN} = V_O + 5V$, $I_O = 1A$	30	45/ 60	50/ 60	mA
Output Noise Voltage	10 Hz - 100 kHz, $I_O = 5 \text{ mA}$	360		1000/ 1000	μV_{RMS}
Ripple Rejection	$f_O = 120 \text{ Hz}$, 1 V_{RMS} , $I_O = 100 \text{ mA}$	66	54/ 48		dB
	$f_O = 1 \text{ kHz}$, 1 V_{rms} , $I_O = 5 \text{ mA}$			52/ 46	dB
Long Term Stability		48			mV/ 1000 Hr
Dropout Voltage	$I_O = 1A$	0.5	0.8/ 1.0	0.7/ 1.0	V
	$I_O = 100 \text{ mA}$	110	150/ 200	150/ 200	mV
Short Circuit Current	(Note 7)	1.9	1.6	1.6/ 1.3	A
Maximum Line Transient	$R_O = 100\Omega$, $T \leq 100 \text{ ms}$	75	60/ 60		V
Reverse Polarity DC Input Voltage	$R_O = 100\Omega$	-30	-15/- 15	-15/- 15	V
Reverse Polarity Transient Input Voltage	$R_O = 100\Omega$, $T \leq 20 \text{ ms}$	-75	-50/- 50		V















ELECTRICAL CHARACTERISTICS $V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22 \mu F$, unless otherwise specified.

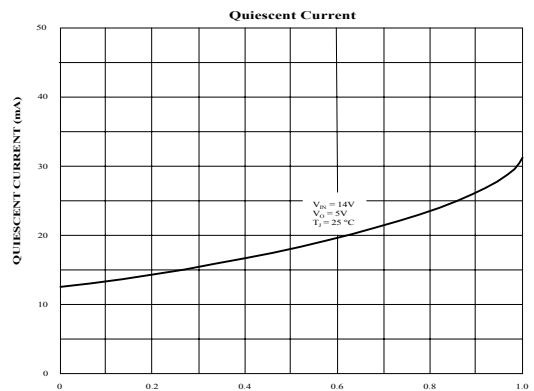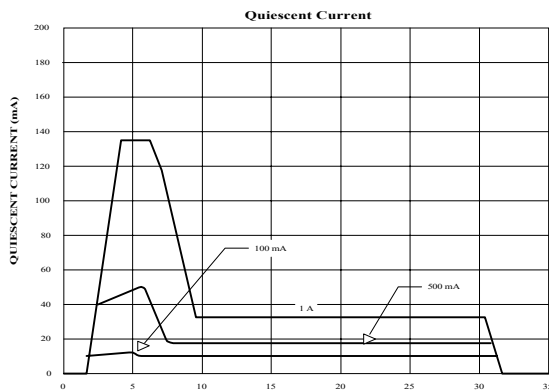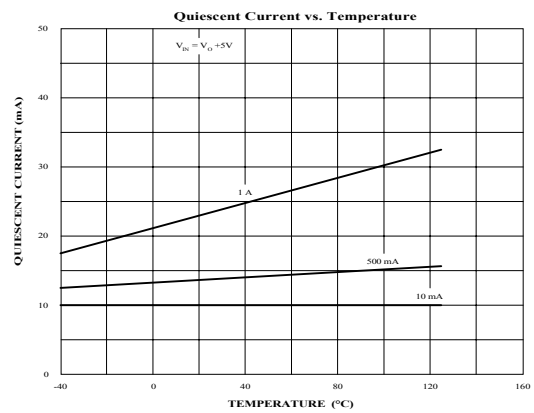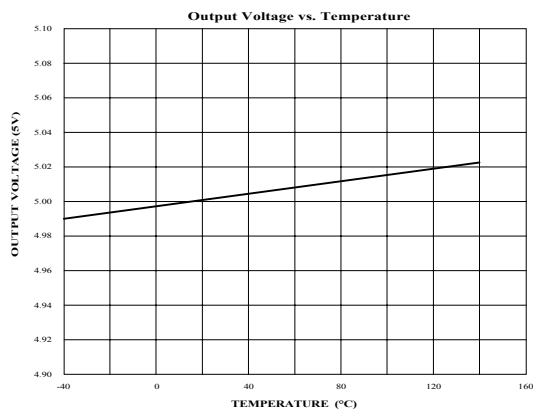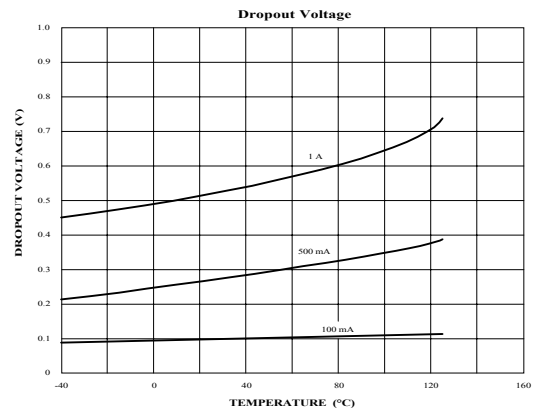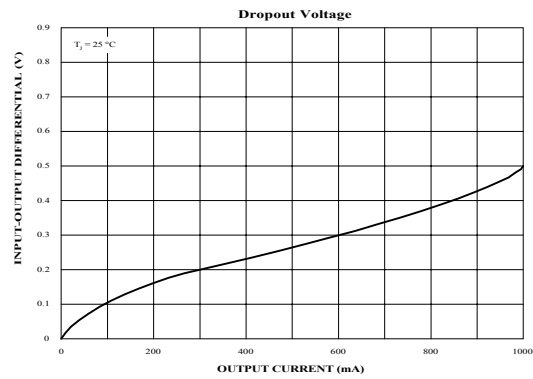

ELECTRICAL CHARACTERISTICS $V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22 \mu F$, unless otherwise specified.

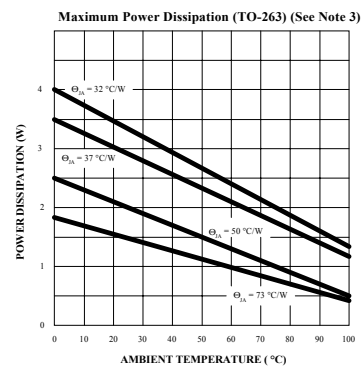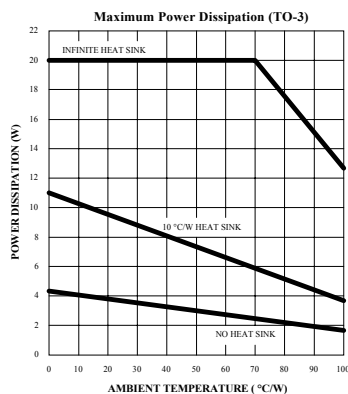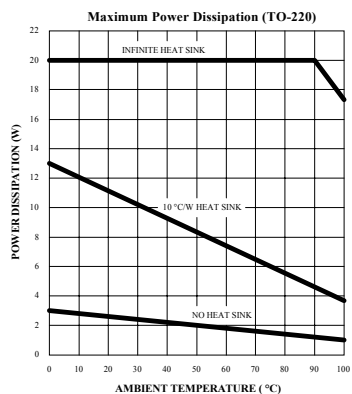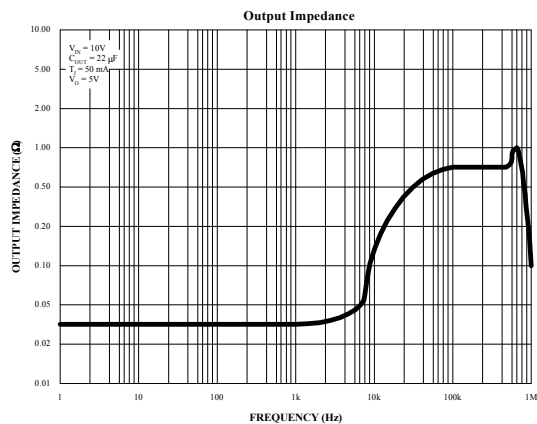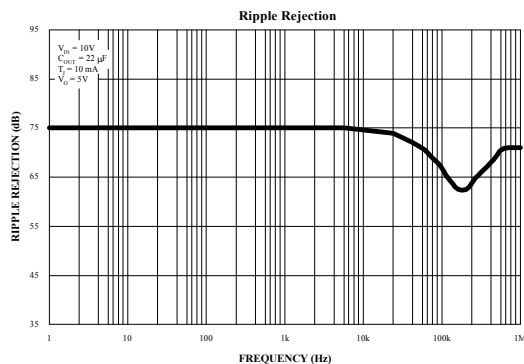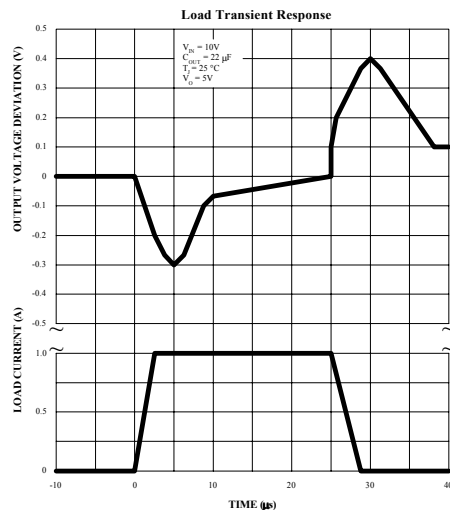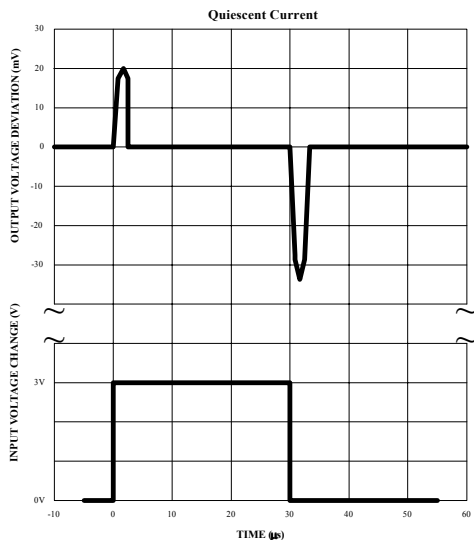


ELECTRICAL CHARACTERISTICS $V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22 \mu F$, unless otherwise specified.

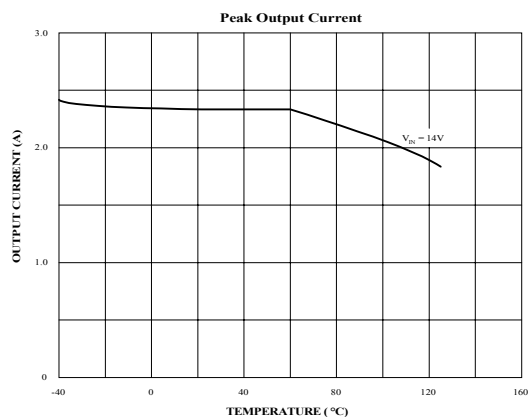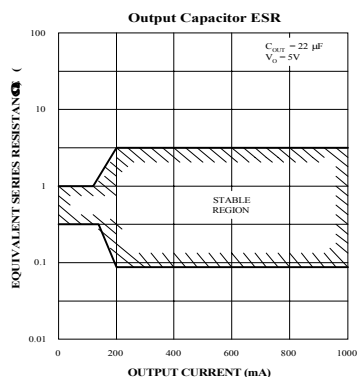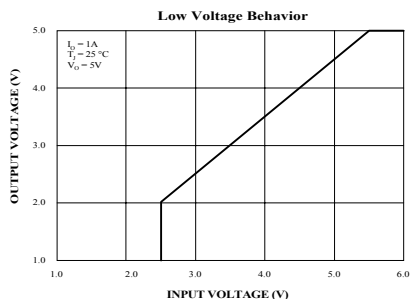

APPLICATION HINTS

External Capacitors

A minimum capacitance of 22μF and conditions on ESR (Equivalent Series Resistance) must be met. The minimum value for the capacitance is 22μF and can be increased without limit. However the ESR may cause loop instability if it is too high or too low. The following graph shows the acceptable range for the ESR.

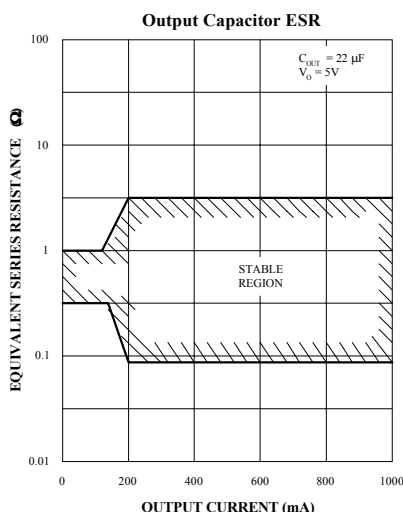

If the capacitor does not meet these requirements oscillation can result.

ESR is specified only at room temperature. Therefore the designer must ensure the proper behavior of the ESR over the temperature range. ESR, for electrolytic capacitor, will increase by about 30X as the temperature is reduced from 25°C to -40°C. Aluminum electrolytic capacitors are not well suited for low temperature operation.

Solid tantalum capacitors' ESR are more stable over temperature, but expensive. A cost-effective approach is then to put in parallel a solid tantalum and a aluminum electrolytic capacitors in the ratio 25/75%.

Thermal Consideration

Although the SPX2940 offers some limiting circuitry for overload conditions, it is necessary not to exceed the maximum junction temperature, and therefore to be careful about thermal resistance. The heat flow will follow the lowest resistance path, which is the Junction-to-case thermal resistance. In order to insure the best thermal flow of the component, a proper mounting is required. Note that the case of the device is electrically connected to the output. In case the case has to be electrically isolated, a thermally conductive spacer can be used. However do not forget to consider its contribution to thermal resistance.

Formulas for calculating the power dissipated in the regulator are the following:

$$I_{IN} = I_L + I_G$$

$$P_D = (V_{IN} + V_{OUT}) * I_L + V_{IN} * I_G$$

Where I_{IN} is the input current, I_L is the load current, I_G is the ground current, P_D is the power dissipated, V_{IN} is the input voltage and V_{OUT} is the output voltage.

ORDERING INFORMATION

Ordering No.	Output Voltage	Packages
SPX2940T3-3.3	3.3V	3 Lead TO-263
SPX2940T3-5.0	5.0V	3 Lead TO-263
SPX2940T3-12.0	12.0V	3 Lead TO-263
SPX2940U3-3.3	3.3V	3 Lead TO-220
SPX2940U3-5.0	5.0V	3 Lead TO-220
SPX2940U3-12.0	12.0V	3 Lead TO-220



SIGNAL PROCESSING EXCELLENCE

Sipex Corporation

Headquarters and Main Offices:

22 Linnell Circle
Billerica, MA 01821
TEL: (978) 667-8700
FAX: (978) 670-9001
e-mail: sales@sipex.com

233 South Hillview Drive
Milpitas, CA 95035
TEL: (408) 935-7600
FAX: (408) 934-7500

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described hereing; neither does it convey any license under its patent rights nor the rights of others.