

3875081 G E SOLID STATE

01E 17465 D 7-29-23

General-purpose Power Transistors

T-33-13

File Number 219

40406, 40407, 40408, 40411

## Silicon N-P-N and P-N-P Power Transistors

For Audio-Amplifier Applications

### Features:

#### 40406 & 40407

- $V_{CE0(sus)} = -50 V$  max. (40406)
- $V_{CE0(sus)} = 50 V$  max. (40407)
- 40406 is p-n-p complement of 40407
- 1 W dissipation rating

#### 40408


- $V_{CE0(sus)} = 90 V$  max.
- 1 W dissipation rating

#### 40411


- $V_{CE0(sus)} = 90$  max.
- 150 W dissipation rating

RCA-40406, 40407, 40408 and the 40411 are silicon n-p-n and p-n-p transistors intended for use in audio amplifiers. Giving high-quality performance economically, these four devices have power dissipation ratings of 1 to 150 W. Types 40406, 40407, and 40408 are supplied in JEDEC TO-205AD hermetic packages. The 40411 unit, intended for use in audio output stages, is in a steel JEDEC TO-204AA hermetic package.

### TERMINAL DESIGNATIONS



JEDEC TO-205AD



JEDEC TO-204AA

### MAXIMUM RATINGS, Absolute-Maximum Values:

	40406	40407	40408	40411	
$V_{CE0(sus)}$ .....	-50	50	90	—	V
$V_{CE0(sus)}$ $R_{\theta E} = 100 \Omega$ .....	—	—	—	90	V
$V_{EBO}$ .....	-4	4	4	4	V
$I_C$ .....	-0.7	0.7	0.7	30	A
$I_B$ .....	-0.2	0.2	0.2	15	A
$P_T$ :					
$T_A \leq 25^\circ C$ .....	1	1	1	—	W
$T_C \leq 25^\circ C$ .....	—	—	—	150	W
$T_J$ .....	-65 to +200				$^\circ C$

3875081 G E SOLID STATE  
General-Purpose Power Transistors

01E 17466

D T-29-23  
T-33-13

40406, 40407, 40408, 40411

ELECTRICAL CHARACTERISTICS,  $T_C = 25^\circ$  Unless Otherwise Specified

CHARACTERISTIC	TEST CONDITIONS			LIMITS						UNITS
	VOLTAGE V dc	CURRENT A dc		40406# 40407		40408		40411		
		V <sub>CE</sub>	I <sub>C</sub>	I <sub>B</sub>	Min.	Max.	Min.	Max.	Min.	
I <sub>CBO</sub> I <sub>E</sub> = 0	10*			-	0.25 <sup>d</sup>	-	-	-	-	μA
I <sub>CEO</sub>	40 80			-	1	-	-	-	1	μA
T <sub>C</sub> = 150° C										
40406	40			-	0.01	-	-	-	-	mA
40407	40			-	0.1	-	-	-	-	
40408	80			-	-	-	0.25	-	-	
I <sub>CER</sub> R <sub>BE</sub> = 100 Ω	80			-	-	-	-	-	500	μA
T <sub>C</sub> = 150° C	80			-	-	-	-	-	2	mA
I <sub>EBO</sub> V <sub>BE</sub> = -4 V		0		-	100	-	100	-	500	μA
V <sub>CEO(sus)</sub>		0.1 <sup>a</sup>	0	50 <sup>b</sup>	-	90 <sup>b</sup>	-	-	-	V
V <sub>CER(sus)</sub> R <sub>BE</sub> = 100 Ω		0.1 0.2		-	-	-	-	-	90	V
V <sub>BE</sub>	10 4 4 4	0.001 <sup>a</sup> 0.01 <sup>a</sup> 0.15 <sup>a</sup> 4 <sup>a</sup>		-	0.8 <sup>c</sup>	-	1	-	-	V
V <sub>CE(sat)</sub>		0.15 <sup>a</sup> 4 <sup>a</sup>	0.015 0.4	-	-	-	1.4	-	0.8	V
h <sub>FE</sub>	40406 40407 40408 40411	10 10 4 4	0.1 mA <sup>a</sup> 0.001 <sup>a</sup> 0.01 <sup>a</sup> 4 <sup>a</sup>	30 40 -	200 200 -	- -	- 40 -	- 200 -	- -	35 100
h <sub>fe</sub> f = 20 MHz	10	0.05		6 <sup>b</sup>	-	-	-	-	-	
f <sub>T</sub>	4	0.05		100 (typ.)		100 (typ.)				MHz
	4	4		-	-	-	-	800 (typ.)		kHz
C <sub>obo</sub> I <sub>E</sub> = 0 f = 1 MHz	10*			15 <sup>b</sup>	-	-	-	-	-	pF
I <sub>S/b</sub> t = 1s nonrep	30			-	-	-	-	5	-	A
R <sub>θJC</sub>				-	35	-	35	-	1.17	°C/W
R <sub>θJA</sub>				-	175	-	175	-	-	

\* For p-n-p devices, voltage and current values are negative  
 • V<sub>CB</sub> • 40407 only  
 a Pulsed; pulse duration = 300 μs, duty factor ≤ 2%

b CAUTION: The sustaining voltage V<sub>CEO(sus)</sub> MUST NOT be measured on a curve tracer. V<sub>CEO(sus)</sub> should be measured by the pulse method (Note 'a').  
 c 40406 tested at I<sub>C</sub> = -0.1 mA

40406, 40407, 40408, 40411

T-33-13

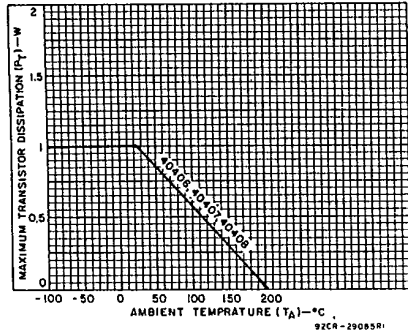


Fig. 1 - Dissipation derating curves for 40406, 40407, and 40408.

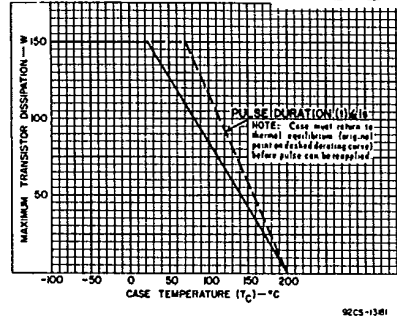


Fig. 2 - Dissipation derating curve for 40411.

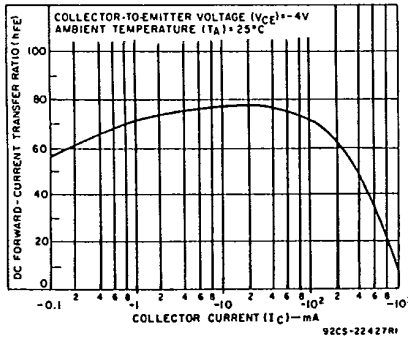


Fig. 3 - Typical dc beta characteristic for 40406.

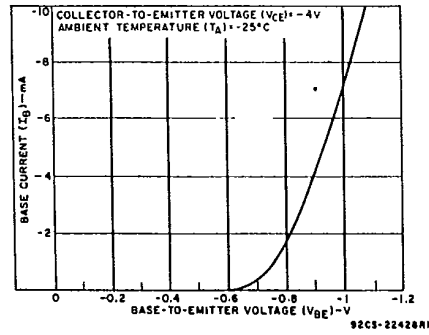


Fig. 4 - Typical input characteristic for 40406.

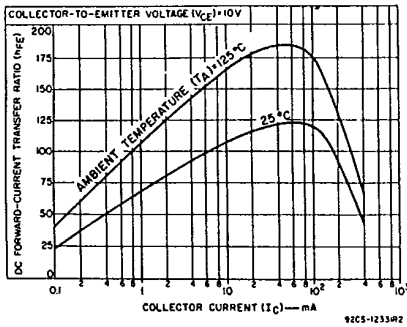


Fig. 5 - Typical dc beta characteristics for 40407 and 40408.

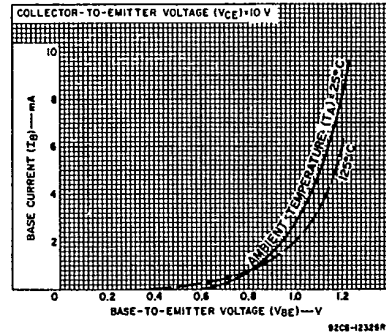


Fig. 6 - Typical input characteristics for 40407 and 40408.

3875081 G E SOLID STATE  
General-Purpose Power Transistors

01E 17468

D T-29-23  
T-33-13

40406, 40407, 40408, 40411

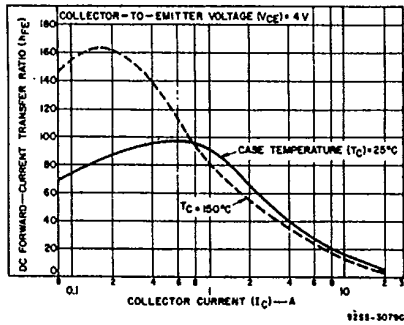


Fig. 7 - Typical dc beta characteristics for 40411.

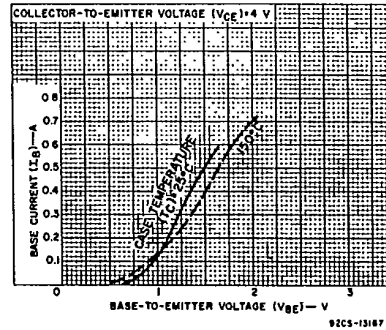


Fig. 8 - Typical input characteristics for 40411.

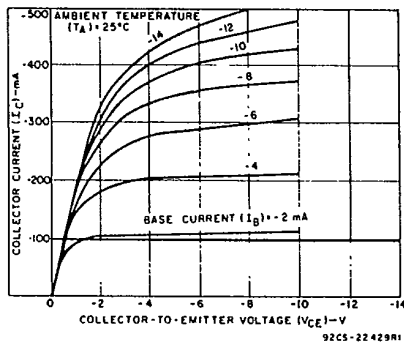


Fig. 9 - Typical output characteristics for 40406.

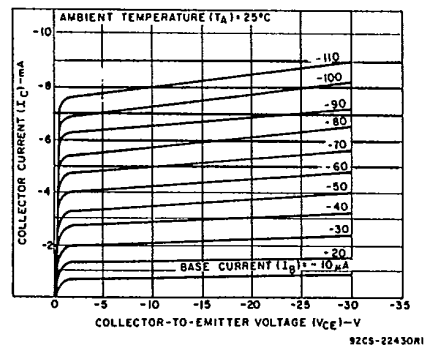


Fig. 10 - Typical large-signal output characteristics for 40406.

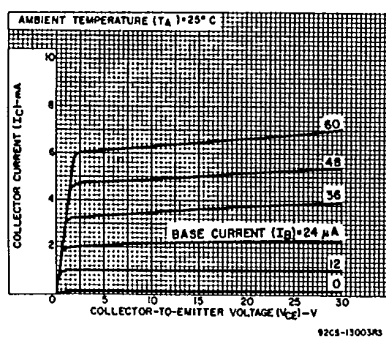


Fig. 11 - Typical output characteristics for 40407 and 40408.

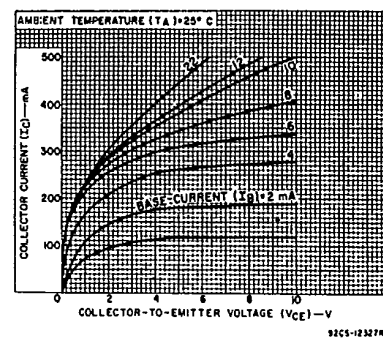


Fig. 12 - Typical large-signal output characteristics for 40407 and 40408.

40406, 40407, 40408, 40411

T-33-13

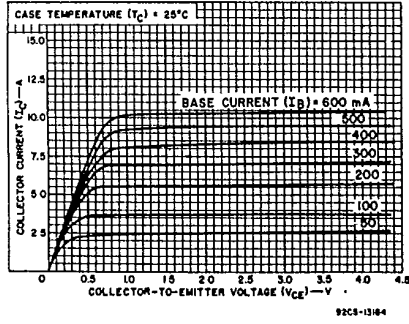


Fig. 13 - Typical output characteristics for 40411.

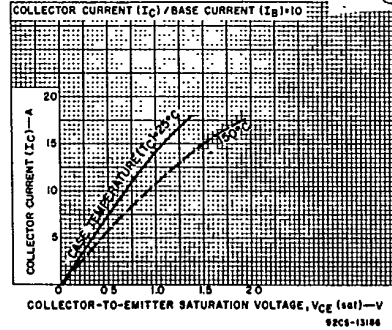


Fig. 14 - Typical saturation-voltage characteristics for 40411.

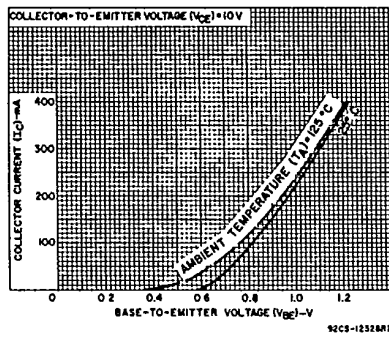


Fig. 15 - Typical transfer characteristics for 40407 and 40408.

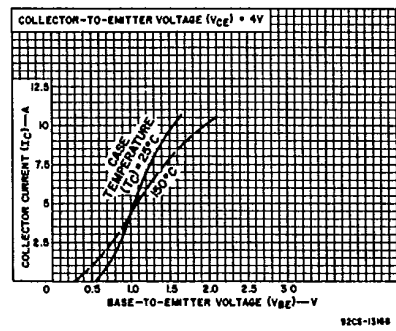


Fig. 16 - Typical transfer characteristics for 40411.