


PROGRAMMABLE PRECISION REFERENCE

DESCRIPTION

The Contek TL431 is a three-terminal adjustable regulator with a guaranteed thermal stability over applicable temperature ranges. The output voltage may be set to any value between V_{ref} (approximately 2.5V) and 36 V with two external resistors. It provides very wide applications, including shunt regulator, series regulator, switching regulator, voltage reference and others.


FEATURES

- *Programmable output Voltage to 36V.
- *Low dynamic output impedance 0.2Ω .
- *Sink current capability of 1.0 to 100mA.
- *Equivalent full-range temperature coefficient of $50\text{ppm}/^{\circ}\text{C}$ typical for operation over full rated operating temperature range.

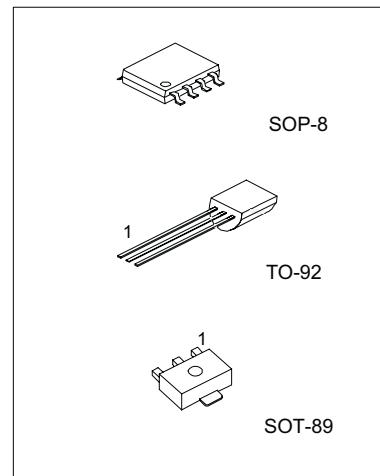

SOP-8 1: Cathode 2,3,6,7: Anode 8:Ref.
4,5: N.C.
TO-92 1: Ref; 2:Anode; 3:Cathode
SOT-89 1: Ref; 2:Anode; 3:Cathode

BLOCK DIAGRAM

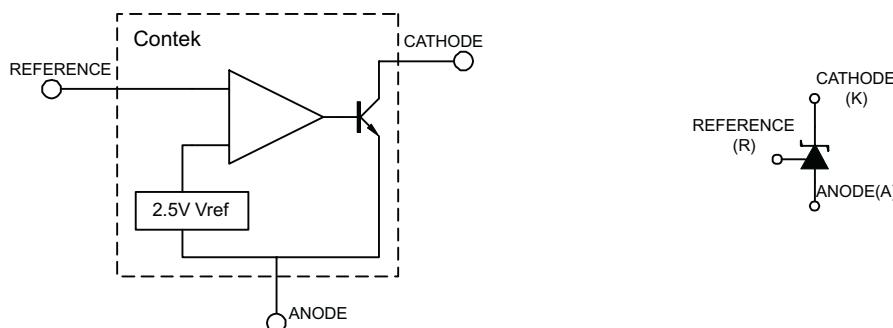

TL431**LINEAR INTEGRATED CIRCUIT****ABSOLUTE MAXIMUM RATINGS** (Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Cathode Voltage	VKA	37	V
Cathode Current Range(Continuous)	IKA	-100 ~ +150	mA
Reference Input Current Range	Iref	0.05 ~ +10	mA
Power Dissipation TO-92 SOP-8 SOT-89	PD	500 300 350	mW mW
Operating Junction Temperature	Topr	-20 ~ +85	C
Storage Temperature Temperature	Tstg	-65 ~ +150	C

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Cathode Voltage	VKA	VREF		36	V
Cathode Current	IKA		10		mA

ELECTRICAL CHARACTERISTICS($T_a=25$ C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Reference Input Voltage	Vref	VKA=VREF,IKA=10mA		2.440	2.495	2.550	V
Deviation of reference Input Voltage Over temperature(note 1)	$\Delta V_{ref}/\Delta T$	VKA=VREF,IKA=10mA			4.5	17	mV
Over temperature(note 1)		TMIN<=TA<=TMAX					
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$\Delta V_{ref} / \Delta V_{KA}$	IKA=10mA	VKA=10V~VREF VKA=36V~10V		-1.0	-2.7 -2.0	mV/V
					-0.5		
Reference Input Current	Iref	IKA=10mA,R1=10kΩ,R2=			1.5	4	μA
Deviation of Reference Input Current Over Full Temperature Range	$\Delta I_{ref}/\Delta T$	IKA=10mA,R1=10kΩ,R2=			0.4	1.2	μA
Over Full Temperature Range		TA=full Temperature					
Minimum Cathode Current for Regulation	IKA(min)	VKA=VREF			0.45	1.0	mA
Off-State Cathode Current	IKA(OFF)	VKA=36V,VREF=0			0.05	1.0	μA
Dynamic Impedance	ZKA	VKA=VREF,IKA=1 to 100mA	f1.0kHz		0.15	0.5	Ω







Note:TMIN=0 C,TMAX=+70 C

Remark: Reference voltage of $\pm 1\%$ tolerance is also available per customer's request.**Contek Microelectronics Co.,Ltd.**<http://www.contek-ic.com> E-mail:sales@contek-ic.com

TL431

LINEAR INTEGRATED CIRCUIT

TYPICAL PERFORMANCE CHARACTERISTICS

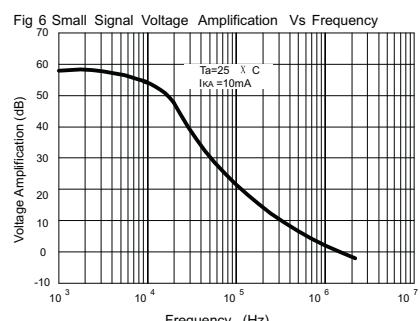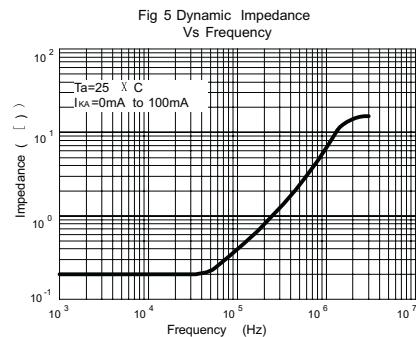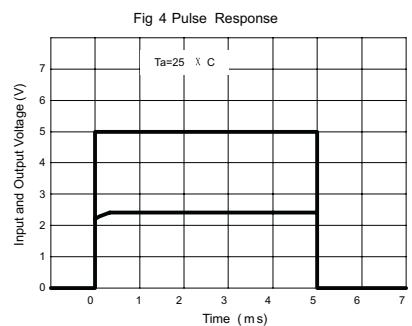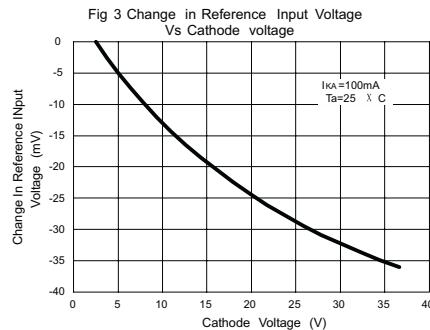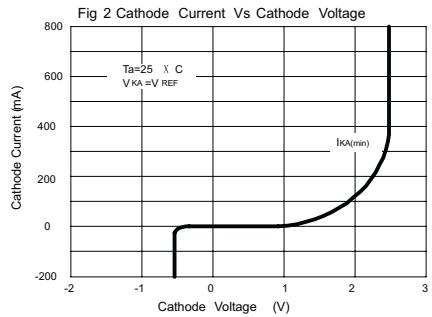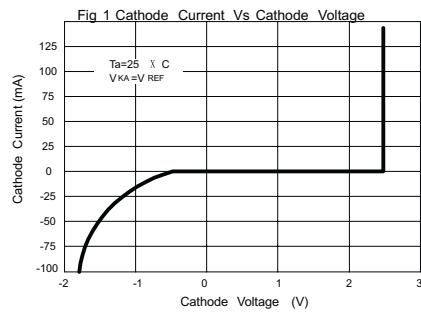

TL431

LINEAR INTEGRATED CIRCUIT

TEST CIRCUIT

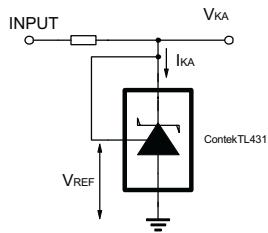


Fig 7 Test Circuit For $V_{KA}=V_{REF}$

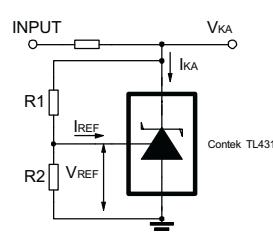


Fig 8 Test Circuit for $V_{KA} > V_{REF}$

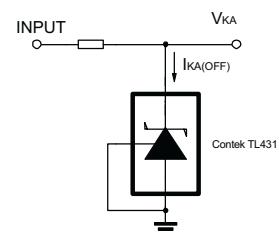


Fig 9 Test Circuit For $I_{KA(OFF)}$

APPLICATION CIRCUIT




Fig 10 Shutdown Regulator




Fig 11 Output Control of a Three-Terminal Fixed Regulator




Fig 12 Higher-current Shunt Regulator

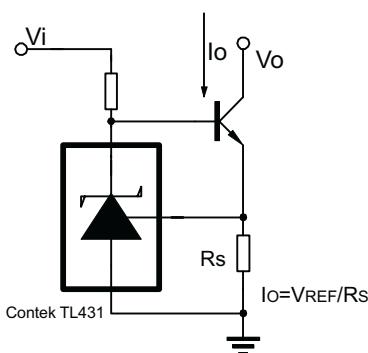


Fig 13 Constant-current Sink

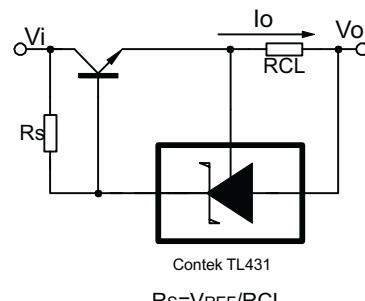


Fig 14 Current Limiting or Current Source



Contek Microelectronics Co.,Ltd.

<http://www.contek-ic.com> E-mail:sales@contek-ic.com