

BCR5AM

MEDIUM POWER USE

NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

Refer to the page 6 as to the product guaranteed maximum junction temperature 150°C


BCR5AM



- I_T (RMS) 5A
- V_{DRM} 600V
- I_{FGT} I , I_{RGT} I , I_{RGT} III 20mA (10mA) *6

OUTLINE DRAWING

Dimensions
in mm

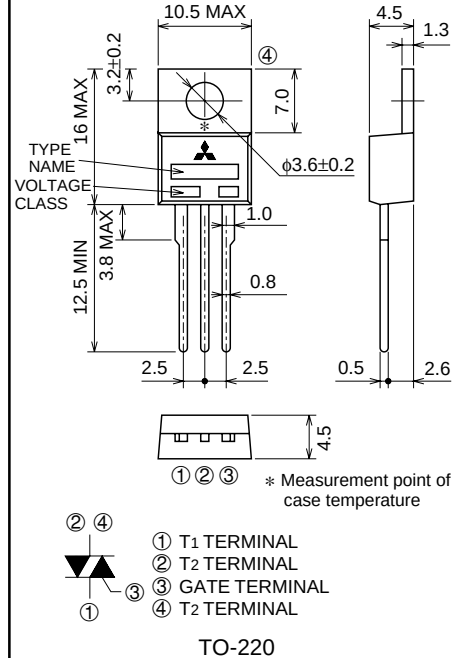

APPLICATION

Switching mode power supply, light dimmer, electric flasher unit,
control of household equipment such as TV sets · stereo · refrigerator · washing machine · infrared
kotatsu · carpet, solenoid drivers, small motor control,
copying machine, electric tool,
other general purpose control applications

MAXIMUM RATINGS

Symbol	Parameter	Voltage class	Unit
		12	
V_{DRM}	Repetitive peak off-state voltage *1	600	V
V_{DSM}	Non-repetitive peak off-state voltage *1	720	V

Symbol	Parameter	Conditions	Ratings	Unit
I_T (RMS)	RMS on-state current	Commercial frequency, sine full wave 360° conduction, $T_c=103^\circ\text{C}$ *3	5	A
I_{TSM}	Surge on-state current	60Hz sinewave 1 full cycle, peak value, non-repetitive	50	A
I^2_t	I^2_t for fusing	Value corresponding to 1 cycle of half wave 60Hz, surge on-state current	10.4	A ² s
PGM	Peak gate power dissipation		3	W
PG (AV)	Average gate power dissipation		0.3	W
VGM	Peak gate voltage		10	V
IGM	Peak gate current		2	A
T_j	Junction temperature		-40 ~ +125	°C
T_{stg}	Storage temperature		-40 ~ +125	°C
—	Weight	Typical value	2.0	g

*1. Gate open.

BCR5AM

Refer to the page 6 as to the product guaranteed
maximum junction temperature 150°C

MEDIUM POWER USE
NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive peak off-state current	$T_J=125^\circ\text{C}$, V_{DRM} applied	—	—	2.0	mA
V_{TM}	On-state voltage	$T_c=25^\circ\text{C}$, $I_{TM}=7\text{A}$, Instantaneous measurement	—	—	1.8	V
$V_{FGT\text{ I}}$	Gate trigger voltage *2	$T_J=25^\circ\text{C}$, $V_D=6\text{V}$, $R_L=6\Omega$, $R_G=330\Omega$	—	—	1.5	V
$V_{RGT\text{ I}}$			—	—	1.5	V
$V_{RGT\text{ III}}$			—	—	1.5	V
$I_{FGT\text{ I}}$	Gate trigger current *2	$T_J=25^\circ\text{C}$, $V_D=6\text{V}$, $R_L=6\Omega$, $R_G=330\Omega$	—	—	20 *6	mA
$I_{RGT\text{ I}}$			—	—	20 *6	mA
$I_{RGT\text{ III}}$			—	—	20 *6	mA
V_{GD}	Gate non-trigger voltage	$T_J=125^\circ\text{C}$, $V_D=1/2V_{DRM}$	0.2	—	—	V
$R_{th(j-c)}$	Thermal resistance	Junction to case *3 *4	—	—	3.0	$^\circ\text{C/W}$
$(dv/dt)_c$	Critical-rate of rise of off-state commutating voltage *5	$T_J=125^\circ\text{C}$	5	—	—	$\text{V}/\mu\text{s}$

*2. Measurement using the gate trigger characteristics measurement circuit.

*3. Case temperature is measured at the T2 terminal 1.5mm away from the molded case.



*4. The contact thermal resistance $R_{th(c-j)}$ in case of greasing is 1.0°C/W .

*5. Test conditions of the critical-rate of rise of off-state commutating voltage is shown in the table below.

*6. High sensitivity ($I_{GT}\leq 10\text{mA}$) is also available. (I_{GT} item ①)

Test conditions	Commutating voltage and current waveforms (inductive load)
1. Junction temperature $T_J=125^\circ\text{C}$ 2. Rate of decay of on-state commutating current $(di/dt)_c=-2.5\text{A/ms}$ 3. Peak off-state voltage $V_D=400\text{V}$	

PERFORMANCE CURVES

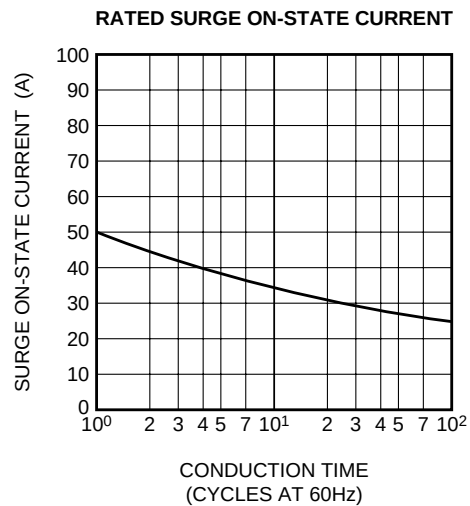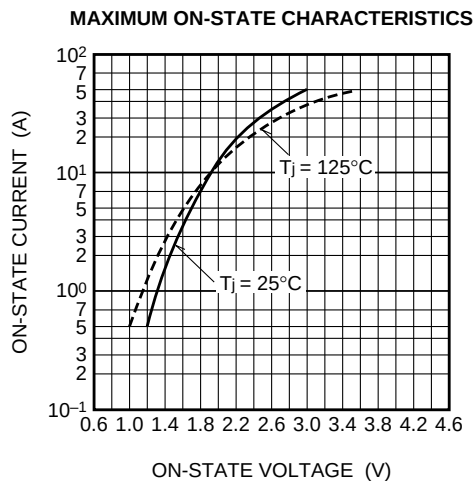


BCR5AM


Refer to the page 6 as to the product guaranteed maximum junction temperature 150°C

MEDIUM POWER USE
NON-INSULATED TYPE, PLANAR PASSIVATION TYPE


**GATE CHARACTERISTICS
(I, II AND III)**

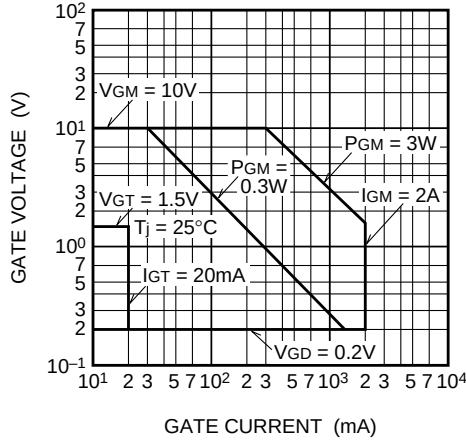


**GATE TRIGGER CURRENT VS.
JUNCTION TEMPERATURE**

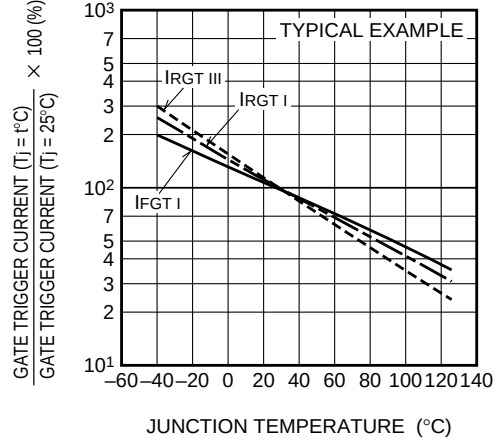


**GATE TRIGGER VOLTAGE VS.
JUNCTION TEMPERATURE**

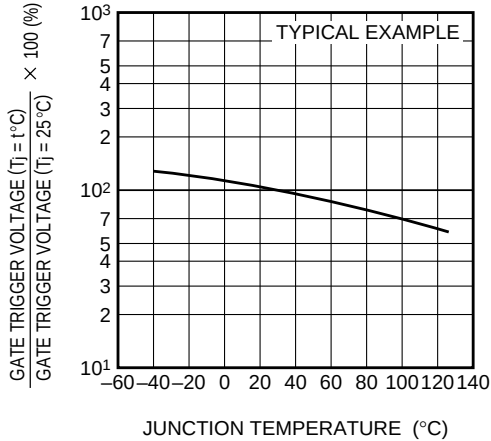


**MAXIMUM TRANSIENT THERMAL
IMPEDANCE CHARACTERISTICS
(JUNCTION TO CASE)**

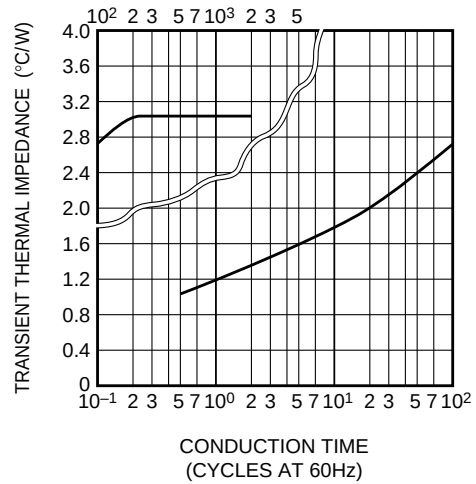

**MAXIMUM ON-STATE POWER
DISSIPATION**

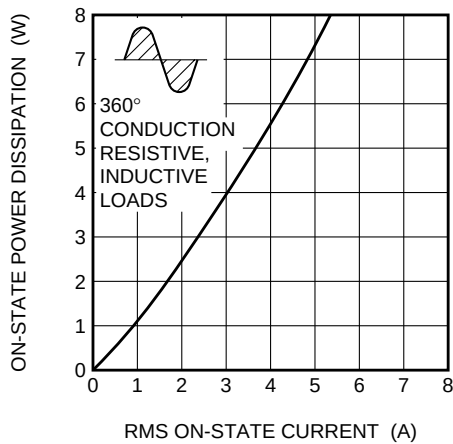

**ALLOWABLE CASE TEMPERATURE
VS. RMS ON-STATE CURRENT**

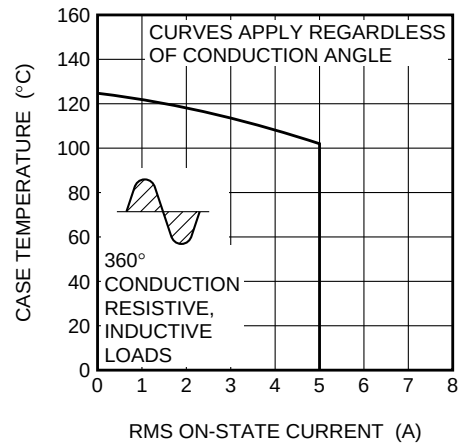


BCR5AM


Refer to the page 6 as to the product guaranteed
maximum junction temperature 150°C

MEDIUM POWER USE
NON-INSULATED TYPE, PLANAR PASSIVATION TYPE


ALLOWABLE AMBIENT TEMPERATURE
VS. RMS ON-STATE CURRENT

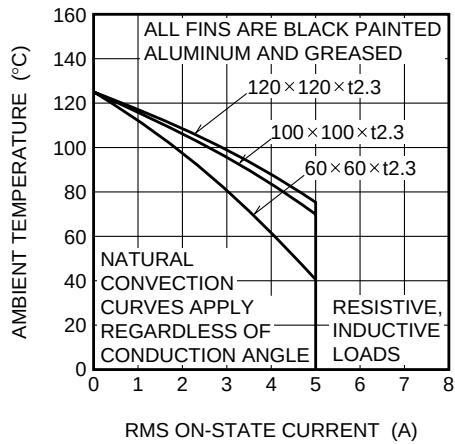


ALLOWABLE AMBIENT TEMPERATURE
VS. RMS ON-STATE CURRENT

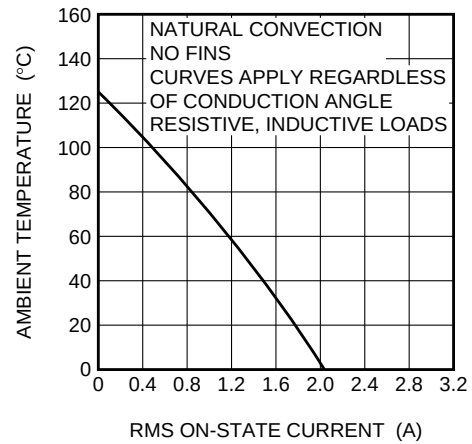


REPETITIVE PEAK OFF-STATE
CURRENT VS. JUNCTION
TEMPERATURE

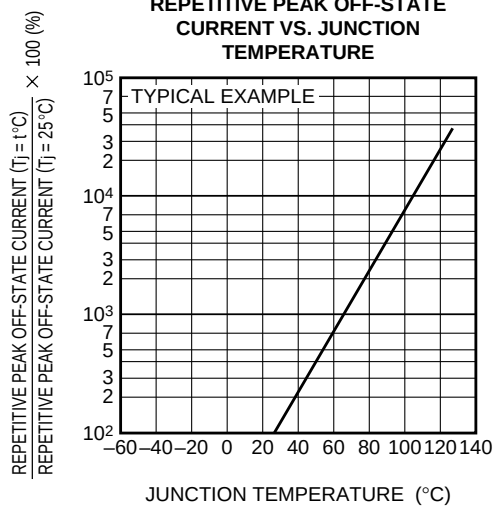


HOLDING CURRENT VS.
JUNCTION TEMPERATURE

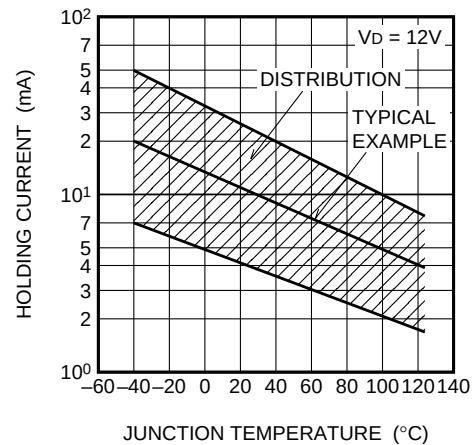

LACHING CURRENT VS.
JUNCTION TEMPERATURE

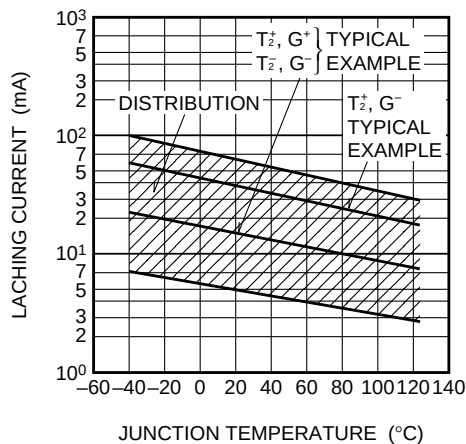




BREAKOVER VOLTAGE VS.
JUNCTION TEMPERATURE

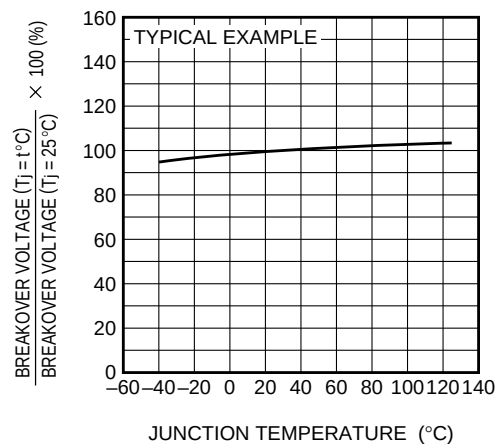


BCR5AM

Refer to the page 6 as to the product guaranteed maximum junction temperature 150°C

MEDIUM POWER USE
NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

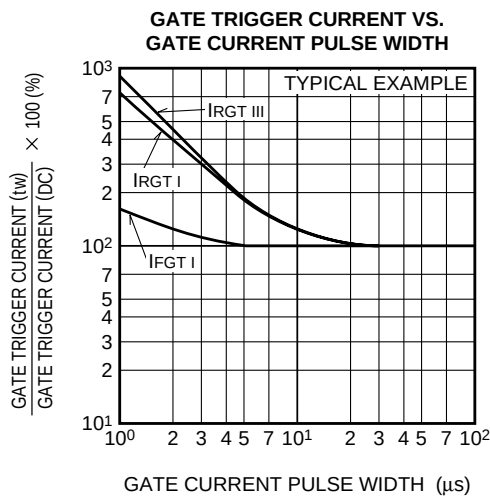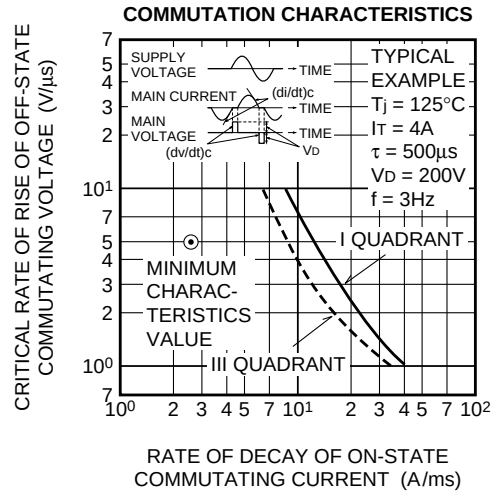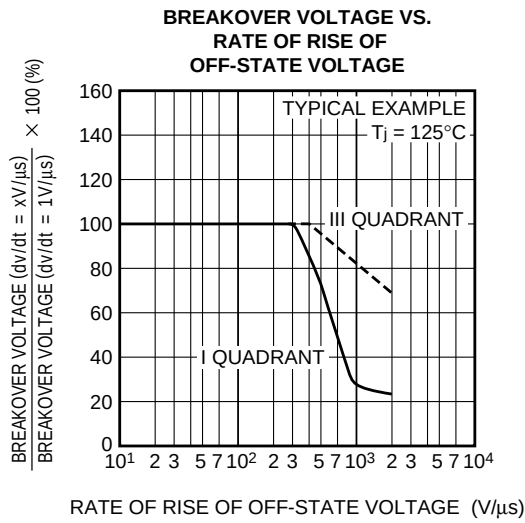

GATE TRIGGER CHARACTERISTICS TEST CIRCUITS

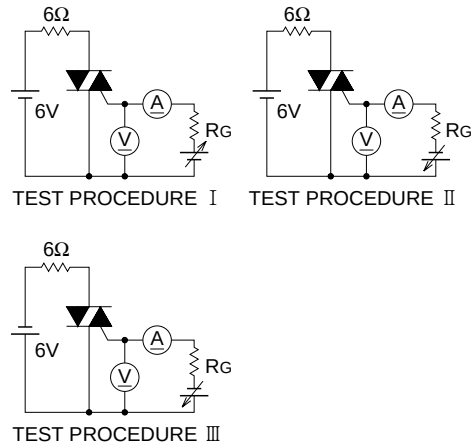

BCR5AM

MEDIUM POWER USE

NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

The product guaranteed maximum junction temperature 150°C (See warning.)


BCR5AM



- I_T (RMS) 5A
- V_{DRM} 600V
- I_{FGT} I , I_{RGT} I , I_{RGT} III 20mA (10mA) *6

OUTLINE DRAWING

Dimensions
in mm

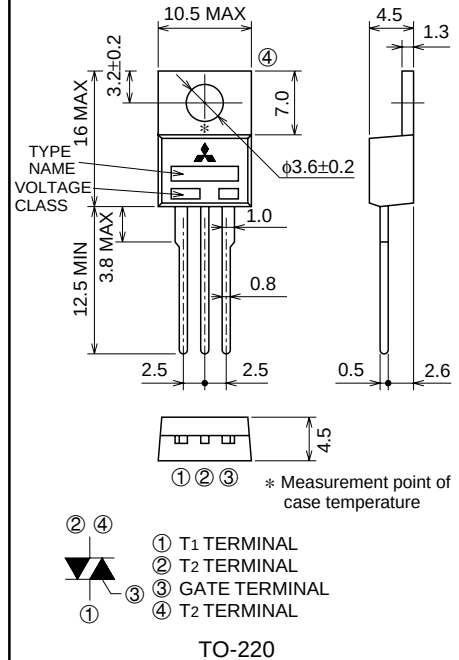

APPLICATION

Switching mode power supply, light dimmer, electric flasher unit, control of household equipment such as TV sets · stereo · refrigerator · washing machine · infrared kotatsu · carpet, solenoid drivers, small motor control, copying machine, electric tool, other general purpose control applications

(Warning)

1. Refer to the recommended circuit values around the triac before using.
2. Be sure to exchange the specification before using. If not exchanged, general triacs will be supplied.

MAXIMUM RATINGS

Symbol	Parameter	Voltage class	Unit
		12	
V_{DRM}	Repetitive peak off-state voltage *1	600	V
V_{DSM}	Non-repetitive peak off-state voltage *1	720	V

Symbol	Parameter	Conditions	Ratings	Unit
I_T (RMS)	RMS on-state current	Commercial frequency, sine full wave 360° conduction, $T_c=128^\circ\text{C}$ *3	5	A
I_{TSM}	Surge on-state current	60Hz sinewave 1 full cycle, peak value, non-repetitive	50	A
I^2_t	I^2_t for fusing	Value corresponding to 1 cycle of half wave 60Hz, surge on-state current	10.4	A ² s
P_{GM}	Peak gate power dissipation		3	W
P_G (AV)	Average gate power dissipation		0.3	W
V_{GM}	Peak gate voltage		10	V
I_{GM}	Peak gate current		2	A
T_j	Junction temperature		-40 ~ +150	°C
T_{stg}	Storage temperature		-40 ~ +150	°C
—	Weight	Typical value	2.0	g

*1. Gate open.

BCR5AM

The product guaranteed maximum junction temperature 150°C (See warning.)

MEDIUM POWER USE
NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive peak off-state current	$T_j=150^\circ\text{C}$, V_{DRM} applied	—	—	2.0	mA
V_{TM}	On-state voltage	$T_c=25^\circ\text{C}$, $I_{TM}=7\text{A}$, Instantaneous measurement	—	—	1.8	V
$V_{FGT\text{ I}}$	Gate trigger voltage *2	$T_j=25^\circ\text{C}$, $V_D=6\text{V}$, $R_L=6\Omega$, $R_G=330\Omega$	—	—	1.5	V
$V_{RGT\text{ I}}$			—	—	1.5	V
$V_{RGT\text{ III}}$			—	—	1.5	V
$I_{FGT\text{ I}}$	Gate trigger current *2	$T_j=25^\circ\text{C}$, $V_D=6\text{V}$, $R_L=6\Omega$, $R_G=330\Omega$	—	—	20 *6	mA
$I_{RGT\text{ I}}$			—	—	20 *6	mA
$I_{RGT\text{ III}}$			—	—	20 *6	mA
V_{GD}	Gate non-trigger voltage	$T_j=125^\circ\text{C}/150^\circ\text{C}$, $V_D=1/2V_{DRM}$	0.2/0.1	—	—	V
$R_{th(j-c)}$	Thermal resistance	Junction to case *3 *4	—	—	3.0	$^\circ\text{C}/\text{W}$
$(dv/dt)_c$	Critical-rate of rise of off-state commutating voltage *5	$T_j=125^\circ\text{C}/150^\circ\text{C}$	5/1	—	—	$\text{V}/\mu\text{s}$

*2. Measurement using the gate trigger characteristics measurement circuit.

*3. Case temperature is measured at the T2 terminal 1.5mm away from the molded case.



*4. The contact thermal resistance $R_{th(c-j)}$ in case of greasing is $1.0^\circ\text{C}/\text{W}$.

*5. Test conditions of the critical-rate of rise of off-state commutating voltage is shown in the table below.

*6. High sensitivity ($I_{GT}\leq 10\text{mA}$) is also available. (I_{GT} item ①)

Test conditions	Commutating voltage and current waveforms (inductive load)
1. Junction temperature $T_j=125^\circ\text{C}/150^\circ\text{C}$ 2. Rate of decay of on-state commutating current $(di/dt)_c=-2.5\text{A}/\text{ms}$ 3. Peak off-state voltage $V_D=400\text{V}$	

PERFORMANCE CURVES

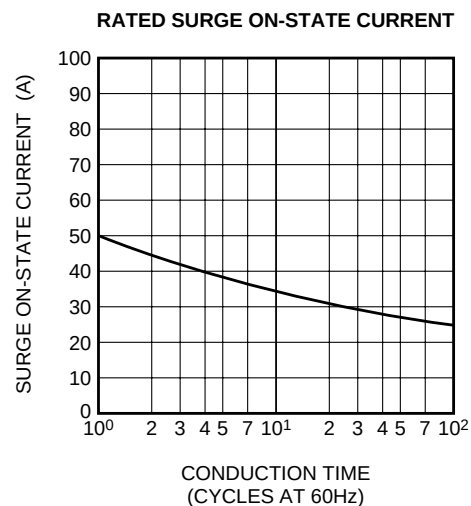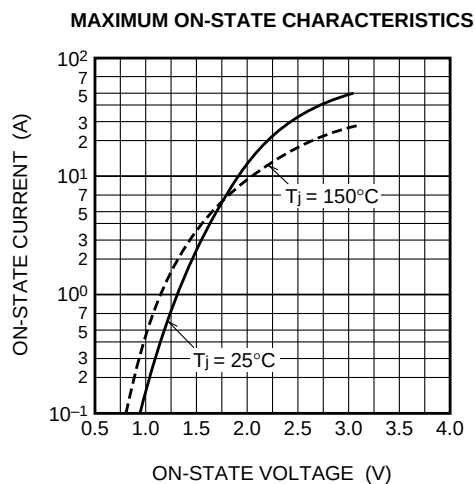


BCR5AM


The product guaranteed maximum junction temperature 150°C (See warning.)

MEDIUM POWER USE
NON-INSULATED TYPE, PLANAR PASSIVATION TYPE


**GATE CHARACTERISTICS
(I, II AND III)**

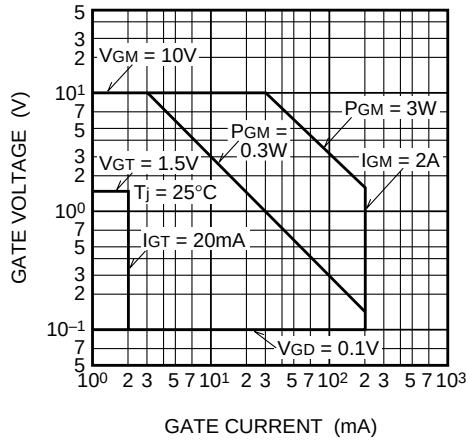


**GATE TRIGGER CURRENT VS.
JUNCTION TEMPERATURE**

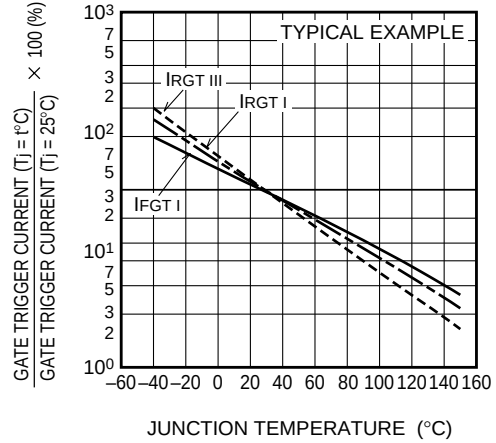


**GATE TRIGGER VOLTAGE VS.
JUNCTION TEMPERATURE**

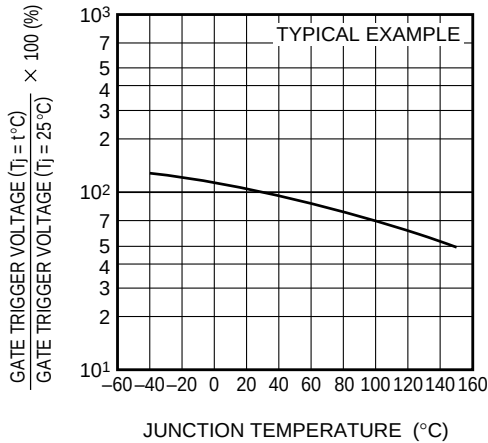


**MAXIMUM TRANSIENT THERMAL
IMPEDANCE CHARACTERISTICS
(JUNCTION TO CASE)**

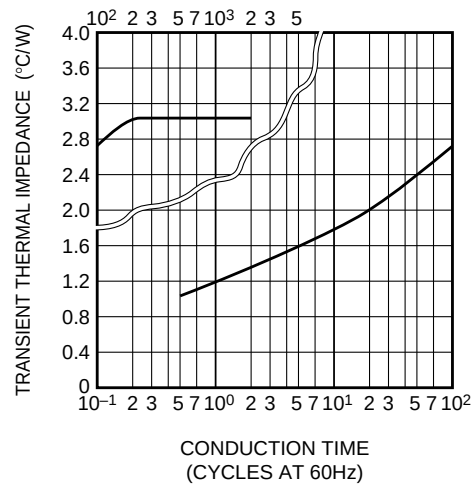

**MAXIMUM ON-STATE POWER
DISSIPATION**

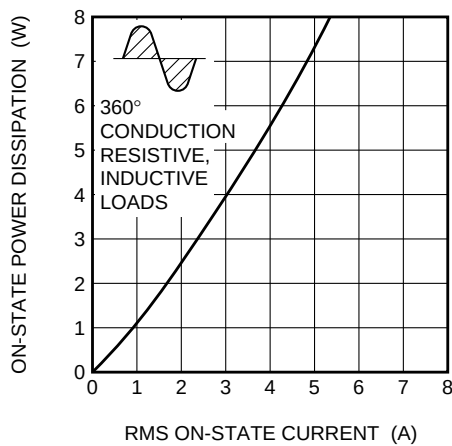

**ALLOWABLE CASE TEMPERATURE
VS. RMS ON-STATE CURRENT**

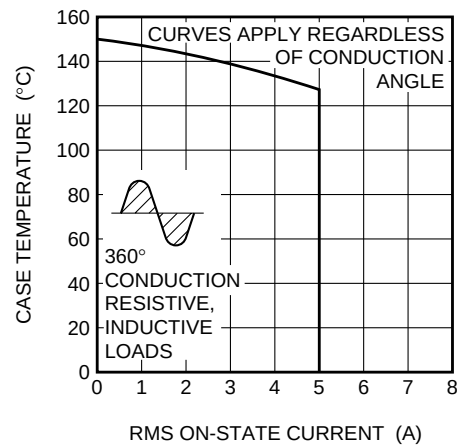


BCR5AM


The product guaranteed maximum junction temperature 150°C (See warning.)

MEDIUM POWER USE
NON-INSULATED TYPE, PLANAR PASSIVATION TYPE


ALLOWABLE AMBIENT TEMPERATURE
VS. RMS ON-STATE CURRENT

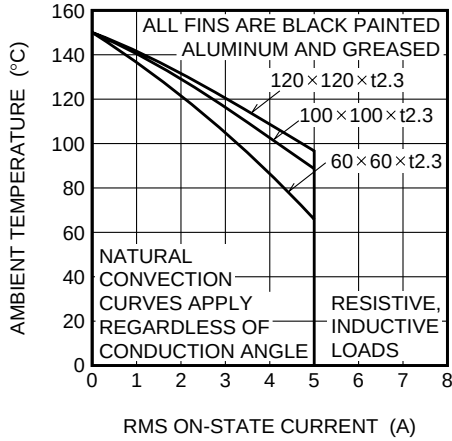


ALLOWABLE AMBIENT TEMPERATURE
VS. RMS ON-STATE CURRENT

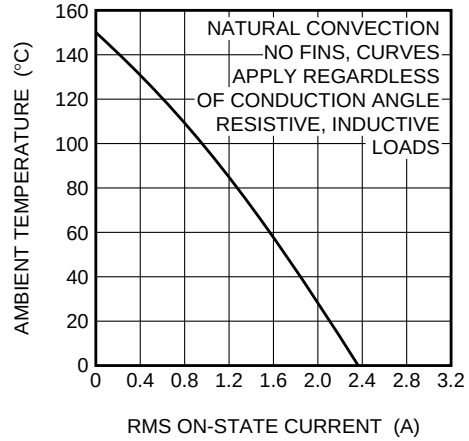


REPETITIVE PEAK OFF-STATE
CURRENT VS. JUNCTION
TEMPERATURE

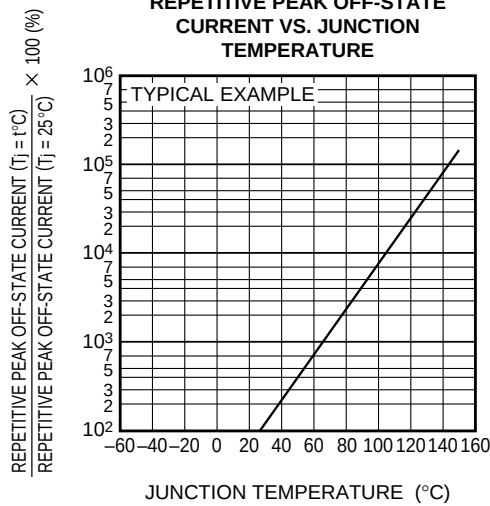


HOLDING CURRENT VS.
JUNCTION TEMPERATURE

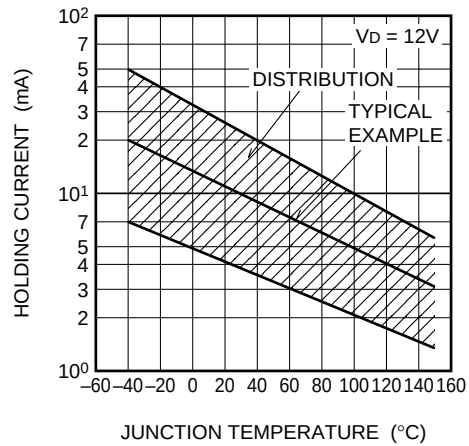

LATCHING CURRENT VS.
JUNCTION TEMPERATURE

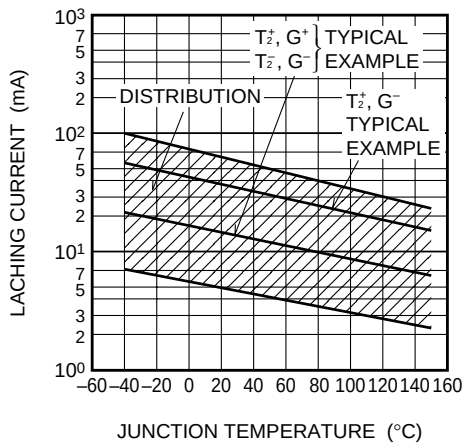






BREAKOVER VOLTAGE VS.
JUNCTION TEMPERATURE

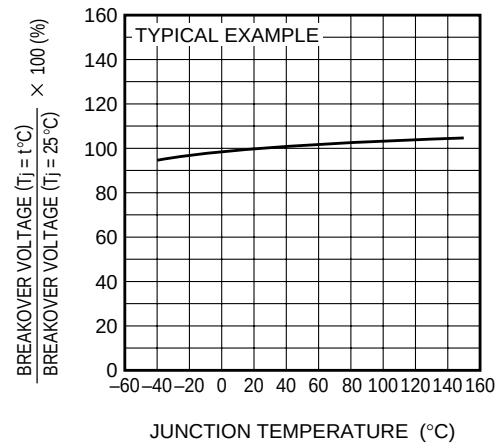

BCR5AM

The product guaranteed maximum junction temperature 150°C (See warning.)


MEDIUM POWER USE
NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

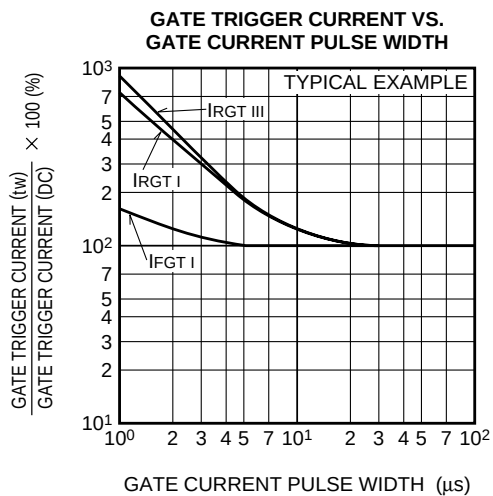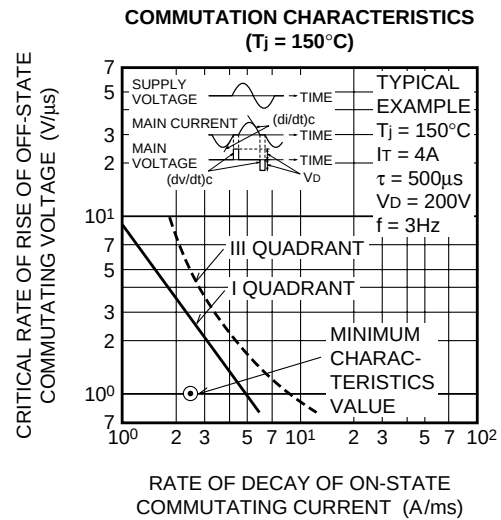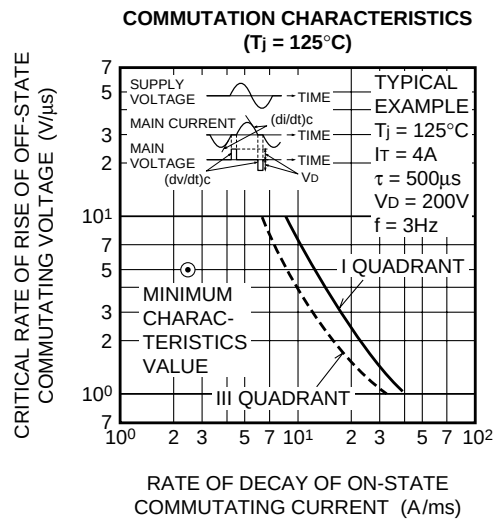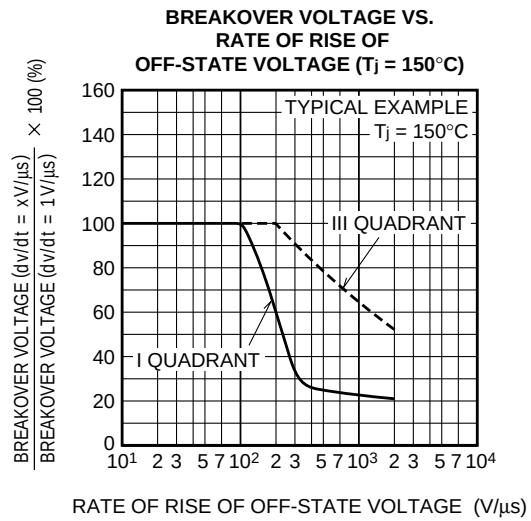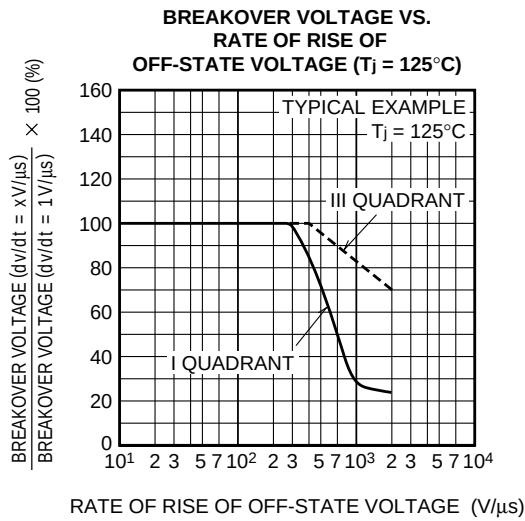


BCR5AM

The product guaranteed maximum junction
temperature 150°C (See warning.)


MEDIUM POWER USE
NON-INSULATED TYPE, PLANAR PASSIVATION TYPE

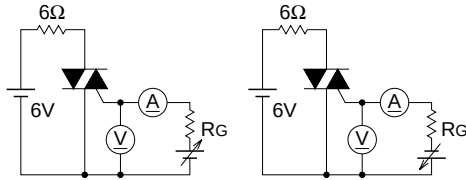GATE TRIGGER CHARACTERISTICS TEST CIRCUITS

TEST PROCEDURE I TEST PROCEDURE II



TEST PROCEDURE III

**RECOMMENDED CIRCUIT VALUES
AROUND THE TRIAC**

$C_1 = 0.1 \sim 0.47 \mu\text{F}$ $C_0 = 0.1 \mu\text{F}$
 $R_1 = 47 \sim 100 \Omega$ $R_0 = 100 \Omega$