

Fuji Discrete Package IGBT


■ Features

- Square RBSOA
- Low Saturation Voltage
- Less Total Power Dissipation
- Minimized Internal Stray Inductance

■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

■ Outline Drawing

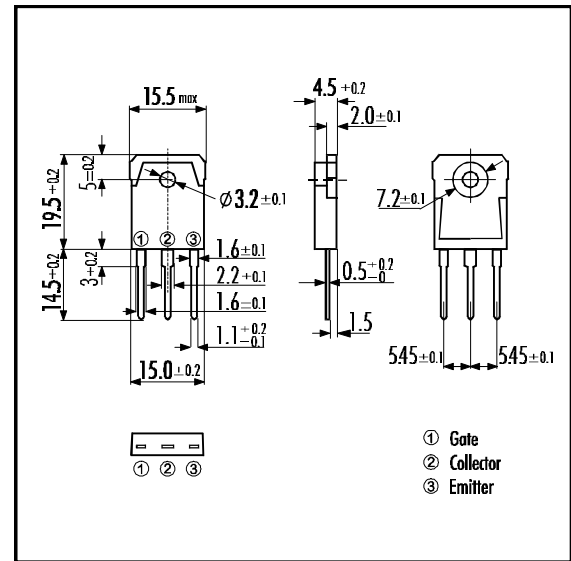


■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings (T_c=25°C)

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V _{CES}	1200	V
Gate-Emitter Voltage	V _{GES}	± 20	V
Collector Current	DC T _c = 25°C	I _{C 25}	13
	DC T _c =100°C	I _{C 100}	8
	1ms T _c = 25°C	I _{C PULSE}	39
IGBT Max. Power Dissipation	P _C	115	W
FWD Max. Power Dissipation	P _C	70	W
Operating Temperature	T _I	+150	°C
Storage Temperature	T _{stg}	-40 ~ +150	°C
Mounting Screw Torque		50	Nm

■ Equivalent Circuit

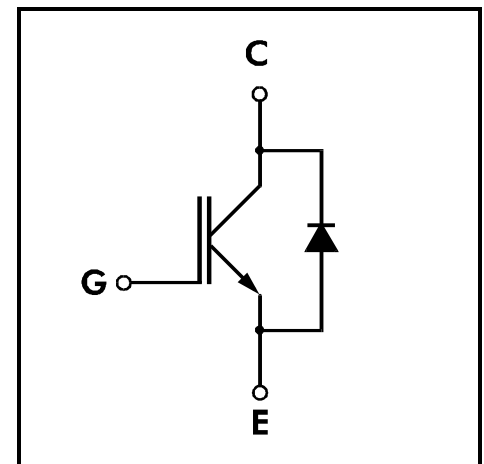


• Electrical Characteristics (at T_j=25°C)

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =1200V			1.0	mA
Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =± 20V			20	μA
Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{GE} =20V I _C =8mA	5.5		8.5	V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =8A			3.5	V
Input capacitance	C _{ies}	V _{GE} =0V		1000		pF
Output capacitance	C _{oes}	V _{CE} =10V		160		
Reverse Transfer capacitance	C _{res}	f=1MHz		60		
Switching Time	Turn-on Time	t _{ON}	V _{CC} =600V		1.2	μs
		t _r	I _C =8A		0.6	
	Turn-off Time	t _{OFF}	V _{GE} =±15V		1.5	
		t _f	R _G =200Ω		0.5	
	Turn-on Time	t _{ON}	V _{CC} =600V	0.16		μs
		t _r	I _C =8A	0.11		
	Turn-off Time	t _{OFF}	V _{GE} =+15V	0.30		
		t _f	R _G =20Ω		0.5	
Diode Forward On-Voltage	V _F	I _F =8A V _{GE} =0V			3.0	V
Reverse Recovery Time	t _{rr}	I _F =8A, V _{GE} =-10V, di/dt=100A/μs			350	ns


• Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R _{th(j-c)}	IGBT			1.08	°C/W
	R _{th(j-e)}	Diode			1.78	


Collector Current vs. Collector-Emittor Voltage

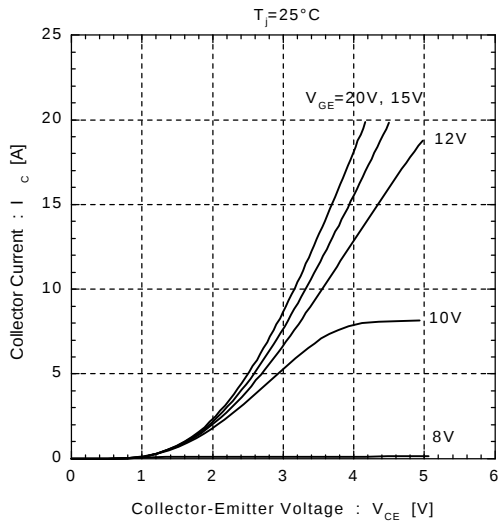


Collector Current vs. Collector-Emittor Voltage

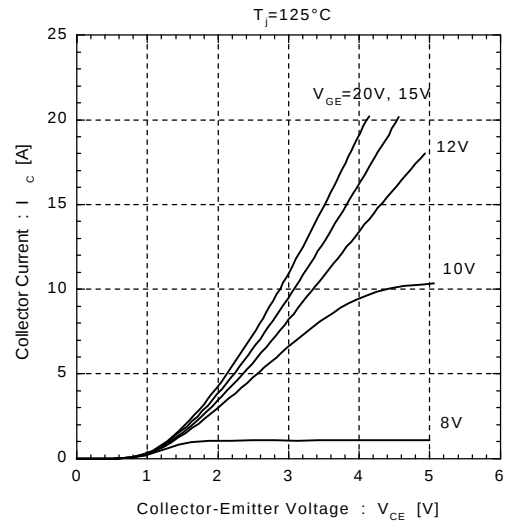


Collector-Emittor Voltage vs. Gate-Emittor Voltage

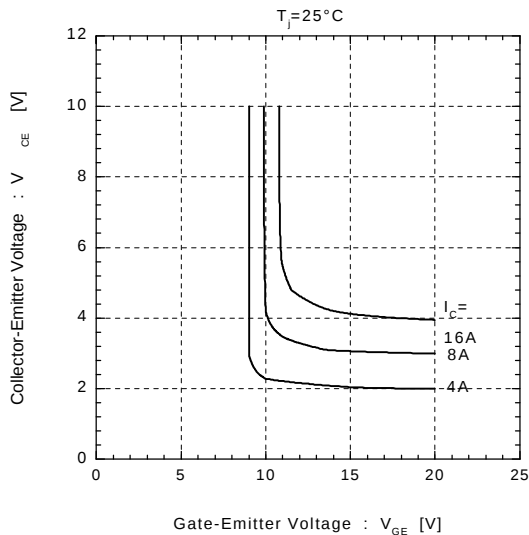


Collector-Emittor Voltage vs. Gate-Emittor Voltage






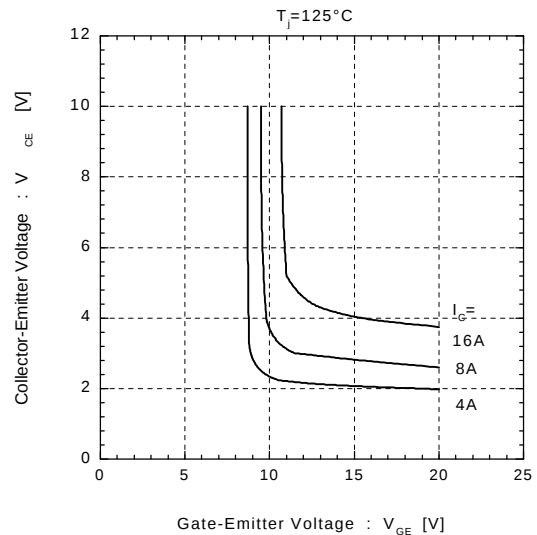







Switching Time vs. Collector Current
 $V_{CC} = 600V, R_G = 20\Omega, V_{GE} = \pm 15V, T_J = 25^\circ\text{C}$

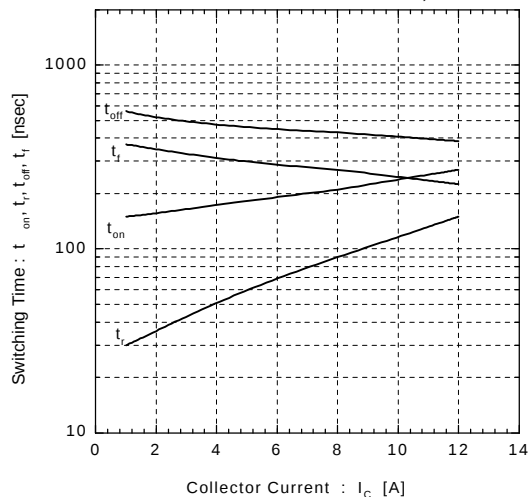


Switching Time vs. Collector Current
 $V_{CC} = 600V, R_G = 20\Omega, V_{GE} = \pm 15V, T_J = 125^\circ\text{C}$

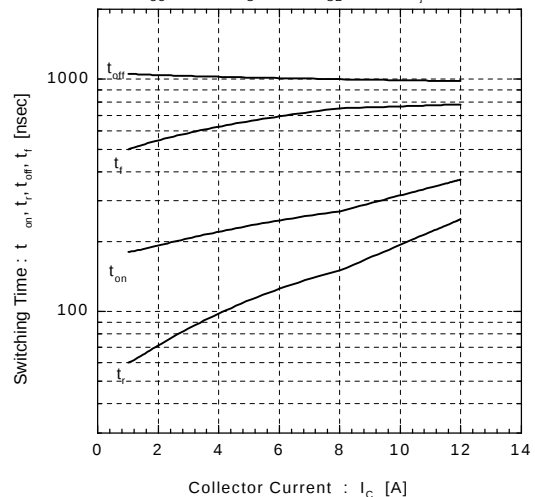

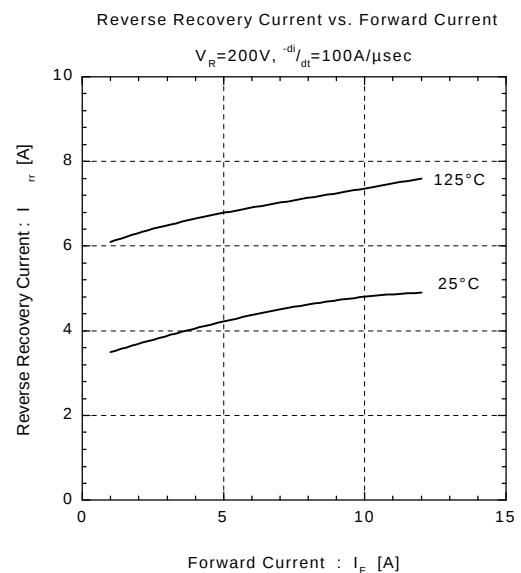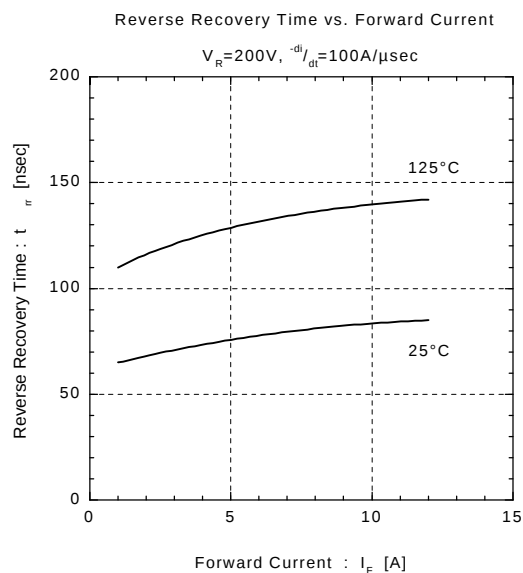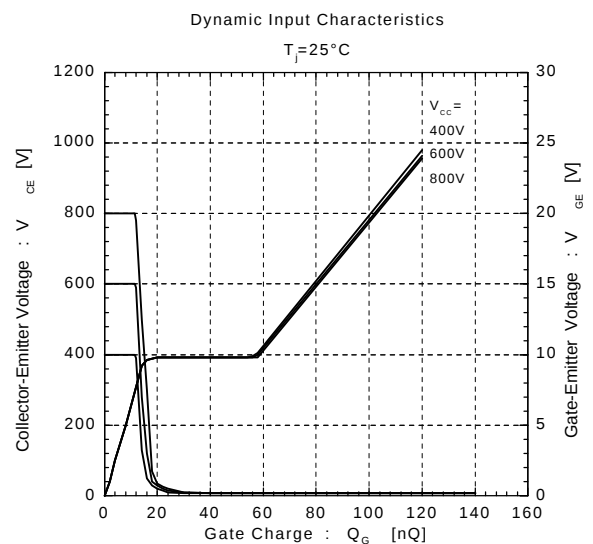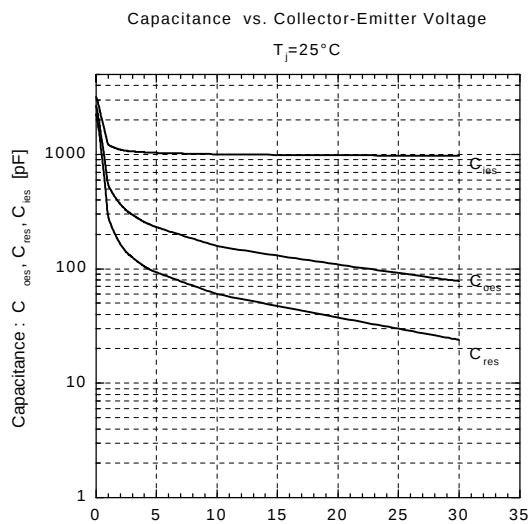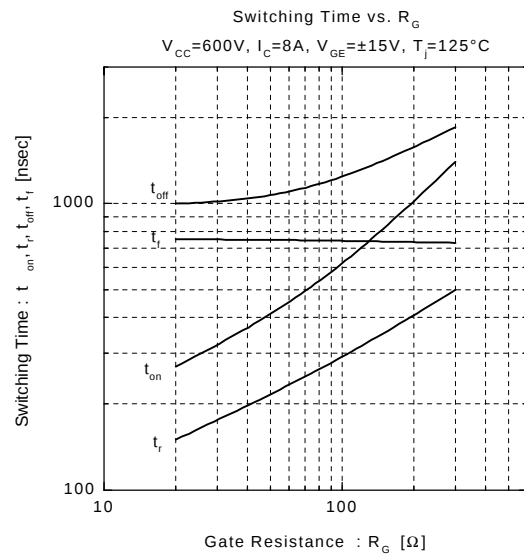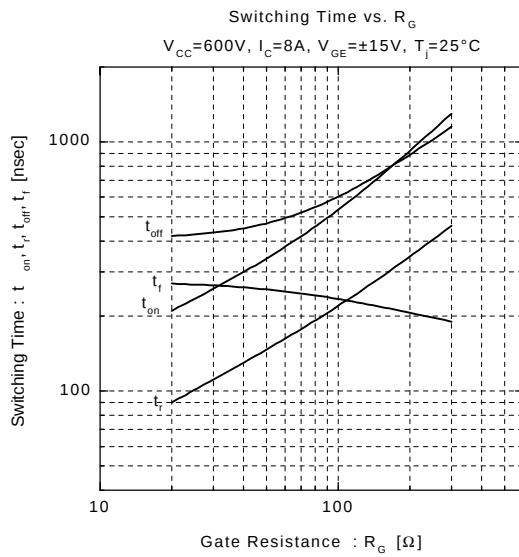


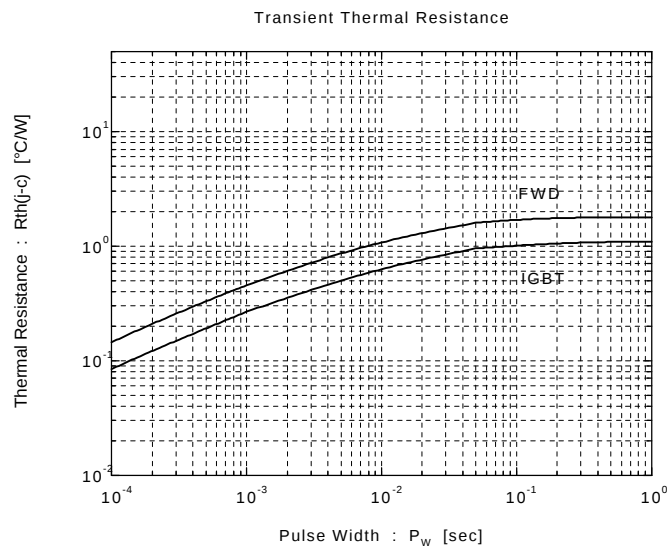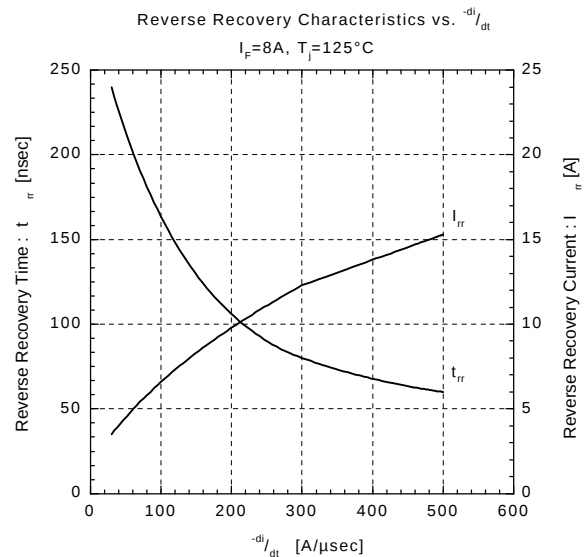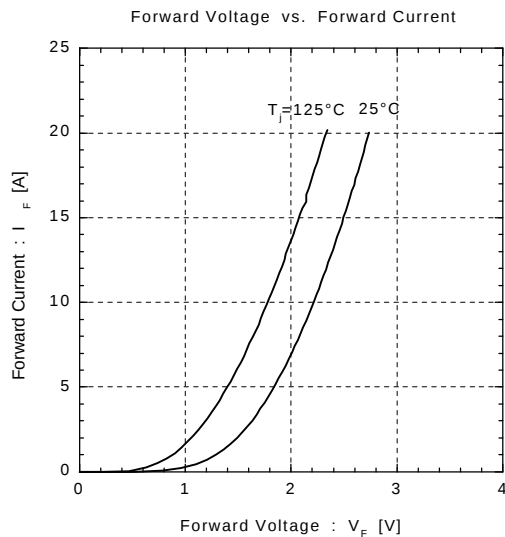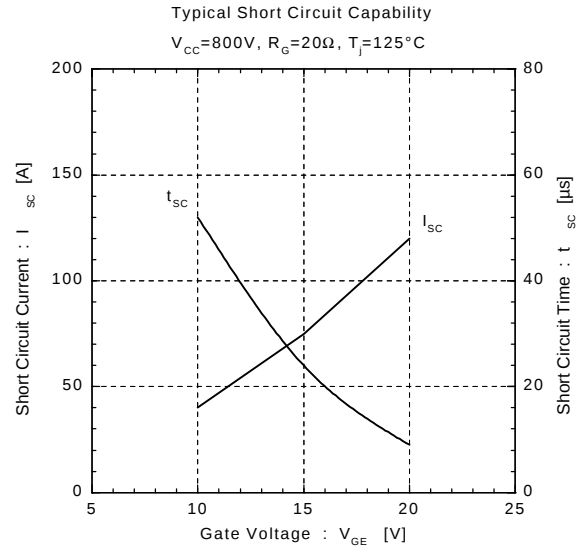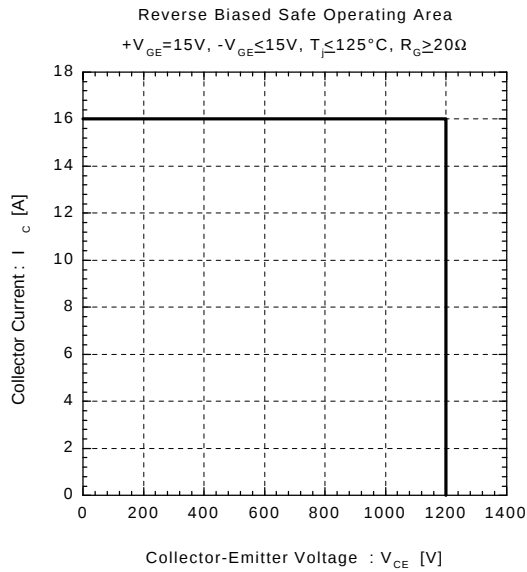

Switching losses (E_{on} , E_{off} vs. I_c)

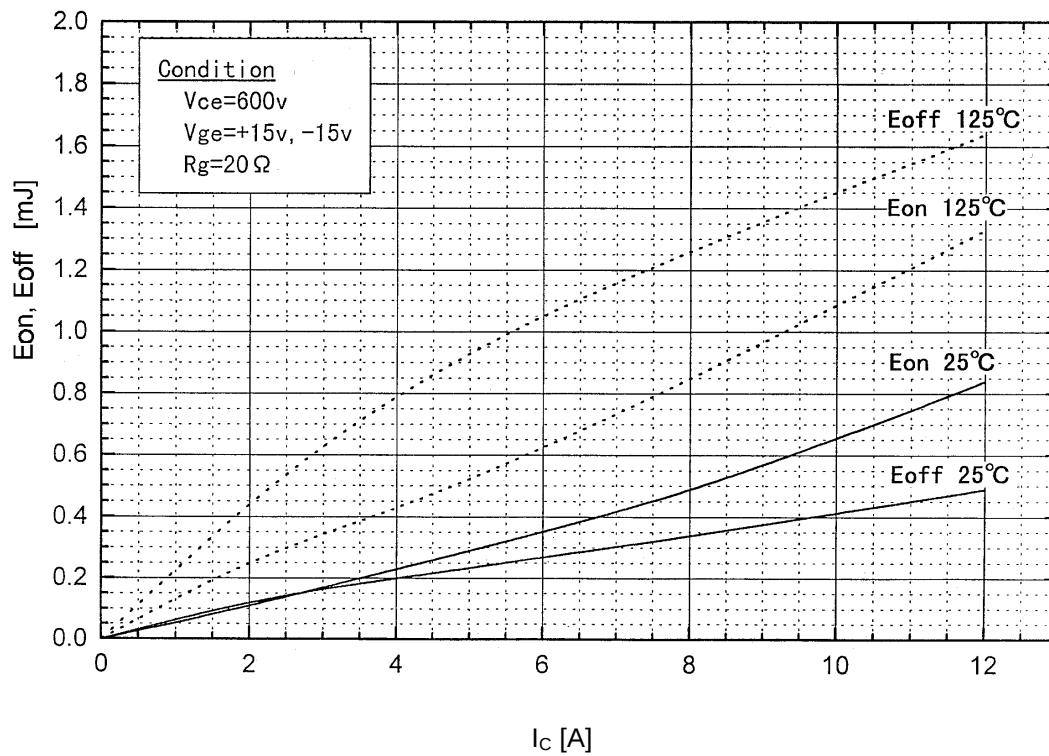

Test Circuit



Switching waveforms

