


LOW LEVEL AUDIO-AMPLIFIER AND SWITCHING.

FEATURES

- Super Mini Packaged Transistor for Hybrid Circuits.
- For Complementary with PNP Type BCW69/70/89.

MAXIMUM RATING (Ta=25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	BCW71/72	V_{CBO}	50	V
	BCV71/72		60	
Collector-Emitter Voltage	BCW71/72	V_{CEO}	45	V
	BCV71/72		60	
Emitter-Base Voltage		V_{EBO}	5	V
Collector Current		I_C	100	mA
Emitter Current		I_E	-100	mA
Collector Power Dissipation		P_C	200	mW
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-65 ~ 150	°C

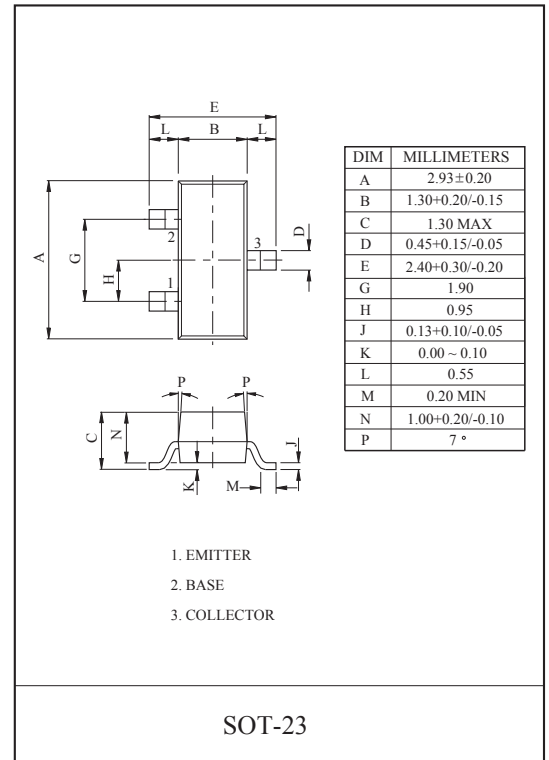

MARK SPEC

TYPE	MARK
BCW71	K 1
BCW72	K 2
BCV71	K 7
BCV72	K 8

Marking

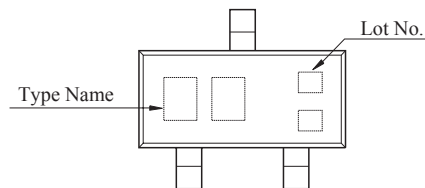

BCV71/72, BCW71/72

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector-Emitter Breakdown Voltage	BCW71/72	$V_{(BR)CEO}$	$I_C=2mA, I_B=0$	45	-	-	V
	BCV71/72			60	-	-	
Collector-Base Breakdown Voltage	BCW71/72	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	50	-	-	V
	BCV71/72			60	-	-	
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	5.0	-	-	V
Collector Cut-off Current		I_{CBO}	$V_{CB}=20V, I_E=0$	-	-	100	nA
			$T_a=100^\circ C, V_{CB}=20V, I_E=0$	-	-	10	μA
DC Current Gain	BCV71/BCW71	h_{FE}	$V_{CE}=5V, I_C=10\mu A$	-	100	-	
	BCV72/BCW72			-	160	-	
	BCV71/BCW71		$V_{CE}=5V, I_C=2mA$	110	-	220	
	BCV72/BCW72			200	-	450	
Base-Emitter Voltage		$V_{BE(ON)}$	$V_{CE}=5V, I_C=2mA$	550	-	700	mV
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=10mA, I_B=0.5mA$	-	750	-	mV
			$I_C=50mA, I_B=2.5mA$	-	870	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=10mA, I_B=0.5mA$	-	-	250	mV
			$I_C=50mA, I_B=2.5mA$	-	230	-	
Transition Frequency		f_T	$I_C=10mA, V_{CE}=5V, f=100MHz$	-	300	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	-	4.0	pF
Noise Figure		NF	$I_C=0.2mA, V_{CE}=5V, \Delta f=200Hz$ $R_g=2k\Omega, f=1kHz$	-	-	10	dB