



POWER AMPLIFIER APPLICATION.  
POWER SWITCHING APPLICATION.

### FEATURES

- Low Collector Saturation Voltage  
:  $V_{CE(sat)}=0.5V(\text{Max.}) (I_C=1A)$
- High Speed Switching Time :  $t_{stg}=1\mu S(\text{Typ.})$
- Complementary to KTA1718D/L.

### MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	50	V
Collector-Emitter Voltage		$V_{CEO}$	50	V
Emitter-Base Voltage		$V_{EBO}$	5	V
Collector Current		$I_C$	2	A
Emitter Current		$I_E$	-2	A
Collector Power Dissipation	Ta=25°C	$P_C$	1.3	W
	Tc=25°C		10	
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-55 ~ 150	°C

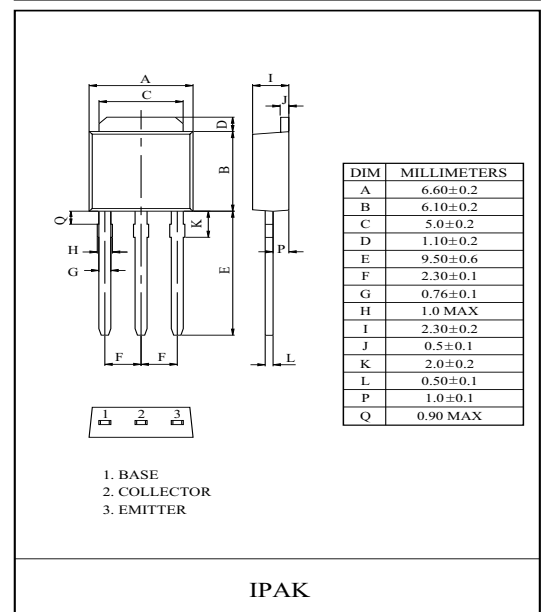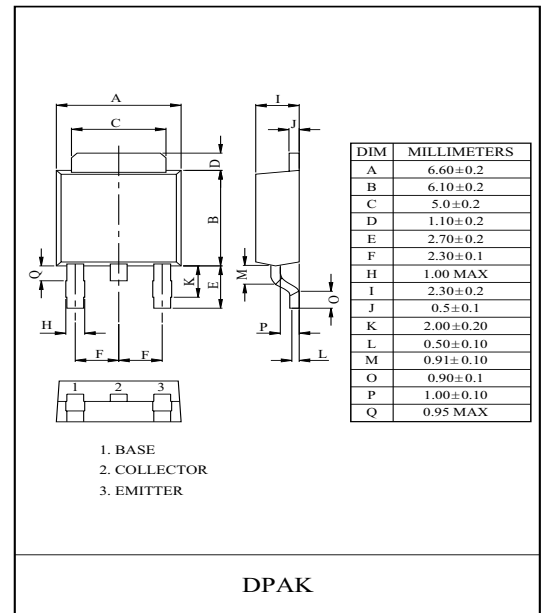


### ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		$I_{CBO}$	$V_{CB}=50V, I_E=0$	-	-	0.1	μA
Emitter Cut-off Current		$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	0.1	μA
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	50	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)		$V_{CE}=2V, I_C=0.5A$	70	-	240	
	$h_{FE2}$		$V_{CE}=2V, I_C=1.5A$	40	-	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=1A, I_B=0.05A$	-	-	0.5	V
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=1A, I_B=0.05A$	-	-	1.2	V
Transition Frequency		$f_T$	$V_{CE}=2V, I_C=0.5A$	-	100	-	MHz
Collector Output Capacitance		$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	30	-	pF
Switching Time	Turn On Time	$t_{on}$	<p><math>I_{B1}=I_{B2}=0.05A</math> DUTY CYCLE ≤ 1%</p>	-	0.1	-	μS
	Storage Time	$t_{stg}$		-	1.0	-	
	Fall Time	$t_f$		-	0.1	-	


Note :  $h_{FE(1)}$  Classification O:70~140, Y:120~240.

# KTC2815D/L


## STATIC CHARACTERISTICS

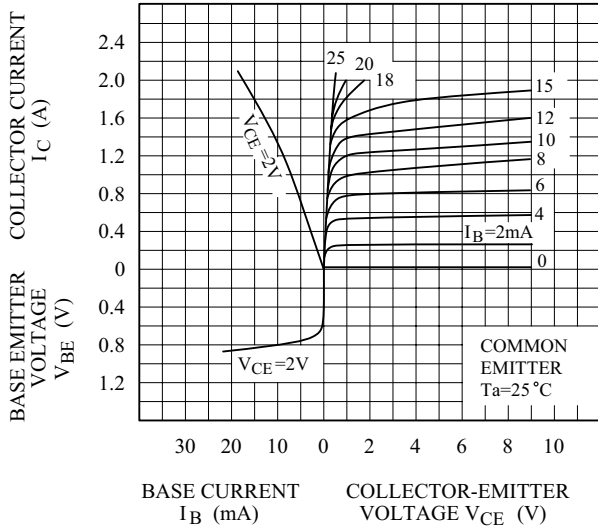


## $V_{CE} - I_C$

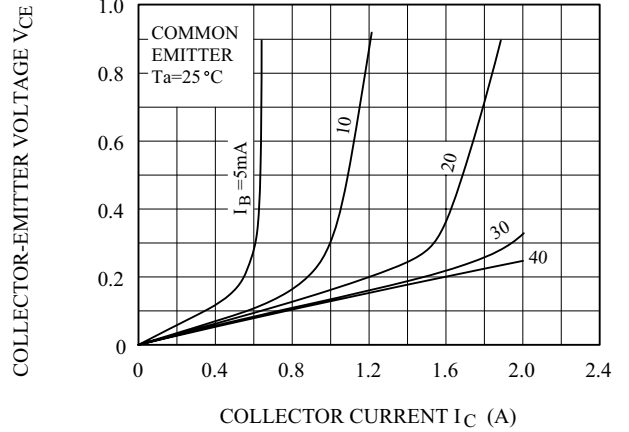


## $V_{CE} - I_C$

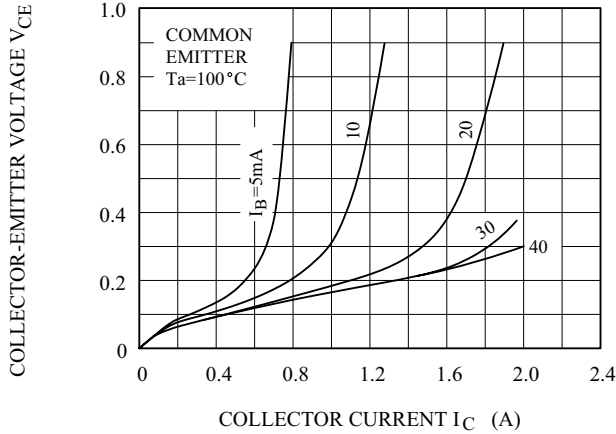


## $V_{CE} - I_C$

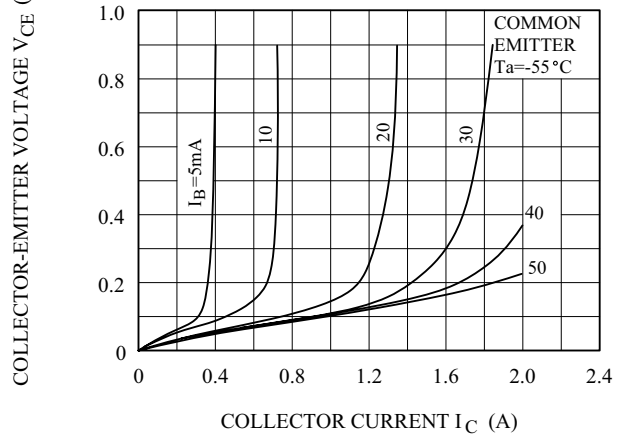

## $h_{FE} - I_C$

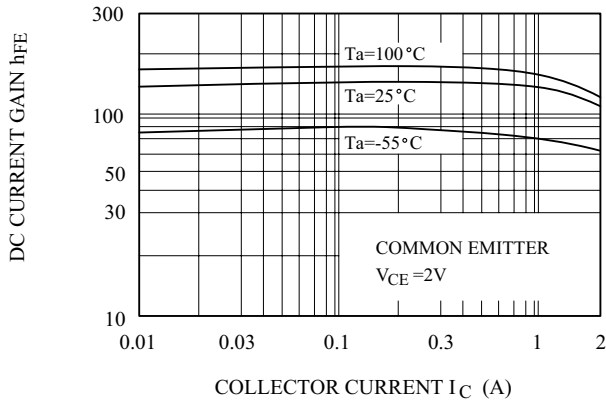


## $V_{CE(sat)} - I_C$

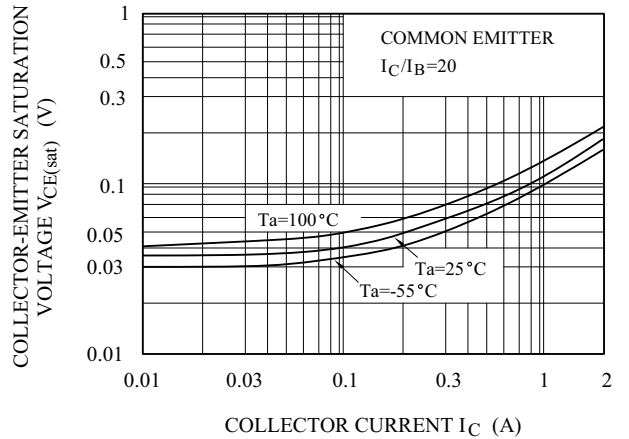

# KTC2815D/L

SAFE OPERATING AREA

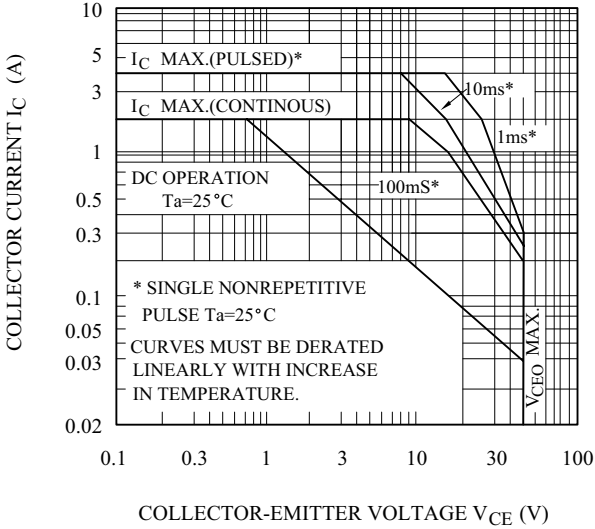

$P_c - T_a$

