


SWITCHING APPLICATIONS.
HAMMER DRIVER, PULSE MOTOR DRIVER
APPLICATIONS.

FEATURES


- High DC Current Gain : $h_{FE}=1000(\text{Min.})$ at $V_{CE}=3V$, $I_C=3A$.
- High Collector Breakdown Voltage : $V_{CEO}=100V(\text{Min.})$

MAXIMUM RATING ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	100	V
Collector-Emitter Voltage		V_{CEO}	100	V
Emitter-Base Voltage		V_{EB0}	5	V
Collector Current	DC	I_C	5	A
	Pules	I_{CP}	8	
Base Current		I_B	0.12	A
Collector Power Dissipation ($T_c=25^\circ\text{C}$)		P_C	65	W
Junction Temperature		T_j	150	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-55 ~ 150	$^\circ\text{C}$

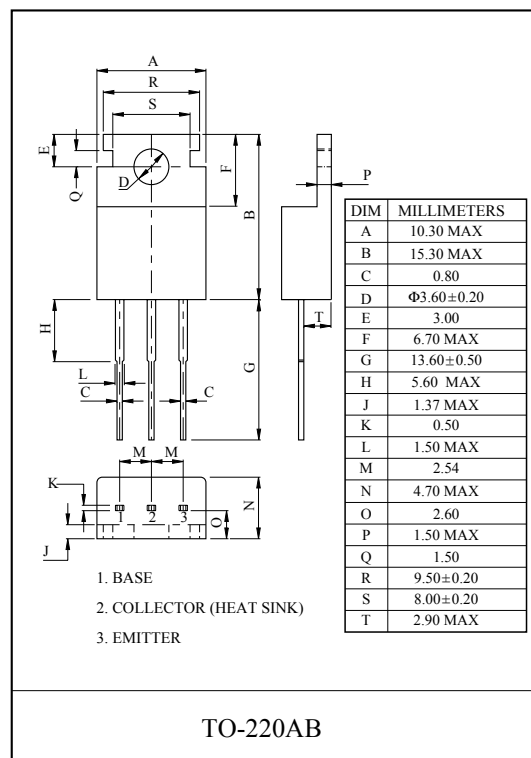


EQUIVALENT CIRCUIT

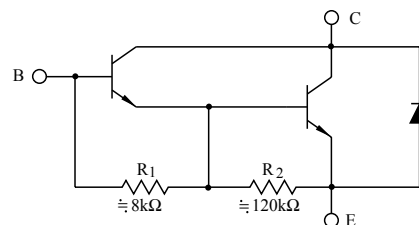


ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=100V$, $I_E=0$	-	-	0.2	mA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V$, $I_C=0$	-	-	2	mA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=10mA$, $I_B=0$	100	-	-	V
DC Current Gain	$h_{FE(1)}$	$V_{CE}=3V$, $I_C=0.5A$	1000	-	10000	
	$h_{FE(2)}$	$V_{CE}=3V$, $I_C=3A$	1000	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)(1)}$	$I_C=3A$, $I_B=12mA$	-	-	2	V
	$V_{CE(sat)(2)}$	$I_C=5A$, $I_B=20mA$	-	-	4	
Base-Emitter Voltage	V_{BE}	$V_{CE}=3V$, $I_C=3A$	-	-	2.5	V
Output Capacitance	C_{ob}	$V_{CB}=10V$, $I_E=0$, $f=1MHz$	-	-	300	pF


$h_{FE} - I_C$

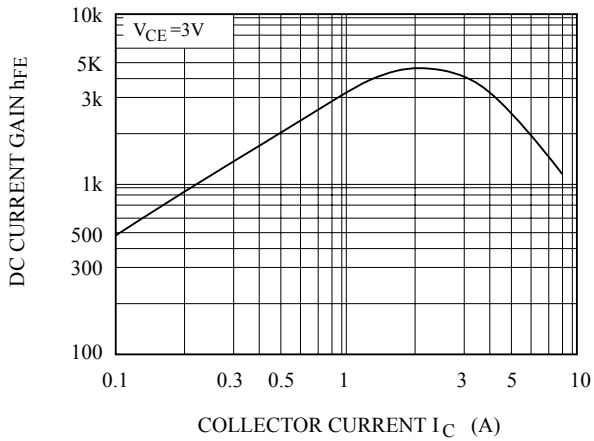


$V_{CE(sat)}, V_{BE(sat)} - I_C$

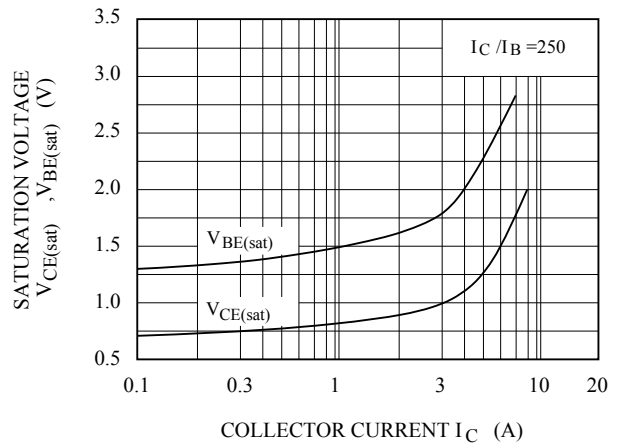

$P_C - T_a$

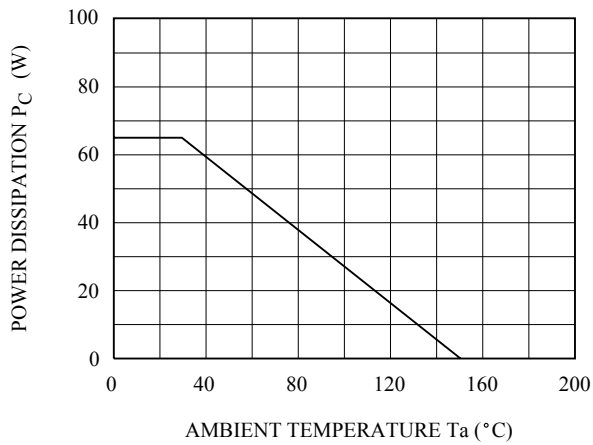

SAFE OPERATING AREA

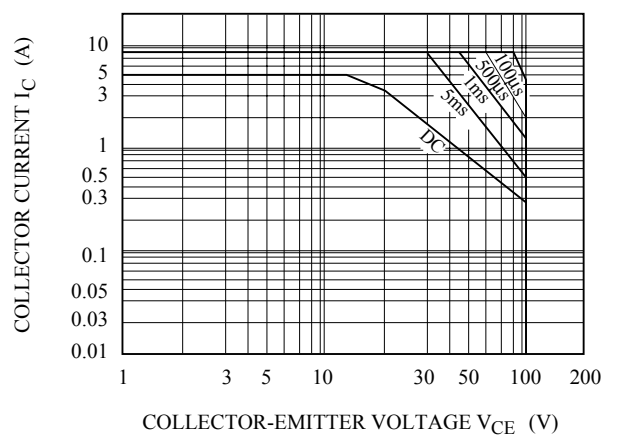

OUTPUT AND INPUT CAPACITANCE
vs. REVERSE VOLTAGE

