

M54519P/FP

7-UNIT 400mA DARLINGTON TRANSISTOR ARRAY

DESCRIPTION

M54519P and M54519FP are seven-circuit Darlington transistor arrays. The circuits are made of NPN transistors. Both the semiconductor integrated circuits perform high-current driving with extremely low input-current supply.

FEATURES

- High breakdown voltage ($BV_{CEO} \geq 40V$)
- High-current driving ($I_{c(max)} = 400mA$)
- Driving available with PMOS IC output
- Wide operating temperature range ($T_a = -20$ to $+75^\circ C$)

APPLICATION

Drives of relays and printers, digit drives of indication elements (LEDs and lamps), and MOS-bipolar logic IC interfaces


FUNCTION

The M54519P and M54519FP each have seven circuits consisting of NPN Darlington transistors. These ICs have resistance of $20k\Omega$ between input transistor bases and input pins. The output transistor emitters are all connected to the GND pin (pin 8).

Collector current is 400mA maximum. Collector-emitter supply voltage is 40V maximum.


The M54519FP is enclosed in a molded small flat package, enabling space-saving design.

PIN CONFIGURATION

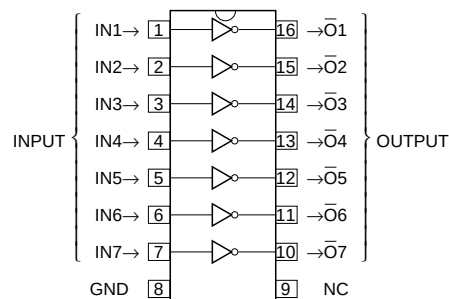

16P4(P)
Package type 16P2N-A(FP) NC : No connection

CIRCUIT DIAGRAM

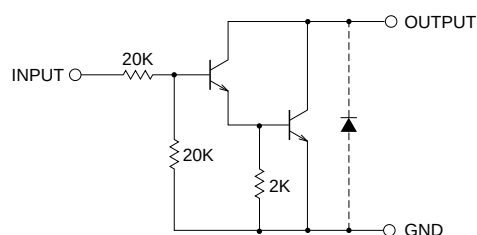

The seven circuits share the GND.

The diode, indicated with the dotted line, is parasitic, and cannot be used.

Unit : Ω

ABSOLUTE MAXIMUM RATINGS (Unless otherwise noted, $T_a = -20 \sim +75^\circ C$)

Symbol	Parameter	Conditions	Ratings	Unit
V_{CEO}	Collector-emitter voltage	Output, H	$-0.5 \sim +40$	V
I_C	Collector current	Current per circuit output, L	400	mA
V_i	Input voltage		$-0.5 \sim +40$	V
P_d	Power dissipation	$T_a = 25^\circ C$, when mounted on board	1.47(P)/1.00(FP)	W
T_{opr}	Operating temperature		$-20 \sim +75$	$^\circ C$
T_{stg}	Storage temperature		$-55 \sim +125$	$^\circ C$

M54519P/FP

7-UNIT 400mA DARLINGTON TRANSISTOR ARRAY

RECOMMENDED OPERATING CONDITIONS (Unless otherwise noted, $T_a = -20 \sim +75^\circ\text{C}$)

Symbol	Parameter		Limits			Unit
			min	typ	max	
Vo	Output voltage		0	—	40	V
Ic	Collector current (Current per 1 circuit when 7 circuits are coming on simultaneously)	Duty Cycle P : no more than 8% FP : no more than 6%	0	—	400	mA
		Duty Cycle P : no more than 30% FP : no more than 25%	0	—	200	
VIH	“H” input voltage	Ic ≤ 400mA	8	—	30	V
		Ic ≤ 200mA	5	—		
VIL	“L” input voltage		0	—	0.5	V


ELECTRICAL CHARACTERISTICS (Unless otherwise noted, $T_a = -20 \sim +75^\circ\text{C}$)

Symbol	Parameter	Test conditions	Limits			Unit
			min	typ*	max	
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_{CEO} = 100\mu\text{A}$	40	—	—	V
$V_{CE(sat)}$	Collector-emitter saturation voltage	$V_I = 8\text{V}, I_c = 400\text{mA}$	—	1.3	2.4	V
		$V_I = 5\text{V}, I_c = 200\text{mA}$	—	1.0	1.6	
I_i	Input current	$V_I = 17\text{V}$	0.3	0.8	1.8	mA
h_{FE}	DC amplification factor	$V_{CE} = 4\text{V}, I_c = 400\text{mA}, T_a = 25^\circ\text{C}$	1000	6000	—	—


* : The typical values are those measured under ambient temperature (T_a) of 25°C . There is no guarantee that these values are obtained under any conditions.

SWITCHING CHARACTERISTICS (Unless otherwise noted, $T_a = 25^\circ\text{C}$)

Symbol	Parameter	Test conditions	Limits			Unit
			min	typ	max	
t_{on}	Turn-on time	$C_L = 15\text{pF}$ (note 1)	—	40	—	ns
t_{off}	Turn-off time		—	400	—	ns

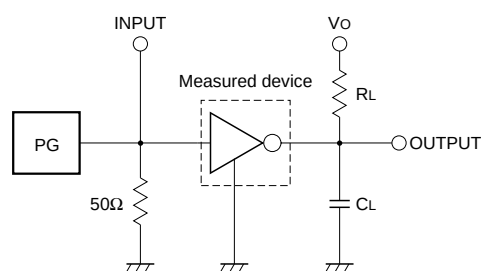NOTE 1 TEST CIRCUIT







- (1) Pulse generator (PG) characteristics : PRR = 1kHz,
 $t_w = 10\mu\text{s}$, $t_r = 6\text{ns}$, $t_f = 6\text{ns}$, $Z_o = 50\Omega$
 $V_P = 8\text{V}_{P-P}$
- (2) Input-output conditions : $R_L = 25\Omega$, $V_o = 10\text{V}$
- (3) Electrostatic capacity C_L includes floating capacitance at connections and input capacitance at probes

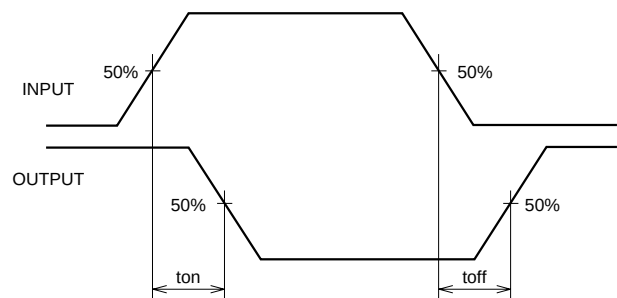TIMING DIAGRAM

M54519P/FP

7-UNIT 400mA DARLINGTON TRANSISTOR ARRAY

TYPICAL CHARACTERISTICS

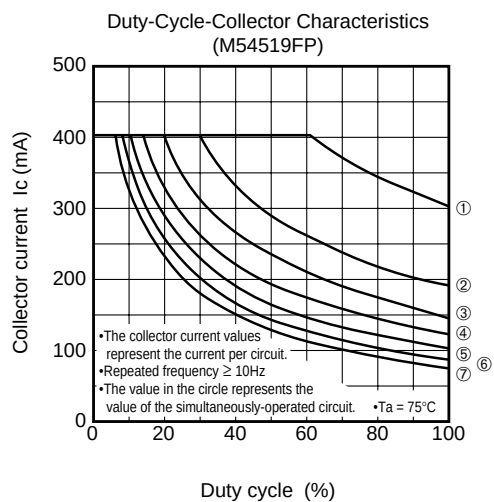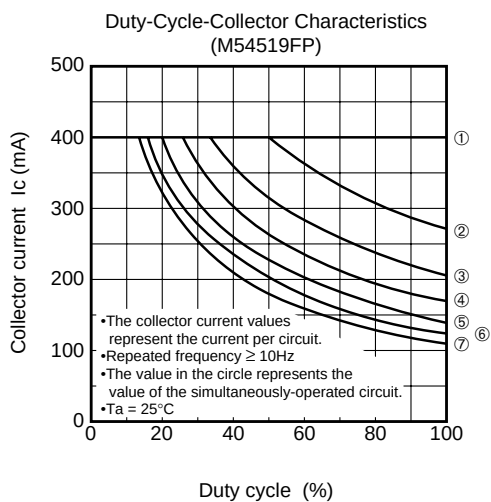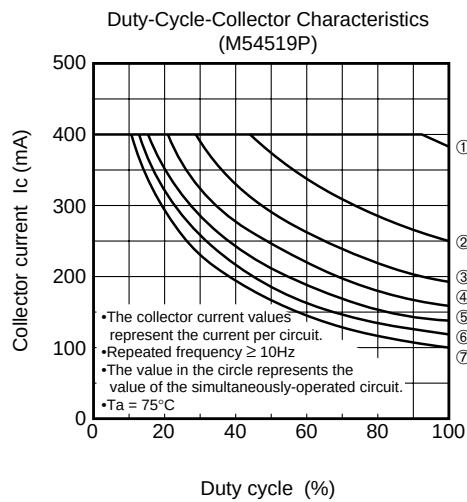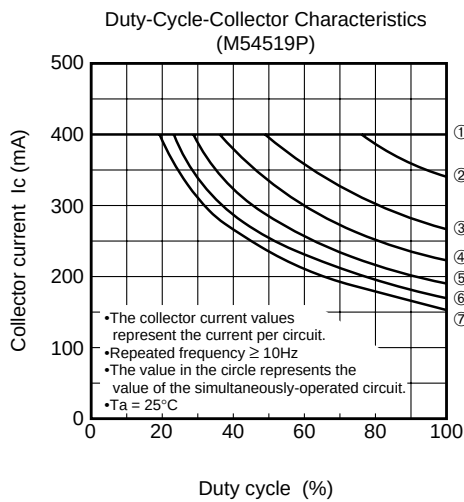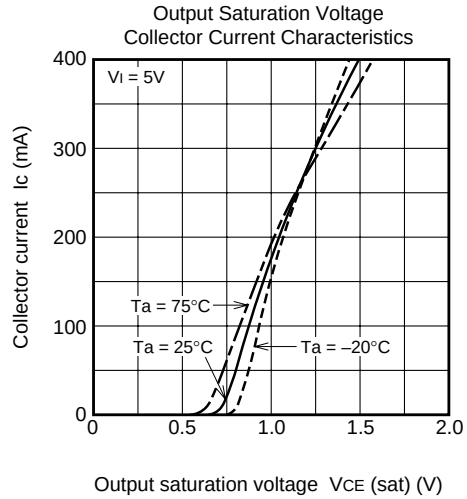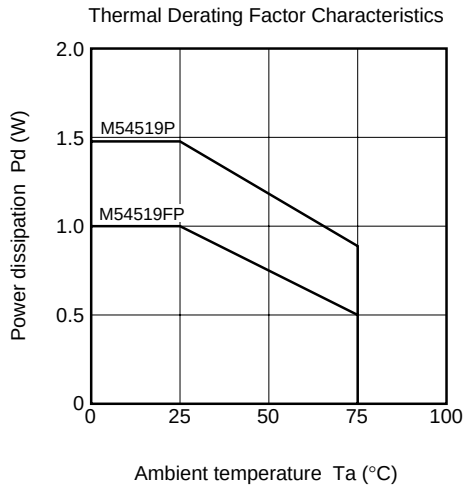

M54519P/FP

7-UNIT 400mA DARLINGTON TRANSISTOR ARRAY

