


TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002

- Low-Voltage Operation . . . Down to 1.24 V
- 1% Reference-Voltage Tolerance (TLV431A)
- Adjustable Output Voltage, $V_O = V_{ref}$ to 6 V
- Low Operational Cathode Current . . . 80 μ A Typ
- 0.25- Ω Typical Output Impedance
- Package Options Include Plastic Small-Outline (D), Small-Outline Transistor (DBV), and Cylindrical (LP) Packages

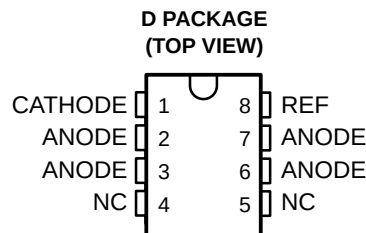


NC – No internal connection

description


The TLV431 and TLV431A are low-voltage three-terminal adjustable voltage references with specified thermal stability over applicable industrial and commercial temperature ranges. Output voltage can be set to any value between V_{ref} (1.24 V) and 6 V with two external resistors (see Figure 2). The TLV431 and TLV431A operate from a lower voltage (1.24 V) than the widely used TL431 and TL1431 shunt-regulator references.

When used with an optocoupler, the TLV431 and TLV431A are ideal voltage references in isolated feedback circuits for 3-V to 3.3-V switching-mode power supplies. These devices have a typical output impedance of 0.25 Ω . Active output circuitry provides a very sharp turn-on characteristic, making the TLV431 and TLV431A excellent replacements for low-voltage Zener diodes in many applications, including onboard regulation and adjustable power supplies.

The TLV431C and TLV431AC devices are characterized for operation from 0°C to 70°C. The TLV431I and TLV431AI devices are characterized for operation from –40°C to 85°C.

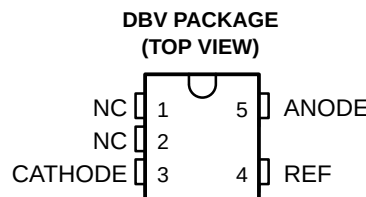

NC – No internal connection



AVAILABLE OPTIONS

T_A	PACKAGE		
	TO-92 (LP)	SOIC (D)	5-PIN SOT-23 (DBV)
0°C to 70°C	TLV431CLP TLV431ACL	— —	TLV431CDBVR TLV431ACDBVR
–40°C to 85°C	TLV431ILP TLV431AILP	— TLV431AID	TLV431IDBVR TLV431AIDBVR

The D and LP packages are available taped and reeled. Add the suffix R to the device type (e.g., TLV431ACLPR). The DBV package is available only taped and reeled.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


Copyright © 2002, Texas Instruments Incorporated

TLV431, TLV431A


LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002


logic symbol



logic diagram (positive logic)

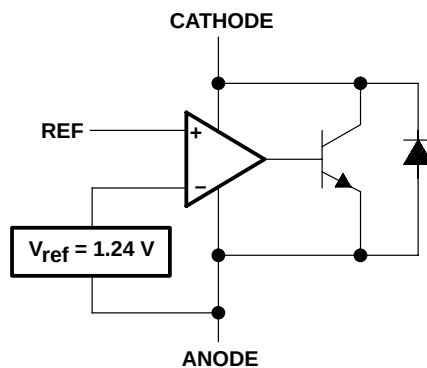

equivalent schematic

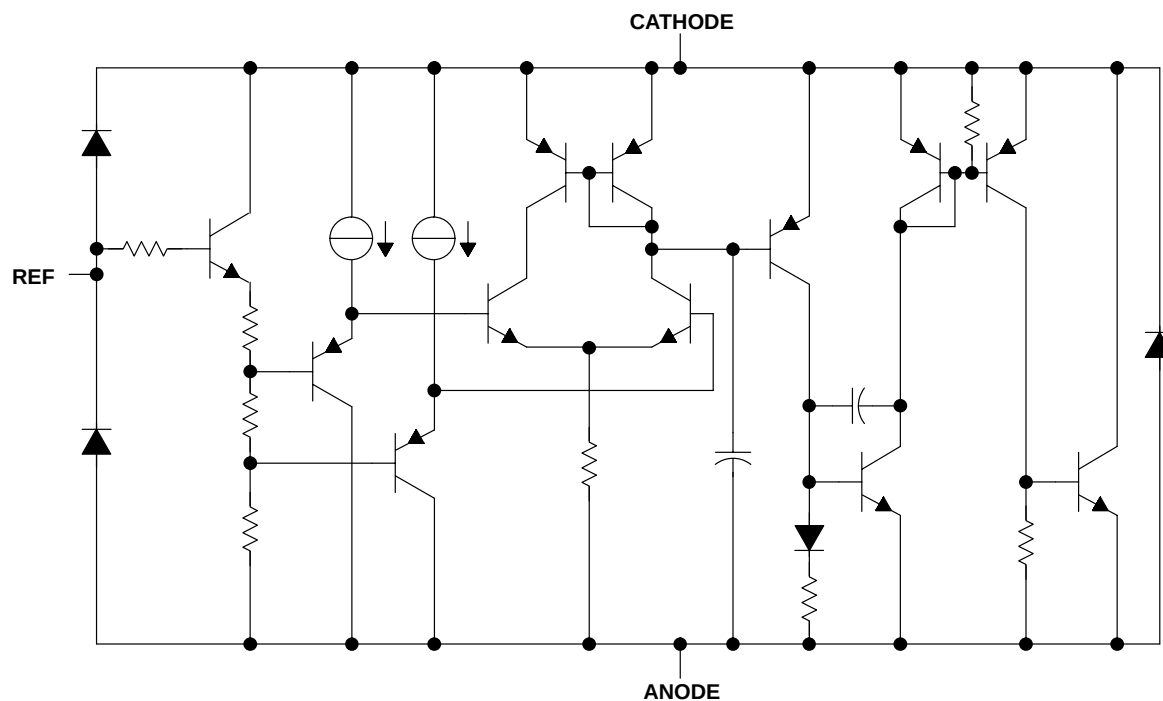

TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Cathode voltage, V_{KA} (see Note 1)	7 V
Continuous cathode current range, I_K	–20 mA to 20 mA
Reference current range, I_{ref}	–0.05 mA to 3 mA
Package thermal impedance, θ_{JA} (see Notes 2 and 3): D package	97°C/W
DBV package	206°C/W
LP package	156°C/W
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, T_{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. Voltage values are with respect to the anode terminal unless otherwise noted.
 2. Maximum power dissipation is a function of $T_J(max)$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
 3. The package thermal impedance is calculated in accordance with JESD 51-7.

recommended operating conditions

		MIN	MAX	UNIT
Cathode voltage, V_{KA}		V_{ref}	6	V
Cathode current, I_K		0.1	15	mA
Operating free-air temperature range, T_A	TLV431C, TLV431AC	0	70	°C
	TLV431I, TLV431AI	–40	85	



TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002

electrical characteristics, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TLV431C			TLV431I			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	
V_{ref} Reference voltage	$V_{KA} = V_{\text{ref}}, I_K = 10\text{ mA}$	1.222	1.24	1.258	1.222	1.24	1.258	V
	$T_A = 25^\circ\text{C}$ $T_A = \text{full range}$ (see Note 4 and Figure 1)	1.21		1.27	1.202		1.278	
$V_{\text{ref(dev)}}$ V_{ref} deviation over full temperature range (see Note 5)	$V_{KA} = V_{\text{ref}}, I_K = 10\text{ mA}$, (see Note 4 and Figure 1)		4	12		6	20	mV
$\frac{\Delta V_{\text{ref}}}{\Delta V_{KA}}$ Ratio of V_{ref} change in cathode voltage change	$I_K = 10\text{ mA}$, $V_{KA} = V_{\text{ref}}$ to 6 V, (see Figure 2)		-1.5	-2.7		-1.5	-2.7	mV/V
I_{ref} Reference terminal current	$I_K = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \text{open}$ (see Figure 2)		0.15	0.5		0.15	0.5	μA
$I_{\text{ref(dev)}}$ I_{ref} deviation over full temperature range (see Note 5)	$I_K = 10\text{ mA}$, $R1 = 10\text{ k}\Omega$, $R2 = \text{open}$ (see Note 4 and Figure 2)		0.05	0.3		0.1	0.4	μA
$I_{K(\text{min})}$ Minimum cathode current for regulation	$V_{KA} = V_{\text{ref}}$ (see Figure 1)		55	80		55	80	μA
$I_{K(\text{off})}$ Off-state cathode current	$V_{KA} = 6\text{ V}$, $V_{\text{ref}} = 0$ (see Figure 3)		0.001	0.1		0.001	0.1	μA
$ z_{KA} $ Dynamic impedance (see Note 6)	$V_{KA} = V_{\text{ref}}, f \leq 1\text{ kHz}$, $I_K = 0.1\text{ mA}$ to 15 mA (see Figure 1)		0.25	0.4		0.25	0.4	Ω

NOTES: 4. Full range is -40°C to 85°C for the TLV431I, and 0°C to 70°C for the TLV431C.

5. The deviation parameters $V_{\text{ref(dev)}}$ and $I_{\text{ref(dev)}}$ are defined as the differences between the maximum and minimum values obtained over the rated temperature range. The average full-range temperature coefficient of the reference input voltage, $\alpha_{V_{\text{ref}}}$, is defined as:

$$|\alpha_{V_{\text{ref}}}|\left(\frac{\text{ppm}}{^\circ\text{C}}\right) = \frac{\left(\frac{V_{\text{ref(dev)}}}{V_{\text{ref at } 25^\circ\text{C}}}\right) \times 10^6}{\Delta T_A}$$

where:

ΔT_A is the rated operating temperature range of the device.

$\alpha_{V_{\text{ref}}}$ can be positive or negative, depending on whether minimum V_{ref} or maximum V_{ref} , respectively, occurs at the lower temperature.

6. The dynamic impedance is defined as: $|z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_{KA}}$

When the device is operating with two external resistors (see Figure 2), the total dynamic impedance of the circuit is given by:

$$|z_{KA}| = \frac{\Delta V}{\Delta I} \approx |z_{KA}| \times \left(1 + \frac{R1}{R2}\right)$$

TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002

electrical characteristics, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TLV431AC			TLV431AI			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	
V_{ref} Reference voltage	$V_{KA} = V_{\text{ref}}, I_K = 10\text{ mA}, T_A = 25^\circ\text{C}$ $T_A = \text{full range, (see Note 4 and Figure 1)}$	1.228	1.24	1.252	1.228	1.24	1.252	V
		1.221		1.259	1.215		1.265	
$V_{\text{ref(dev)}}$ V_{ref} deviation over full temperature range (see Note 5)	$V_{KA} = V_{\text{ref}}, I_K = 10\text{ mA}$ (see Note 4 and Figure 1)		4	12		6	20	mV
$\frac{\Delta V_{\text{ref}}}{\Delta V_{KA}}$ Ratio of V_{ref} change in cathode voltage change	$I_K = 10\text{ mA}, V_{KA} = V_{\text{ref}}$ to 6 V (see Figure 2)		–1.5	–2.7		–1.5	–2.7	mV/V
I_{ref} Reference terminal current	$I_K = 10\text{ mA}, R1 = 10\text{ k}\Omega$ (see Figure 2)		0.15	0.5		0.15	0.5	μA
$I_{\text{ref(dev)}}$ I_{ref} deviation over full temperature range (see Note 5)	$I_K = 10\text{ mA}, R1 = 10\text{ k}\Omega, R2 = \text{open}$ (see Note 4 and Figure 2)		0.05	0.3		0.1	0.4	μA
$I_{K(\text{min})}$ Minimum cathode current for regulation	$V_{KA} = V_{\text{ref}}$ (see Figure 1)		55	80		55	80	μA
$I_{K(\text{off})}$ Off-state cathode current	$V_{KA} = 6\text{ V}, V_{\text{ref}} = 0$, (see Figure 3)		0.001	0.1		0.001	0.1	μA
$ z_{KA} $ Dynamic impedance (see Note 6)	$V_{KA} = V_{\text{ref}}, f \leq 1\text{ kHz}, I_K = 0.1\text{ mA}$ to 15 mA (see Figure 1)		0.25	0.4		0.25	0.4	Ω

NOTES: 7. Full range is -40°C to 85°C for the TLV431I, and 0°C to 70°C for the TLV431C.

8. The deviation parameters $V_{\text{ref(dev)}}$ and $I_{\text{ref(dev)}}$ are defined as the differences between the maximum and minimum values obtained over the rated temperature range. The average full-range temperature coefficient of the reference input voltage, $\alpha_{V_{\text{ref}}}$, is defined as:

$$|\alpha_{V_{\text{ref}}}| \left(\frac{\text{ppm}}{^\circ\text{C}} \right) = \frac{\left(\frac{V_{\text{ref(dev)}}}{V_{\text{ref at } 25^\circ\text{C}}} \right) \times 10^6}{\Delta T_A}$$

where:

ΔT_A is the rated operating temperature range of the device.

$\alpha_{V_{\text{ref}}}$ can be positive or negative, depending on whether minimum V_{ref} or maximum V_{ref} , respectively, occurs at the lower temperature.

9. The dynamic impedance is defined as: $|z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_{KA}}$

When the device is operating with two external resistors (see Figure 2), the total dynamic impedance of the circuit is given by:

$$|z_{KA}| = \frac{\Delta V}{\Delta I} \approx |z_{KA}| \times \left(1 + \frac{R1}{R2} \right)$$



TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002

PARAMETER MEASUREMENT INFORMATION




Figure 1. Test Circuit for $V_{KA} = V_{ref}$,
 $V_O = V_{KA} = V_{ref}$

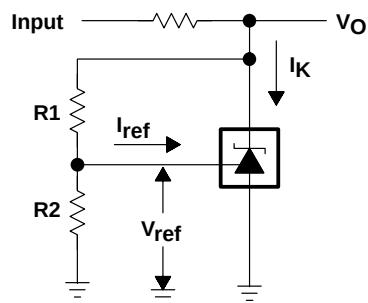


Figure 2. Test Circuit for $V_{KA} > V_{ref}$,
 $V_O = V_{KA} = V_{ref} \times (1 + R1/R2) + I_{ref} \times R1$








Figure 3. Test Circuit for $I_{K(off)}$

PARAMETER MEASUREMENT INFORMATION†

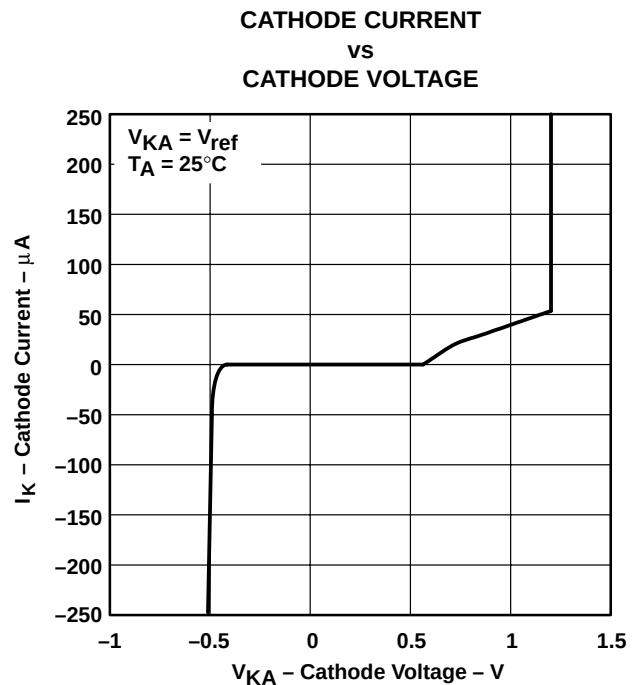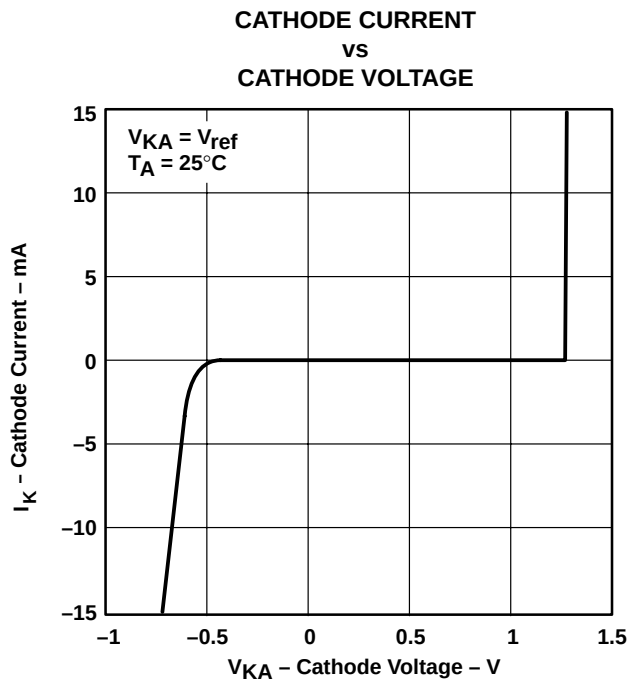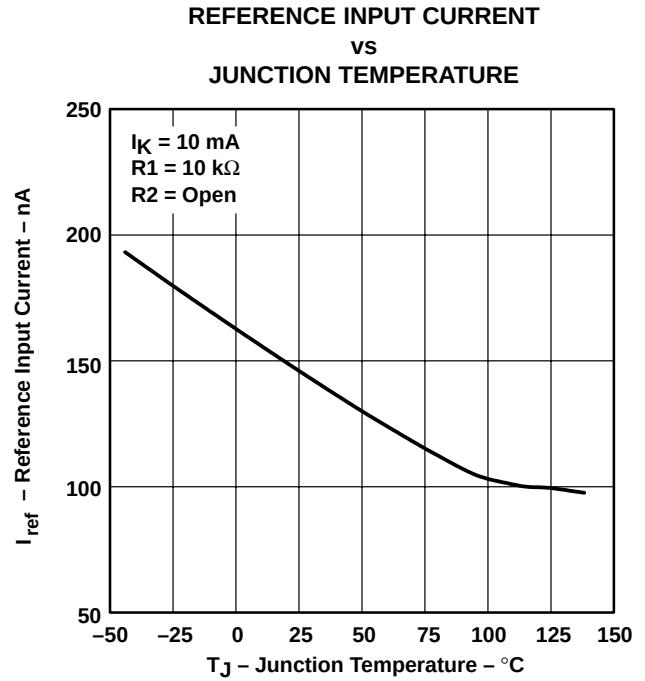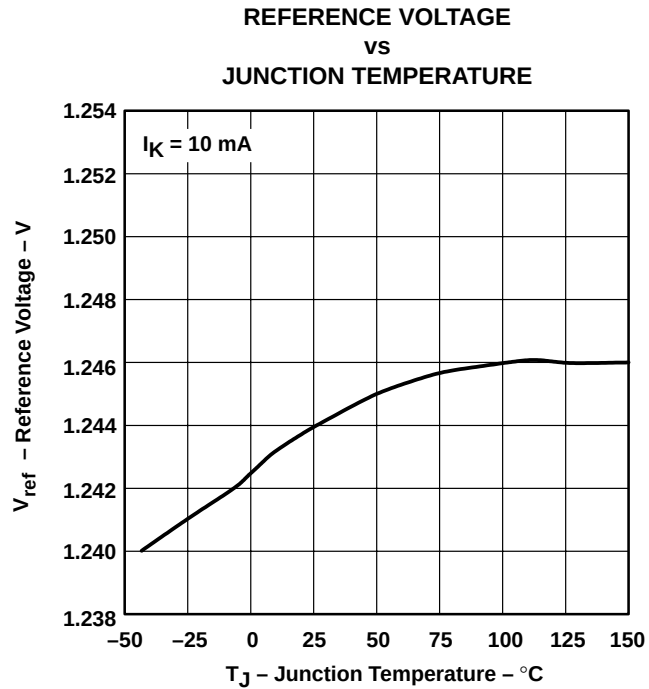




† Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.

TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002

PARAMETER MEASUREMENT INFORMATION†

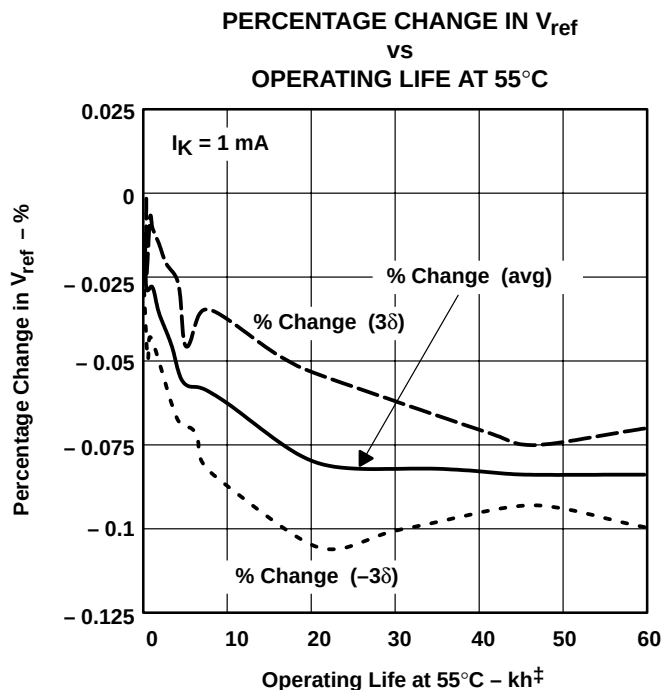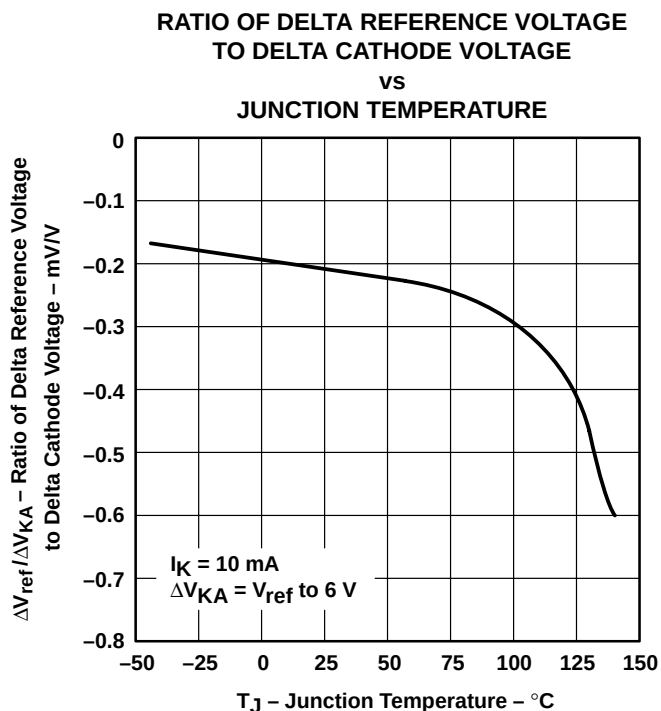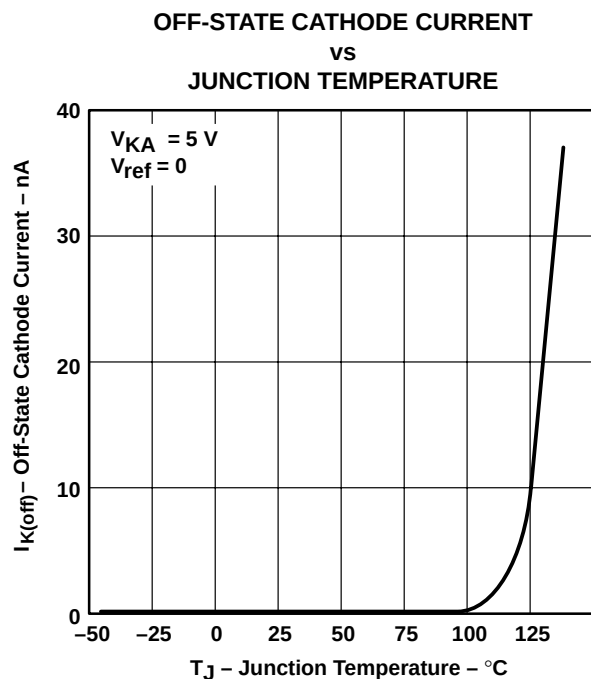

† Extrapolated from life-test data taken at 125°C; the activation energy assumed is 0.7 eV.

Figure 10

† Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

PARAMETER MEASUREMENT INFORMATION

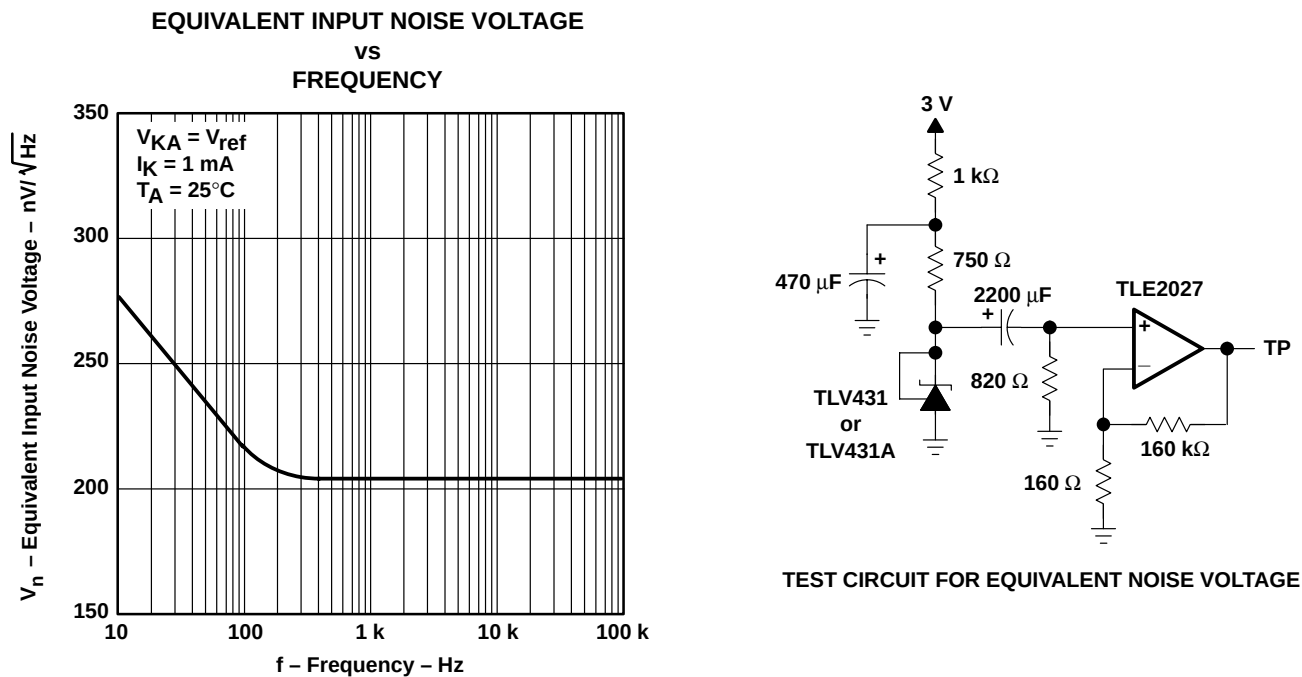


Figure 11



TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002

PARAMETER MEASUREMENT INFORMATION



EQUIVALENT INPUT NOISE VOLTAGE
OVER A 10-SECOND PERIOD

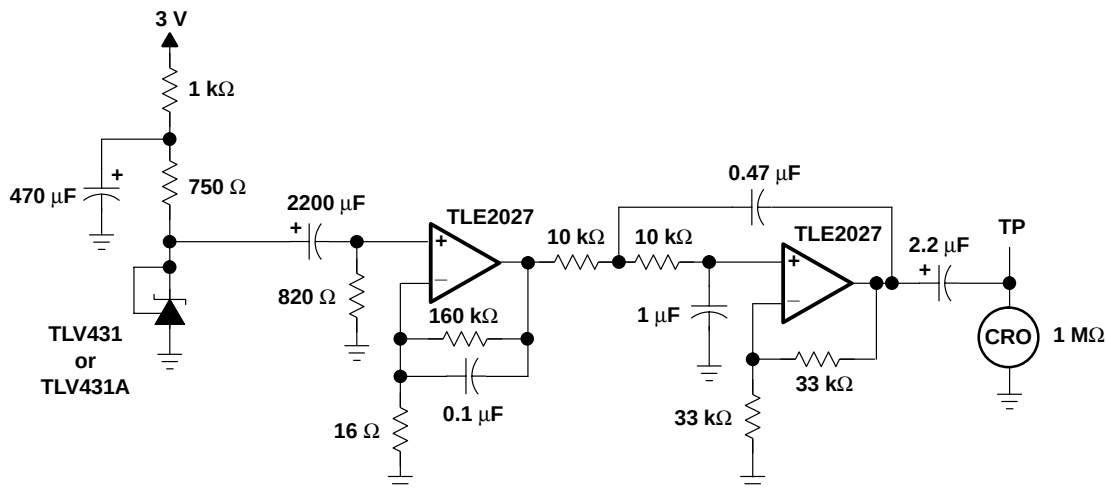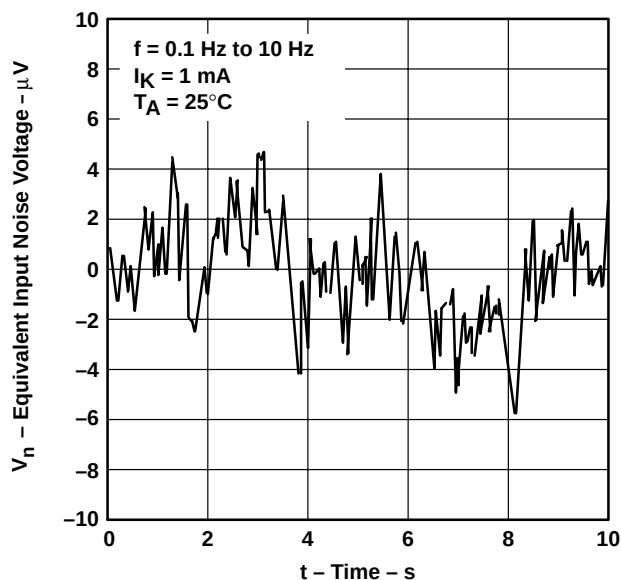

TEST CIRCUIT FOR 0.1-Hz TO 10-Hz EQUIVALENT NOISE VOLTAGE



Figure 12

PARAMETER MEASUREMENT INFORMATION

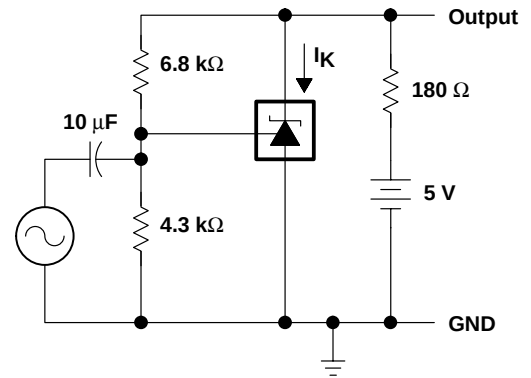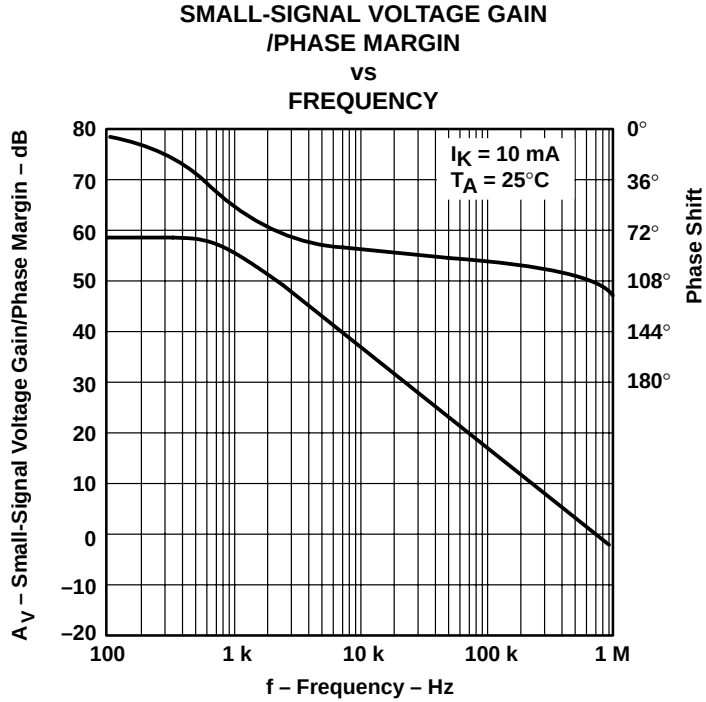

TEST CIRCUIT FOR VOLTAGE GAIN AND PHASE MARGIN

Figure 13

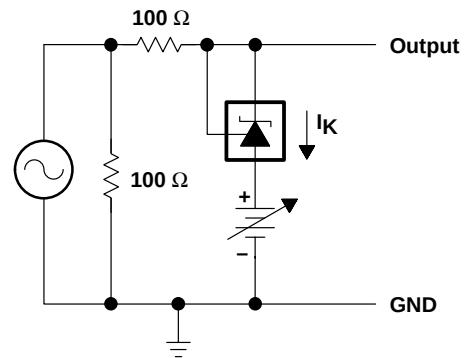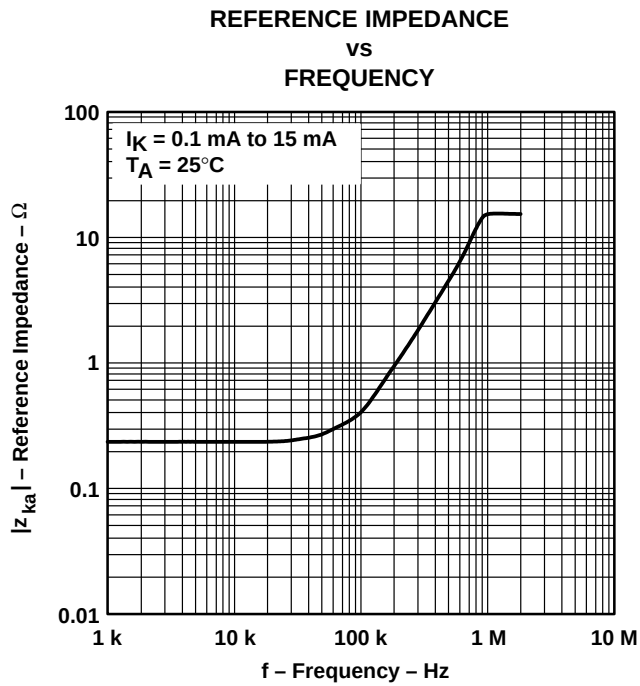

TEST CIRCUIT FOR REFERENCE IMPEDANCE

Figure 14

TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002

PARAMETER MEASUREMENT INFORMATION

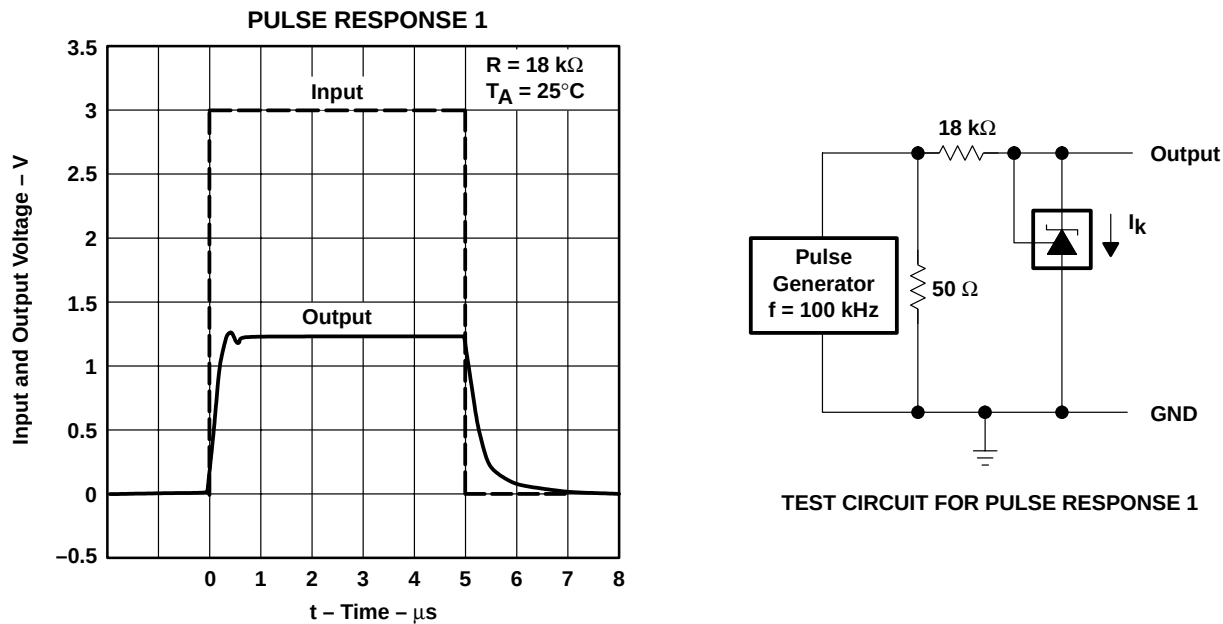


Figure 15




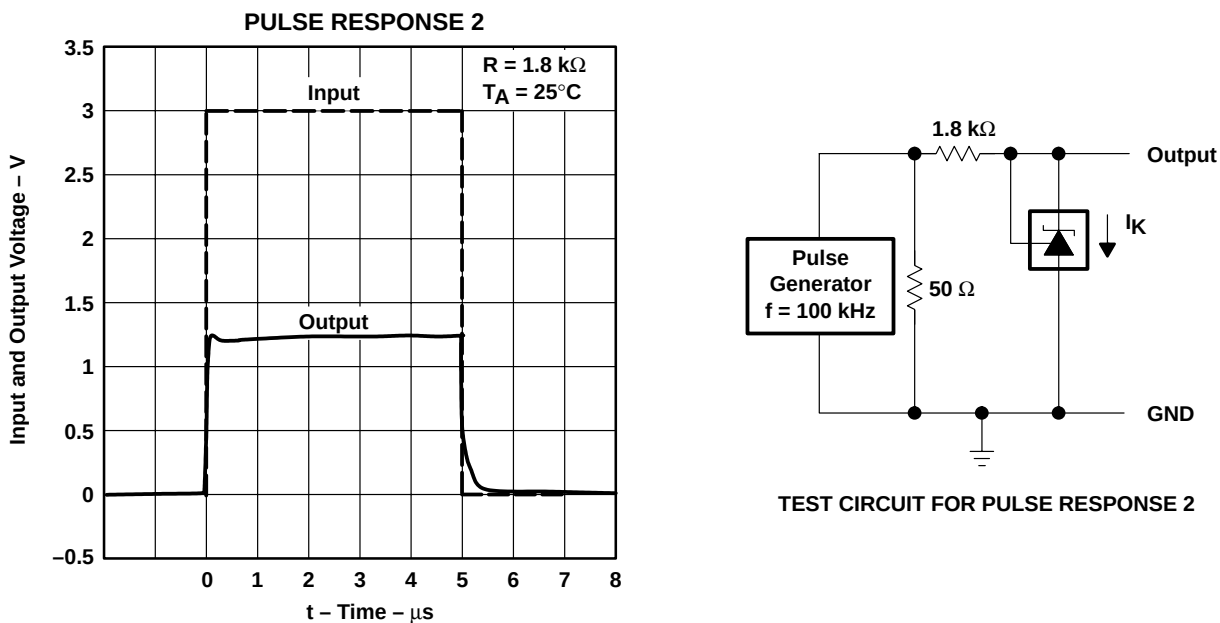


Figure 16

PARAMETER MEASUREMENT INFORMATION[†]

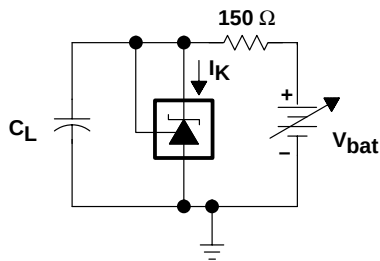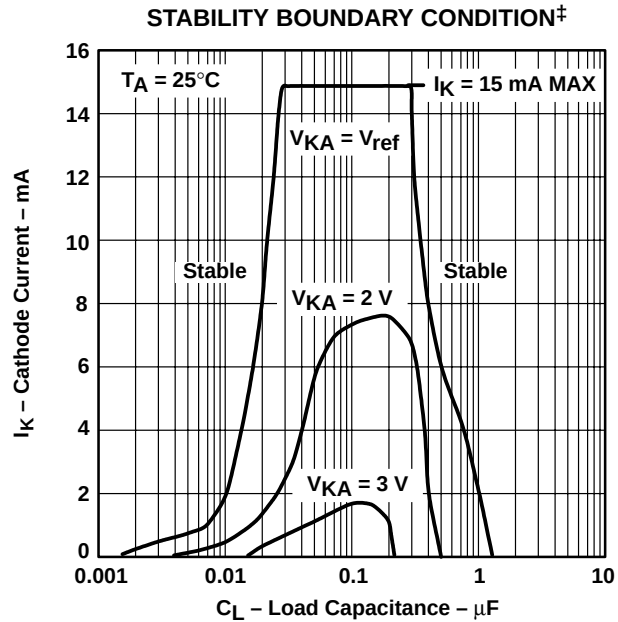

TEST CIRCUIT FOR $V_{KA} = V_{ref}$

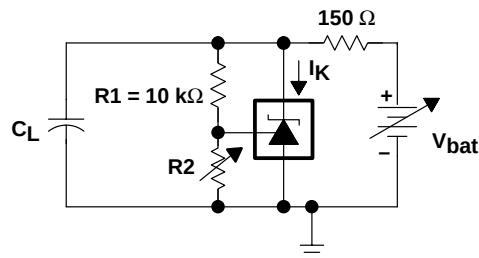

TEST CIRCUIT FOR $V_{KA} = 2\text{ V}, 3\text{ V}$

[‡] The areas under the curves represent conditions that may cause the device to oscillate. For $V_{KA} = 2\text{-V}$ and 3-V curves, $R2$ and V_{bat} were adjusted to establish the initial V_{KA} and I_K conditions with $C_L = 0$. V_{bat} and C_L then were adjusted to determine the ranges of stability.

Figure 17

[†] Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.

TLV431, TLV431A

LOW-VOLTAGE ADJUSTABLE PRECISION SHUNT REGULATORS

SLVS139E – JULY 1996 – REVISED JUNE 2002

APPLICATION INFORMATION

Figure 18 shows the TLV431 or TLV431A used in a 3.3-V isolated flyback supply. Output voltage V_O can be as low as reference voltage V_{ref} ($1.24\text{ V} \pm 1\%$). The output of the regulator, plus the forward voltage drop of the optocoupler LED ($1.24 + 1.4 = 2.64\text{ V}$), determine the minimum voltage that can be regulated in an isolated supply configuration. Regulated voltage as low as 2.7 Vdc is possible using the circuit in Figure 18.


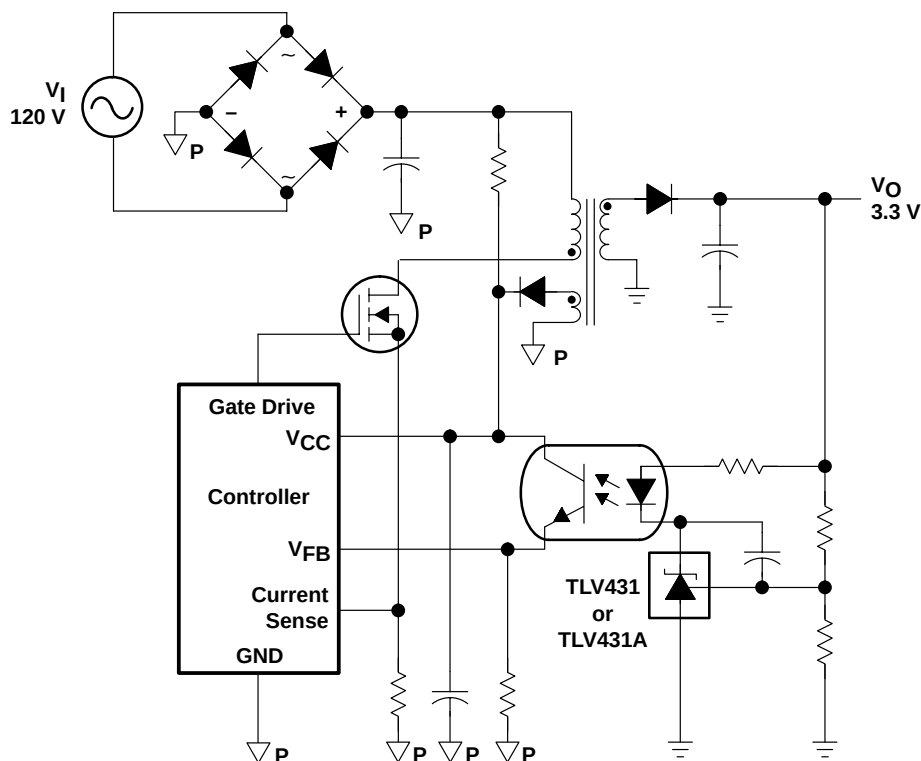


Figure 18. Flyback With Isolation Using TLV431 or TLV431A as Voltage Reference and Error Amplifier

DBV (R-PDSO-G5)

PLASTIC SMALL-OUTLINE

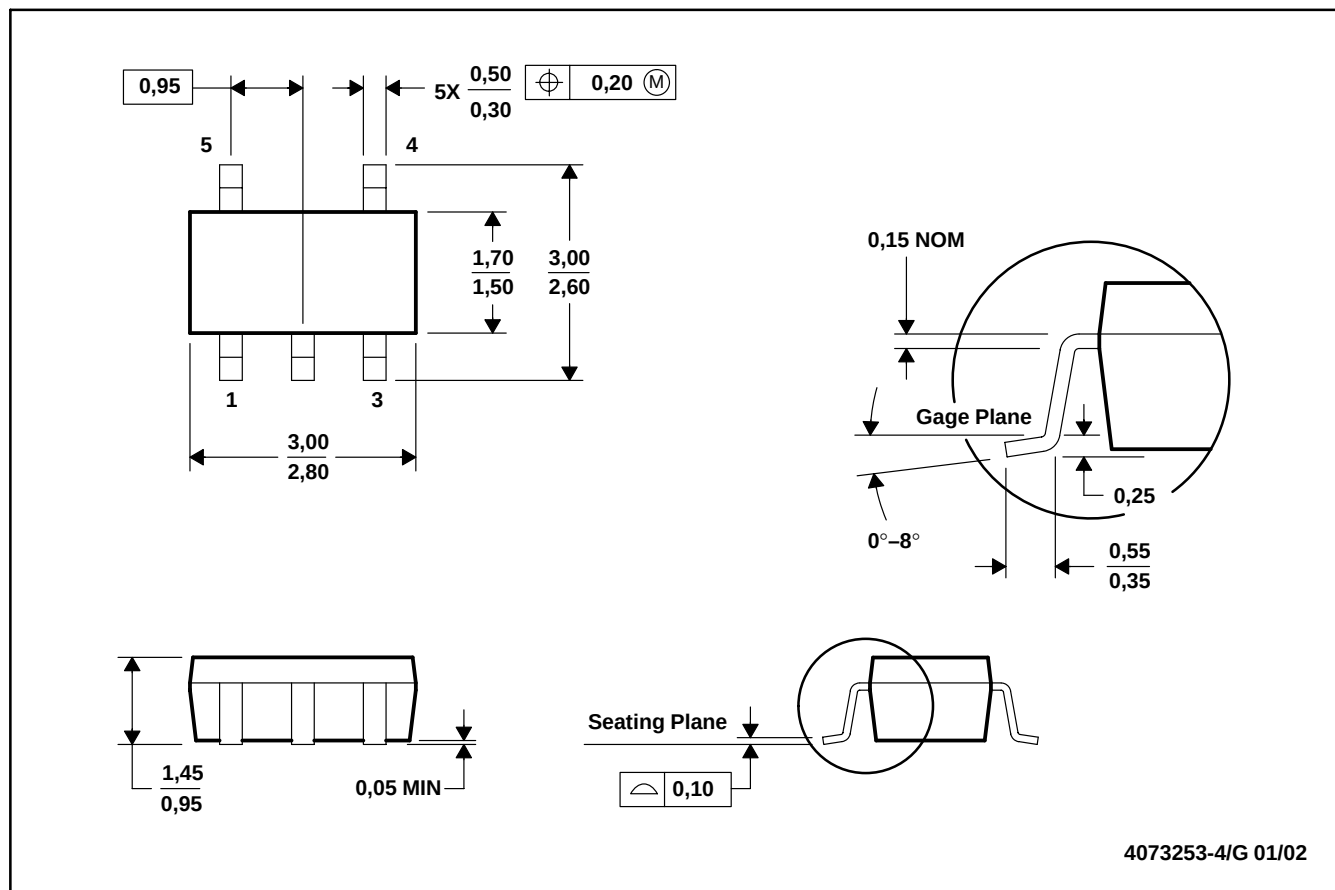


- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion.
 - D. Falls within JEDEC MO-178

D (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE


8 PINS SHOWN

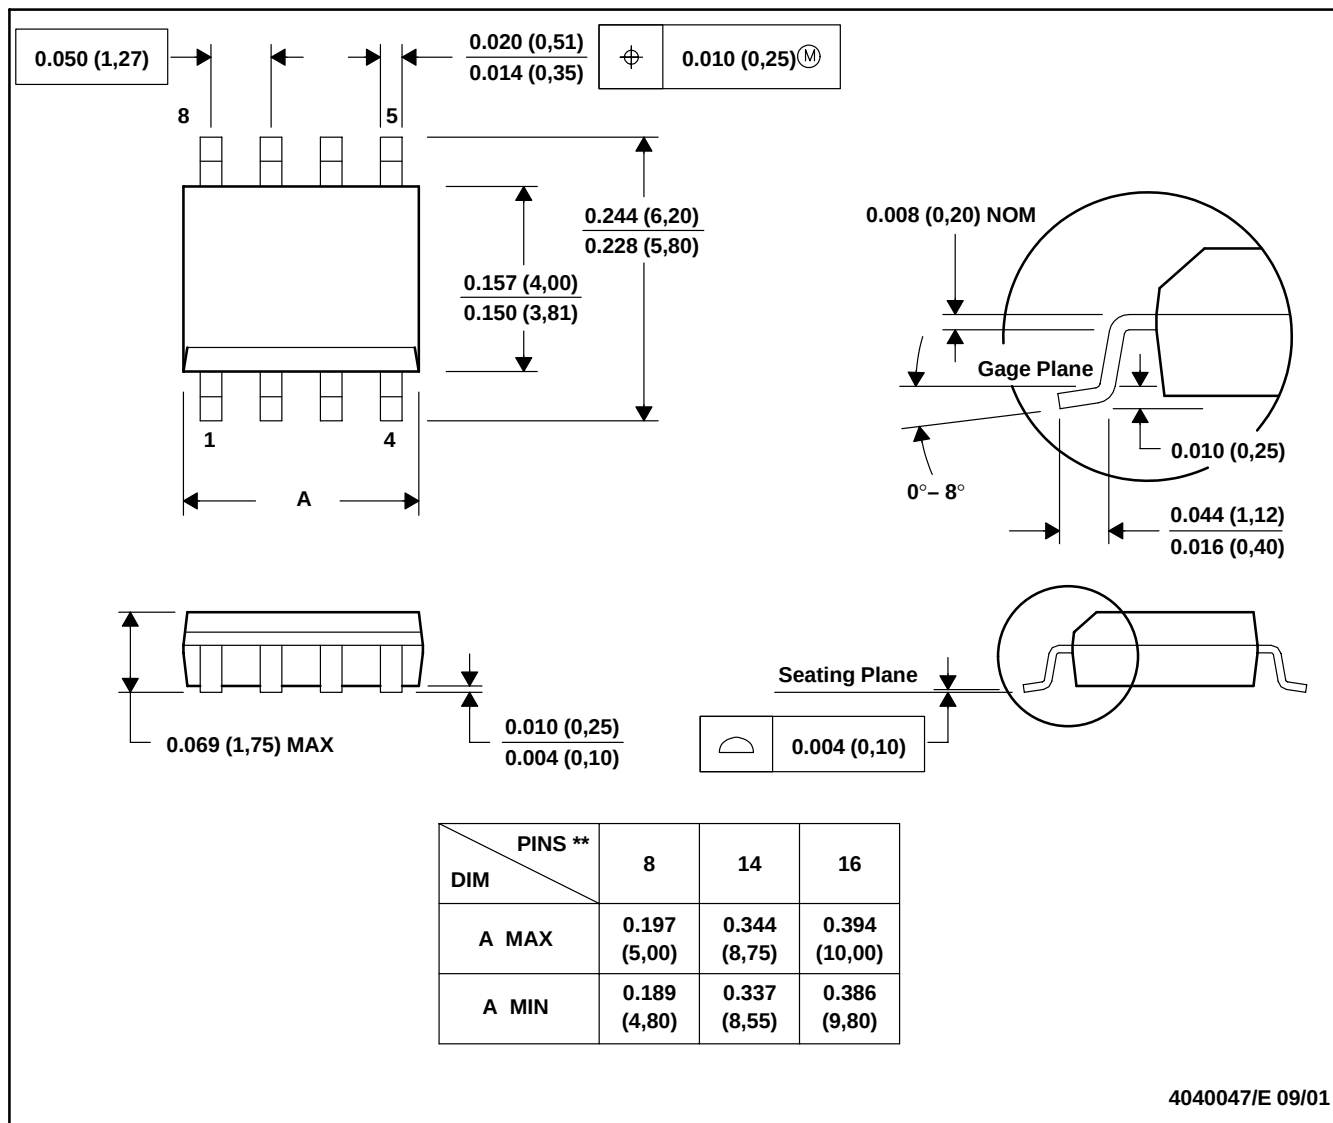

- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0.006 (0,15).
 D. Falls within JEDEC MS-012

LP (O-PBCY-W3)

PLASTIC CYLINDRICAL PACKAGE

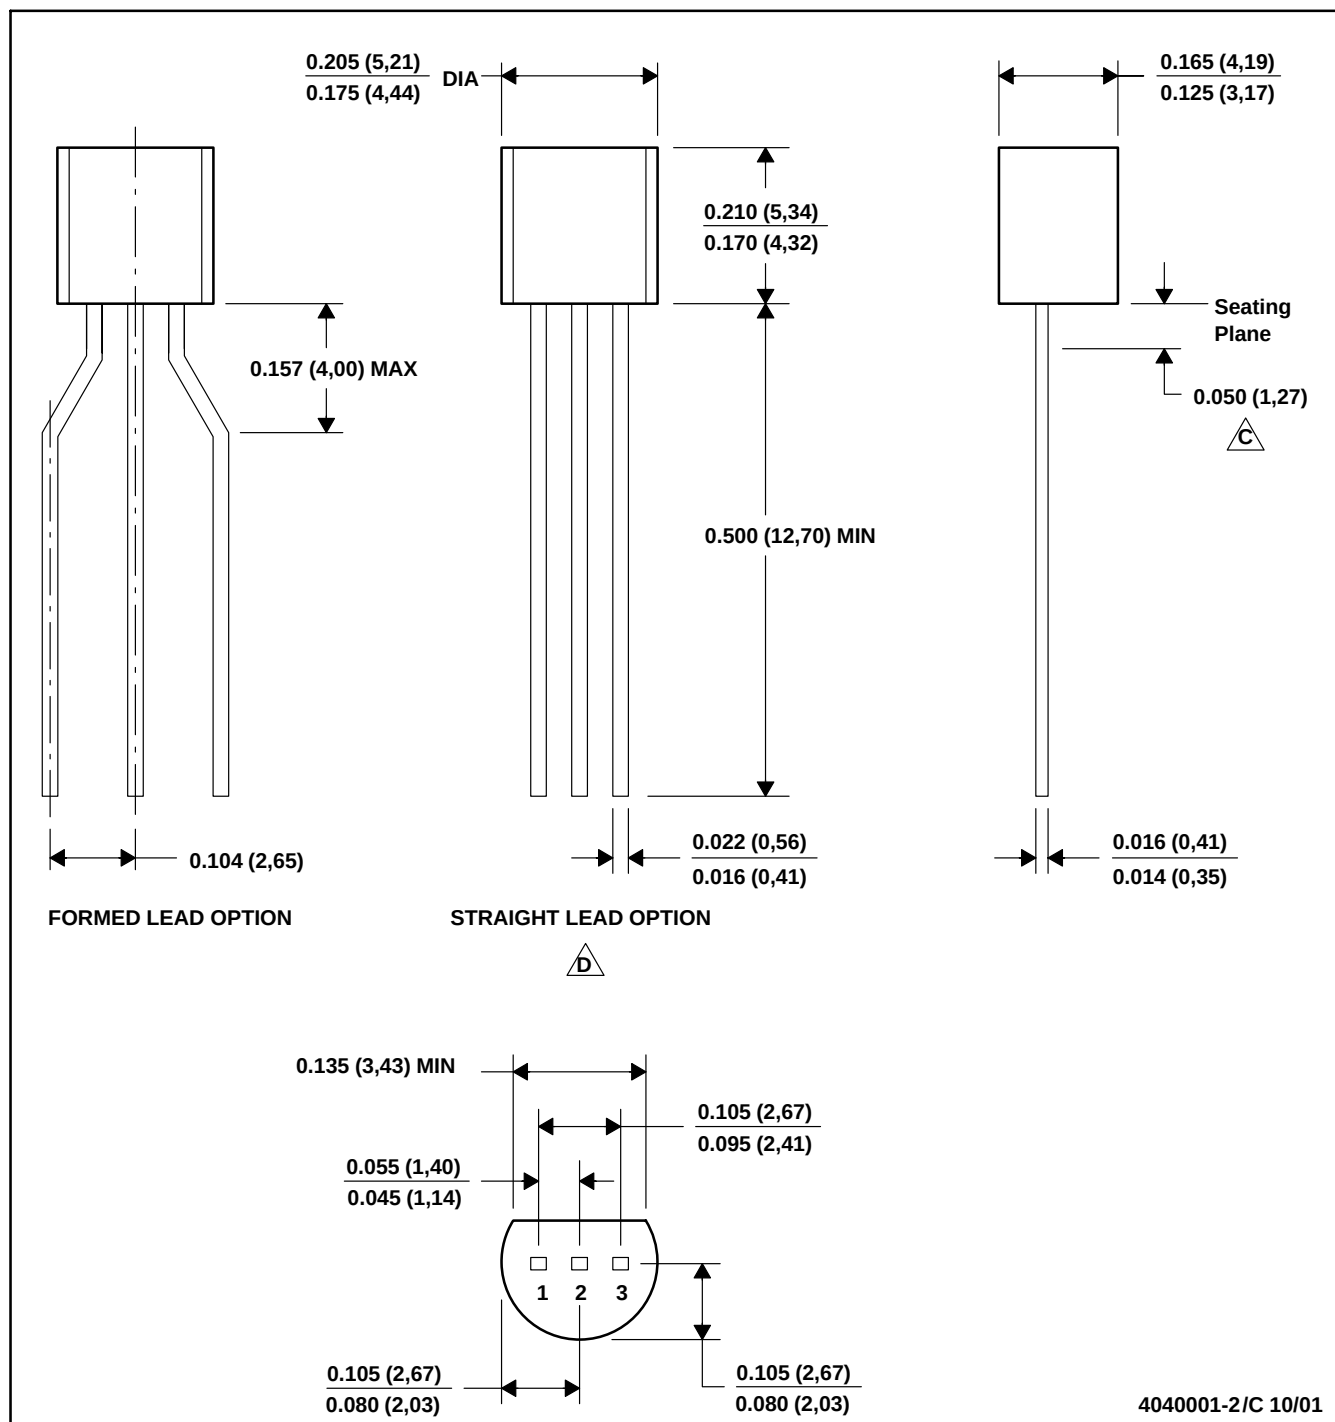


- NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 $\triangle C$ Lead dimensions are not controlled within this area
 $\triangle D$ Falls within JEDEC TO -226 Variation AA (TO-226 replaces TO-92)
 E. Shipping Method:
 Straight lead option available in bulk pack only.
 Formed lead option available in tape & reel or ammo pack.

MECHANICAL DATA

MSOT002A – OCTOBER 1994 – REVISED NOVEMBER 2001

LP (O-PBCY-W3)

PLASTIC CYLINDRICAL PACKAGE

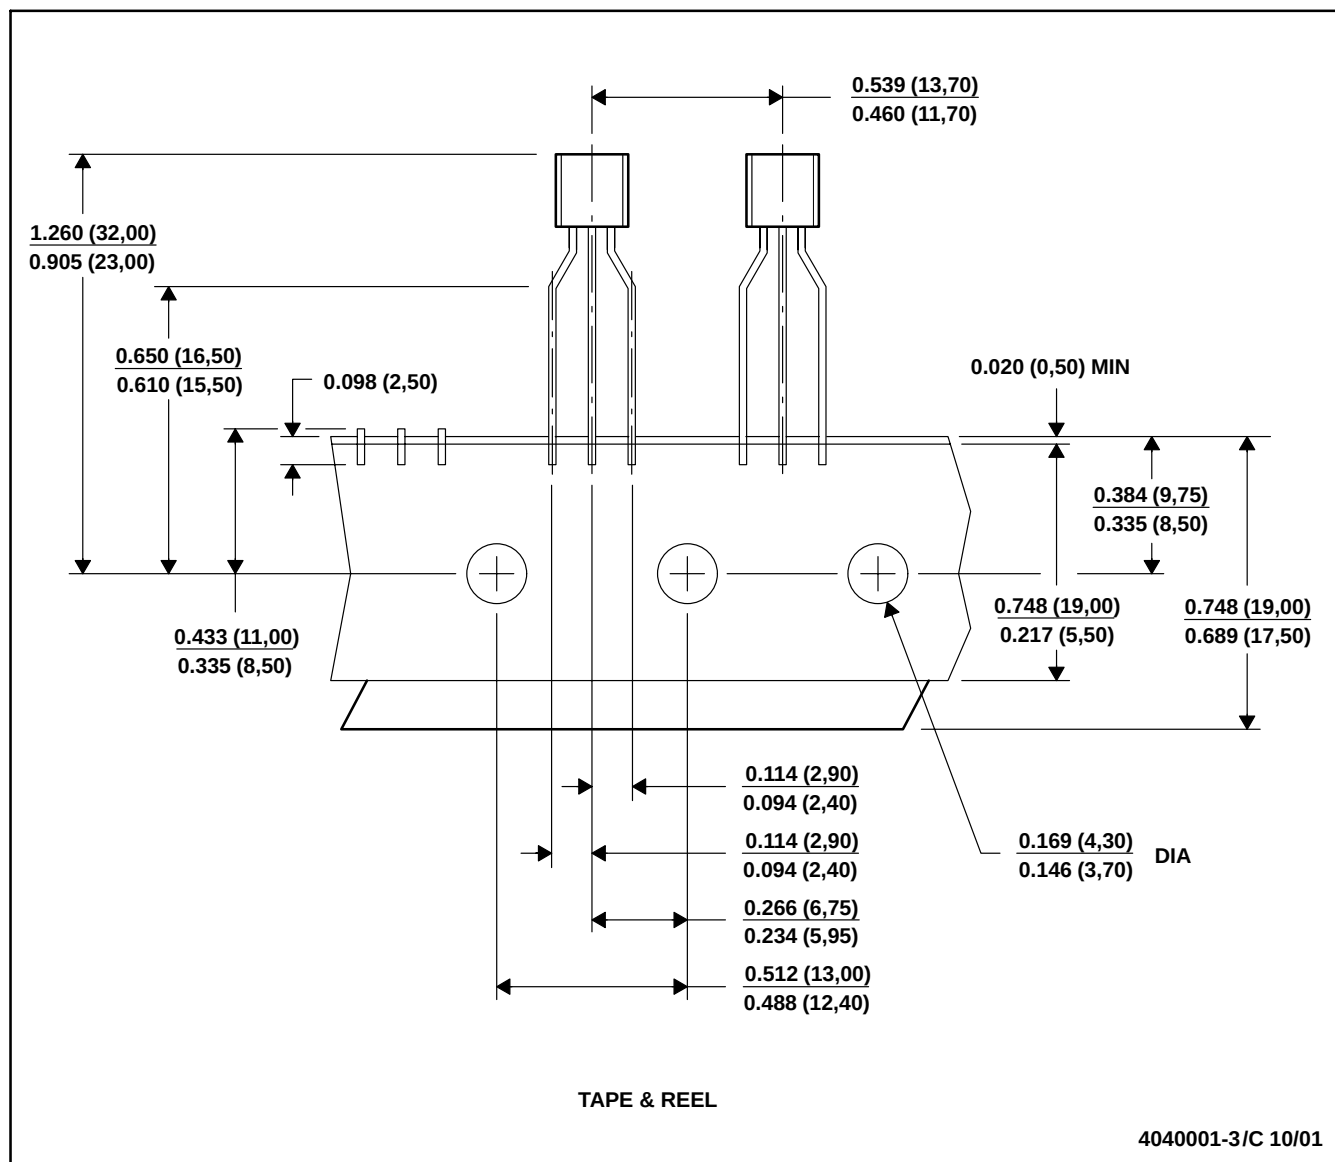

- NOTES: A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Tape and Reel information for the Format Lead Option package.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265