

- 1N3154-1 THRU 1N3157-1 AVAILABLE IN JAN, JANTX, JANTXV AND JANS PER MIL-PRF-19500/158
- 8.4 VOLT NOMINAL ZENER VOLTAGE
- TEMPERATURE COMPENSATED ZENER REFERENCE DIODES
- METALLURGICALLY BONDED

1N3154 thru 1N3157A
and
1N3154-1 thru 1N3157A-1

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C
DC Power Dissipation: 500mW @ +50°C
Power Derating: 4 mW / °C above +50°C

REVERSE LEAKAGE CURRENT

$I_R = 10\mu A$ @ 25°C & $V_R = 5.5V_{dc}$

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

JEDEC TYPE NUMBER	ZENER VOLTAGE V_Z @ I_{ZT}	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE Z_{ZT} (Note 1)	VOLTAGE TEMPERATURE STABILITY ΔV_{ZT} MAXIMUM (Note 2)	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT
	VOLTS	mA	OHMS	mV	°C	% / °C
1N3154 1N3154A	8.00—8.80	10	15	130	-55 to +100	.01
	8.00—8.80	10	15	172	-55 to +150	.01
1N3155 1N3155A	8.00—8.80	10	15	65	-55 to +100	.005
	8.00—8.80	10	15	86	-55 to +150	.005
1N3156 1N3156A	8.00—8.80	10	15	26	-55 to +100	.002
	8.00—8.80	10	15	34	-55 to +150	.002
1N3157 1N3157A	8.00—8.80	10	15	13	-55 to +100	.001
	8.00—8.80	10	15	17	-55 to +150	.001

NOTE 1 Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} .

NOTE 2 The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV at any discrete temperature between the established limits, per JEDEC standard No.5.

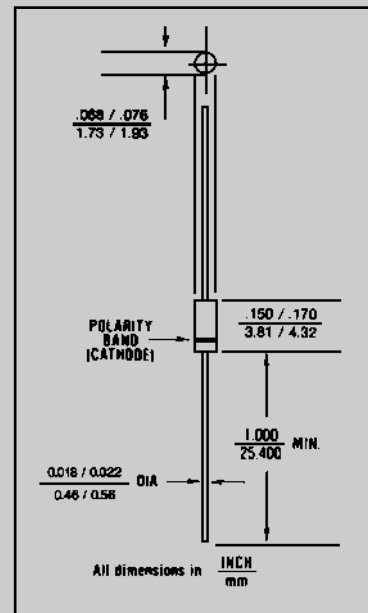


FIGURE 1

DESIGN DATA

CASE: Hermetically sealed glass case. DO – 35 outline.

LEAD MATERIAL: Copper clad steel.

LEAD FINISH: Tin / Lead

POLARITY: Diode to be operated with the banded (cathode) end positive.


MOUNTING POSITION: ANY.



6 LAKE STREET, LAWRENCE, MASSACHUSETTS 01841
PHONE (978) 620-2600
WEBSITE: <http://www.microsemi.com>

FAX (978) 689-0803

1N3154 thru 1N3157A INCLUDING -1 VERSIONS

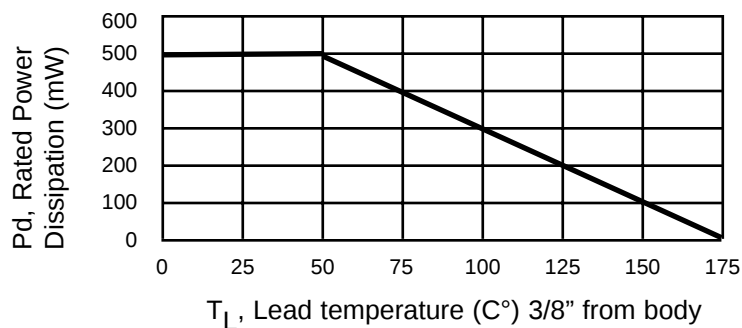

**FIGURE 2
POWER DERATING CURVE**


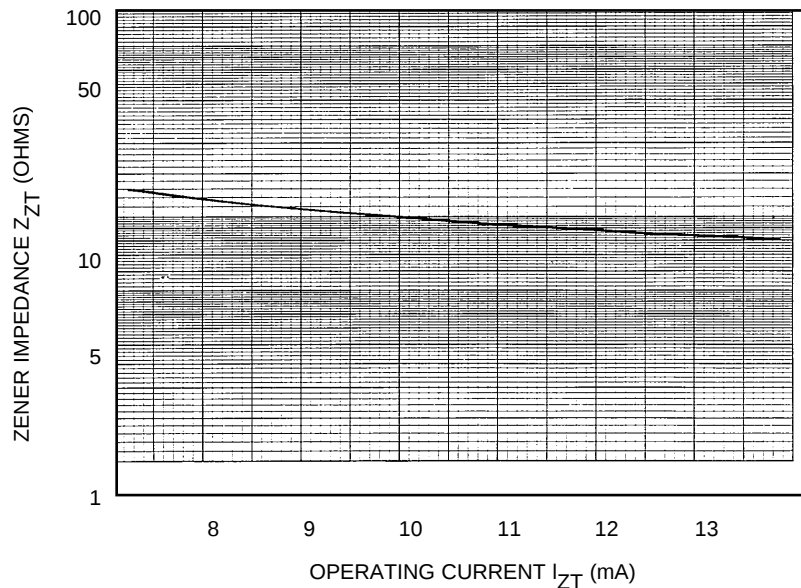


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT

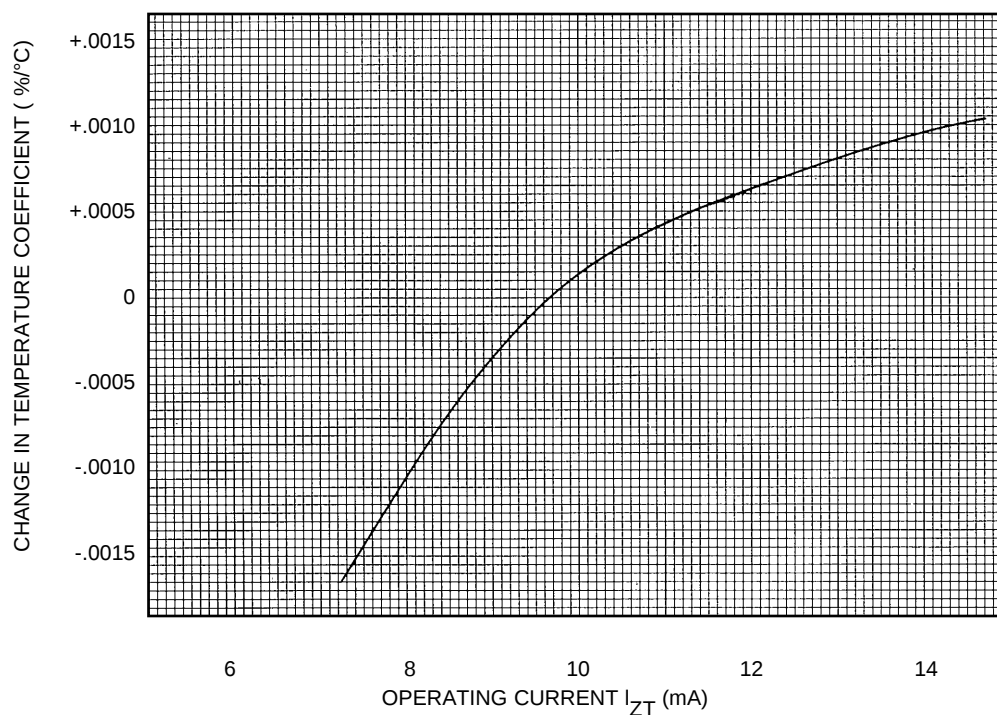

**FIGURE 4
TYPICAL CHANGE OF TEMPERATURE COEFFICIENT
WITH CHANGE IN OPERATING CURRENT**