


# 1 Amp Schottky Rectifier DL5817 — DL5819

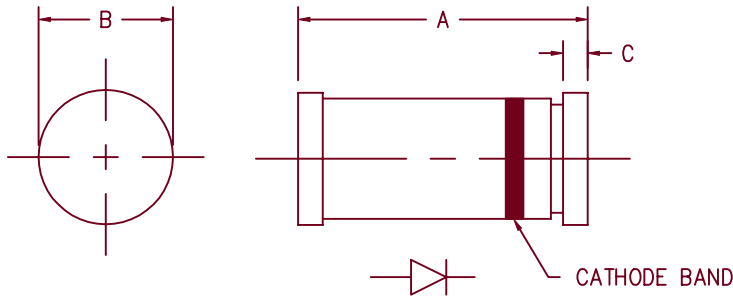

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.190	.205	4.83	5.20	
B	.094	.105	2.39	2.66	Dia.
C	---	.022	---	.55	

PLASTIC DO213AB

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
DL5817	20V	20V
DL5818	30V	30V
DL5819	40V	40V

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- High Reliability
- High Current Capability

Electrical Characteristics					
		DL5817	DL5818	DL5819	
Average forward current	I <sub>F(AV)</sub>	1A	1A	1A	Square wave, R <sub>θJEC</sub> = 45 C/W 8.3ms, half sine, T <sub>J</sub> = 150°C I <sub>FM</sub> = 0.1A: T <sub>J</sub> = 25°C* I <sub>FM</sub> = 1.0A: T <sub>J</sub> = 25°C* I <sub>FM</sub> = 3.0A: T <sub>J</sub> = 25°C* V <sub>RRM</sub> , T <sub>J</sub> = 25°C V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C
End Cap Temperature		130°C	125°C	125°C	
Maximum surge current	I <sub>FSM</sub>	50A	50A	50A	
Max peak forward voltage	V <sub>FM</sub>	.36V	.39V	.39V	
Max peak forward voltage	V <sub>FM</sub>	.45V	.55V	.60V	
Max peak forward voltage	V <sub>FM</sub>	.65V	.85V	.90V	
Max peak reverse current	I <sub>RM</sub>	1mA	1mA	1mA	
Typical junction capacitance	C <sub>J</sub>	105pF	50pF	50pF	

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics		
Storage temperature range	T <sub>STG</sub>	-65°C to 150°C
Operating junction temp range	T <sub>J</sub>	-65°C to 150°C
Maximum thermal resistance	R <sub>θJEC</sub>	45°C/W Junction to End Cap
Weight		.004 ounces (.012 grams) typical

10-2-01 Rev. IR

# DL5817

Figure 1  
Typical Forward Characteristics

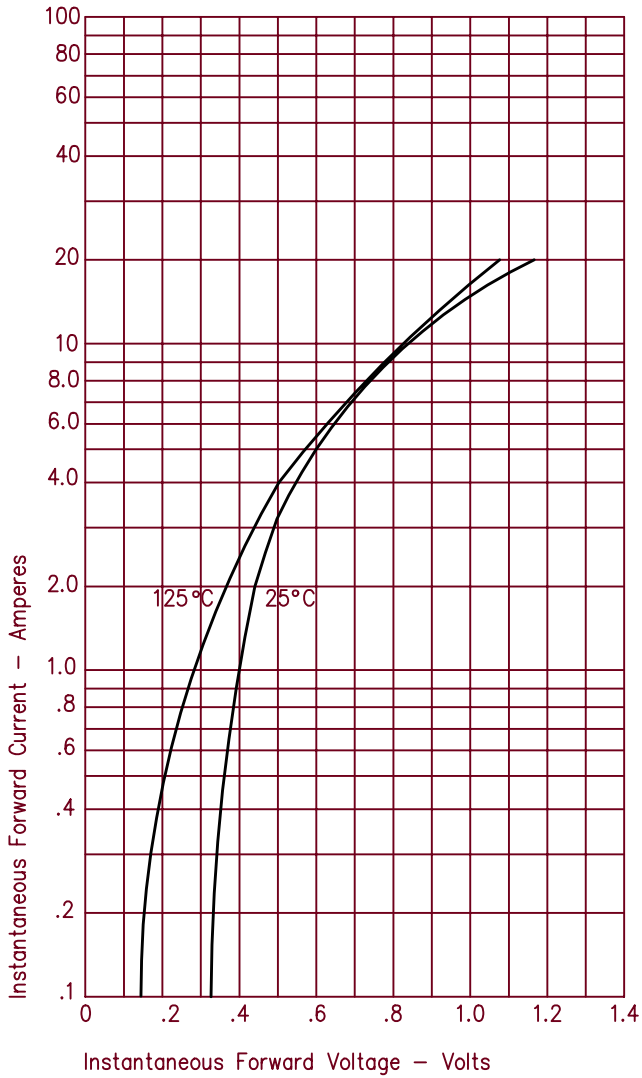


Figure 3  
Typical Junction Capacitance


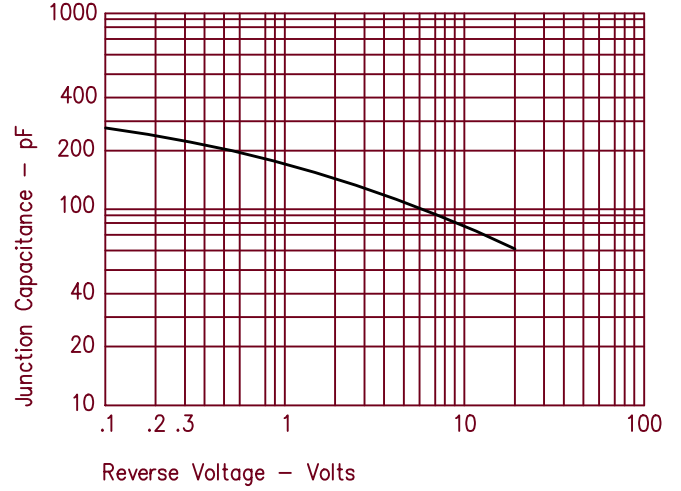


Figure 2  
Typical Reverse Characteristics

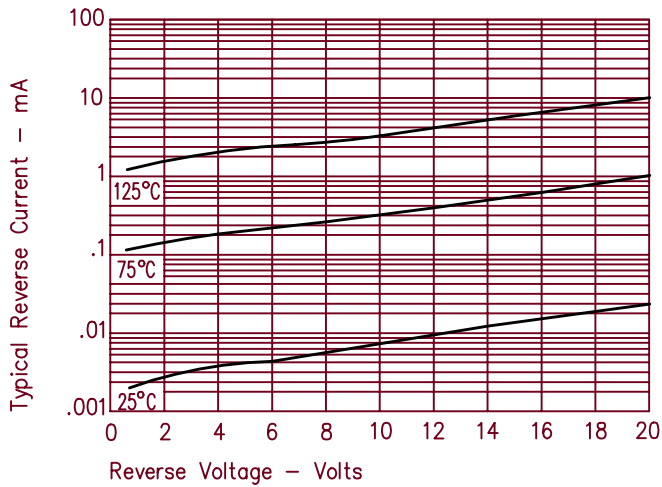

# DL5818 & DL5819

Figure 1  
Typical Forward Characteristics

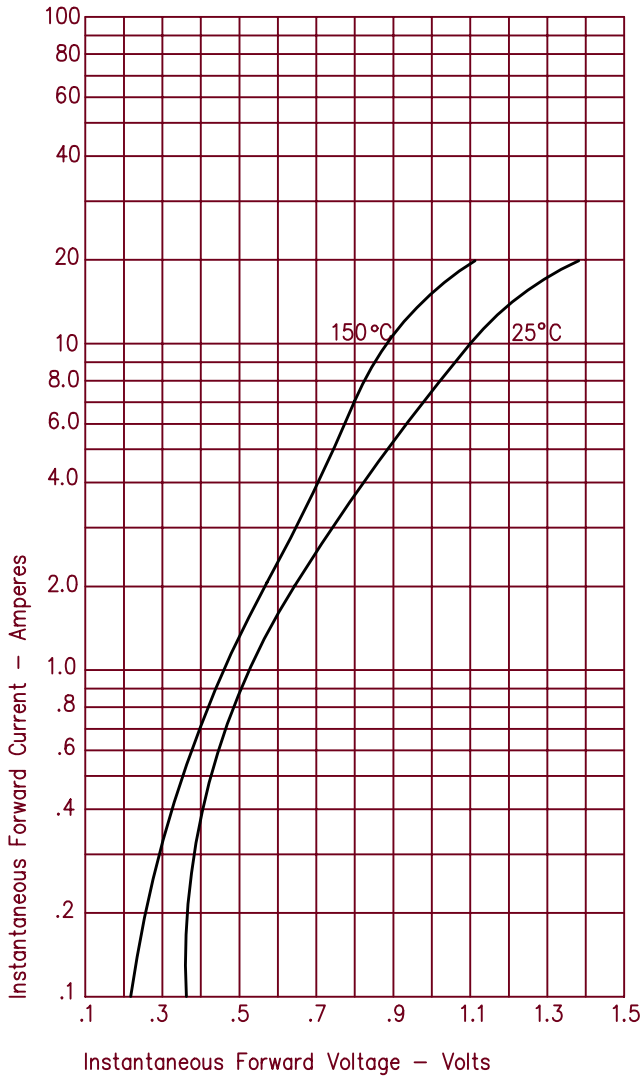


Figure 3  
Typical Junction Capacitance

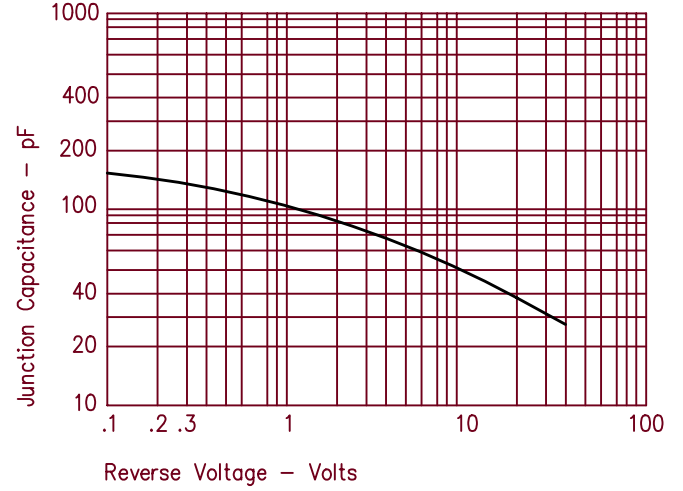


Figure 2  
Typical Reverse Characteristics

