

SANYO

NO.667B

LB1273R**6-Unit, Darlington Transistor Array**

The circuit construction of this IC is a Darlington transistor array with six units, most suitable for printer hammer drive, lamp, and relay drive. With built-in protective diodes against negative inputs, it is advantageous in designing drive circuits for printex calculators and cash registers.

Features

- Since six units are included, it is suitable for 18-digit printers.
- The load current is considerably large i.e., 230mA and is, thus, suitable for thermal printers.

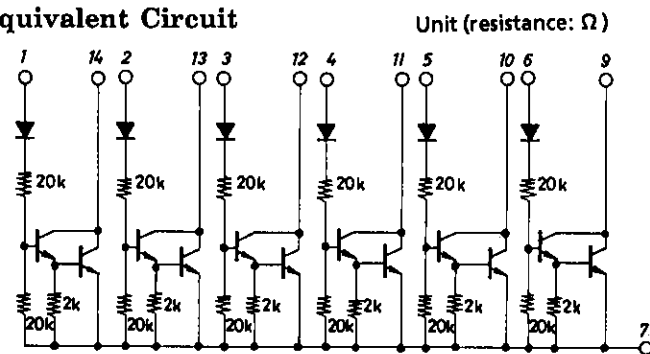
Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

			unit
Output Supply Voltage	V_{OUT}	-0.3 to +20	V
Input Supply Voltage	V_{IN}	-40 to +20	V
Output Inflow Current	I_{OUT}	per unit 150	mA
Instantaneous Output Inflow Current	i_{op}	per unit duty=60% pulse width (2ms) 230	mA
GND Pin Inflow Current	I_7	-700	mA
GND Pin Instantaneous Outflow Current	I_{7p}	duty=60% pulse width (2ms) 1.4	A
Allowable Power Dissipation	$P_d \text{ max}$	1.15	W
Instantaneous Allowable Power Consumption		Pulse width must be less than 2 msec. The percentage of all of 6 units being ON must be less than 50% for 100ms.	2.3 W

Junction Temperature	T_j	125	$^\circ\text{C}$
Operating Temperature	T_{opr}	-20 to +70	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +125	$^\circ\text{C}$

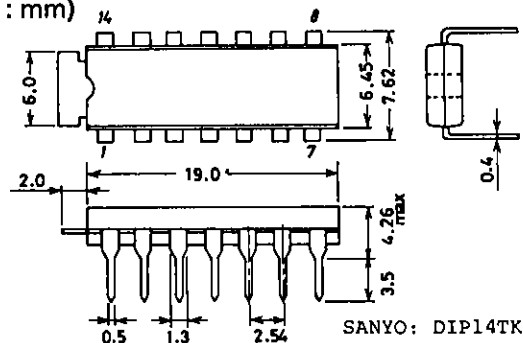
Allowable Operating Conditions at $T_a = 25^\circ\text{C}$

			unit
Output Supply Voltage	V_{OUT}	20	V
Input 'H' Level Voltage	V_{IH}	output terminal current=150mA 15 to 20	V
Input 'L' Level Voltage	V_{IL}	output terminal current=100uA -35 to +1	V
Load Resistance	R_L	No inductance components should be included.	80 ohm (min)

Equivalent Circuit

(Note) pin 8: No connection

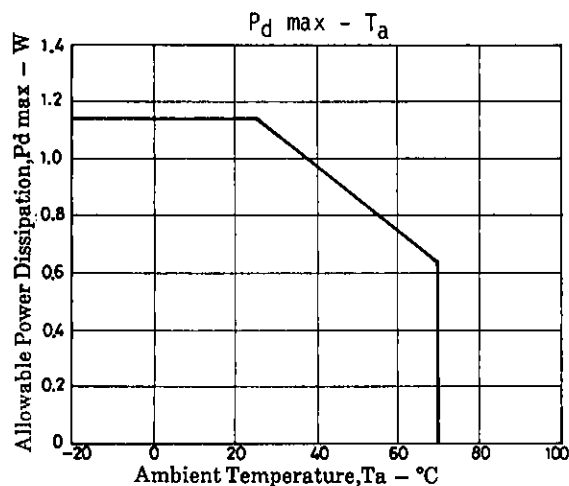
should be opened at operating mode.

Package Dimensions 3004A-D14TKIC (unit: mm)

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

Electrical Characteristics at $T_a = 25^\circ\text{C}$

			min	typ	max	unit
Output Voltage	$V_{\text{OUT}(1)}$	$V_{\text{IN}}=15\text{V}, I_{\text{OUT}}=230\text{mA}$			1.7	V
Output Voltage	$V_{\text{OUT}(2)}$	$V_{\text{IN}}=15\text{V}, I_{\text{OUT}}=150\text{mA}$			1.5	V
Output Leak Current	I_{off}	$V_{\text{IN}}=1.0\text{V}, V_{\text{OUT}}=20\text{V}$			100	μA
Input Current	I_{IN}	$V_{\text{IN}}=18\text{V}$			1.8	mA
Output Current	I_{OUT}	$I_{\text{IN}}=0.5\text{mA}, V_{\text{OUT}}=1.5\text{V}$	150			mA
Input Leak Current	I_{leak}	$V_{\text{IN}}=-35\text{V}$	-10			μA



■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.